

LJSF 3 REST API

Complete v1 technical reference




Item	Value
Product	LJSF 3 - ATLAS Installation System
Application version	3.0.0
Package revision	r32
API version	v1
Base path	/atlas_install/api/v1
Format	JSON / HTTPS

Normative reference for REST API v1 included in package r32. Legacy endpoints remain available but are outside the REST contract.

1. Service identity

- **Product:** LJSF 3 - ATLAS Installation System
- **Application version:** 3.0.0
- **Package revision:** r32
- **Base path:** /atlas_install/api/v1
- **Media type:** application/json; charset=UTF-8
- **Response cache:** Cache-Control: no-store
- **API version header:** X-API-Version: v1
- **Request correlation:** X-Request-ID

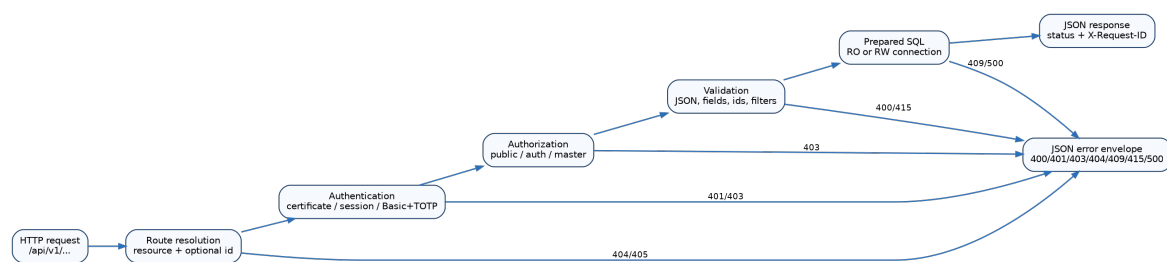


REST request lifecycle

Figure: REST request lifecycle.

2. Authentication model

The API reuses the application identity model. Identity resolution is: an existing local Web session; a valid X.509 client certificate; then, as a REST-specific fallback, HTTP Basic using a local account. If the local account has at least one active TOTP credential, Basic authentication also requires X-ATLAS-TOTP.

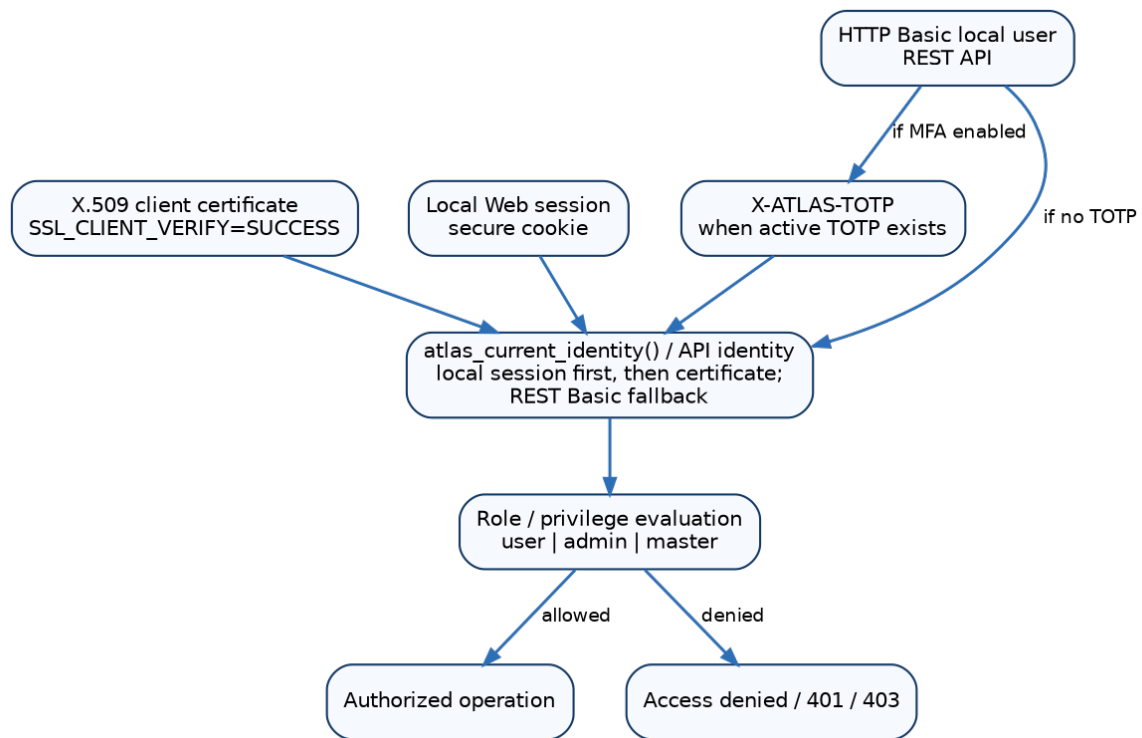

Authentication model

Mechanism	Transport	Requirements	Notes
X.509 certificate	TLS client certificate	TLS reaches Apache; SSL_CLIENT_VERIFY=SUCCESS; DN mapped in user.	Suitable for personal/robot certificates.
Local session	Secure Web cookie	Unexpired local session and enabled account.	Useful for browser-originated API calls.
HTTP Basic	Authorization: Basic ...	Enabled local account, valid password, must_change_password=0.	Use only over HTTPS.
Basic + TOTP	Basic + X-ATLAS-TOTP: 123456	Required when at least one active TOTP exists.	Six digits; current TOTP slice +/- 1 is accepted.

2.1 Authentication examples

```
# Basic without TOTP
curl --fail-with-body -u operator:'PASSWORD' \
  https://atlas-install.example.org/atlas_install/api/v1/me

# Basic with TOTP
curl --fail-with-body -u operator:'PASSWORD' \
  -H 'X-ATLAS-TOTP: 123456' \
  https://atlas-install.example.org/atlas_install/api/v1/me

# X.509
curl --fail-with-body --cert client.pem --key client.key \
  https://atlas-install.example.org/atlas_install/api/v1/me
```

2.2 Authentication failures

- 401 authentication_required: no valid identity. Response includes WWW-Authenticate: Basic realm="LJSF 3 REST API".
- 401 totp_required: Basic credentials are valid but TOTP is missing/invalid.
- 403 password_change_required: the local account must change its password through the Web UI before API use.
- 403 forbidden: valid authentication but insufficient role.

3. HTTP and JSON conventions

Item	Behavior
GET collection	200 with {data:[...], meta:{resource,total,limit,offset,count}}
GET item	200 with {data:{...}}; 404 if not found
POST collection	Requires JSON body; 201 Created; Location header; response contains created id and location
PATCH item	Partial update; 200 with the updated resource
PUT item	Currently has the same supplied-field partial-update semantics as PATCH; it is not a full replacement
DELETE item	204 No Content; 404 if missing; 409 on database conflicts
OPTIONS	Returns supported method names; router advertises GET, HEAD, POST, PUT, PATCH, DELETE, OPTIONS
HEAD	Accepted on read routes; web server may suppress the body as required by HTTP
Content-Type	POST/PUT/PATCH with a non-empty body require application/json; otherwise 415

Item	Behavior
Unknown JSON field	400 unknown_field; immutable keys are also rejected on update
Arrays/objects in fields	Rejected with 400 invalid_field; resource fields are scalar
Caching	All API responses send Cache-Control: no-store

3.1 Error envelope

```
{
  "error": {
    "status": 400,
    "code": "invalid_request",
    "message": "...",
    "request_id": "7c3f2a9b...",
    "details": {}
  }
}
```

3.2 Status codes

HTTP	Name	Meaning
200	OK	Successful read or update.
201	Created	Successful creation; use Location.
204	No Content	Successful deletion.
400	Bad Request	Invalid id/JSON/field/request.
401	Unauthorized	Missing authentication or TOTP required.
403	Forbidden	Insufficient role or password change required.
404	Not Found	Unknown route/resource/record.
405	Method Not Allowed	Method unsupported by route.
409	Conflict	Database constraint/conflict during write/delete.
415	Unsupported Media Type	Non-JSON request body.
500	Internal Server Error	Internal error; correlate request_id with logs.

4. Collections, filtering, search, pagination and sorting

Every exposed field can be supplied as a query parameter for exact matching (`field=value`). `q` performs `LIKE %q%` only on the resource search fields. `limit` defaults to 200 and is capped at 1000; `offset` cannot be negative. `sort` must be an exposed field or the primary key is used; `order` accepts `ASC` or `DESC` , otherwise `ASC` .

```
curl 'https://atlas-install.example.org/atlas_install/api/v1/releases?
      limit=100&offset=0&sort=name&order=DESC&q=24.3'
```

5. Resource matrix

Resource	DB table	Key	GET	Write	fields
releases	release_data	ref	public	authenticated user	name, tag, package, comments
sites	site	ref	public	authenticated user	cs, cename, name, atlas_name, alias, arch
requests	request	id	authenticated user	authenticated user	id, user_comments, admin_comments
tasks	task	ref	public	authenticated user	name, description, target
architectures	release_arch	ref	public	authenticated user	platform_type, os_type, gcc_ver, mode, description
targets	autoinstall_target	ref	public	authenticated user	name, description
infosys	bdii	ref	public	authenticated user	hostname, ns, lb, ld, wmpoxy, myproxy
release-subscriptions	release_subscription	ref	authenticated user	authenticated user	sitename, pattern, comment
release-status	release_stat	ref	public	authenticated user	name, tag, status, comments

Resource	DB table	Key	GET	Write	fields
grids	grid	ref	public	authenticated user	name, description
facilities	facility	ref	public	authenticated user	name, description
site-types	site_type	ref	public	authenticated user	name, description
request-statuses	request_status	ref	public	master role	description
request-types	request_type	ref	public	master role	field, description, comment
users	user	ref	master role	master role	name, dn, email
local-users	atlas_local_user	id	master role	master role	username, first_name, last_name, email, role

6. Special endpoints

GET /

Returns API name, version, documentation URL and resource list.

GET /health

API health only; it is not the full application readiness probe. Response:


```
{"status": "ok", "api": "v1", "request_id": "..."}.
```

GET /me

Requires authentication and returns the effective identity. `password_hash` is always removed.

GET /openapi

Returns a compact OpenAPI 3.1 document with paths and methods; this manual is the more detailed source for fields, authentication and semantics.

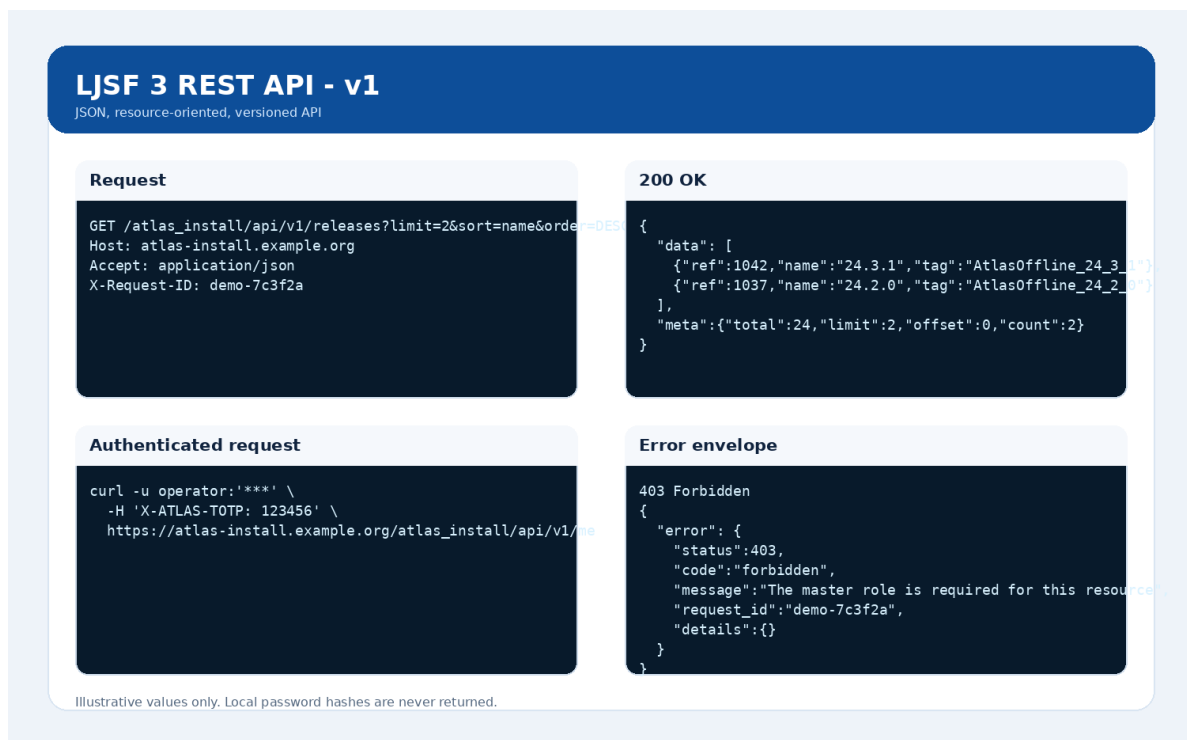

API request/response screenshot

7. Complete resource reference

7.1 releases

DB table: `release_data`

Key: `ref` (integer)

Read access: public

Write access: authenticated user

q search fields: `name`, `tag`, `package`, `comments`

Methods:

- GET `/releases`
- GET `/releases/{id}`
- POST `/releases`
- PATCH `/releases/{id}`
- PUT `/releases/{id}`
- DELETE `/releases/{id}`

Exposed fields:

Field	DB type	Nullable	Writable	Description
<code>ref</code>	<code>int(11)</code>	NO	no	Numeric resource identifier.
<code>name</code>	<code>varchar(50)</code>	NO	yes	Canonical or displayed name.

Field	DB type	Nullable	Writable	Description
build	varchar(15)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
typefk	int(11)	NO	yes	Type reference.
archfk	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
sw_archfk	int(11)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
userfk	int(11)	NO	yes	User reference.
obsolete	int(11)	YES	yes	Obsolete-release flag.
autoinstall	int(11)	YES	yes	Automatic-installation flag.
requires	varchar(30)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
dbrelease	varchar(10)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
installer_version	varchar(10)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
install_tools_version	varchar(10)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
sw_name	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.

Field	DB type	Nullable	Writable	Description
sw_revision	varchar(20)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
sw_physicalpath	varchar(255)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
sw_logicalpath	varchar(255)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
tag	varchar(100)	NO	yes	Software/release tag.
package	varchar(255)	NO	yes	Software package or descriptor.
comments	varchar(255)	YES	yes	Operational comments.
date	datetime	NO	yes	Date/time associated with the record.
cvmfs_available	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
critical	int(11)	NO	yes	Critical-release flag.
critical_validity_from	datetime	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
critical_validity_to	datetime	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
critical_description	varchar(25)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/releases?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/releases/123
```

7.2 sites

DB table: site

Key: ref (integer)

Read access: public

Write access: authenticated user

q search fields: cs, cename, name, atlas_name, alias, arch

Methods:

- GET /sites
- GET /sites/{id}
- POST /sites
- PATCH /sites/{id}
- PUT /sites/{id}
- DELETE /sites/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
cs	varchar(128)	NO	yes	Legacy computer-service identifier.
cename	varchar(50)	NO	yes	Legacy CE name.
name	varchar(30)	NO	yes	Canonical or displayed name.
atlas_name	varchar(30)	NO	yes	ATLAS site name.
tier_level	int(11)	NO	yes	Site tier level.
gridfk	int(11)	NO	yes	Grid reference.
facilityfk	int(11)	YES	yes	Facility reference.
activity_typefk	int(11)	YES	yes	Activity-type reference.
osname	varchar(128)	NO	yes	OS name.
osrelease	varchar(128)	NO	yes	OS release.
osversion	varchar(128)	NO	yes	OS version.
arch	varchar(20)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.

Field	DB type	Nullable	Writable	Description
tags	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
alias	varchar(128)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
swarea	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
fstype	varchar(15)	YES	yes	Filesystem type.
mountpoint	varchar(255)	YES	yes	Mount point.
capacity	int(11)	YES	yes	Capacity.
available	int(11)	YES	yes	Available space.
quota	int(11)	YES	yes	Quota.
status	int(11)	YES	yes	Application status.
attr	int(10)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
host_status	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
resource_status	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
last_activity	timestamp	YES	yes	Last recorded activity.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/sites?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/sites/123
```

7.3 requests

DB table: request

Key: id (string)

Read access: authenticated user

Write access: authenticated user

q search fields: id, user_comments, admin_comments

Methods:

- GET /requests
- GET /requests/{id}
- POST /requests
- PATCH /requests/{id}
- PUT /requests/{id}
- DELETE /requests/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
id	varchar(128)	NO	no	Resource identifier.
bdiifk	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
sitefk	int(11)	NO	yes	Site reference.
relfk	int(11)	NO	yes	Release reference.
typefk	int(11)	NO	yes	Type reference.
userfk	int(11)	NO	yes	User reference.
adminfk	int(11)	YES	yes	Assigned administrator/operator reference.
statusfk	int(11)	NO	yes	Request-status reference.
force_run	int(11)	NO	yes	Force-execution flag.
request_date	datetime	YES	yes	Request date/time.
update_date	datetime	YES	yes	Last update date/time.
user_comments	varchar(255)	YES	yes	User comments.
admin_comments	varchar(255)	YES	yes	Administrative comments.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/requests?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/requests/REQ-EXAMPLE-001
```

7.4 tasks

DB table: task

Key: ref (integer)

Read access: public

Write access: authenticated user

q search fields: name, description, target

Methods:

- GET /tasks
- GET /tasks/{id}
- POST /tasks
- PATCH /tasks/{id}
- PUT /tasks/{id}
- DELETE /tasks/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
name	varchar(50)	NO	yes	Canonical or displayed name.
description	varchar(255)	YES	yes	Human-readable description.
target	varchar(20)	YES	yes	Task target.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/tasks?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/tasks/123
```

7.5 architectures

DB table: release_arch

Key: ref (integer)

Read access: public

Write access: authenticated user

q search fields: platform_type, os_type, gcc_ver, mode, description

Methods:

- GET /architectures
- GET /architectures/{id}

- `POST /architectures`
- `PATCH /architectures/{id}`
- `PUT /architectures/{id}`
- `DELETE /architectures/{id}`

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
platform_type	varchar(16)	NO	yes	Platform type.
os_type	varchar(128)	NO	yes	Operating-system type.
gcc_ver	varchar(128)	NO	yes	GCC/toolchain version.
mode	varchar(10)	NO	yes	Build mode.
description	varchar(255)	NO	yes	Human-readable description.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/architectures?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/architectures/123
```

7.6 targets

DB table: `autoinstall_target`

Key: `ref` (integer)

Read access: public

Write access: authenticated user

q search fields: `name`, `description`

Methods:

- `GET /targets`
- `GET /targets/{id}`
- `POST /targets`
- `PATCH /targets/{id}`
- `PUT /targets/{id}`
- `DELETE /targets/{id}`

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.

Field	DB type	Nullable	Writable	Description
name	varchar(15)	NO	yes	Canonical or displayed name.
description	varchar(255)	YES	yes	Human-readable description.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/targets?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/targets/123
```

7.7 infosys

DB table: bdii

Key: ref (integer)

Read access: public

Write access: authenticated user

q search fields: hostname, ns, lb, ld, wmpoxy, myproxy

Methods:

- GET /infosys
- GET /infosys/{id}
- POST /infosys
- PATCH /infosys/{id}
- PUT /infosys/{id}
- DELETE /infosys/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
facilityfk	int(11)	NO	yes	Facility reference.
hostname	varchar(128)	NO	yes	Host name.
port	int(11)	NO	yes	TCP port.
ns	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
lb	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.

Field	DB type	Nullable	Writable	Description
Id	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
wmproxy	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
myproxy	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
preferred	int(11)	NO	yes	Preference flag.
enabled	int(11)	NO	yes	Enable flag (0/1).

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/infosys?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/infosys/123
```

7.8 release-subscriptions

DB table: release_subscription

Key: ref (integer)

Read access: authenticated user

Write access: authenticated user

q search fields: sitename, pattern, comment

Methods:

- GET /release-subscriptions
- GET /release-subscriptions/{id}
- POST /release-subscriptions
- PATCH /release-subscriptions/{id}
- PUT /release-subscriptions/{id}
- DELETE /release-subscriptions/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
sitename	varchar(50)	NO	yes	Site name.

Field	DB type	Nullable	Writable	Description
userfk	int(11)	NO	yes	User reference.
pattern	varchar(50)	NO	yes	Subscription pattern.
date	datetime	NO	yes	Date/time associated with the record.
comment	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/release-subscriptions?
    limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/release-subscriptions/123
```

7.9 release-status

DB table: release_stat

Key: ref (integer)

Read access: public

Write access: authenticated user

q search fields: name, tag, status, comments

Methods:

- GET /release-status
- GET /release-status/{id}
- POST /release-status
- PATCH /release-status/{id}
- PUT /release-status/{id}
- DELETE /release-status/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
sitefk	int(11)	NO	yes	Site reference.
name	varchar(50)	NO	yes	Canonical or displayed name.
userfk	int(11)	NO	yes	User reference.
pin	int(11)	YES	yes	Pin flag.
pinuserfk	int(11)	YES	yes	User who set the pin.

Field	DB type	Nullable	Writable	Description
pindate	datetime	YES	yes	Pin date.
tag	varchar(100)	NO	yes	Software/release tag.
status	varchar(100)	NO	yes	Application status.
comments	varchar(255)	YES	yes	Operational comments.
date	datetime	NO	yes	Date/time associated with the record.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/release-status?
    limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/release-status/123
```

7.10 grids

DB table: grid

Key: ref (integer)

Read access: public

Write access: authenticated user

q search fields: name, description

Methods:

- GET /grids
- GET /grids/{id}
- POST /grids
- PATCH /grids/{id}
- PUT /grids/{id}
- DELETE /grids/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
name	varchar(10)	NO	yes	Canonical or displayed name.
description	varchar(255)	YES	yes	Human-readable description.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/grids?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/grids/123
```

7.11 facilities

DB table: facility

Key: ref (integer)

Read access: public

Write access: authenticated user

q search fields: name, description

Methods:

- GET /facilities
- GET /facilities/{id}
- POST /facilities
- PATCH /facilities/{id}
- PUT /facilities/{id}
- DELETE /facilities/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
name	varchar(10)	NO	yes	Canonical or displayed name.
description	varchar(255)	YES	yes	Human-readable description.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/facilities?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/facilities/123
```

7.12 site-types

DB table: site_type

Key: ref (integer)

Read access: public

Write access: authenticated user

q search fields: name, description

Methods:

- GET /site-types
- GET /site-types/{id}
- POST /site-types

- PATCH /site-types/{id}
- PUT /site-types/{id}
- DELETE /site-types/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
name	varchar(50)	NO	yes	Canonical or displayed name.
description	varchar(255)	NO	yes	Human-readable description.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/site-types?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/site-types/123
```

7.13 request-statuses

DB table: request_status

Key: ref (integer)

Read access: public

Write access: master role

q search fields: description

Methods:

- GET /request-statuses
- GET /request-statuses/{id}
- POST /request-statuses
- PATCH /request-statuses/{id}
- PUT /request-statuses/{id}
- DELETE /request-statuses/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
description	varchar(128)	YES	yes	Human-readable description.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/request-statuses?  
    limit=20&offset=0  
curl https://atlas-install.example.org/atlas_install/api/v1/request-statuses/123
```

7.14 request-types

DB table: request_type

Key: ref (integer)

Read access: public

Write access: master role

q search fields: field, description, comment

Methods:

- GET /request-types
- GET /request-types/{id}
- POST /request-types
- PATCH /request-types/{id}
- PUT /request-types/{id}
- DELETE /request-types/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
level	int(11)	NO	yes	Level/precedence.
field	varchar(100)	NO	yes	Application field name.
description	varchar(128)	YES	yes	Human-readable description.
comment	varchar(255)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/request-types?limit=20&offset=0  
curl https://atlas-install.example.org/atlas_install/api/v1/request-types/123
```

7.15 users

DB table: user

Key: ref (integer)

Read access: master role

Write access: master role

q search fields: name, dn, email

Methods:

- GET /users
- GET /users/{id}
- POST /users
- PATCH /users/{id}
- PUT /users/{id}
- DELETE /users/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
ref	int(11)	NO	no	Numeric resource identifier.
name	varchar(50)	NO	yes	Canonical or displayed name.
dn	varchar(200)	YES	yes	X.509 Distinguished Name.
email	varchar(150)	YES	yes	Associated email address.
priv_view	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
priv_insert	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
priv_update	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
priv_pin	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
priv_relsb	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.

Field	DB type	Nullable	Writable	Description
priv_critical	int(11)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
rolefk	int(11)	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
valid_start	datetime	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
valid_end	datetime	YES	yes	Canonical application-schema field; operational meaning depends on the resource.
enabled	int(11)	NO	yes	Enable flag (0/1).

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/users?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/users/123
```

7.16 local-users

DB table: atlas_local_user

Key: id (integer)

Read access: master role

Write access: master role

q search fields: username, first_name, last_name, email, role

Methods:

- GET /local-users
- GET /local-users/{id}
- POST /local-users
- PATCH /local-users/{id}
- PUT /local-users/{id}
- DELETE /local-users/{id}

Exposed fields:

Field	DB type	Nullable	Writable	Description
id	BIGINT	NO	no	Resource identifier.

Field	DB type	Nullable	Writable	Description
username	VARCHAR(64)	NO	yes	Local account name.
first_name	VARCHAR(100)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
last_name	VARCHAR(100)	NO	yes	Canonical application-schema field; operational meaning depends on the resource.
email	VARCHAR(254)	NO	yes	Associated email address.
role	VARCHAR(32)	NO	yes	Local application role: user, admin, or master.
enabled	TINYINT(1)	NO	yes	Enable flag (0/1).
must_change_password	TINYINT(1)	NO	yes	When 1, password change is required before API use.
created_at	DATETIME	NO	yes	Creation date/time.
updated_at	DATETIME	NO	yes	Last update date/time.

Examples:

```
curl https://atlas-install.example.org/atlas_install/api/v1/local-users?limit=20&offset=0
curl https://atlas-install.example.org/atlas_install/api/v1/local-users/123
```

`password` is a special input-only field: accepted by POST/PATCH/PUT, minimum 8 characters, converted into `password_hash`, and never returned.

8. End-to-end examples

8.1 Create and update a local user

```
curl -u admin:'ADMIN_PASSWORD' -H 'Content-Type: application/json' \
-d '{"username":"operator","first_name":"API","last_name":"Operator","email":"operator@example.org","role":"user","enabled":1,"password":"StrongPass-2026"}' \
https://atlas-install.example.org/atlas_install/api/v1/local-users

curl -u admin:'ADMIN_PASSWORD' -X PATCH -H 'Content-Type: application/json' \
-d '{"role":"admin","must_change_password":0}' \
https://atlas-install.example.org/atlas_install/api/v1/local-users/5
```

8.2 Python

```
import requests

base = 'https://atlas-install.example.org/atlas_install/api/v1'
r = requests.get(f'{base}/releases', params={'q':'24.3','limit':50}, timeout=30)
r.raise_for_status()
for release in r.json()['data']:
    print(release['ref'], release['name'], release['tag'])
```

8.3 Robust error handling

```
import requests

r = requests.get('https://atlas-install.example.org/atlas_install/api/v1/requests',
                 timeout=30)
if r.status_code >= 400:
    payload = r.json()
    err = payload.get('error', {})
    print('HTTP', r.status_code, err.get('code'), err.get('message'), 'request_id=',
          err.get('request_id'))
```

9. Security, compatibility and current limitations

- Always use HTTPS; Basic sends reusable credentials on every request.
- Local passwords/hashes are never returned.
- Writes use parameterized queries and an exposed-field allowlist.
- There are currently no ETag/If-Match semantics and no Idempotency-Key header: clients must avoid blind POST retries.
- There are no bulk endpoints: each request modifies one resource.
- PUT is intentionally patch-like in v1; do not assume full replacement semantics.
- Maximum page size is 1000; iterate with offset for larger datasets.

- Resources with DB dependencies may return 409 on DELETE/UPDATE due to constraints/conflicts.
- Legacy endpoints are separate; do not infer REST contracts from legacy endpoint syntax.

10. Production client checklist

- ☐ Verify the server TLS certificate.
- ☐ Set explicit client-side timeouts.
- ☐ Record and propagate `X-Request-ID` where possible.
- ☐ Handle 401, 403, 409, 415 and 5xx separately.
- ☐ Never log passwords, Basic Authorization or TOTP codes.
- ☐ Use pagination and reasonable limits.
- ☐ Before DELETE, account for dependencies and handle 409.
- ☐ Use dedicated automation identities with the least required role.

Deleting the `users` resource

`DELETE /atlas_install/api/v1/users/{ref}` performs a soft deletion: it disables the user, clears active privileges, closes validity, and records `deleted_at`. The row is not physically removed because requests, logs, and other historical objects may reference it. A successful request returns `204 No Content`.