QUORIVIO

Presenter guide

Version 0.1.0-dev · Build dev-20261022 · 22 October 2026



Alessandro De Salvo · github.com/desalvo/quorivio

Documented features match the development build; unverified and planned operations are explicitly marked.

Contents

Overview	4
Create a session	5
Build and run activities	6
Exports and lifecycle	7
Troubleshooting and roadmap	8
Importing slide pages	9
Themes, media and audience access	10
Collaboration and live session editing	11
Pre-event checklist	12
Conducting an event, step by step	13
Collaboration, portability and revision control	14
Presenter troubleshooting	15
Moderate Q&A; and word cloud (new)	16
Streaming uploads and checks	17
Presenter TOTP MFA	18
GitHub and Facebook linked identities	19
Portability and collaboration in the web interface	20
Widgets, satisfaction scores and page composition	21
Profiles, collaboration and multiple ratings	22
Visual editing, formatting and comments	23

Page sequence and duplication 24

PDF/PPTX import from the workspace 25


Drag-and-drop page sequence 25

Widget positioning canvas 26

Federated OIDC sign-in (experimental) 27

Appendices and known limitations 28

Overview

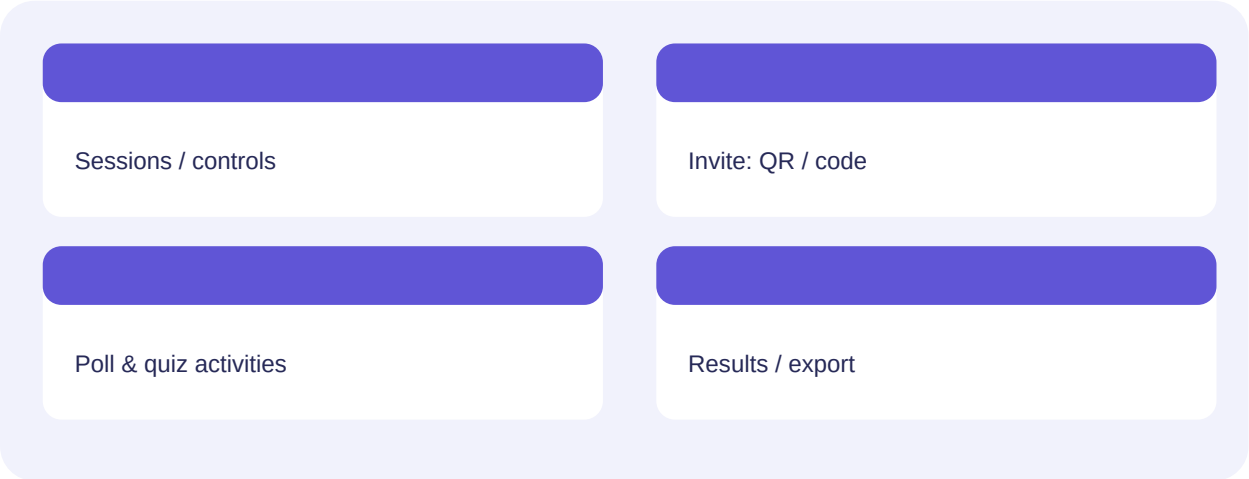

Presenter workspace

Sign in using administrator-provided local credentials. Create sessions, author polls and quizzes, invite participants and view live results. External SSO providers are not yet operational.

External presentation workflow

Keep PowerPoint or PDF in your usual presentation application. Insert a Quorivio session QR code and control questions from a separate browser or device.


Create a session

Start a workspace

1. Sign in. 2. Enter a title in New session. 3. Click Create. 4. Select the new session in the sidebar.

Invite participants

In Session invitation, copy the join URL or download the QR code as PNG or SVG. Insert it into your external slides and test the participant experience before the event.

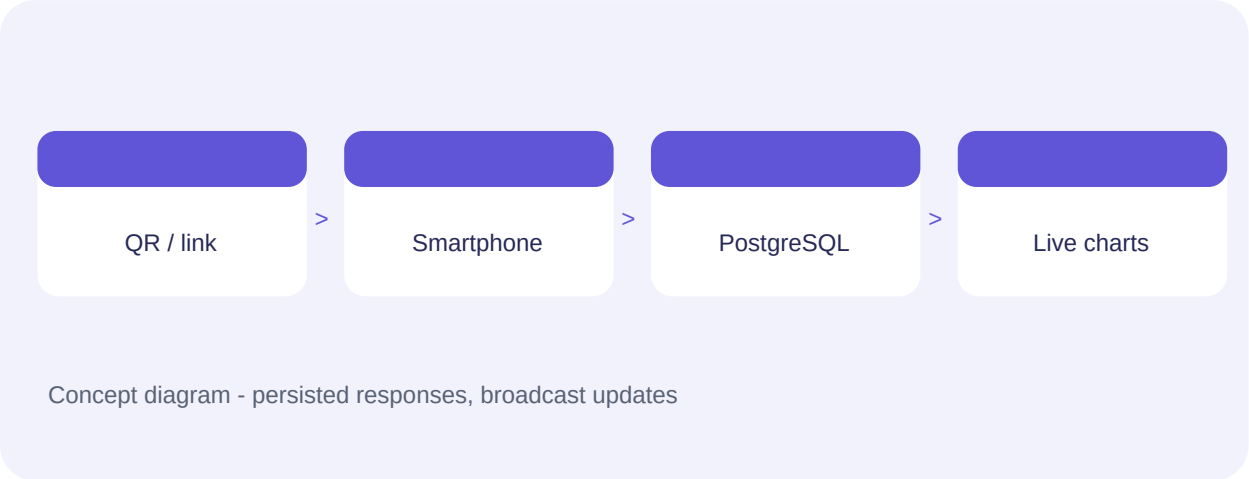

Concept diagram - persisted responses, broadcast updates

Build and run activities

Poll creation

Under New activity choose Poll, enter a question, write one answer option per line and click Add activity.

Quiz creation


Choose Quiz, enter options and designate the correct option. A server-side default timer is used; leaderboards are not available in this build.

Session flow

1. Click Start. 2. Open the desired question. 3. Watch live results. 4. Close the current question or open the next one. 5. Click End to close the session.

Public display

Open Public screen in a second browser tab or projected display. Bars show confirmed answers persisted in PostgreSQL.

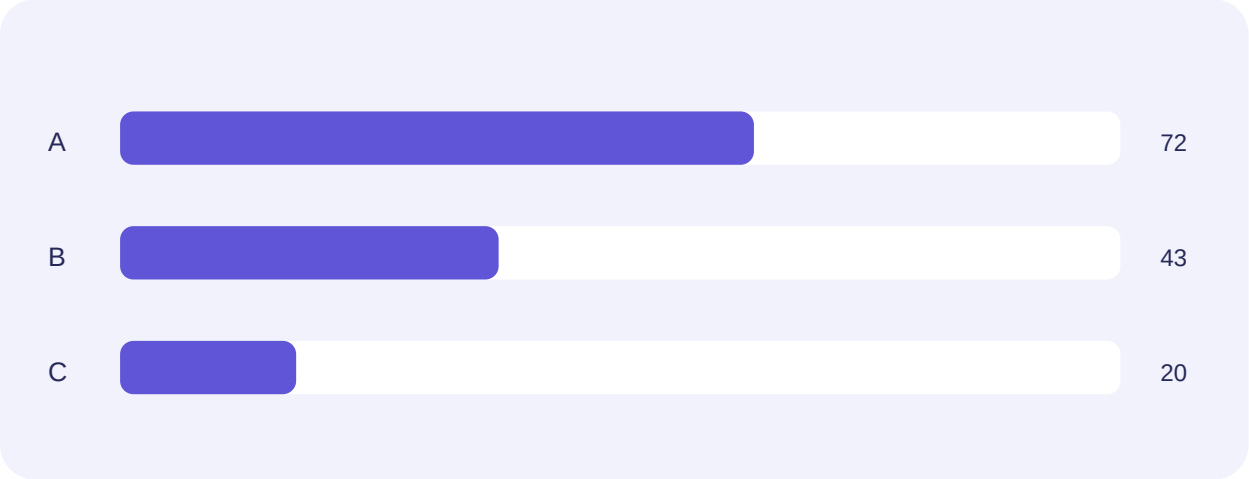

Example chart — illustrative values, not live data.

Exports and lifecycle

CSV export

Click Export CSV under Session data. Store the file securely and limit access to authorized recipients.

Retention control

Under Privacy and lifecycle, change retention days (1–3650) and leave the field to save. Background deletion applies only once sessions are closed or expired.

Revoke and delete

Revoke access closes a session and rotates invitations after confirmation. Delete session permanently removes the session and associated responses after confirmation. Review retention obligations first.

Troubleshooting and roadmap

Common problems

Expired QR: renew invitations. Missing charts: verify an open activity and submitted responses. Access denied: verify session ownership. Multi-replica WebSocket operation is not validated.

Planned functions

Word clouds, moderated Q&A, document import, collaborators, leaderboards, PDF/XLSX export and SSO are not implemented yet.

Importing slide pages

PDF and PowerPoint

First convert the document with python3 tools/import_presentation.py slides.pdf /tmp/pages. Animations and embedded video are not preserved.

Web import

In the presenter workspace select a session, then choose the generated PNG files together from the Attachments section. Each image creates a slide page; individual uploaded images also offer Create slide page. Confirm ordering before presenting.

Audience playback

When a slide is opened as the current activity, participants can view its image. It is informational and requires no vote.

Known limits

PDF/PPTX conversion remains offline; isolated background worker and end-to-end browser/database verification are outstanding.

Themes, media and audience access

Preliminary appearance controls

The workspace includes inputs for HTTPS background and logo URLs shared across a session, and an image, video or PDF attached to the current question. Typed page configuration is in place; multiple templates, WYSIWYG customization and uploads remain pending.

Anonymous admissions

The presenter can enable or disable anonymous access and publishing live participant results in the Privacy section. Anonymous participation uses pseudonyms and necessary cookies; registered-user participation is still planned.

Data retention

Closed sessions follow an administrator-wide deletion policy initially set to 60 days after closure. Earlier owner retention settings must be reconciled before production.

Collaboration and live session editing

Co-presenters

An owner can add approved presenters from the same organization via POST /api/sessions/{id}/presenters. Shared session authoring is in the API; complete UI and multi-user testing are pending.

Copy and definition import/export

The export.json, import and duplicate endpoints preserve activities and themes without answers or personal data. Duplicates are new drafts with new QR links. Visual controls are not yet complete.

Live edits and invalidation

Question text and options may be changed live without removing answered option IDs. Invalidation preserves an audit trail and excludes marked responses from results. Re-answering after invalidation is not yet supported.

Pre-event checklist

One day before

Confirm administrator approval for presenter role. Create the session with a recognizable name and reference date. Review questions, answer choices, QR and public address. Test participation using a second nonauthenticated device.

Admission and notice

Choose whether anonymous attendees are allowed and whether they can view aggregates. Explain the pseudonym and necessary cookie flow. Do not claim strong anonymous one-person-one-vote guarantees.

Appearance setup

Where available, enter HTTPS logo and background addresses using the basic theme controls. Remote media and the page editor are incomplete. Check readability, image contrast and projection quality on actual hardware.

Dry run

Submit a test answer from another device and verify the public results and CSV export. Use a separate session or definition-only duplicate for rehearsals; never pollute production event results.

Conducting an event, step by step

Before opening

Choose your session in the presenter workspace. Download QR as PNG or SVG and insert it in an external PDF/PowerPoint. Keep presenter controls on your private display and public screen in a second tab or device.

Start

Start the session, then open the first activity. Present the code and confirm that a phone can submit. Avoid projecting secrets or administrative controls. Configure result visibility deliberately.

During voting

Watch submitted counts and avoid unexpected structural edits. Keep existing option identifiers when changing answered questions. Live edit APIs exist, but a complete visual authoring experience is not validated.

Close and export

Close each activity before proceeding. End the event session when done, then export CSV and verify access to history. Closed-session retention defaults to a global 60 days, adjustable by administrators.

Collaboration, portability and revision control

Co-presenters

The owner can grant access to approved presenters within the organization using the session API. The complete invite UI, concurrent editing and permissions integration tests are unfinished.

Duplicate a session

The duplicate API creates a fresh draft with new invitation credentials and no audience responses. Set an appropriate name and reference date, review contents and circulate only the new QR.

Definition import and export

JSON export/import covers questions and layout definitions but not participant responses, uploaded files or complete backups. Review input data and trial imports in a nonproduction environment.

Invalidate responses

The API can mark responses to one activity as invalid, excluding them from active aggregates while retaining an audit record. Tell the audience when this changes results. Reanswering after invalidation is not fully supported.

Presenter troubleshooting

Audience cannot connect

Check PUBLIC_BASE_URL, HTTPS, session state, expiration and anonymous admission. QR codes downloaded before a public URL change must be regenerated.

Projected results freeze

Check that the question is open and responses were confirmed. Reload the public screen carefully; cross-replica WebSocket synchronization has not been validated.

Results do not match the question

Review whether choices changed after submissions started. Do not destroy identifiers linked to responses. Invalidate only with an explicit decision and retain an explanation.

CSV cannot be exported

Verify presenter authorization and that the session has results. CSV is available; complete Excel export remains planned. Check encoding and preserve files in access-controlled storage.

Moderate Q&A and word cloud (new)

Collect words

Open an activity and select Refresh in the Q&A and word cloud panel. The list contains normalized words and their frequency, ordered by contribution count.

Moderate questions

New questions start as pending. Select Approve to publish or Reject to withhold a question. The moderation state is persistent.

Review upvotes

Refresh the panel to read vote totals alongside each question and its status. Do not expose participant identifiers on the public display.

Operational limits

Moderator push updates, concurrency and anti-abuse testing are not finished. Do not treat the feature as production validated.

Streaming uploads and checks

Uploading files

Uploads are progressively written to private storage; type signature, length and default 100 MB limit are checked. Keep the browser open until confirmation. The Compose/Helm deployment bundles antivirus scanning; shared storage is still pending.

Presenter TOTP MFA

Enable an authenticator

Log in locally, choose Configure MFA, import the secret or otpauth link and confirm a valid code. Subsequent logins require password plus the current six-digit code.

Disable and recovery

Deactivation requires the password and a valid TOTP code. One-time recovery codes are generated and shown once: store them securely offline.

GitHub and Facebook linked identities

Linking a provider

First sign in with an approved local account. Under Federated identities / SSO select Link GITHUB or Link FACEBOOK and complete provider authorization. Identity matching uses the immutable provider subject, never an email address.

OAuth sign-in

After linking, select the configured provider on the login screen. Accounts using TOTP must continue signing in locally with MFA; federation must not bypass the second factor.

Limitations

OAuth clients require registered HTTPS callbacks. Live providers, multi-replica and end-to-end flows are unverified. See docs/SOCIAL_OAUTH.en.md.

Portability and collaboration in the web interface

Duplicate a session

1. Sign in as an approved presenter. 2. Select a session. 3. Open Portability and collaboration. 4. Choose Duplicate session. 5. Select the new entry and verify its fresh QR code. Prior responses are not copied.

Export and import JSON

Choose Export definition JSON for a definition-only export; responses and uploaded files are excluded. To import, choose a .json file in the same panel. The imported session appears in the list. Never import untrusted files.

Co-presenters

The session owner supplies the email address of an approved presenter within the same organization, selects Add presenter and refreshes the list with Show collaborators. Removing a presenter requires confirmation. Permissions are enforced by the server.

Live edits and invalidation

Choose Live edit alongside an activity. Each option uses ID|text: retain existing IDs to preserve historical responses, and do not silently change an option’s meaning. Select Save changes. Use Invalidate responses only when necessary after explicit confirmation; invalidated results remain auditable and do not count as valid votes.

Operational boundaries

Complete session archives including answers and assets and a rich-media WYSIWYG editor are not implemented. Verify CI, PostgreSQL migrations and multiuser flows before production use.

Widgets, satisfaction scores and page composition

Manual identity

Application version: 0.1.0-dev. Documentation build: dev-20261022. Git release tags and revision numbers are excluded; they do not require rebuilding manuals if the documented application build is unchanged.

Widget palette

The palette includes a 0–10 satisfaction rating, emoji reactions, text, divider, indicative timer and QR placeholder. Widgets complement rather than replace poll or quiz answers.

Presenter workflow

Open the session, choose Page layout for an activity, select + rating or another widget, edit its label, reorder by drag and drop or keyboard-friendly arrow buttons, then save the layout. Existing answers remain untouched.

Participant workflow

Join with the session QR and pseudonym. Where enabled, choose a number from 0 to 10. One satisfaction response per participant per activity is stored separately from quiz answers and emoji reactions.

Statistics

Use Satisfaction 0–10 in the session view to see an overall count and average and a per-page breakdown. Minimum, maximum and distribution are available through the protected API. Do not disclose participant identities on public screens.

Known limitations

Drag and drop reorders widgets on question pages; freeform spatial positioning and all page types are not yet supported. Timer and QR are visual placeholders. Browser and real PostgreSQL integration tests are pending.

Profiles, collaboration and multiple ratings

Project opening

The workspace clearly distinguishes Author / owner and Invited collaborator for each listed session.

Presenter profile

Load the profile in the Presenter profile area, set the public display name and an HTTPS photo URL, then save. Direct photograph upload is not yet supported; review image rights and consent.

Profile widget

Open Page layout, add + profile, choose a session presenter, and save. Repeat for multiple profiles; Remove deletes individual widgets.

Independent ratings

Insert multiple rating widgets, selecting Question, Quiz, Session or Presenter as their target. Select the presenter where applicable. A participant can score each widget once.

Statistics and limitations

Presenter statistics include a count and average for each widget. The quiz target currently maps to an activity rather than a multi-question quiz. The PostgreSQL schema migration requires live validation.

Visual editing, formatting and comments

Widget options

In Page layout add multiple widgets. Rating widgets require a title and support an optional description. Expand Style and animations to choose font, size (10–96), color, bold, italic, underline, strikethrough, and fade/slide.

Text editing

Double-click the title input to select and edit the text, then save the page. Drag to reorder or use the accessible up/down controls.

Rating comment

Each rating widget requires a title. Participants may write an optional comment up to 1,000 characters alongside a 0–10 rating. Comments remain private and are not included in public aggregates.

Question widgets

Add a question widget in single, multiple, free-text or file mode. In this build it is an additional visual block, not yet an independent response channel.

Limits

A freeform widget canvas is available experimentally; production browser validation is pending, as is fully integrated per-widget media editing. Browser/PostgreSQL verification remains required.

Page sequence and duplication

Reorder a page

Open the session workspace and use the up/down buttons in the activity list. The order is saved immediately; historic votes and the currently open activity keep their identifiers.

Duplicate a page

Choose Duplicate page. A new activity with the same definitions, options and widgets is appended without copying votes or participant information.

Restrictions and verification

Closed sessions cannot be reordered or duplicated. Presenter authorization is required. The freeform canvas is still under development; real PostgreSQL and multi-browser tests are pending.

PDF/PPTX import from the workspace

Prerequisites

Direct conversion is experimental and disabled by default. Python 3 and Poppler are required; LibreOffice is needed for PPTX. Never enable in production without an independently sandboxed conversion worker.

Presenter procedure

1. Open a session you own or co-present. 2. In Attachments select Import PDF/PPTX directly. 3. Select a file up to 100 MiB. 4. Wait for the result. 5. Verify inserted slide pages and open the first one for participants.

Limits

Maximum 200 pages. Slides are flattened to images; animation, video and transitions are not preserved. If QUORIVIO_ENABLE_CONVERTER is unset, the endpoint returns 503. The current subprocess is not a production sandbox.

Troubleshooting

HTTP 503: worker not configured. 415: unsupported file. 413: oversized file. 500: inspect restricted server logs and conversion dependencies. Slide insertion rolls back on failure.

Drag-and-drop page sequence

In the presenter workspace, drag a page row onto another page to change sequence order. Keyboard users can use Up/Down controls instead. Duplicate page creates a new page without historical responses. The operation preserves page IDs, existing answers and the currently open page. Closed sessions cannot be reordered.

Drag-and-drop requires HTML5 support and a connection to the backend; reload the session if an error occurs.

Widget positioning canvas

Using the canvas

Open Page layout. Drag widgets by their bodies, resize from the edges, rotate using the circular handle and double-click to edit titles. The white 16:9 slide has rulers and fullscreen editing.

Removal and persistence

Remove deletes only the selected widget. Choose Save layout to store percent-based positions; saved arrangements reappear when the page is opened.

Keyboard access

The widget list, Up/Down buttons and configuration menus remain available independently from dragging. Advanced spatial keyboard controls require accessibility testing.

Limitations

Real mobile browsers, PostgreSQL migration and layout interactions remain unverified. Topic-question widgets provide independently paginated streams of ten questions per presenter page.

Federated OIDC sign-in (experimental)

Availability

Google, generic OIDC or custom OIDC sign-in is only displayed when the administrator configures all HTTPS provider parameters. GitHub and Facebook offer experimental OAuth2 flows; SAML is not yet integrated.

Link identity

Sign in with your approved local account and choose Link in your profile. Authenticate at the IdP and confirm success. Matching email alone never links an identity.

Federated login

After linking, choose the configured IdP from the sign-in page. Users with local TOTP MFA enabled must continue using their local password and MFA code.

Production limitations

Real IdP tests, PostgreSQL migration checks, multi-replica shared state and security review remain open. See docs/OIDC_SSO.en.md; this flow is not production certified.

Appendices and known limitations

Status: development. Before operational deployment, review docs/DEVELOPMENT_STATUS.md, docs/GDPR.en.md and docs/SECURITY.md.

Visual diagrams are illustrative reproductions of workflows, not browser screenshots.