
AWS Lambda

Developer Guide



AWS Lambda: Developer Guide

Copyright © 2016 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

Amazon's trademarks and trade dress may not be used in connection with any product or service that is not Amazon's, in any manner that is likely to cause confusion among customers, or in any manner that disparages or discredits Amazon. All other trademarks not owned by Amazon are the property of their respective owners, who may or may not be affiliated with, connected to, or sponsored by Amazon.

Table of Contents

What Is AWS Lambda?	1
When should I Use Lambda?	1
Are You a First-time User of AWS Lambda?	2
How It Works	3
Example 1	4
Example 2	5
Example 3: Custom Application Publishes Events and Invokes a Lambda Function	6
Lambda Function	8
Compute Requirements – Lambda Function Configuration	8
Invocation Types	9
How Does AWS Lambda Run My Code? The Container Model	9
Event Source Mapping	10
Event Source Mapping for AWS Services	11
Event Source Mapping for AWS Stream-based Services	12
Event Source Mapping for Custom Applications	13
Supported Event Sources	14
Amazon S3	15
Amazon DynamoDB	16
Amazon Kinesis Streams	16
Amazon Simple Notification Service	16
Amazon Simple Email Service	17
Amazon Cognito	17
AWS CloudFormation	17
Amazon CloudWatch Logs	17
Amazon CloudWatch Events	18
Scheduled Events (powered by Amazon CloudWatch Events)	18
AWS Config	18
Amazon Echo	19
Amazon API Gateway	19
Other Event Sources: Invoking a Lambda Function On Demand	19
Sample Event Data	19
Concurrent Executions	28
Concurrent Execution Request Rate	28
Concurrent Executions Safety Limit	28
Retries on Errors	29
Permissions Model	30
Manage Permissions: Using an IAM Role (Execution Role)	31
Manage Permissions: Using a Lambda Function Policy	32
Execution Environment	33
Getting Started	35
Step 1: Set Up an AWS Account and the AWS CLI	35
Step 1.1: Set Up an Account	35
Step 1.2: Set Up the AWS CLI	38
Step 2: Create a HelloWorld Lambda Function and Explore the Console	39
Preparing for the Getting Started	39
Step 2.1: Create a Hello World Lambda Function	39
Step 2.2: Invoke the Lambda Function	42
Step 2.3: (Optional) Try Other Blueprints	44
Step 2.4: (Optional) Create a Lambda Function Authored in Java	45
What's Next?	46
Building AWS Lambda-Based Applications	47
Authoring Code for Your Lambda Function	48
Deploying Code and Creating a Lambda Function	48
Creating a Deployment Package	49
Uploading a Deployment Package	49

Testing a Lambda Function	49
Using AWS CloudFormation	50
Monitoring and Troubleshooting	50
AWS Lambda-Based Application Examples	50
Related Topics	50
Programming Model	51
Programming Model (Node.js)	51
Programming Model (Java)	63
Programming Model (Python)	81
Creating a Deployment Package	89
Creating a Deployment Package (Node.js)	89
Creating a Deployment Package (Java)	91
Creating a Deployment Package (Python)	98
Versioning and Aliases	101
Versioning	102
Aliases	106
Versioning, Aliases, and Resource Policies	114
Managing Versioning	116
Troubleshooting and Monitoring	118
Troubleshooting Scenarios	119
Accessing CloudWatch Metrics	120
Accessing CloudWatch Logs	122
Metrics	123
Use Cases	125
Amazon S3	125
Tutorial	127
Amazon Kinesis	142
Tutorial	143
Amazon DynamoDB	151
Tutorial	152
AWS CloudTrail	161
Tutorial	162
Amazon SNS	175
Tutorial	175
Amazon API Gateway	180
Tutorial	181
Mobile Backend (Android)	193
Tutorial	195
Scheduled Events	207
Tutorial	207
Custom User Applications	212
Tutorial	212
VPC Support	220
Configuring a Lambda Function for Amazon VPC Access	220
Internet Access for Lambda Functions	221
Guidelines for Setting Up VPC-Enabled Lambda Functions	222
Tutorials: Accessing Resources in an Amazon VPC	223
Tutorial: Accessing Amazon ElastiCache in an Amazon VPC	223
Tutorial: Accessing Amazon RDS in an Amazon VPC	227
API Logging with AWS CloudTrail	233
AWS Lambda Information in CloudTrail	233
Understanding AWS Lambda Log File Entries	234
Best Practices	236
Limits	237
List of AWS Lambda Limits	237
AWS Lambda Limit Errors	238
Authentication and Access Control	239
Authentication	239

Access Control	240
Overview of Managing Access	241
AWS Lambda Resources and Operations	241
Understanding Resource Ownership	242
Managing Access to Resources	242
Specifying Policy Elements: Actions, Effects, Resources, and Principals	244
Specifying Conditions in a Policy	245
Using Identity-Based Policies (IAM Policies)	245
Permissions Required to Use the AWS Lambda Console	246
AWS Managed (Predefined) Policies for AWS Lambda	246
Customer Managed Policy Examples	247
Console Permissions	250
Using Resource-Based Policies (Lambda Function Policies)	258
Allow Amazon S3 to Invoke a Lambda Function	259
Allow Amazon API Gateway to Invoke a Lambda Function	260
Cross-Account Scenario	261
Retrieve a Lambda Function Policy	261
Remove Permissions	262
Working with Lambda Function Versioning, Aliases, and Permissions	262
Lambda API Permissions Reference	262
Policy Templates	264
Basic: 'Basic Lambda Permissions'	264
VPCLAccess: 'Lambda VPC Access Permissions'	264
Kinesis: 'Lambda Kinesis stream poller permissions'	265
DynamoDB: 'Lambda DynamoDB stream poller permissions'	265
CloudFormation: 'CloudFormation stack read-only permissions'	266
AMI: 'AMI read-only permissions'	266
KMS: 'KMS decryption permissions'	266
S3: 'S3 object read-only permissions'	267
Elasticsearch: 'Elasticsearch permissions'	267
SES: 'SES bounce permissions'	267
TestHarness: 'Test Harness permissions'	267
Microservice: 'Simple Microservice permissions'	268
VPN: 'VPN Connection Monitor permissions'	268
SQS: 'SQS Poller permissions'	269
IoTButton: 'AWS IoT Button permissions'	269
API Reference	270
Actions	270
AddPermission	272
CreateAlias	275
CreateEventSourceMapping	278
CreateFunction	282
DeleteAlias	287
DeleteEventSourceMapping	288
DeleteFunction	290
GetAlias	292
GetEventSourceMapping	294
GetFunction	296
GetFunctionConfiguration	298
GetPolicy	301
Invoke	303
InvokeAsync	307
ListAliases	309
ListEventSourceMappings	311
ListFunctions	313
ListVersionsByFunction	315
PublishVersion	317
RemovePermission	321

UpdateAlias	323
UpdateEventSourceMapping	325
UpdateFunctionCode	328
UpdateFunctionConfiguration	332
Data Types	336
AliasConfiguration	337
EventSourceMappingConfiguration	338
FunctionCode	339
FunctionCodeLocation	340
FunctionConfiguration	341
VpcConfig	343
VpcConfigResponse	344
Document History	345
AWS Glossary	349

What Is AWS Lambda?

AWS Lambda is a compute service where you can upload your code to AWS Lambda and the service can run the code on your behalf using AWS infrastructure. After you upload your code and create what we call a *Lambda function*, AWS Lambda takes care of provisioning and managing the servers that you use to run the code. You can use AWS Lambda as follows:

- As an event-driven compute service where AWS Lambda runs your code in response to events, such as changes to data in an Amazon S3 bucket or an Amazon DynamoDB table.
- As a compute service to run your code in response to HTTP requests using Amazon API Gateway or API calls made using AWS SDKs.

AWS Lambda runs your code on a high-availability compute infrastructure and performs all of the administration of the compute resources, including server and operating system maintenance, capacity provisioning and automatic scaling, code monitoring and logging. All you need to do is supply your code in one of the languages that AWS Lambda supports (currently Node.js, Java, and Python). For more information about the AWS Lambda execution environment, see [Lambda Execution Environment and Available Libraries](#) (p. 33). For information about how AWS Lambda determines compute resources required to execute your code, see [Compute Requirements – Lambda Function Configuration](#) (p. 8).

AWS Lambda executes your code only when needed and scales automatically, from a few requests per day to thousands per second. With these capabilities, you can use Lambda to easily build data processing triggers for AWS services like Amazon S3 and Amazon DynamoDB, process streaming data stored in Amazon Kinesis, or create your own back end that operates at AWS scale, performance, and security.

When Should I Use AWS Lambda?

AWS Lambda is an ideal compute platform for many application scenarios, provided that you can write your application code in languages supported by AWS Lambda (that is, Node.js, Java, and Python), and run within the AWS Lambda standard runtime environment and resources provided by Lambda.

When using AWS Lambda, you are responsible only for your code. AWS Lambda manages the compute fleet that offers a balance of memory, CPU, network, and other resources. This is in exchange for flexibility, which means you cannot log in to compute instances, or customize the operating system or language runtime. These constraints enable AWS Lambda to perform operational and administrative activities on your behalf, including provisioning capacity, monitoring fleet health, applying security patches, deploying your code, and monitoring and logging your Lambda functions.

If you need to manage your own compute resources, Amazon Web Services also offers other compute services to meet your needs.

- Amazon Elastic Compute Cloud (Amazon EC2) service offers flexibility and a wide range of EC2 instance types to choose from. It gives you the option to customize operating systems, network and security settings, and the entire software stack, but you are responsible for provisioning capacity, monitoring fleet health and performance, and using Availability Zones for fault tolerance.
- Elastic Beanstalk offers an easy-to-use service for deploying and scaling applications onto Amazon EC2 in which you retain ownership and full control over the underlying EC2 instances.

Are You a First-time User of AWS Lambda?

If you are a first-time user of AWS Lambda, we recommend that you read the following sections in order:

1. **Read the product overview and watch the introductory video.** These resources are available on the [AWS Lambda webpage](#).

Read the "How It Works" section of this guide. This section introduces various AWS Lambda components you work with to create an end-to-end experience. For more information, see [How It Works \(p. 3\)](#).
2. **Review the programming model.** When creating a Lambda function there are core concepts you should be familiar with. This section explains these concepts and provides details of how they work in different languages that you can use to author your Lambda function code. For more information, see [Programming Model \(p. 51\)](#).
3. **Try the console-based Getting Started exercise.** The exercise provides instructions for you to create and test your first Lambda function using the console. You also learn about the console provided blueprints to quickly create your Lambda functions. For more information, see [Getting Started \(p. 35\)](#).

Beyond the Getting Started exercise, you can explore the various use cases, each of which is provided with a tutorial that walks you through an example scenario. Depending on your application needs (for example, whether you want event driven Lambda function invocation or on-demand invocation), you can follow specific tutorials that meet your specific needs. For more information, see [Use Cases \(p. 125\)](#).

The following topics provide additional information about AWS Lambda:

- [AWS Lambda Function Versioning and Aliases \(p. 101\)](#)
- [Troubleshooting and Monitoring AWS Lambda Functions with Amazon CloudWatch \(p. 118\)](#)
- [Best Practices for Working with AWS Lambda Functions \(p. 236\)](#)
- [AWS Lambda Limits \(p. 237\)](#)

AWS Lambda: How It Works

When building applications on AWS Lambda, the core components are Lambda functions and event sources. An *event source* is the AWS service or custom application that publishes events, and a *Lambda function* is the custom code that processes the events. To illustrate, consider the following scenarios:

- **File processing** – Suppose you have a photo sharing application. People use your application to upload photos, and the application stores these user photos in an Amazon S3 bucket. Then, your application creates a thumbnail version of each user's photos and displays them on the user's profile page. In this scenario, you may choose to create a Lambda function that creates a thumbnail automatically. Amazon S3 is one of the supported AWS event sources that can publish *object-created events* and invoke your Lambda function. Your Lambda function code can read the photo object from the S3 bucket, create a thumbnail version, and then save it in another S3 bucket.
- **Data and analytics** – Suppose you are building an analytics application and storing raw data in a DynamoDB table. When you write, update, or delete items in a table, DynamoDB streams can publish item update events to a stream associated with the table. In this case, the event data provides the item key, event name (such as insert, update, and delete), and other relevant details. You can write a Lambda function to generate custom metrics by aggregating raw data.
- **Websites** – Suppose you are creating a website and you want to host the backend logic on Lambda. You can invoke your Lambda function over HTTP using Amazon API Gateway as the HTTP endpoint. Now, your web client can invoke the API, and then API Gateway can route the request to Lambda.
- **Mobile applications** – Suppose you have a custom mobile application that produces events. You can create a Lambda function to process events published by your custom application. For example, in this scenario you can configure a Lambda function to process the clicks within your custom mobile application.

Each of these event sources uses a specific format for the event data. For more information, see [Sample Events Published by Event Sources \(p. 19\)](#). When a Lambda function is invoked, it receives the event as a parameter for the Lambda function.


AWS Lambda supports many AWS services as event sources. For more information, see [Supported Event Sources \(p. 14\)](#). When you configure these event sources to trigger a Lambda function, the Lambda function is invoked automatically when events occur. You define *event source mapping*, which is how you identify what events to track and which Lambda function to invoke.

In addition to the supported AWS services, user applications can also generate events—you can build your own custom event sources. Custom event sources invoke a Lambda function using the AWS Lambda [Invoke \(p. 303\)](#) operation. User applications, such as client, mobile, or web applications, can publish events and invoke Lambda functions on demand using the AWS SDKs or AWS Mobile SDKs, such as the AWS Mobile SDK for Android.

The following are introductory examples of event sources and how the end-to-end experience works.

Example 1: Amazon S3 Pushes Events and Invokes a Lambda Function

Amazon S3 can publish events of different types, such as PUT, POST, COPY, and DELETE object events on a bucket. Using the bucket notification feature, you can configure an event source mapping that directs Amazon S3 to invoke a Lambda function when a specific type of event occurs, as shown in the following illustration.

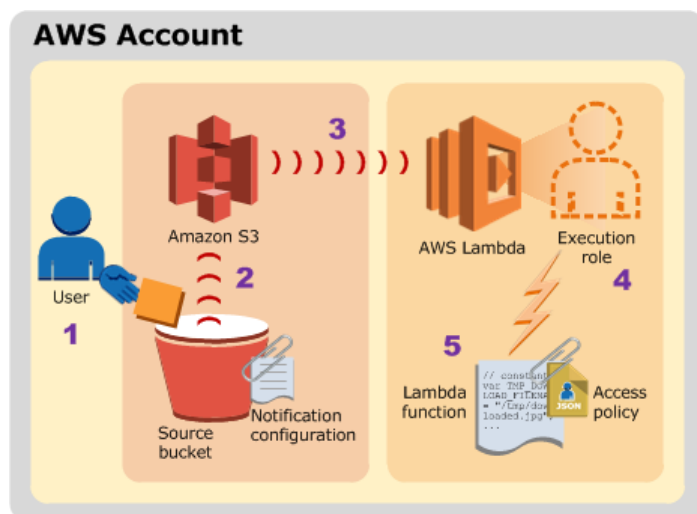

The diagram illustrates the following sequence:

1. The user creates an object in a bucket.
2. Amazon S3 detects the object created event.
3. Amazon S3 invokes your Lambda function using the permissions provided by the execution role. For more information on execution roles, see [Authentication and Access Control for AWS Lambda \(p. 239\)](#). Amazon S3 knows which Lambda function to invoke based on the event source mapping that is stored in the bucket notification configuration.
4. AWS Lambda executes the Lambda function, specifying the event as a parameter.


Note the following:

- The event source mapping is maintained within the event source service, Amazon S3 in this scenario. This is true for all supported AWS event sources except the stream-based sources (Amazon Kinesis and DynamoDB streams). The next example explains stream-based event sources.
- The event source (Amazon S3) invokes the Lambda function (referred to as the *push model*). Again, this is true for all supported AWS services except the stream-based event sources.
- In order for the event source (Amazon S3) to invoke your Lambda function, you must grant permissions using the permissions policy attached to the Lambda function.

Example 2: AWS Lambda Pulls Events from an Amazon Kinesis Stream and Invokes a Lambda Function

For stream-based event sources, AWS Lambda polls the stream and invokes the Lambda function when records are detected on the stream. These stream sources are special in that event source mapping information is stored in Lambda. AWS Lambda provides an API for you to create and manage these event source mappings.

The following diagram shows how a custom application writes records to an Amazon Kinesis stream.

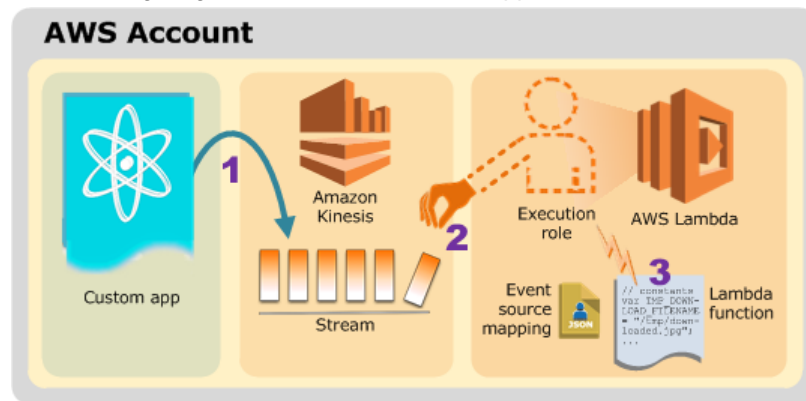

The diagram illustrates the following sequence:


1. The custom application writes records to an Amazon Kinesis stream.
2. AWS Lambda continuously polls the stream, and invokes the Lambda function when the service detects new records on the stream. AWS Lambda knows which stream to poll and which Lambda function to invoke based on the event source mapping you create in Lambda.
3. The Lambda function is invoked with the incoming event.

Note the following:

- When working with stream-based event sources:
 - You create event source mappings in AWS Lambda.
 - AWS Lambda invokes the Lambda function (referred to as the *pull model*).
- AWS Lambda does not need permission to invoke your Lambda function, therefore you don't need to add any permissions to the permissions policy attached to your Lambda function.
- Your Lambda role needs permission to read from the stream.

Example 3: Custom Application Publishes Events and Invokes a Lambda Function

The following diagram shows how a custom application in your account invokes your Lambda function.

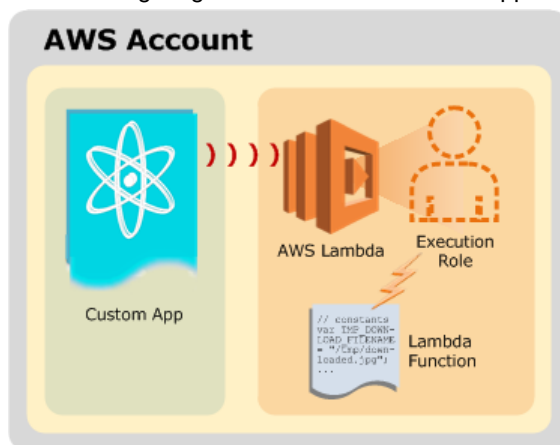


The diagram illustrates the following sequence:

1. The custom application invokes your Lambda function using the AWS SDK.
2. The Lambda function is invoked with the incoming event.

The following diagram shows how a custom mobile application invokes a Lambda function.

AWS Lambda Developer Guide

Example 3: Custom Application Publishes Events and Invokes a Lambda Function

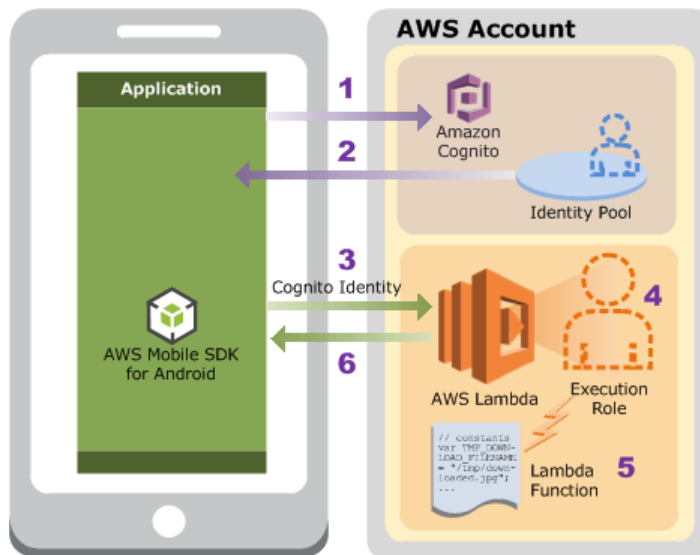

1. The mobile application sends a request to Amazon Cognito with an identity pool ID in the request (you create the identity pool as part of the setup).
2. Amazon Cognito returns temporary security credentials to the application.
Amazon Cognito assumes the role associated with the identity pool to generate temporary credentials.
3. The mobile application invokes the Lambda function using the temporary credentials (Cognito Identity).
4. AWS Lambda assumes the execution role to execute your Lambda function on your behalf.
5. The Lambda function executes.
6. AWS Lambda returns results to the mobile application, assuming the app invoked the Lambda function using the `RequestResponse` invocation type (referred to as *synchronous invocation*).

Note the following:

- This is an example of an on-demand invocation of a Lambda function. For on-demand invocations, you don't need to preconfigure an event source mapping like you do for AWS services.
- In this example, because the custom application is using the same account credentials as the account that owns the Lambda function, it does not require additional permissions to invoke the function.

Suggested Reading

If you are new to AWS Lambda, at this time you can continue and read all of the topics in this How It Works chapter for details. You might also consider exploring the [Getting Started \(p. 35\)](#) exercise first to get hands-on experience creating and testing a Lambda function, and then read the topics in this chapter.

Additionally, the [Building AWS Lambda-Based Applications \(p. 47\)](#) also provides introductory information that you might find useful, before you dive deep into the technology.

Lambda Function

After you package up your custom code, including any dependencies, and upload it to AWS Lambda, you have created a *Lambda function*.

If you are new to AWS Lambda, you might ask: what type of code can I run as a Lambda function? How does AWS Lambda execute my code? How does AWS Lambda know the amount of memory and CPU requirements needed to run my Lambda code? The following sections provide an overview of how a Lambda function works.

Depending on your scenario, you can build applications where you use the AWS Lambda service to run all or parts of your application code. For more information, see [Building AWS Lambda-Based Applications \(p. 47\)](#). [How It Works \(p. 3\)](#) provides examples that illustrate how to create a Lambda function for specific scenarios.

The sections in this topic provide the following introductory information about Lambda functions:

Topics

- [Compute Requirements – Lambda Function Configuration \(p. 8\)](#)
- [Invocation Types \(p. 9\)](#)
- [How Does AWS Lambda Run My Code? The Container Model \(p. 9\)](#)

Compute Requirements – Lambda Function Configuration

A Lambda function consists of code and any associated dependencies. In addition, a Lambda function also has configuration information associated with it. Initially, you specify the configuration information when you create a Lambda function. Lambda provides an API for you to update some of the configuration data. Lambda function configuration information includes the following key elements:

- **Compute resources that you need** – You only specify the amount of memory you want to allocate for your Lambda function. AWS Lambda allocates CPU power proportional to the memory by using the same ratio as a general purpose Amazon EC2 instance type, such as an M3 type. For example, if you allocate 256 MB memory, your Lambda function will receive twice the CPU share than if you allocated only 128 MB.

You can update the configuration and request additional memory in 64 MB increments. For information about relevant limits, see [AWS Lambda Limits \(p. 237\)](#).

- **Maximum execution time (timeout)** – You pay for the AWS resources that are used to run your Lambda function. To prevent your Lambda function from running indefinitely, you specify a timeout. When the specified timeout is reached, AWS Lambda terminates your Lambda function.

- **IAM role (execution role)** – This is the role that AWS Lambda assumes when it executes the Lambda function on your behalf.
- **Handler name** – The handler refers to the method in your code where AWS Lambda begins execution. AWS Lambda passes any event information, which triggered the invocation, as a parameter to the handler method.

Invocation Types

AWS Lambda supports synchronous and asynchronous invocation of a Lambda function. You can control the invocation type only when you invoke a Lambda function (referred to as *on-demand invocation*). The following examples illustrate on-demand invocations:

- Your custom application invokes a Lambda function.
- You manually invoke a Lambda function (for example, using the AWS CLI) for testing purposes.

In both cases, you invoke your Lambda function using the [Invoke \(p. 303\)](#) operation, and you can specify the invocation type as synchronous or asynchronous.

However, when you are using AWS services as event sources, the invocation type is predetermined for each of these services. You don't have any control over the invocation type that these event sources use when they invoke your Lambda function. For example, Amazon S3 always invokes a Lambda function asynchronously and Amazon Cognito always invokes a Lambda function synchronously. For stream-based AWS services (Amazon Kinesis Streams and Amazon DynamoDB Streams), AWS Lambda polls the stream and invokes your Lambda function synchronously.

How Does AWS Lambda Run My Code? The Container Model

When AWS Lambda executes your Lambda function on your behalf, it takes care of provisioning and managing resources needed to run your Lambda function. When you create a Lambda function, you specify configuration information, such as the amount of memory and maximum execution time that you want to allow for your Lambda function. When a Lambda function is invoked, AWS Lambda launches a container (that is, an execution environment) based on the configuration settings you provided.

Note

The content of this section is for information only. AWS Lambda manages container creations and deletion, there is no AWS Lambda API for you to manage containers.

It takes time to set up a container and do the necessary bootstrapping, which adds some latency each time the Lambda function is invoked. You typically see this latency when a Lambda function is invoked for the first time or after it has been updated because AWS Lambda tries to reuse the container for subsequent invocations of the Lambda function.

After a Lambda function is executed, AWS Lambda maintains the container for some time in anticipation of another Lambda function invocation. In effect, the service freezes the container after a Lambda function completes, and thaws the container for reuse, if AWS Lambda chooses to reuse the container when the Lambda function is invoked again. This container reuse approach has the following implications:

- Any declarations in your Lambda function code (outside the `handler` code, see [Programming Model \(p. 51\)](#)) remains initialized, providing additional optimization when the function is invoked again. For example, if your Lambda function establishes a database connection, instead of reestablishing the

connection, the original connection is used in subsequent invocations. You can add logic in your code to check if a connection already exists before creating one.

- Each container provides some disk space in the `/tmp` directory. The directory content remains when the container is frozen, providing transient cache that can be used for multiple invocations. You can add extra code to check if the cache has the data that you stored. For disk space size, see [AWS Lambda Limits \(p. 237\)](#).
- Background processes or callbacks initiated by your Lambda function that did not complete when the function ended resume if AWS Lambda chooses to reuse the container. You should make sure any background processes or callbacks (in case of Node.js) in your code are complete before the code exits.

Note

When you write your Lambda function code, do not assume that AWS Lambda always reuses the container because AWS Lambda may choose not to reuse the container. Depending on various other factors, AWS Lambda may simply create a new container instead of reusing an existing container.

Suggested Reading

If you are new to AWS Lambda, we suggest you read through all of the topics in the How It Works section to familiarize yourself with Lambda. The next topic is [Event Source Mapping \(p. 10\)](#).

After you read all of the topics in the How it Works section, we recommend that you review [Building AWS Lambda-Based Applications \(p. 47\)](#), try the [Getting Started \(p. 35\)](#) exercise, and then explore the [Use Cases \(p. 125\)](#). Each use case provides step-by-step instructions for you to set up the end-to-end experience.

Event Source Mapping

In AWS Lambda, Lambda functions and event sources are the [core components in AWS Lambda](#). An event source is the entity that publishes events, and a Lambda function is the custom code that processes the events. Supported event sources refer to those AWS services that can be preconfigured to work with AWS Lambda. The configuration is referred to as *event source mapping*, which maps an event source to a Lambda function. It enables automatic invocation of your Lambda function when events occur.

Each event source mapping identifies the type of events to publish and the Lambda function to invoke when events occur. The specific Lambda function then receives the event information as a parameter, your Lambda function code can then process the event.

Note the following about the event sources. These event sources can be any of the following:

- **AWS services** – These are the supported AWS services that can be preconfigured to work with AWS Lambda. You can group these services as regular AWS services or stream-based services. Amazon Kinesis Streams and Amazon DynamoDB Streams are stream-based event sources, all others AWS services do not use stream-based event sources. Where you maintain the event source mapping and how the Lambda function is invoked depends on whether or not you're using a stream-based event source.
- **Custom applications** – You can have your custom applications publish events and invoke a Lambda function.

You may be wondering—where do I keep the event mapping information? Do I keep it within the event source or within AWS Lambda? The following sections explain event source mapping for each of these event source categories. These sections also explain how the Lambda function is invoked and how you manage permissions to allow invocation of your Lambda function.

Topics

- [Event Source Mapping for AWS Services](#) (p. 11)
- [Event Source Mapping for AWS Stream-based Services](#) (p. 12)
- [Event Source Mapping for Custom Applications](#) (p. 13)

Event Source Mapping for AWS Services


Except for the stream-based AWS services (Amazon Kinesis Streams and DynamoDB streams), other supported AWS services publish events and can also invoke your Lambda function (referred to as the *push model*). In the push model, note the following:

- Event source mappings are maintained within the event source. Relevant API support in the event sources enables you to create and manage event source mappings. For example, Amazon S3 provides the bucket notification configuration API. Using this API, you can configure an event source mapping that identifies the bucket events to publish and the Lambda function to invoke.
- Because the event sources invoke your Lambda function, you need to grant the event source the necessary permissions using a resource-based policy (referred to as the *Lambda function policy*). For more information, see [AWS Lambda Permissions Model](#) (p. 30).

The following example illustrates how this model works.

Example – Amazon S3 Pushes Events and Invokes a Lambda Function

Suppose that you want your AWS Lambda function invoked for each *object created* bucket event. You add the necessary event source mapping in the bucket notification configuration.

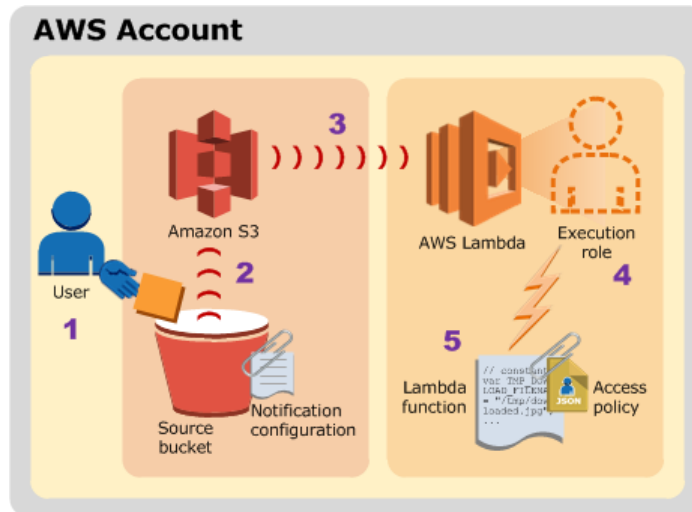

The diagram illustrates the flow:

1. The user creates an object in a bucket.
2. Amazon S3 detects the object created event.
3. Amazon S3 invokes your Lambda function according to the event source mapping described in the bucket notification configuration.
4. AWS Lambda verifies the permissions policy attached to the Lambda function to ensure that Amazon S3 has the necessary permissions, and then executes the Lambda function. Remember that your Lambda function receives the event as parameter.

Event Source Mapping for AWS Stream-based Services

The Amazon Kinesis Streams and DynamoDB streams are the stream-based services that you can preconfigure to with AWS Lambda. After you do the necessary event source mapping, AWS Lambda polls the streams and invokes your Lambda function (referred to as the *pull model*). In the pull model, note the following:


- The event source mappings are maintained within the AWS Lambda. AWS Lambda provides the relevant APIs to create and manage event source mappings. For more information, see [CreateEventSourceMapping](#) (p. 278).
- AWS Lambda needs your permission to poll the stream and read records. You grant these permissions via the execution role, using the permissions policy associated with role that you specify when you create your Lambda function. AWS Lambda does not need any permissions to invoke your Lambda function.

The following example illustrates how this model works.

Example – AWS Lambda Pulls Events from an Amazon Kinesis Stream and Invokes a Lambda Function

The following diagram shows a custom application that writes records to an Amazon Kinesis stream and how AWS Lambda polls the stream. When AWS Lambda detects a new record on the stream, it invokes your Lambda function.

Suppose you have a custom application that writes records to an Amazon Kinesis stream. You want to invoke a Lambda function when new records are detected on the stream. You create a Lambda function and the necessary event source mapping in AWS Lambda.

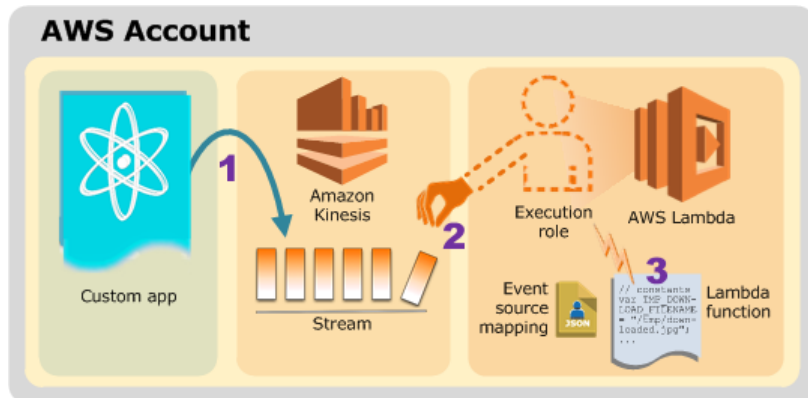

The diagram illustrates the following sequence:

1. The custom application writes records to an Amazon Kinesis stream.
2. AWS Lambda continuously polls the stream, and invokes the Lambda function when the service detects new records on the stream. AWS Lambda knows which stream to poll and which Lambda function to invoke based on the event source mapping you create in AWS Lambda.
3. AWS Lambda then executes the Lambda function.

The example uses an Amazon Kinesis stream but the same applies when working with a DynamoDB stream.


Event Source Mapping for Custom Applications

If you have custom applications that publish and process events, you can create a Lambda function to process these events. In this case, there is no preconfiguration required—you don't have to set up an event source mapping. Instead, the event source uses the AWS Lambda `Invoke` API. If the application and Lambda function are owned by different AWS accounts, the AWS account that owns the Lambda function must allow cross-account permissions in the permissions policy associated with the Lambda function.


The following example illustrates how this works.

Example – Custom Application Publishes Events and Invokes a Lambda Function

The following diagram shows how a custom application in your account can invoke a Lambda function. In this example, the custom application is using the same account credentials as the account that owns the Lambda function, and, therefore, does not require additional permissions to invoke the function.

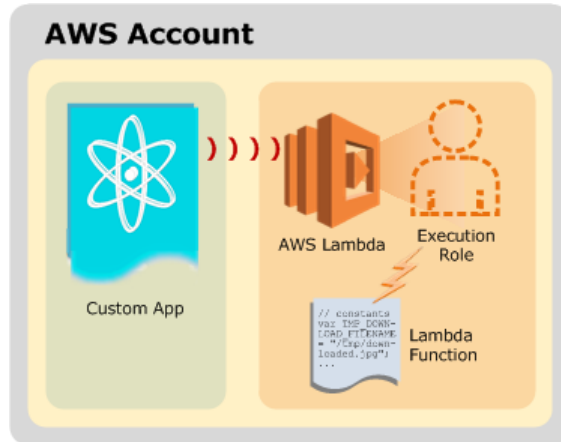

In the following example, the user application and Lambda function are owned by different AWS accounts. In this case, the AWS account that owns the Lambda function must have cross-account permissions in the permissions policy associated with the Lambda function. For more information, see [AWS Lambda Permissions Model \(p. 30\)](#).

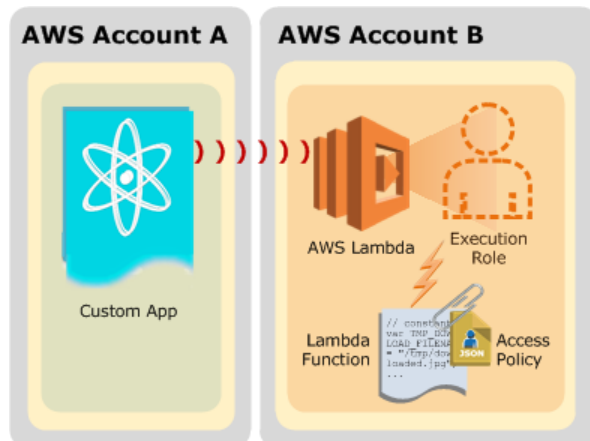

Suggested Reading

If you are new to AWS Lambda, we suggest you read through all of the topics in the How It Works section to familiarize yourself with Lambda. The next topic is [Supported Event Sources \(p. 14\)](#).

After you read all of the topics in the How it Works section, we recommend that you review [Building AWS Lambda-Based Applications \(p. 47\)](#), try the [Getting Started \(p. 35\)](#) exercise, and then explore the [Use Cases \(p. 125\)](#). Each use case provides step-by-step instructions for you to set up the end-to-end experience.

Supported Event Sources

This topic lists the supported AWS services that you can configure as event sources for AWS Lambda functions. After you preconfigure the event source mapping, your Lambda function gets invoked

automatically when these event sources detect events. For more information about invocation modes, see [Event Source Mapping](#) (p. 10).

For all of the event sources listed in this topic, note the following:

- Event sources maintain the event source mapping, except for the stream-based services (Amazon Kinesis Streams and Amazon DynamoDB Streams). For the stream-based services, AWS Lambda maintains the event source mapping. AWS Lambda provides the [CreateEventSourceMapping](#) (p. 278) operation for you to create and manage the event source mapping. For more information, see [Event Source Mapping](#) (p. 10).
- The invocation type that these event sources use when invoking a Lambda function is also preconfigured. For example, Amazon S3 always invokes a Lambda function asynchronously and Amazon Cognito invokes a Lambda function synchronously. The only time you can control the invocation type is when you are invoking the Lambda function yourself using the [Invoke](#) (p. 303) operation (for example, invoking a Lambda function on demand from your custom application).

You can also invoke a Lambda function on demand. For details, see [Other Event Sources: Invoking a Lambda Function On Demand](#) (p. 19).

For examples of events that are published by these event sources, see [Sample Events Published by Event Sources](#) (p. 19).

Topics

- [Amazon S3](#) (p. 15)
- [Amazon DynamoDB](#) (p. 16)
- [Amazon Kinesis Streams](#) (p. 16)
- [Amazon Simple Notification Service](#) (p. 16)
- [Amazon Simple Email Service](#) (p. 17)
- [Amazon Cognito](#) (p. 17)
- [AWS CloudFormation](#) (p. 17)
- [Amazon CloudWatch Logs](#) (p. 17)
- [Amazon CloudWatch Events](#) (p. 18)
- [Scheduled Events \(powered by Amazon CloudWatch Events\)](#) (p. 18)
- [AWS Config](#) (p. 18)
- [Amazon Echo](#) (p. 19)
- [Amazon API Gateway](#) (p. 19)
- [Other Event Sources: Invoking a Lambda Function On Demand](#) (p. 19)
- [Sample Events Published by Event Sources](#) (p. 19)

Amazon S3

You can write Lambda functions to process S3 bucket events, such as the object-created or object-deleted events. For example, when a user uploads a photo to a bucket, you might want Amazon S3 to invoke your Amazon S3 function so that it reads the image and creates a thumbnail for the photo.

You can use the bucket notification configuration feature in Amazon S3 to configure the event source mapping, identifying the bucket events that you want Amazon S3 to publish and which Lambda function to invoke.

For an example Amazon S3 event, see [Event Message Structure](#), [Amazon S3 Put Sample Event](#) (p. 26), and [Amazon S3 Delete Sample Event](#) (p. 27). For an example use case, see [Using AWS Lambda with Amazon S3](#) (p. 125).

Amazon S3 invokes your Lambda function asynchronously.

Amazon DynamoDB

You can use Lambda functions as triggers for your Amazon DynamoDB table. Triggers are custom actions you take in response to updates made to the DynamoDB table. To create a trigger, first you enable Amazon DynamoDB Streams for your table. AWS Lambda polls the stream and your Lambda function processes any updates published to the stream.

This is a stream-based event source. For stream-based service, you create event source mapping in AWS Lambda, identifying the stream to poll and which Lambda function to invoke.

For an example DynamoDB event, see [Step 2.3.2: Test the Lambda Function \(Invoke Manually\)](#) (p. 157) and [Amazon DynamoDB Update Sample Event](#) (p. 23). For general format, see [GetRecord](#) in the *Amazon DynamoDB API Reference*. For an example use case, see [Using AWS Lambda with Amazon DynamoDB](#) (p. 151).

Amazon Kinesis Streams

You can configure AWS Lambda to automatically poll your stream and process any new records such as website click streams, financial transactions, social media feeds, IT logs, and location-tracking events. Then, AWS Lambda polls the stream periodically (multiple times per second) for new records.

For stream-based service, you create event source mapping in AWS Lambda, identifying the stream to poll and which Lambda function to invoke.

For an example event, see [Step 2.3: Create the Lambda Function and Test It Manually](#) (p. 147) and [Amazon Kinesis Streams Sample Event](#) (p. 25). For an example use case, see [Using AWS Lambda with Amazon Kinesis](#) (p. 142).

Amazon Simple Notification Service

You can write Lambda functions to process Amazon Simple Notification Service notifications. When a message is published to an Amazon SNS topic, the service can invoke your Lambda function by passing the message payload as parameter. Your Lambda function code can then process the event, for example publish the message to other Amazon SNS topics, or send the message to other AWS services.

This also enables you to trigger a Lambda function in response to Amazon CloudWatch alarms and other AWS services that use Amazon SNS.

You configure the event source mapping in Amazon SNS via topic subscription configuration. For more information, see [Invoking Lambda functions using Amazon SNS notifications](#) in the *Amazon Simple Notification Service Developer Guide*.

For an example event, see [Appendix: Message and JSON Formats](#) and [Amazon SNS Sample Event](#) (p. 23). For an example use case, see [Using AWS Lambda with Amazon SNS from Different Accounts](#) (p. 175).

From a user perspective, Amazon SNS invokes your Lambda function asynchronously. Once a user calls the Publish API to publish a message, Amazon SNS will queue the message and return success. From there, Amazon SNS will pull the message from the queue and invoke the Lambda function synchronously. Lambda then returns a delivery status.

If there is an error calling Lambda, Amazon SNS will retry invoking the Lambda function up to 50 times. After 50 tries, if Amazon SNS still could not successfully invoke the Lambda function, then Amazon SNS will send a delivery status failure message to CloudWatch.

Amazon Simple Email Service

Amazon Simple Email Service (Amazon SES) is a cost-effective email service. With Amazon SES, in addition to sending emails, you can also use the service to receive messages. For more information about Amazon SES, see [Amazon Simple Email Service](#). When you use Amazon SES to receive messages, you can configure Amazon SES to call your Lambda function when messages arrive. The service can then invoke your Lambda function by passing in the incoming email event as parameter. For example scenarios, see [Considering Your Use Case for Amazon SES Email Receiving](#).

You configure event source mapping using the rule configuration in Amazon SES. The following topics provide additional information in the *Amazon Simple Email Service Developer Guide*:

- For sample events, see [Lambda Action](#) and [Amazon SES Email Receiving Sample Event \(p. 20\)](#).
- For Lambda function examples, see [Lambda Function Examples](#).

Amazon SES invokes your Lambda function asynchronously.

Amazon Cognito

The Amazon Cognito Events feature enables you to run Lambda function in response to events in Amazon Cognito. For example, you can invoke a Lambda function for the Sync Trigger events, that is published each time a dataset is synchronized. To learn more and walk through an example, see [Introducing Amazon Cognito Events: Sync Triggers](#) in the Mobile Development blog.

You configure event source mapping using Amazon Cognito event subscription configuration. For information about event source mapping and a sample event, see [Amazon Cognito Events](#) in the *Amazon Cognito Developer Guide*. For another example event, see [Amazon Cognito Sync Trigger Sample Event \(p. 25\)](#)

Amazon Cognito is configured to invoke a Lambda function synchronously. AWS Lambda returns response in real time.

AWS CloudFormation

As part of deploying AWS CloudFormation stacks, you can specify a Lambda function as a custom resource to execute any custom commands. Associating a Lambda function with a custom resource enables you to invoke your Lambda function whenever you create, update, or delete AWS CloudFormation stacks.

You configure event source mapping in AWS CloudFormation using stack definition. For more information, see [AWS Lambda-backed Custom Resources](#) in the *AWS CloudFormation User Guide*.

For an example event, see [AWS CloudFormation Create Request Sample Event \(p. 20\)](#).

AWS CloudFormation invokes your Lambda function asynchronously.

Amazon CloudWatch Logs

You can use AWS Lambda functions to perform custom analysis on Amazon CloudWatch Logs using CloudWatch Logs subscriptions. CloudWatch Logs subscriptions provide access to a real-time feed of log events from CloudWatch Logs and deliver it to your AWS Lambda function for custom processing,

analysis, or loading to other systems. For more information about CloudWatch Logs, see [Monitoring Log Files](#).

You maintain event source mapping in Amazon CloudWatch Logs using the log subscription configuration. For more information, see [Real-time Processing of Log Data with Subscriptions \(Example 2: AWS Lambda\)](#) in the *Amazon CloudWatch Developer Guide*.

For an example event, see [Amazon CloudWatch Logs Sample Event \(p. 22\)](#).

Amazon CloudWatch Logs invokes your Lambda function asynchronously (invoking a Lambda function does not block write operation into the logs).

Amazon CloudWatch Events

[Amazon CloudWatch Events](#) help you to respond to state changes in your AWS resources. When your resources change state, they automatically send events into an event stream. You can create rules that match selected events in the stream and route them to your AWS Lambda function to take action. For example, you can automatically invoke an AWS Lambda function to log the state of an [EC2 instance](#) or [AutoScaling Group](#).

You maintain event source mapping in Amazon CloudWatch Events by using a rule target definition. For more information, see the [PutTargets](#) operation in the *Amazon CloudWatch Events API Reference*.

For sample events, see [Supported Event Types](#) in the *Amazon CloudWatch Developer Guide*.

Amazon CloudWatch Events invokes your Lambda function asynchronously.

Scheduled Events (powered by Amazon CloudWatch Events)

You can also set up AWS Lambda to invoke your code on a regular, scheduled basis using the schedule event capability in Amazon CloudWatch Events. To set a schedule you can specify a fixed rate (number of hours, days, or weeks) or specify a cron expression (see [Schedule Expression Syntax for Rules](#) in the *Amazon CloudWatch Developer Guide*).

You maintain event source mapping in Amazon CloudWatch Events by using a rule target definition. For more information, see the [PutTargets](#) operation in the *Amazon CloudWatch Events API Reference*.

For an example use case, see [Using AWS Lambda with Scheduled Events \(p. 207\)](#).

For an example event, see [Scheduled Event Sample Event \(p. 22\)](#).

Amazon CloudWatch Events is configured to invoke a Lambda function asynchronously.

AWS Config

You can use AWS Lambda functions to evaluate whether your AWS resource configurations comply with your custom Config rules. As resources are created, deleted, or changed, AWS Config records these changes and sends the information to your Lambda functions. Your Lambda functions then evaluate the changes and report results to AWS Config. You can then use AWS Config to assess overall resource compliance: you can learn which resources are noncompliant and which configuration attributes are the cause of noncompliance.

You maintain event source mapping in AWS Config by using a rule target definition. For more information, see the [PutConfigRule](#) operation in the *AWS Config API reference*.

For more information, see [Evaluating Resources With AWS Config Rules](#). For an example of setting a custom rule, see [Developing a Custom Rule for AWS Config](#). For example Lambda functions, see [Example AWS Lambda Functions for AWS Config Rules \(Node.js\)](#).

AWS Config is configured to invoke a Lambda function asynchronously.

Amazon Echo

You can use Lambda functions to build services that give new skills to Alexa, the Voice assistant on Amazon Echo. The Alexa Skills Kit provides the APIs, tools, and documentation to create these new skills, powered by your own services running as Lambda functions. Amazon Echo users can access these new skills by asking Alexa questions or making requests. For more information, see [Getting Started with Alexa Skills Kit](#).

Amazon Echo is configured to invoke a Lambda function synchronously.

Amazon API Gateway

You can invoke a Lambda function over HTTPS. You can do this by defining a custom REST API and endpoint using Amazon API Gateway. You map individual API operations, such as `GET` and `PUT`, to specific Lambda functions. When you send an HTTPS request to the API endpoint, the Amazon API Gateway service invokes the corresponding Lambda function.

For more information, see [Make Synchronous Calls to Lambda Functions](#). For an example use case, see [Using AWS Lambda with Amazon API Gateway \(On-Demand Over HTTPS\)](#) (p. 180).

Amazon API Gateway is configured to invoke a Lambda function synchronously.

In addition, you can also use Lambda functions with other AWS services that publish data to one of the supported AWS event sources listed in this topic. For example, you can:

- Trigger Lambda functions in response to CloudTrail updates because it records all API access events to an Amazon S3 bucket.
- Trigger Lambda functions in response to CloudWatch alarms because it publishes alarm events to an Amazon SNS topic.

Other Event Sources: Invoking a Lambda Function On Demand

In addition to invoking Lambda functions using event sources, you can also invoke your Lambda function on demand. You don't need to preconfigure any event source mapping in this case. However, make sure that the custom application has the necessary permissions to invoke your Lambda function.

For example, user applications can also generate events (build your own custom event sources). User applications such as client, mobile, or web applications can publish events and invoke Lambda functions using the AWS SDKs or AWS Mobile SDKs such as the AWS Mobile SDK for Android.

For more information, see [Tools for Amazon Web Services](#). For an example tutorial, see [Using AWS Lambda with Amazon API Gateway \(On-Demand Over HTTPS\)](#) (p. 180).

Sample Events Published by Event Sources

The following is a list of example events published by the supported AWS services. For more information about the supported AWS event sources, see [Supported Event Sources](#) (p. 14).

Sample Events

- [AWS CloudFormation Create Request Sample Event \(p. 20\)](#)
- [Amazon SES Email Receiving Sample Event \(p. 20\)](#)
- [Scheduled Event Sample Event \(p. 22\)](#)
- [Amazon CloudWatch Logs Sample Event \(p. 22\)](#)
- [Amazon SNS Sample Event \(p. 23\)](#)
- [Amazon DynamoDB Update Sample Event \(p. 23\)](#)
- [Amazon Cognito Sync Trigger Sample Event \(p. 25\)](#)
- [Amazon Kinesis Streams Sample Event \(p. 25\)](#)
- [Amazon S3 Put Sample Event \(p. 26\)](#)
- [Amazon S3 Delete Sample Event \(p. 27\)](#)
- [Mobile Backend Sample Event \(p. 27\)](#)

AWS CloudFormation Create Request Sample Event

```
{
  "StackId": stackidarn,
  "ResponseURL": "http://pre-signed-S3-url-for-response",
  "ResourceProperties": {
    "StackName": "stack-name",
    "List": [
      "1",
      "2",
      "3"
    ]
  },
  "RequestType": "Create",
  "ResourceType": "Custom::TestResource",
  "RequestId": "unique id for this create request",
  "LogicalResourceId": "MyTestResource"
}
```

Amazon SES Email Receiving Sample Event

```
"Records": [
  {
    "eventVersion": "1.0",
    "ses": {
      "mail": {
        "commonHeaders": {
          "from": [
            "Jane Doe <janedoe@example.com>"
          ],
          "to": [
            "johndoe@example.com"
          ],
          "returnPath": "janedoe@example.com",
          "messageId": "<0123456789example.com>",
          "date": "Wed, 7 Oct 2015 12:34:56 -0700",
          "subject": "Test Subject"
        }
      }
    }
  }
]
```

```
"source": "janedoe@example.com",
"timestamp": "1970-01-01T00:00:00.000Z",
"destination": [
  "johndoe@example.com"
],
"headers": [
  {
    "name": "Return-Path",
    "value": "<janedoe@example.com>"
  },
  {
    "name": "Received",
    "value": "from mailer.example.com (mailer.example.com [203.0.113.1])
by inbound-smtp.us-west-2.amazonaws.com with SMTP id o3vrnil0e2ic28trm7df
hrc2v0cnbeccl4nbp0glx for johndoe@example.com; Wed, 07 Oct 2015 12:34:56
+0000 (UTC)"
  },
  {
    "name": "DKIM-Signature",
    "value": "v=1; a=rsa-sha256; c=relaxed/relaxed; d=example.com;
s=example; h=mime-version:from:date:message-id:subject:to:content-type;
bh=jX3F0bCAI7sIbkHyy3mLYO28ieDQz2R0P8HwQkk1Fj4x=; b=sQwJ+LMe9RjkesGu+vqU56as
vMhrLRRYrWCbVt6WJJulueecwFwRf9JVGWgkBTkiL6m2hr70xDpPWDhtLdLO+jB3hzjVnX
wK3pYIOHw3vxG6NtJ6o6lXSUwjEsp9tdyxQjZf2HNY
ee873832l3KlEeSXKzxYk9Pwqcp13dMC74ct9GukjIevf1H46hmlL2d9VYTL0LGZGHOAyM
nHmEGB8ZExWbI+k6khpurTQQ4sp4PZPRlgHtnj3Zzv7nmp
To7dtPG5z5S9J+L+Ba7dixT0jn3HuhaJ9b+VThboo4YfsX9PMNhWWxGjVksSFOcG
luPO7QutCPyoY4gbxtwkN9W69HA=="
  },
  {
    "name": "MIME-Version",
    "value": "1.0"
  },
  {
    "name": "From",
    "value": "Jane Doe <janedoe@example.com>"
  },
  {
    "name": "Date",
    "value": "Wed, 7 Oct 2015 12:34:56 -0700"
  },
  {
    "name": "Message-ID",
    "value": "<0123456789example.com>"
  },
  {
    "name": "Subject",
    "value": "Test Subject"
  },
  {
    "name": "To",
    "value": "johndoe@example.com"
  },
  {
    "name": "Content-Type",
    "value": "text/plain; charset=UTF-8"
  }
],
```

```
    "headersTruncated": false,
    "messageId": "o3vrnil0e2ic28trm7dfhrc2v0clambda4nbp0g1x"
  },
  "receipt": {
    "recipients": [
      "johndoe@example.com"
    ],
    "timestamp": "1970-01-01T00:00:00.000Z",
    "spamVerdict": {
      "status": "PASS"
    },
    "dkimVerdict": {
      "status": "PASS"
    },
    "processingTimeMillis": 574,
    "action": {
      "type": "Lambda",
      "invocationType": "Event",
      "functionArn": functionarn
    },
    "spfVerdict": {
      "status": "PASS"
    },
    "virusVerdict": {
      "status": "PASS"
    }
  },
  "eventSource": "aws:ses"
}
```

Scheduled Event Sample Event

```
{
  "account": "123456789012",
  "region": "us-east-1",
  "detail": {},
  "detail-type": "Scheduled Event",
  "source": "aws.events",
  "time": "1970-01-01T00:00:00Z",
  "id": "cdc73f9d-aea9-11e3-9d5a-835b769c0d9c",
  "resources": [
    "arn:aws:events:us-east-1:123456789012:rule/my-schedule"
  ]
}
```

Amazon CloudWatch Logs Sample Event

```
{
  "awslogs": {
    "data": "H4sIAAAAAAAAAHWPwQqCQBCGX0Xm7EFtK+smZBEUgXoLCdMhFtKV3akI8d0bLYmib
vPPN3wz00CJxmQnTO4lwhwWQRlctmEcB6sQbFC3CjW3XW8kxpOpP+OC22d1Wml1qZkQGtoMsScx
aczKN3plG8zlaHIta5KqWsozoTYw3/djzwhpLwivWFGHGpAF7DL68Jl
BUk+17KSN7tCOEJ4M3/qOI49vMHj+zCKdlFqLaU2ZHV2a4Ct/an0/ivdX8oYclUVX860fQDQiM
```

```
dxRQEAAA=="  
}  
}
```

Amazon SNS Sample Event

```
{  
  "Records": [  
    {  
      "EventVersion": "1.0",  
      "EventSubscriptionArn": eventsubscriptionarn,  
      "EventSource": "aws:sns",  
      "Sns": {  
        "SignatureVersion": "1",  
        "Timestamp": "1970-01-01T00:00:00.000Z",  
        "Signature": "EXAMPLE",  
        "SigningCertUrl": "EXAMPLE",  
        "MessageId": "95df01b4-ee98-5cb9-9903-4c221d41eb5e",  
        "Message": "Hello from SNS!",  
        "MessageAttributes": {  
          "Test": {  
            "Type": "String",  
            "Value": "TestString"  
          },  
          "TestBinary": {  
            "Type": "Binary",  
            "Value": "TestBinary"  
          }  
        },  
        "Type": "Notification",  
        "UnsubscribeUrl": "EXAMPLE",  
        "TopicArn": topicarn,  
        "Subject": "TestInvoke"  
      }  
    }  
  ]  
}
```

Amazon DynamoDB Update Sample Event

```
{  
  "Records": [  
    {  
      "eventID": "1",  
      "eventVersion": "1.0",  
      "dynamodb": {  
        "Keys": {  
          "Id": {  
            "N": "101"  
          }  
        },  
        "NewImage": {  
          "Message": {  
            "S": "New item!"  
          }  
        },  
      }  
    }  
  ]  
}
```

```
        "Id": {
          "N": "101"
        }
      },
      "StreamViewType": "NEW_AND_OLD_IMAGES",
      "SequenceNumber": "111",
      "SizeBytes": 26
    },
    "awsRegion": "us-west-2",
    "eventName": "INSERT",
    "eventSourceARN": eventsourcearn,
    "eventSource": "aws:dynamodb"
  },
  {
    "eventID": "2",
    "eventVersion": "1.0",
    "dynamodb": {
      "OldImage": {
        "Message": {
          "S": "New item!"
        }
      },
      "Id": {
        "N": "101"
      }
    },
    "SequenceNumber": "222",
    "Keys": {
      "Id": {
        "N": "101"
      }
    },
    "SizeBytes": 59,
    "NewImage": {
      "Message": {
        "S": "This item has changed"
      }
    },
    "Id": {
      "N": "101"
    }
  },
  "StreamViewType": "NEW_AND_OLD_IMAGES"
},
"awsRegion": "us-west-2",
"eventName": "MODIFY",
"eventSourceARN": sourcearn,
"eventSource": "aws:dynamodb"
},
{
  "eventID": "3",
  "eventVersion": "1.0",
  "dynamodb": {
    "Keys": {
      "Id": {
        "N": "101"
      }
    }
  },
  "SizeBytes": 38,
  "SequenceNumber": "333",
```

```
    "OldImage": {
      "Message": {
        "S": "This item has changed"
      },
      "Id": {
        "N": "101"
      }
    },
    "StreamViewType": "NEW_AND_OLD_IMAGES"
  },
  "awsRegion": "us-west-2",
  "eventName": "REMOVE",
  "eventSourceARN": sourcearn,
  "eventSource": "aws:dynamodb"
}
]
```

Amazon Cognito Sync Trigger Sample Event

```
{
  "datasetName": "datasetName",
  "eventType": "SyncTrigger",
  "region": "us-east-1",
  "identityId": "identityId",
  "datasetRecords": {
    "SampleKey2": {
      "newValue": "newValue2",
      "oldValue": "oldValue2",
      "op": "replace"
    },
    "SampleKey1": {
      "newValue": "newValue1",
      "oldValue": "oldValue1",
      "op": "replace"
    }
  },
  "identityPoolId": "identityPoolId",
  "version": 2
}
```

Amazon Kinesis Streams Sample Event

```
"Records": [
  {
    "eventID": "shardId-
000000000000:49545115243490985018280067714973144582180062593244200961",
    "eventVersion": "1.0",
    "kinesis": {
      "partitionKey": "partitionKey-3",
```

```
    "data": "SGVsbG8sIHRoXMaXMaYYSB0ZXN0IDEyMy4=",
    "kinesisSchemaVersion": "1.0",
    "sequenceNumber":
"49545115243490985018280067714973144582180062593244200961"
  },
  "invokeIdentityArn": identityarn,
  "eventName": "aws:kinesis:record",
  "eventSourceARN": eventsourcearn,
  "eventSource": "aws:kinesis",
  "awsRegion": "us-east-1"
}
]
}
```

Amazon S3 Put Sample Event

```
"Records": [
  {
    "eventVersion": "2.0",
    "eventTime": "1970-01-01T00:00:00.000Z",
    "requestParameters": {
      "sourceIPAddress": "127.0.0.1"
    },
    "s3": {
      "configurationId": "testConfigRule",
      "object": {
        "eTag": "0123456789abcdef0123456789abcdef",
        "sequencer": "0A1B2C3D4E5F678901",
        "key": "HappyFace.jpg",
        "size": 1024
      },
      "bucket": {
        "arn": bucketarn,
        "name": "sourcebucket",
        "ownerIdentity": {
          "principalId": "EXAMPLE"
        }
      },
      "s3SchemaVersion": "1.0"
    },
    "responseElements": {
      "x-amz-id-2": "EXAMPLE123/5678abcdefghijklmbdaisawesome/mnopqr
stuvwxyzABCDEFGH",
      "x-amz-request-id": "EXAMPLE123456789"
    },
    "awsRegion": "us-east-1",
    "eventName": "ObjectCreated:Put",
    "userIdentity": {
      "principalId": "EXAMPLE"
    },
    "eventSource": "aws:s3"
  }
]
}
```


Amazon S3 Delete Sample Event

```
{
  "Records": [
    {
      "eventVersion": "2.0",
      "eventTime": "1970-01-01T00:00:00.000Z",
      "requestParameters": {
        "sourceIPAddress": "127.0.0.1"
      },
      "s3": {
        "configurationId": "testConfigRule",
        "object": {
          "sequencer": "0A1B2C3D4E5F678901",
          "key": "HappyFace.jpg"
        },
        "bucket": {
          "arn": bucketarn,
          "name": "sourcebucket",
          "ownerIdentity": {
            "principalId": "EXAMPLE"
          }
        },
        "s3SchemaVersion": "1.0"
      },
      "responseElements": {
        "x-amz-id-2": "EXAMPLE123/5678abcdefghijklmbdaisawesome/mnopqr
stuvwxyzABCDEFGH",
        "x-amz-request-id": "EXAMPLE123456789"
      },
      "awsRegion": "us-east-1",
      "eventName": "ObjectRemoved:Delete",
      "userIdentity": {
        "principalId": "EXAMPLE"
      },
      "eventSource": "aws:s3"
    }
  ]
}
```

Mobile Backend Sample Event

```
{
  "operation": "echo",
  "message": "Hello world!"
}
```

Lambda Function Concurrent Executions

Concurrent executions refers to the number of executions of your function code that are happening at any given time. You can estimate the concurrent execution count, but the concurrent execution count will differ depending on whether or not your Lambda function is processing events from a stream-based event source.

- **Stream-based event sources** – If you create a Lambda function that processes events from stream-based services (Amazon Kinesis Streams or DynamoDB streams), the number of shards per stream is the unit of concurrency. If your stream has 100 active shards, there will be 100 Lambda functions running concurrently. Then, each Lambda function processes events on a shard in the order that they arrive.
- **Event sources that aren't stream-based** – If you create a Lambda function to process events from event sources that aren't stream-based (for example, Amazon S3 or API Gateway), each published event is a unit of work. Therefore, the number of events (or requests) these event sources publish influences the concurrency.

You can use the following formula to estimate your concurrent Lambda function invocations:

```
events (or requests) per second * function duration
```

For example, consider a Lambda function that processes Amazon S3 events. Suppose that the Lambda function takes on average three seconds and Amazon S3 publishes 10 events per second. Then, you will have 30 concurrent executions of your Lambda function.

Request Rate

Request rate refers to the rate at which your Lambda function is invoked. For all services except the stream-based services, the request rate is the rate at which the event sources generate the events. For stream-based services, AWS Lambda calculates the request rate as follow:

```
request rate = number of concurrent executions / function duration
```

For example, if there are five active shards on a stream (that is, you have five Lambda functions running in parallel) and your Lambda function takes about two seconds, the request rate is 2.5 requests/second.

Safety Limit

By default, AWS Lambda limits the total concurrent executions across all functions within a given region to 100. The default limit is a safety limit that protects you from costs due to potential runaway or recursive functions during initial development and testing. To increase this limit above the default, follow the steps in [To request a limit increase for concurrent executions \(p. 29\)](#).

Any invocation that causes your function's concurrent execution to exceed the safety limit is throttled, and does not execute your function. Each throttled invocation increases the CloudWatch `Throttles` metric for the function.

The throttled invocation is handled differently based on how the function is invoked:

- **Event sources that aren't stream-based** – Some of these event sources invoke a Lambda function synchronously and others invoke it asynchronously.

- **Synchronous invocation** – If the function is invoked synchronously and is throttled, the invoking application receives a 429 error and the invoking application is responsible for retries. These event sources may have additional retries built into the integration. For example, CloudWatch Logs retries the failed batch up to five times with delays between retries. For a list of supported event sources and the invocation types that they use, see [Supported Event Sources \(p. 14\)](#).

If you invoke Lambda through API Gateway, you need to make sure you map Lambda response errors to API Gateway error codes. If you invoke the function directly, such as through the AWS SDKs using the `RequestResponse` invocation mode or through API Gateway, your client receives the 429 error and you can choose to retry the invocation.

- **Asynchronous invocation** – If your Lambda function is invoked asynchronously and is throttled, AWS Lambda automatically retries the throttled event for up to six hours, with delays between retries. Asynchronous events are queued before they are used to invoke the Lambda function.
- **Stream-based event sources** – For stream-based event sources (Amazon Kinesis Streams and DynamoDB streams), AWS Lambda polls your stream and invokes your Lambda function. Therefore, when your Lambda function is throttled, AWS Lambda attempts to process the throttled batch of records until the time the data expires, which can be up to seven days for Amazon Kinesis Streams. The throttled request is treated as blocking per shard and Lambda will not read any new records from the shard until the throttled batch of records either expires or succeeds. If there is more than one shard in the stream, Lambda will continue invokes on the non-throttled shards until one gets through.

To request a limit increase for concurrent executions

1. Open the [AWS Support Center](#) page, sign in, if necessary, and then click **Create case**.
2. Under **Regarding**, select **Service Limit Increase**.
3. Under **Limit Type**, select **Lambda**, fill in the necessary fields in the form, and then click the button at the bottom of the page for your preferred method of contact.

Note

AWS may automatically raise the concurrent execution limit on your behalf to enable your function to match the incoming event rate, as in the case of triggering the function from an Amazon S3 bucket.

Suggested Reading

If you are new to AWS Lambda, we suggest you read through all of the topics in the How It Works section to familiarize yourself with Lambda. The next topic is [Retries on Errors \(p. 29\)](#).

After you read all of the topics in the How it Works section, we recommend that you review [Building AWS Lambda-Based Applications \(p. 47\)](#), try the [Getting Started \(p. 35\)](#) exercise, and then explore the [Use Cases \(p. 125\)](#). Each use case provides step-by-step instructions for you to set up the end-to-end experience.

Retries on Errors

A Lambda function can fail for any of the following reasons:

- The function times out while trying to reach an endpoint.

- The function fails to successfully parse input data.
- The function experiences resource constraints, such as out-of-memory errors or other timeouts.

If any of these failures occur, your function will throw an exception. How the exception is handled depends upon how the Lambda function was invoked:

- **Event sources that aren't stream-based** – Some of these event sources are set up to invoke a Lambda function synchronously and others invoke it asynchronously. Accordingly, exceptions are handled as follows:
 - **Synchronous invocation** – The invoking application receives a 429 error, and is responsible for retries. For a list of supported event sources and the invocation types they use, see [Supported Event Sources](#). These event sources may have additional retries built into the integration.

If you invoked the Lambda function directly through AWS SDKs, or through API Gateway, your client receives the error and can choose to retry. If you are invoking Lambda through API Gateway, you need to make sure you map Lambda response errors to API Gateway error codes.
 - **Asynchronous invocation** – AWS Lambda automatically retries the failed event up to three times with delays between retries. Asynchronous events are queued before being used to invoke the Lambda function.
- **Stream-based event sources** – For stream-based event sources (Amazon Kinesis Streams and DynamoDB streams), AWS Lambda polls your stream and invokes your Lambda function. Therefore, if a Lambda function fails, AWS Lambda attempts to process the erring batch of records until the time the data expires, which can be up to seven days for Amazon Kinesis Streams. The exception is treated as blocking, and AWS Lambda will not read any new records from the stream until the failed batch of records either expires or processed successfully. This ensures that AWS Lambda processes the stream events in order.

For more information about invocation modes, see [Event Source Mapping \(p. 10\)](#).

Suggested Reading

If you are new to AWS Lambda, we suggest you read through all of the topics in the How It Works section to familiarize yourself with Lambda. The next topic is [AWS Lambda Permissions Model \(p. 30\)](#).

After you read all of the topics in the How it Works section, we recommend that you review [Building AWS Lambda-Based Applications \(p. 47\)](#), try the [Getting Started \(p. 35\)](#) exercise, and then explore the [Use Cases \(p. 125\)](#). Each use case provides step-by-step instructions for you to set up the end-to-end experience.

AWS Lambda Permissions Model

For the end-to-end AWS Lambda-based applications to work, you have to manage various permissions. For example:

- For event sources, except for the stream-based services (Amazon Kinesis Streams and DynamoDB streams), invoke your Lambda function, you must grant the event source permissions to invoke your AWS Lambda function.

- For stream-based event sources (Amazon Kinesis Streams and DynamoDB streams), AWS Lambda polls the streams on your behalf and reads new records on the stream, so you need to grant AWS Lambda permissions for the relevant stream actions.
- When your Lambda function executes, it can access AWS resources in your account (for example, read an object from your S3 bucket). AWS Lambda executes your Lambda function on your behalf by assuming the role you provided at the time of creating the Lambda function. Therefore, you need to grant the role the necessary permissions that your Lambda function needs, such as permissions for Amazon S3 actions to read an object.

The following sections describe permissions management.

Topics

- [Manage Permissions: Using an IAM Role \(Execution Role\) \(p. 31\)](#)
- [Manage Permissions: Using a Lambda Function Policy \(p. 32\)](#)

Manage Permissions: Using an IAM Role (Execution Role)

Each Lambda function has an IAM role (execution role) associated with it. You specify the IAM role when you create your Lambda function. Permissions you grant to this role determine what AWS Lambda can do when it assumes the role. There are two types of permissions that you grant to the IAM role:

- If your Lambda function code accesses other AWS resources, such as to read an object from an S3 bucket or write logs to CloudWatch Logs, you need to grant permissions for relevant Amazon S3 and CloudWatch actions to the role.
- If the event source is stream-based (Amazon Kinesis Streams and DynamoDB streams), AWS Lambda polls these streams on your behalf. AWS Lambda needs permissions to poll the stream and read new records on the stream so you need to grant the relevant permissions to this role.

For more information about IAM roles, see [Roles \(Delegation and Federation\)](#) in the *IAM User Guide*.

Important

The user that creates the IAM role is, in effect, passing permissions to AWS Lambda to assume this role, which requires the user to have permissions for the `iam:PassRole` action. If an administrator user is creating this role, you don't need to do anything extra to set up permissions for the `iam:PassRole` action because the administrator user has full permissions, including the `iam:PassRole` action.

To simplify the process for creating an execution role, AWS Lambda provides the following AWS managed (predefined) permissions policies that you can use. These policies include common permissions for specific scenarios:

- **AWSLambdaBasicExecutionRole** – Grants permissions only for the Amazon CloudWatch Logs actions to write logs. You can use this policy if your Lambda function does not access any other AWS resources except writing logs.

- **AWSLambdaKinesisExecutionRole** – Grants permissions for Amazon Kinesis Streams actions, and CloudWatch Logs actions. If you are writing a Lambda function to process Amazon Kinesis stream events you can attach this permissions policy.
- **AWSLambdaDynamoDBExecutionRole** – Grants permissions for DynamoDB streams actions and CloudWatch Logs actions. If you are writing a Lambda function to process DynamoDB stream events you can attach this permissions policy.
- **AWSLambdaVPCAccessExecutionRole** – Grants permissions for Amazon Elastic Compute Cloud (Amazon EC2) actions to manage elastic network interfaces (ENIs). If you are writing a Lambda function to access resources in a VPC in the Amazon Virtual Private Cloud (Amazon VPC) service, you can attach this permissions policy. The policy also grants permissions for CloudWatch Logs actions to write logs.


You can find these AWS managed permissions policies in the IAM console. Search for these policies and you can see the permissions each of these policies grant.

Manage Permissions: Using a Lambda Function Policy

All supported event sources, except the stream-based services (Amazon Kinesis and DynamoDB streams), invoke your Lambda function (the *push model*), provided the you grant the necessary permissions. For example, if you want Amazon S3 to invoke your Lambda function when objects are created in a bucket, Amazon S3 needs permissions to invoke your Lambda function.

You can grant these permissions via the function policies. AWS Lambda provides APIs for you to manage permission in a function policy. For example, see [AddPermission](#) (p. 272).

You can also grant cross-account permissions using the function policy. For example, if a user-defined application and the Lambda function it invokes belong to the same AWS account, you don't need to grant explicit permissions. Otherwise, the AWS account that owns the Lambda function must allow cross-account permissions in the permissions policy associated with the Lambda function.

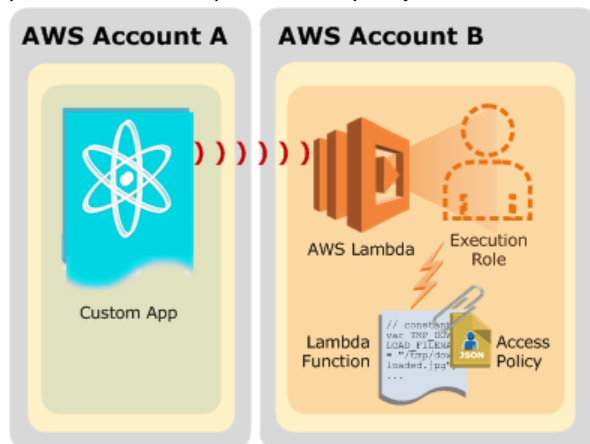

Note

Instead of using a Lambda function policy, you can create another IAM role that grants the event sources (for example, Amazon S3 or DynamoDB) permissions to invoke your Lambda function. However, you might find that resource policies are easier to set up and they make it easier for you to track which event sources have permissions to invoke your Lambda function.

For more information about Lambda function policies, see [Using Resource-Based Policies for AWS Lambda \(Lambda Function Policies\)](#) (p. 258). For more information about Lambda permissions, see [Authentication and Access Control for AWS Lambda](#) (p. 239).

Suggested Reading

If you are new to AWS Lambda, we suggest you read through all of the topics in the How It Works section to familiarize yourself with Lambda. The next topic is [Lambda Execution Environment and Available Libraries](#) (p. 33).

After you read all of the topics in the How it Works section, we recommend that you review [Building AWS Lambda-Based Applications](#) (p. 47), try the [Getting Started](#) (p. 35) exercise, and then explore the [Use Cases](#) (p. 125). Each use case provides step-by-step instructions for you to set up the end-to-end experience.

Lambda Execution Environment and Available Libraries

The underlying AWS Lambda execution environment is based on the following:

- Public Amazon Linux AMI version (AMI name: amzn-ami-hvm-2015.09.1.x86_64-gp2):
 - AMI ID – ami-f0091d91 in the US West (Oregon) region.
 - AMI ID – ami-60b6c60a in the US East (N. Virginia) region.
 - AMI ID – ami-bff32ccc in the EU (Ireland) region.
 - AMI ID – ami-bc5b48d0 in the EU (Frankfurt) region.
 - AMI ID – ami-383c1956 in the Asia Pacific (Tokyo) region.
 - AMI ID – ami-48d38c2b in the Asia Pacific (Sydney) region.

For information about using an AMI, see [Amazon Machine Images \(AMI\)](#) in the *Amazon EC2 User Guide for Linux Instances*.

- Linux kernel version – 4.1.19-24.31.amzn1.x86_64

If you are using any native binaries in your code, make sure they are compiled in this environment.

AWS Lambda supports the following runtime versions:

- Node.js – v0.10.36, v4.3.2 (recommended)
- Java – Java 8
- Python – Python 2.7

The following libraries are available in the AWS Lambda execution environment so you don't need to include them:

- ImageMagick – Installed with default settings. For versioning information, see [imagemagick nodejs wrapper](#) and [ImageMagick native binary](#) (search for "ImageMagick").
- AWS SDK – [AWS SDK for JavaScript](#) version 2.4.2

If you author your Lambda function code in Python, the following libraries are available in the AWS Lambda execution environment so you don't need to include them:

- AWS SDK for Python (Boto 3) version 1.3.1

There are no additional libraries available for Java.

Suggested Reading

If you are new to AWS Lambda, we suggest you read through all of the topics in the How It Works section to familiarize yourself with Lambda, starting with [How It Works \(p. 3\)](#).

After you read all of the topics in the How it Works section, we recommend that you review [Building AWS Lambda-Based Applications \(p. 47\)](#), try the [Getting Started \(p. 35\)](#) exercise, and then explore the [Use Cases \(p. 125\)](#). Each use case provides step-by-step instructions for you to set up the end-to-end experience.

Getting Started

In this Getting Started section, you do the following:

- Set up an AWS account and AWS Command Line Interface (AWS CLI). Most tutorials use the AWS CLI commands.
- Create and test a simple Hello World Lambda function.

To get started, complete the steps in the following topics:

Topics

- [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#)
- [Step 2: Create a HelloWorld Lambda Function and Explore the Console \(p. 39\)](#)

Step 1: Set Up an AWS Account and the AWS CLI

If you have not already done so, you need to sign up for an AWS account and create an administrator user in the account. You also need to set up the AWS Command Line Interface (AWS CLI). Many of the tutorials use the AWS CLI.

To complete the setup, follow the instructions in the following topics:

Topics

- [Step 1.1: Set Up an AWS Account and Create an Administrator User \(p. 35\)](#)
- [Step 1.2: Set Up the AWS Command Line Interface \(AWS CLI\) \(p. 38\)](#)

Step 1.1: Set Up an AWS Account and Create an Administrator User

Before you use AWS Lambda for the first time, complete the following tasks:

1. [Sign up for AWS \(p. 36\)](#)
2. [Create an IAM User \(p. 36\)](#)

Sign up for AWS

When you sign up for Amazon Web Services (AWS), your AWS account is automatically signed up for all services in AWS, including AWS Lambda. You are charged only for the services that you use.

With AWS Lambda, you pay only for the resources you use. For more information about AWS Lambda usage rates, see the [AWS Lambda product page](#). If you are a new AWS customer, you can get started with AWS Lambda for free. For more information, see [AWS Free Usage Tier](#).

If you already have an AWS account, skip to the next task. If you don't have an AWS account, use the following procedure to create one.

To create an AWS account

1. Open <http://aws.amazon.com/>, and then choose **Create an AWS Account**.
2. Follow the online instructions.

Part of the sign-up procedure involves receiving a phone call and entering a PIN using the phone keypad.

Note your AWS account ID, because you'll need it for the next task.

Create an IAM User

Services in AWS, such as AWS Lambda, require that you provide credentials when you access them, so that the service can determine whether you have permissions to access the resources owned by that service. The console requires your password. You can create access keys for your AWS account to access the AWS CLI or API. However, we don't recommend that you access AWS using the credentials for your AWS account. Instead, we recommend that you use AWS Identity and Access Management (IAM). Create an IAM user, add the user to an IAM group with administrative permissions, and then grant administrative permissions to the IAM user that you created. You can then access AWS using a special URL and that IAM user's credentials.

If you signed up for AWS, but you haven't created an IAM user for yourself, you can create one using the IAM console.

The Getting Started exercises and tutorials in this guide assume you have a user (`adminuser`) with administrator privileges. When you follow the procedure, create a user with name `adminuser`.

To create a group for administrators

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. In the navigation pane, choose **Groups**, and then choose **Create New Group**.
3. For **Group Name**, type a name for your group, such as **Administrators**, and then choose **Next Step**.
4. In the list of policies, select the check box next to the **AdministratorAccess** policy. You can use the **Filter** menu and the **Search** box to filter the list of policies.
5. Choose **Next Step**, and then choose **Create Group**.

Your new group is listed under **Group Name**.

To create an IAM user for yourself, add the user to the administrators group, and create a password for the user

1. In the navigation pane, choose **Users**, and then choose **Create New Users**.
2. In box 1, type a user name.
3. Clear the check box next to **Generate an access key for each user**.
4. Choose **Create**.
5. In the list of users, choose the name (not the check box) of the user you just created. You can use the **Search** box to search for the user name.
6. Choose the **Groups** tab and then choose **Add User to Groups**.
7. Select the check box next to the administrators group. Then choose **Add to Groups**.
8. Choose the **Security Credentials** tab. Under **Sign-In Credentials**, choose **Manage Password**.
9. Select **Assign a custom password**. Then type a password in the **Password** and **Confirm Password** boxes. When you are finished, choose **Apply**.

To sign in as the new IAM user

1. Sign out of the AWS Management Console.
2. Use the following URL format to log in to the console:

```
https://aws_account_number.signin.aws.amazon.com/console/
```

The *aws_account_number* is your AWS account ID without hyphen. For example, if your AWS account ID is 1234-5678-9012, your AWS account number is 123456789012. For information about how to find your account number, see [Your AWS Account ID and Its Alias](#) in the *IAM User Guide*.

3. Enter the IAM user name and password that you just created. When you're signed in, the navigation bar displays *your_user_name @ your_aws_account_id*.

If you don't want the URL for your sign-in page to contain your AWS account ID, you can create an account alias.

To create or remove an account alias

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. On the navigation pane, choose **Dashboard**.
3. Find the IAM users sign-in link.
4. To create the alias, click **Customize**, enter the name you want to use for your alias, and then choose **Yes, Create**.
5. To remove the alias, choose **Customize**, and then choose **Yes, Delete**. The sign-in URL reverts to using your AWS account ID.

To sign in after you create an account alias, use the following URL:

```
https://your_account_alias.signin.aws.amazon.com/console/
```

To verify the sign-in link for IAM users for your account, open the IAM console and check under **IAM users sign-in link**: on the dashboard.

For more information about IAM, see the following:

- [Identity and Access Management \(IAM\)](#)
- [Getting Started](#)
- [IAM User Guide](#)

Next Step

[Step 1.2: Set Up the AWS Command Line Interface \(AWS CLI\)](#) (p. 38)

Step 1.2: Set Up the AWS Command Line Interface (AWS CLI)

All the exercises in this guide assume that you are using administrator user credentials (`adminuser`) in your account to perform the operations. For instructions on creating an administrator user in your AWS account, see [Step 1.1: Set Up an AWS Account and Create an Administrator User](#) (p. 35), and then follow the steps to download and configure the AWS Command Line Interface (AWS CLI).

To set up the AWS CLI

1. Download and configure the AWS CLI. For instructions, see the following topics in the *AWS Command Line Interface User Guide*.
 - [Getting Set Up with the AWS Command Line Interface](#)
 - [Configuring the AWS Command Line Interface](#)
2. Add a named profile for the administrator user in the AWS CLI config file. You use this profile when executing the AWS CLI commands.

```
[profile adminuser]
aws_access_key_id = adminuser access key ID
aws_secret_access_key = adminuser secret access key
region = aws-region
```

For a list of available AWS regions, see [Regions and Endpoints](#) in the *Amazon Web Services General Reference*.

3. Verify the setup by entering the following commands at the command prompt.
 - Try the help command to verify that the AWS CLI is installed on your computer:

```
aws help
```

- Try a Lambda command to verify the user can reach AWS Lambda. This command lists Lambda functions in the account, if any. The AWS CLI uses the `adminuser` credentials to authenticate the request.

```
aws lambda list-functions --profile adminuser
```

Now that you have set up an account and AWS CLI, you can create your first Lambda function. For instructions, see [Step 2: Create a HelloWorld Lambda Function and Explore the Console](#) (p. 39).

Step 2: Create a HelloWorld Lambda Function and Explore the Console

In this Getting Started exercise you first create a Hello World Lambda function using the AWS Lambda console. Next, you manually invoke the Lambda function using a sample event data. AWS Lambda executes the Lambda function and returns results. You then verify execution results, including the logs that your Lambda function created and various CloudWatch metrics.

As you follow the steps, you will also familiarize yourself with the AWS Lambda console including:

- Explore the blueprints. Each blueprint provides sample code and sample configurations that enable you to create Lambda functions with just a few clicks. The Getting Started exercise uses the **hello-world-python** blueprint.
- View and update configuration information of your Lambda function.
- Invoke a Lambda function manually and explore results in the **Execution results** section.
- Monitor CloudWatch metrics in the console.

Although not required, we recommend you review [How It Works \(p. 3\)](#) first.

Preparing for the Getting Started

First, you need to sign up for an AWS account and create an administrator user in your account. For instructions, see [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#).

Next Step

[Step 2.1: Create a Hello World Lambda Function \(p. 39\)](#)

Step 2.1: Create a Hello World Lambda Function

Follow the steps in this section to create a Hello World Lambda function. In this step, you will do the following:

- **Select a blueprint** – For this exercise, you use the **hello-world-python** blueprint. It provides sample code authored in Python. The language used for the Lambda function does not matter for this exercise. Later you can create your own Lambda functions in any of the supported languages.

Blueprints provide example code to do some minimal processing. Most blueprints process events from specific event sources, such as Amazon S3, DynamoDB, or custom application. For example, if you select an **s3-get-object** blueprint, it provides sample code that processes an object-created event published by Amazon S3 that Lambda receives as parameter.

- **Configure function** – Because you select a blueprint for this exercise, the console will have some of the configuration information prepopulated. For example, it preconfigures Python 2.7 as the runtime, provides example code, identifies the handler in the code sample, and other configuration information such as memory and timeout. For more information about configuring functions, see [Lambda Function \(p. 8\)](#). For more information about the function configuration parameters, see [CreateFunction \(p. 282\)](#).

You will also create an IAM role (referred as the *execution role*) with the necessary permissions that AWS Lambda can assume to invoke your Lambda function on your behalf.

To create a Hello World Lambda function

1. Sign in to the AWS Management Console and open the AWS Lambda console.
2. Choose **Get Started Now**.



Note

The console shows the **Get Started Now** page only if you do not have any Lambda functions created. If you have created functions already, you will see the **Lambda > Functions** page. On the list page, choose **Create a Lambda function** to go to the **Lambda > New function** page.

3. On the **Select blueprint** page, first explore the available blueprints. Then, select a specific blueprint for this Getting Started exercise.
 - a. Review the blueprints. You can also use the **Filter** to search for specific blueprints. For example:
 - Enter `s3` in **Filter** to get only the list of blueprints available to process Amazon S3 events.
 - Enter `dynamodb` in **Filter** to get a list of available blueprints to process Amazon DynamoDB events.
 - b. For this Getting Started exercise, enter `hello-world-python` in **Filter**, and then choose the **hello-world-python** blueprint.
4. On the **Configure triggers** page, you can optionally choose a service that automatically triggers your Lambda function by choosing the gray box with ellipses (...) to display a list of available services.
 - a. Depending on which service you select, you are prompted to provide relevant information for that service. For example, if you select DynamoDB, you need to provide the following:
 - The name of the DynamoDB table
 - Batch size
 - Starting position
 - b. For this Getting Started exercise, do not configure a trigger and choose **Next**.
5. On the **Configure function** page, do the following:
 - a. Review the preconfigured Lambda function configuration information, including:
 - **Runtime** is Python 2.7.

- Code authored in Python is provided. It reads incoming event data and logs some of the information to CloudWatch.
- **Handler** shows `lambda_function.lambda_handler` value. It is the *filename.handler-function*. The console saves the sample code in the `lambda_function.py` file and in the code `lambda_handler` is the function name that receives the event as a parameter when the Lambda function is invoked. For more information, see [Lambda Function Handler \(Python\)](#) (p. 82).

b. Enter the function name `hello-world-python` in **Name**.

c. In the **Lambda Function Code** section, do the following:

- Review the sample code. Note that:
 - The console saves this code as `lambda_handler.py`. The console then zips the file, and uploads it to AWS Lambda creating your Lambda function.
 - The sample code processes incoming events of the following form:

```
{
  "key3": "value3",
  "key2": "value2",
  "key1": "value1"
}
```

After creating the Lambda function, you invoke it using sample events of this form in the next section.

d. In the **Lambda function handler and role** section, do the following:

- Note the **Handler*** value. It is of the form *python-file-name.handler-function*.
- In **Role***, choose **Create new role from template(s)**.
- In **Role name**, type a name for the role.
- In **Role templates**, Lambda provides a list of optional templates that, should you select one, automatically creates the role with the requisite permissions attached to that policy. For a list of the **Policy templates**, see [Policy Templates](#) (p. 264). For the purpose of this tutorial, you can leave this field blank because your Lambda function already has the basic execution permission it needs.

Note

Optionally, you could select **Choose an existing role** if you already have a role created with specific permissions beyond basic execution. You can also select **Create a custom role**. When you choose this option, a window appears where you can edit the permissions policy inline.


e. In the **Advanced settings** section, leave the default Lambda function configuration values.

The memory and timeout values are sufficient for the Lambda function you are creating. These configurations influence the performance of your code. For more information, see [Lambda Function](#) (p. 8).

f. Choose **Next**.

g. Choose **Create Function** to create a Lambda function.

The console saves the code into a file and then zips the file, which is the deployment package. The console then uploads the deployment package to AWS Lambda creating your Lambda function. The console shows the **hello-world-python** Lambda function, you can now perform various action including test the function:

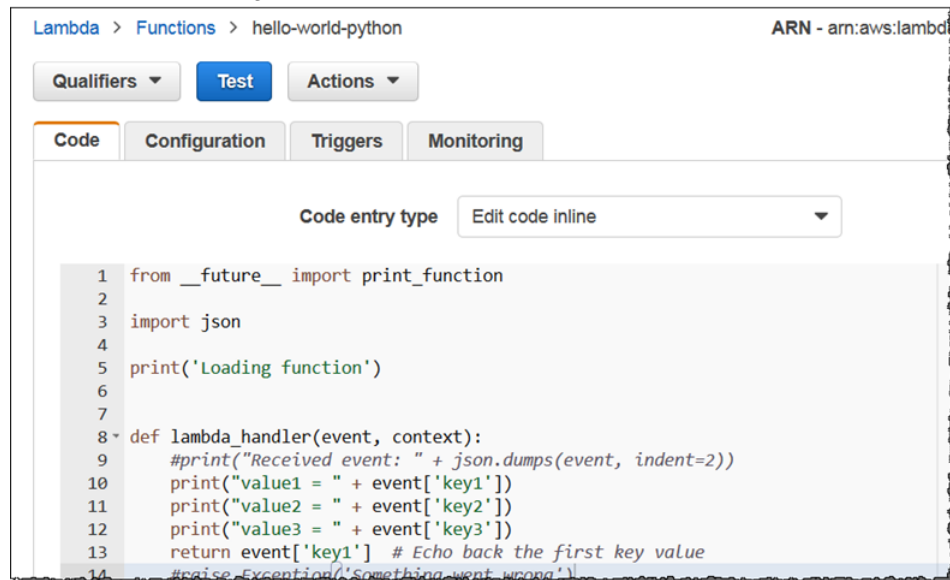

Note the tabs in the console:

- **Code** – Shows the Lambda function code.
- **Configuration** – shows current function configuration and you can change the configuration as needed. After you change any configuration settings, you choose **Save** to save the updated configuration.
- **Triggers** – Shows any triggers you configured for this function (does not apply to this Getting Started exercise).
- **Monitoring** – Provides various CloudWatch metrics for your Lambda function. In the next section, you invoke your **hello-world-python** Lambda function and review these metrics.

Next Step

[Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics \(p. 42\)](#)

Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics

Follow the steps to invoke your Lambda function using the sample event data provided in the console.

1. On the **Lambda > Functions > HelloWorld** page, choose **Test**.
2. In the **Input test event** page, choose **Hello World** from the **Sample event template** list. The following sample event template appears in the window.


```
{
  "key3": "value3",
  "key2": "value2",
  "key1": "value1"
}
```

You can change key and values in the sample JSON, but don't change the event structure. If you do change any keys and values, you must update the sample code accordingly. Choose **Save and test**.

3. AWS Lambda executes your function on your behalf. The `handler` in your Lambda function receives and then processes the sample event.
4. Upon successful execution, view results in the console.

Execution result: succeeded (logs)

The area below shows the result returned by your function execution.

```
"value1"
```

Summary		Log output
Code	SHA-256	The area below shows the logging calls in your code. These correspond to a single row within the CloudWatch log group corresponding to this Lambda function. Click here to view the CloudWatch log group.
Request ID	1b5fcc4d-3411-11e6-96e7-f1f1149561e0	START RequestId: 1b5fcc4d-3411-11e6-96e7-f1f1149561e0 Version: \$LATEST
Duration	0.28 ms	value1 = value1
Billed duration	100 ms	value2 = value2
Resources	128 MB configured	value3 = value3
Max memory used	30 MB	END RequestId: 1b5fcc4d-3411-11e6-96e7-f1f1149561e0
		REPORT RequestId: 1b5fcc4d-3411-11e6-96e7-f1f1149561e0 Duration: 0.28 ms Billed Duration: 100 ms

Note the following:

- The **Execution result** section shows the execution status as **succeeded** and also shows the function execution results, returned by the `return` statement.


Note

The console always uses the `RequestResponse` invocation type (synchronous invocation) when invoking a Lambda function which causes AWS Lambda to return a response immediately. For more information, see [Invocation Types \(p. 9\)](#).

- The **Summary** section shows the key information reported in the **Log output** section (the `REPORT` line in the execution log).
- The **Log output** section shows the log AWS Lambda generates for each execution. These are the logs written to CloudWatch by the Lambda function. The AWS Lambda console shows these logs for your convenience.

Note that the **Click here** link shows logs in the CloudWatch console. The function then adds logs to Amazon CloudWatch in the log group that corresponds to the Lambda function.

5. Run the Lambda function a few times to gather some metrics that you can view in the next step.
6. Choose the **Monitoring** tab to view the CloudWatch metrics for your Lambda function. This page shows four CloudWatch metrics.

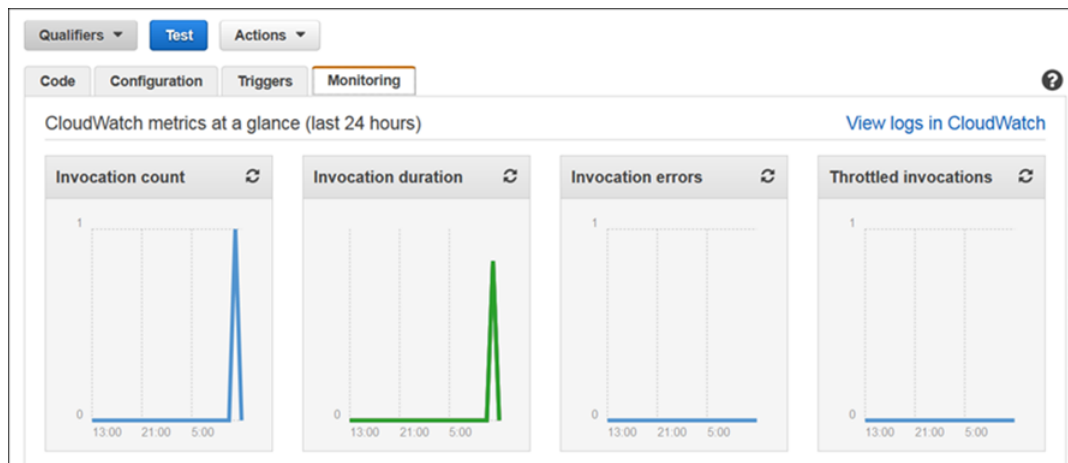

Note the following:

- The X-axis shows the past 24 hours from the current time (for example, 2:00 pm as shown in the screen shot).
- Invocation count shows the number of invocations during this interval.
- Invocation duration shows how long it took for your Lambda function to run. It shows minimum, maximum, and average time of execution.
- Invocation errors show the number of times your Lambda function failed. You can compare the number of times your function executed and how many times it failed (if any).
- Throttled invocation metrics show whether AWS Lambda throttled your Lambda function invocation. For more information, see [List of AWS Lambda Limits \(p. 237\)](#).
- The AWS Lambda console shows these CloudWatch metrics for your convenience. You can see these metrics in the Amazon CloudWatch console by clicking any of these metrics.

Next Step

[Step 2.3: \(Optional\) Try Other Blueprints \(p. 44\)](#)

Step 2.3: (Optional) Try Other Blueprints

You can optionally try the following exercises:

- You used the **hello-world-python** blueprint in this Getting Started exercise. This blueprint provides sample code authored in Python. There is also the **hello-world** blueprint that provides similar Lambda function code that is authored in Node.js.
- Both the **hello-world-python** and the **hello-world** blueprints process custom events. For this Getting Started exercise, you used hand-crafted sample event data. You can write Lambda functions to process events published by event sources such as Amazon S3 and DynamoDB. This requires event source configuration in the console.

For example, you can write a Lambda function to process Amazon S3 events. Then, you configure Amazon S3 as the event source to publish object-created events to AWS Lambda. When you upload an object to your bucket, Amazon S3 detects the event and invokes your Lambda function. Your Lambda function receives the event data as a parameter. You can verify your Lambda function executed by reviewing the CloudWatch logs either in the Lambda console or the CloudWatch console.

The Lambda console provides a blueprint to set up an example Lambda function to process Amazon S3 events. When creating a Lambda function in the console on the **Select blueprint** page, enter **s3** in the **Filter** box to search for a list of available blueprints.

For more information about working with different event sources, see [Use Cases \(p. 125\)](#).

Next Step

[Step 2.4: \(Optional\) Create a Lambda Function Authored in Java \(p. 45\)](#)

Step 2.4: (Optional) Create a Lambda Function Authored in Java

The blueprints provide sample code authored either in Python or Node.js. You can easily modify the example using the inline editor in the console. However, if you want to author code for your Lambda function in Java, there are no blueprints provided. Also, there is no inline editor for you to write Java code in the AWS Lambda console.

That means, you must write your Java code and also create your deployment package outside the console. After you create the deployment package, you can use the console to upload the package to AWS Lambda to create your Lambda function. You can also use the console to test the function by manually invoking it.

In this section you create a Lambda function using the following Java code example.

```
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;

public class Hello {
    public String myHandler(int myCount, Context context) {
        LambdaLogger logger = context.getLogger();
        logger.log("received : " + myCount);
        return String.valueOf(myCount);
    }
}
```

The programming model explains how to write your Java code in detail, for example the input/output types AWS Lambda supports. For more information about the programming model, see [Programming Model for Authoring Lambda Functions in Java \(p. 63\)](#). For now, note the following about this code:

- When you package and upload this code to create your Lambda function, you specify the `example.Hello::myHandler` method reference as the handler.
- The handler in this example uses the `int` type for input and the `String` type for output.

AWS Lambda supports input/output of JSON-serializable types and `InputStream`/`OutputStream` types. When you invoke this function you will pass a sample `int` (for example, 123).

- In this exercise you use the console to manually invoke this Lambda function. The console always uses the `RequestResponse` invocation type (synchronous) and therefore you will see the response in the console.
- The handler includes the optional `Context` parameter. In the code we use the `LambdaLogger` provided by the `Context` object to write log entries to CloudWatch logs. For information about using the `Context` object, see [The Context Object \(Java\) \(p. 74\)](#).

First, you need to package this code and any dependencies into a deployment package. Then, you can use the Getting Started exercise to upload the package to create your Lambda function and test using the console.

Next Step

[What's Next? \(p. 46\)](#)

What's Next?

This Getting Started exercise provided you with an overview of how to use the AWS Lambda console. You used the **hello-world-python** blueprint to create a simple Lambda function that you invoked manually using sample event data.

AWS Lambda functions can also be automatically invoked in response to events in other AWS services such as Amazon S3 and DynamoDB. Lambda functions can also be invoked on-demand over HTTPS. You can also build your own custom event sources and invoke Lambda functions on demand. For more information, see [How It Works \(p. 3\)](#).

Depending on your integration scenario, whether your application needs event-driven Lambda function invocation or on-demand invocation, see the following sections:

- [Using AWS Lambda with Amazon S3 \(p. 125\)](#)
- [Using AWS Lambda with Amazon Kinesis \(p. 142\)](#)
- [Using AWS Lambda with Amazon DynamoDB \(p. 151\)](#)
- [Using AWS Lambda with AWS CloudTrail \(p. 161\)](#)
- [Using AWS Lambda with Amazon API Gateway \(On-Demand Over HTTPS\) \(p. 180\)](#)
- [Using AWS Lambda as Mobile Application Backend \(Custom Event Source: Android\) \(p. 193\)](#)

The console provides several blueprints for you to set up example Lambda functions quickly that can process events from these event sources. You may want to explore other blueprints in the console to get started with Lambda functions triggered by these event sources.

Introduction: Building and Managing AWS Lambda-Based Applications

This topic provides a summary of the steps involved in building AWS Lambda-based applications. You upload your application code in the form of one or more *Lambda functions* to AWS Lambda, a compute service, and the service can run the code on your behalf. AWS Lambda takes care of provisioning and managing the servers to run the code upon invocation.

Typically, the lifecycle for an AWS Lambda-based application includes authoring code, deploying code to AWS Lambda, and then monitoring and troubleshooting. The following are general questions that come up in each of these lifecycle phases:

- **Authoring code for your Lambda function** – What languages are supported? Is there a programming model that I need to follow? How do I package my code and dependencies for uploading to AWS Lambda? What tools are available?
- **Uploading code and creating Lambda functions** – How do I upload my code package to AWS Lambda? How do I tell AWS Lambda where to begin executing my code? How do I specify compute requirements like memory and timeout?
- **Monitoring and troubleshooting** – For my Lambda function that is in production, what metrics are available? If there are any failures, how do I get logs or troubleshoot issues?

The following sections provide introductory information and the Example section at the end provides working examples for you to explore.

Note

This topic provides an introductory overview of how you develop AWS Lambda-based applications. The [How It Works \(p. 3\)](#) section describes the specifics about Lambda functions, event sources, and how AWS Lambda executes your Lambda functions.

Authoring Code for Your Lambda Function

You can author your Lambda function code in the languages that are supported by AWS Lambda. For a list of supported languages, see [Lambda Execution Environment and Available Libraries \(p. 33\)](#). There are tools for authoring code, such as the AWS Lambda console, Eclipse IDE, and Visual Studio IDE. But the available tools and options depend on the following:

- Language you choose to write your Lambda function code.
- Libraries that you use in your code. AWS Lambda runtime provides some of the libraries and you must upload any additional libraries that you use.

The following table lists languages, and the available tools and options that you can use.

Language	Tools and Options for Authoring Code	More Info
Node.js	<ul style="list-style-type: none">• AWS Lambda console• Visual Studio, with IDE plug-in (see AWS Lambda Support in Visual Studio)• Your own authoring environment	You can use the console if the languages you choose do not require compilation, the code is saved in a single file, and it does not depend on any libraries.
Java	<ul style="list-style-type: none">• Eclipse, with AWS Toolkit for Eclipse (see Using AWS Lambda with the AWS Toolkit for Eclipse)• Your own authoring environment	The AWS Toolkit also creates the deployment package, which is explained in Deploying Code and Creating a Lambda Function (p. 48) .
Python	<ul style="list-style-type: none">• AWS Lambda console• Your own authoring environment	You can use the console if the languages you choose do not require compilation, the code is saved in a single file, and it does not depend on any libraries.

In addition, regardless of the language you choose, there is a pattern to writing Lambda function code. For example, how you write the handler method of your Lambda function (that is, the method that AWS Lambda first calls when it begins executing the code), how you pass events to the handler, what statements you can use in your code to generate logs in CloudWatch Logs, how to interact with AWS Lambda runtime and obtain information such as the time remaining before timeout, and how to handle exceptions. The [Programming Model \(p. 51\)](#) section provides information for each of the supported languages.

Note

After you familiarize yourself with AWS Lambda, see the [Use Cases \(p. 125\)](#), which provide step-by-step instructions to help you explore the end-to-end experience.

Deploying Code and Creating a Lambda Function

To create a Lambda function, you first package your code and dependencies in a deployment package. Then, you upload the deployment package to AWS Lambda to create your Lambda function.

Topics

- [Creating a Deployment Package](#) (p. 49)
- [Uploading a Deployment Package](#) (p. 49)
- [Testing a Lambda Function](#) (p. 49)
- [Using AWS CloudFormation](#) (p. 50)

Creating a Deployment Package – Organizing Code and Dependencies

You must first organize your code and dependencies in certain ways and create a *deployment package*. Instructions to create a deployment package vary depending on the language you choose to author the code. For example, you can use build plugins such as Jenkins (for Node.js and Python), and Maven (for Java) to create the deployment packages. For more information, see [Creating a Deployment Package](#) (p. 89).

When you create Lambda functions using the console, the console creates the deployment package for you, and then uploads it to create your Lambda function.

Uploading a Deployment Package – Creating a Lambda Function

AWS Lambda provides the [CreateFunction](#) (p. 282) operation, which is what you use to create a Lambda function. You can use the AWS Lambda console, AWS CLI, and AWS SDKs to create a Lambda function. Internally, all of these interfaces call the `CreateFunction` operation.

In addition to providing your deployment package, you can provide configuration information when you create your Lambda function including the compute requirements of your Lambda function, the name of the handler method in your Lambda function, and the runtime, which depends on the language you chose to author your code. For more information, see [Lambda Function](#) (p. 8).

Note

This section provides an introductory overview of developing AWS Lambda-based applications. [How It Works](#) (p. 3) describes specifics about Lambda functions, event sources, and how AWS Lambda executes your Lambda functions.

Testing a Lambda Function

If your Lambda function is designed to process events of a specific type, you can use sample event data to test your Lambda function using one of the following methods:

- Test your Lambda function in the console.
- Test your Lambda function using the AWS CLI. You can use the `Invoke` method to invoke your Lambda function and pass in sample event data.

The console provides sample event data. The same data is also provided in the [Sample Events Published by Event Sources](#) (p. 19) topic, which you can use in the AWS CLI to invoke your Lambda function.

Using AWS CloudFormation to Create Applications with AWS Lambda

You can also use AWS CloudFormation for end-to-end configuration, such as to deploy Lambda function, set up event sources, and set up whatever AWS Lambda needs when executing your Lambda function. For example, if your Lambda function accesses a DynamoDB table, you can set up the table as part of the AWS CloudFormation template. For information about specifying a Lambda function as part of your AWS CloudFormation template, see [AWS::Lambda::Function](#) in the *AWS CloudFormation User Guide*.

Monitoring and Troubleshooting

After your Lambda function is in production, AWS Lambda automatically monitors functions on your behalf, reporting metrics through Amazon CloudWatch. For more information, see [Accessing Amazon CloudWatch Metrics for AWS Lambda](#) (p. 120).

To help you troubleshoot failures in a function, Lambda logs all requests handled by your function and also automatically stores logs that your code generates in Amazon CloudWatch Logs. For more information, see [Accessing Amazon CloudWatch Logs for AWS Lambda](#) (p. 122).

AWS Lambda-Based Application Examples

This guide provides several examples with step-by-step instructions. If you are new to AWS Lambda, we recommend you try the following exercises:

- [Getting Started](#) (p. 35) – The Getting Started exercise provides a console-based experience. The sample code is authored in Python. You can edit the code in the console, upload it to AWS Lambda, and test it using sample event data provided in the console.
- [Use Cases](#) (p. 125) – If you cannot author your code using the console, you must create your own deployment packages and use the AWS CLI (or SDKs) to create your Lambda function. For more information, see [Authoring Code for Your Lambda Function](#) (p. 48). Most examples in the Uses Cases section use the AWS CLI. If you are new to AWS Lambda, we recommend that you try one of these exercises.

Related Topics

The following topics provide additional information.

[Programming Model](#) (p. 51)

[Creating a Deployment Package](#) (p. 89)

[AWS Lambda Function Versioning and Aliases](#) (p. 101)

[Troubleshooting and Monitoring AWS Lambda Functions with Amazon CloudWatch](#) (p. 118)

Programming Model

You write code for your Lambda function in one of the languages AWS Lambda supports. Regardless of the language you choose, there is a common pattern to writing code for a Lambda function that includes the following core concepts:

- **Handler** – Handler is the function AWS Lambda calls to start execution of your Lambda function. You identify the handler when you create your Lambda function. When a Lambda function is invoked, AWS Lambda starts executing your code by calling the handler function. AWS Lambda passes any event data to this handler as the first parameter. Your handler should process the incoming event data and may invoke any other functions/methods in your code.
- **The context object and how it interacts with Lambda at runtime** – AWS Lambda also passes a context object to the handler function, as the second parameter. Via this context object your code can interact with AWS Lambda. For example, your code can find the execution time remaining before AWS Lambda terminates your Lambda function.

In addition, for languages such as Node.js, there is an asynchronous platform that uses callbacks. AWS Lambda provides additional methods on this context object. You use these context object methods to tell AWS Lambda to terminate your Lambda function and optionally return values to the caller.

- **Logging** – Your Lambda function can contain logging statements. AWS Lambda writes these logs to CloudWatch Logs. Specific language statements generate log entries, depending on the language you use to author your Lambda function code.
- **Exceptions** – Your Lambda function needs to communicate the result of the function execution to AWS Lambda. Depending on the language you author your Lambda function code, there are different ways to end a request successfully or to notify AWS Lambda an error occurred during execution. If you invoke the function synchronously, then AWS Lambda forwards the result back to the client.

Note

Your Lambda function code must be written in a stateless style, and have no affinity with the underlying compute infrastructure. Your code should expect local file system access, child processes, and similar artifacts to be limited to the lifetime of the request. Persistent state should be stored in Amazon S3, Amazon DynamoDB, or another cloud storage service. Requiring functions to be stateless enables AWS Lambda to launch as many copies of a function as needed to scale to the incoming rate of events and requests. These functions may not always run on the same compute instance from request to request, and a given instance of your Lambda function may be used more than once by AWS Lambda.

The following language specific topics provide detail information:

- [Programming Model \(Node.js\) \(p. 51\)](#)
- [Programming Model for Authoring Lambda Functions in Java \(p. 63\)](#)
- [Programming Model for Authoring Lambda Functions in Python \(p. 81\)](#)

Programming Model (Node.js)

AWS Lambda currently supports the following Node.js runtimes:

- Node.js runtime v4.3 (runtime = nodejs4.3)
- Node.js runtime v0.10.42 (runtime = nodejs)

Important

The v0.10.42 runtime will be unavailable to create new functions beginning on October 2016, given the end-of-life announcement for this version. We recommend that you use v4.3. All examples in this documentation use the new v4.3 runtime. For information about programming model differences in the v0.10.42 runtime, see [Using the Earlier Node.js Runtime v0.10.42](#) (p. 60).

When you create a Lambda function, you specify the runtime that you want to use. For more information, see `runtime` parameter of the [CreateFunction](#) (p. 282).

The following sections explain how [common programming patterns and core concepts](#) apply when authoring Lambda function code in Node.js. The programming model described in the following sections apply to both versions, except where indicated.

Topics

- [Lambda Function Handler \(Node.js\)](#) (p. 52)
- [The Context Object \(Node.js\)](#) (p. 55)
- [Logging \(Node.js\)](#) (p. 57)
- [Exceptions \(Node.js\)](#) (p. 59)
- [Using the Earlier Node.js Runtime v0.10.42](#) (p. 60)

Lambda Function Handler (Node.js)

At the time you create a Lambda function you specify a *handler*, a function in your code, that AWS Lambda can invoke when the service executes your code. Use the following general syntax when creating a handler function in Node.js.

```
exports.myHandler = function(event, context,) {  
    ...  
}
```

The callback parameter is optional and you want to return information to the caller.

```
exports.myHandler = function(event, context, callback) {  
    ...  
  
    // Use callback() and return information to the caller.  
}
```

In the syntax, note the following:

- `event` – AWS Lambda uses this parameter to pass in event data to the handler.
- `context` – AWS Lambda uses this parameter to provide your handler the runtime information of the Lambda function that is executing. For more information, see [The Context Object \(Node.js\)](#) (p. 55).
- `callback` – You can use the optional callback to return information to the caller, otherwise return value is null. For more information, see [Using the Callback Parameter](#) (p. 54).

Note

The callback is supported only in the Node.js runtime v4.3. If you are using the earlier runtime v0.10.42, you need to use the context methods (`done`, `succeed`, and `fail`) to properly terminate

the Lambda function. For information about terminating Lambda functions written for earlier runtime versions, see [Using the Earlier Node.js Runtime v0.10.42 \(p. 60\)](#).

- **myHandler** – This is the name of the function AWS Lambda invokes. You export this so it is visible to AWS Lambda. Suppose you save this code as `helloworld.js`. Then, `helloworld.myHandler` is the handler. For more information, see handler in [CreateFunction \(p. 282\)](#).
- If you used the `RequestResponse` invocation type (synchronous execution), AWS Lambda returns the result of the Node.js function call to the client invoking the Lambda function (in the HTTP response to the invocation request, serialized into JSON). For example, AWS Lambda console uses the `RequestResponse` invocation type, so when you test invoke the function using the console, the console will display the return value.

If the handler does not return anything, AWS Lambda returns null.

- If you used the `Event` invocation type (asynchronous execution), the value is discarded.

Example

Consider the following Node.js example code.

```
exports.myHandler = function(event, context, callback) {  
  console.log("value1 = " + event.key1);  
  console.log("value2 = " + event.key2);  
  callback(null, "some success message");  
  // or  
  // callback("some error type");  
}
```

This example has one function, which is also the handler. In the function, the `console.log()` statements log some of the incoming event data to CloudWatch Logs. When the callback is called, the Lambda function exits only after the Node.js event loop is empty (the Node.js event loop is not the same as the event that was passed as a parameter).

Note

If you are using the earlier runtime v0.10.42, you need to use the context methods (`done`, `succeed`, and `fail`) to properly terminate the Lambda function. For more information, see [Using the Earlier Node.js Runtime v0.10.42 \(p. 60\)](#).

To upload and test this code as a Lambda function (console)

1. In the console, create a Lambda function using the following information:
 - Use the hello-world blueprint.
 - Specify **nodejs4.3** as the **runtime**.
 - In **Handler**, replace `index.handler` with `exports.myHandler`.

For instructions to create a Lambda function using the console, see [Step 2.1: Create a Hello World Lambda Function \(p. 39\)](#).

2. Replace the template code with the code provided in this section and create the function.
3. Test the Lambda function using the **Sample event template** called **Hello World** provided in the Lambda console. For instructions on how to do this, see [Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics \(p. 42\)](#).

Using the Callback Parameter

The Node.js runtime v4.3 supports the optional `callback` parameter. You can use it to explicitly return information back to the caller. The general syntax is:

```
callback(Error error, Object result);
```

Where:

- `error` – is an optional parameter that you can use to provide results of the failed Lambda function execution. When a Lambda function succeeds, you can pass `null` as the first parameter.
- `result` – is an optional parameter that you can use to provide the result of a successful function execution. The result provided must be `JSON.stringify` compatible. If an error is provided, this parameter is ignored.

Note

Using the `callback` parameter is optional. If you don't use the optional `callback` parameter, the behavior is same as if you called the `callback()` without any parameters. You can specify the `callback` in your code to return information to the caller.

If you don't use `callback` in your code, AWS Lambda will call it implicitly and the return value is `null`.

When the callback is called (explicitly or implicitly), AWS Lambda continues the Lambda function invocation until the Node.js event loop is empty.

The following are example callbacks:

```
callback();           // Indicates success but no information returned to the caller.
callback(null);       // Indicates success but no information returned to the caller.
callback(null, "success"); // Indicates success with information returned to the caller.
callback(error);      // Indicates error with error information returned to the caller.
```

AWS Lambda treats any non-null value for the `error` parameter as a handled exception.

Note the following:

- Regardless of the invocation type specified at the time of the Lambda function invocation (see [Invoke \(p. 303\)](#)), the callback method automatically logs the string representation of non-null values of `error` to the Amazon CloudWatch Logs stream associated with the Lambda function.
- If the Lambda function was invoked synchronously (using the `RequestResponse` invocation type), the callback returns a response body as follows:
 - If `error` is `null`, the response body is set to the string representation of `result`.
 - If the `error` is not `null`, the `error` value will be populated in the response body.

Note

When the `callback(error, null)` (and `callback(error)`) is called, Lambda will log the first 256 KB of the error object. For a larger error object, AWS Lambda truncates the log and displays the text `Truncated by Lambda` next to the error object.

The Context Object (Node.js)

While a Lambda function is executing, it can interact with AWS Lambda to get useful runtime information such as:

- How much time is remaining before AWS Lambda terminates your Lambda function (timeout is one of the Lambda function configuration properties).
- The CloudWatch log group and log stream associated with the Lambda function that is executing.
- The AWS request ID returned to the client that invoked the Lambda function. You can use the request ID for any follow up inquiry with AWS support.
- If the Lambda function is invoked through AWS Mobile SDK, you can learn more about the mobile application calling the Lambda function.

AWS Lambda provides this information via the `context` object that the service passes as the second parameter to your Lambda function handler. For more information, see [Lambda Function Handler \(Node.js\)](#) (p. 52).

The following sections provide an example Lambda function that uses the `context` object, and then lists all of the available methods and attributes.

Example

Consider the following Node.js example. The handler receives runtime information via a `context` parameter.

```
console.log('Loading function');

exports.handler = function(event, context, callback) {
    //console.log('Received event:', JSON.stringify(event, null, 2));
    console.log('value1 =', event.key1);
    console.log('value2 =', event.key2);
    console.log('value3 =', event.key3);
    console.log('remaining time =', context.getRemainingTimeInMillis());
    console.log('functionName =', context.functionName);
    console.log('AWSrequestID =', context.awsRequestId);
    console.log('logGroupName =', context.logGroupName);
    console.log('logStreamName =', context.logStreamName);
    console.log('clientContext =', context.clientContext);
    if (typeof context.identity !== 'undefined') {
        console.log('Cognito
        identity ID =', context.identity.cognitoIdentityId);
    }
    callback(null, event.key1); // Echo back the first key value
    // or
    // callback("some error type");
};
```

The handler code in this example logs some of the runtime information of the Lambda function to CloudWatch. If you invoke the function using the Lambda console, the console displays the logs in the **Log output** section. You can create a Lambda function using this code and test it using the console.

To test this code in the AWS Lambda console

1. In the console, create a Lambda function using the hello-world blueprint. In **runtime**, choose **nodejs4.3**. For instructions on how to do this, see [Step 2.1: Create a Hello World Lambda Function](#) (p. 39).

2. Test the function, and then you can also update the code to get more context information.

The Context Object Methods (Node.js)

The context object provides the following methods.

`context.getRemainingTimeInMillis()`

Returns the approximate remaining execution time (before timeout occurs) of the Lambda function that is currently executing. The timeout is one of the Lambda function configuration. When the timeout reaches, AWS Lambda terminates your Lambda function.

You can use this method to check the remaining time during your function execution and take appropriate corrective action at run time.

The general syntax is:

```
context.getRemainingTimeInMillis();
```

The Context Object Properties (Node.js)

The `context` object provides the following property that you can update:

callbackWaitsForEmptyEventLoop

The default value is `true`. This property is useful only to modify the default behavior of the callback. By default, the callback will wait until the Node.js runtime event loop is empty before freezing the process and returning the results to the caller. You can set this property to `false` to request AWS Lambda to freeze the process soon after the `callback` is called, even if there are events in the event loop. AWS Lambda will freeze the process, any state data and the events in the Node.js event loop (any remaining events in the event loop processed when the Lambda function is called next and if AWS Lambda chooses to use the frozen process). For more information about callback, see [Using the Callback Parameter \(p. 54\)](#).

In addition, the `context` object provides the following properties that you can use obtain runtime information:

functionName

Name of the Lambda function that is executing.

functionVersion

The Lambda function version that is executing. If an alias is used to invoke the function, then `function_version` will be the version the alias points to.

invokedFunctionArn

The ARN used to invoke this function. It can be a function ARN or an alias ARN. An unqualified ARN executes the `$LATEST` version and aliases execute the function version it is pointing to.

memoryLimitInMB

Memory limit, in MB, you configured for the Lambda function. You set the memory limit at the time you create a Lambda function and you can change it later.

awsRequestId

AWS request ID associated with the request. This is the ID returned to the client that called the `invoke` method.

Note

If AWS Lambda retries the invocation (for example, in a situation where the Lambda function that is processing Amazon Kinesis records throws an exception), the request ID remains the same.

logGroupName

The name of the CloudWatch log group where you can find logs written by your Lambda function.

logStreamName

The name of the CloudWatch log group where you can find logs written by your Lambda function. The log stream may or may not change for each invocation of the Lambda function.

The value is null if your Lambda function is unable to create a log stream, which can happen if the execution role that grants necessary permissions to the Lambda function does not include permissions for the CloudWatch actions.

identity

Information about the Amazon Cognito identity provider when invoked through the AWS Mobile SDK. It can be null.

- **identity.cognitoidentityId**
- **identity.cognitoidentityPoolId**

For more information about the exact values for a specific mobile platform, see [Identity Context](#) in the *AWS Mobile SDK for iOS Developer Guide*, and [Identity Context](#) in the *AWS Mobile SDK for Android Developer Guide*.

clientContext

Information about the client application and device when invoked through the AWS Mobile SDK. It can be null. Using `clientContext`, you can get the following information:

- **clientContext.client.installation_id**
- **clientContext.client.app_title**
- **clientContext.client.app_version_name**
- **clientContext.client.app_version_code**
- **clientContext.client.app_package_name**
- **clientContext.Custom**

Custom values set by the mobile client application.

- **clientContext.env.platform_version**
- **clientContext.env.platform**
- **clientContext.env.make**
- **clientContext.env.model**
- **clientContext.env.locale**

For more information about the exact values for a specific mobile platform, see [Client Context](#) in the *AWS Mobile SDK for iOS Developer Guide*, and [Client Context](#) in the *AWS Mobile SDK for Android Developer Guide*.

Logging (Node.js)

Your Lambda function can contain logging statements. AWS Lambda writes these logs to CloudWatch. If you use the Lambda console to invoke your Lambda function, the console displays the same logs.

The following Node.js statements generate log entries:


- `console.log()`
- `console.error()`
- `console.warn()`
- `console.info()`

For example, consider the following Node.js code example.

```
console.log('Loading function');

exports.handler = function(event, context, callback) {
    //console.log('Received event:', JSON.stringify(event, null, 2));
    console.log('value1 =', event.key1);
    console.log('value2 =', event.key2);
    console.log('value3 =', event.key3);
    callback(null, event.key1); // Echo back the first key value
};
```

The screenshot shows an example **Log output** section in Lambda console, you can also find these logs in CloudWatch. For more information, see [Accessing Amazon CloudWatch Logs for AWS Lambda \(p. 122\)](#).

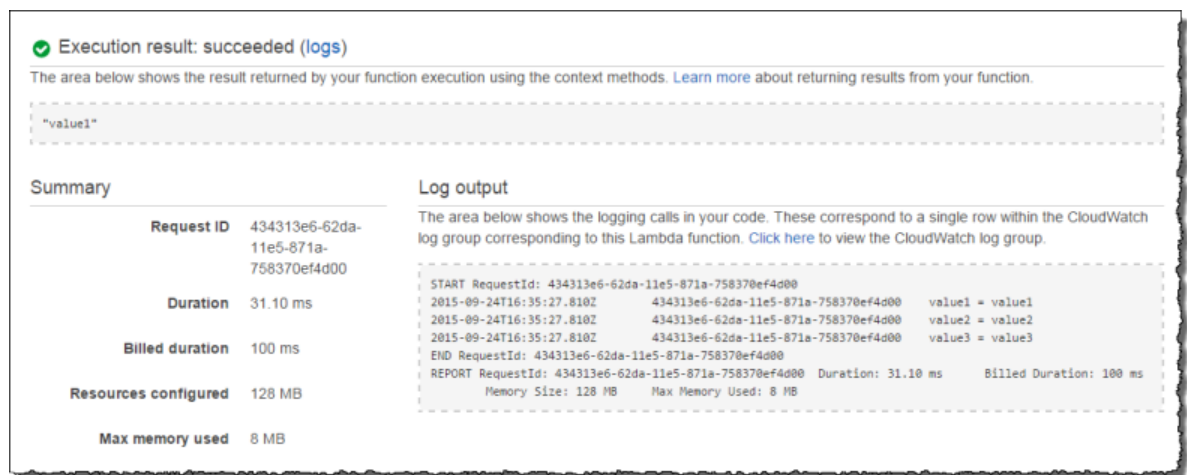

The console uses the `RequestResponse` invocation type (synchronous invocation) when invoking the function, therefore it gets the return value (`value1`) back from AWS Lambda which the console displays.

To test the preceding Node.js code in AWS Lambda console

1. In the console, create a Lambda function using the hello-world blueprint. Make sure to select the Node.js as the **runtime**. For instructions on how to do this, see [Step 2.1: Create a Hello World Lambda Function \(p. 39\)](#).
2. Test the Lambda function using the **Sample event template** called **Hello World** provided in the Lambda console. For instructions on how to do this, see [Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics \(p. 42\)](#). You can also update the code and try other logging methods and properties discussed in this section.

For step-by-step instructions, see [Getting Started \(p. 35\)](#).

Finding Logs

You can find the logs that your Lambda function writes, as follows:

- **In the AWS Lambda console** – The **Log output** section in the AWS Lambda console shows the logs.
- **In the response header, when you invoke a Lambda function programmatically** – If you invoke a Lambda function programmatically, you can add the `LogType` parameter to retrieve the last 4 KB of

log data that is written to CloudWatch Logs. AWS Lambda returns this log information in the `x-amz-log-results` header in the response. For more information, see [Invoke](#).

If you use AWS CLI to invoke the function, you can specify the `--log-type` parameter with value `Tail` to retrieve the same information.

- **In CloudWatch Logs** – To find your logs in CloudWatch you need to know the log group name and log stream name. You can get that information by adding the `context.logGroupName`, and `context.logStreamName` methods in your code. When you run your Lambda function, the resulting logs in the console or CLI will show you the log group name and log stream name.

Exceptions (Node.js)

If your Lambda function notifies AWS Lambda that it failed to execute properly by calling the `context.fail` method, AWS Lambda serializes the error information and returns it. If the error value passed to `context.fail` is an exception, Lambda will attempt to serialize information about the exception such as its type, error message, and stack trace. Otherwise, Lambda will attempt to convert the error object to a String. Consider the following example:

```
console.log('Loading function');

exports.handler = function(event, context, callback) {
  // This example code only throws error.
  var error = new Error("something is wrong");
  callback(error);
};
```

When you invoke this Lambda function, it will notify AWS Lambda that function execution completed with an error and passes error information to AWS Lambda. AWS Lambda returns the error information back to the client:


```
{
  "errorMessage": "something is wrong",
  "errorType": "Error",
  "stackTrace": [
    "exports.handler (/var/task/index.js:10:17)"
  ]
}
```

Note that the stack trace is returned as the `stackTrace` JSON array of stack trace elements.

How you get the error information back depends on the invocation type that the client specifies at the time of function invocation:

- If a client specifies the `RequestResponse` invocation type (that is, synchronous execution), it returns the result to the client that made the invoke call.

For example, the console always use the `RequestResponse` invocation type, so the console will display the error in the **Execution result** section as shown:

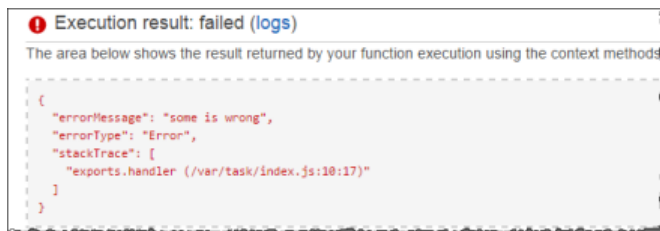

The same information is also sent to CloudWatch and the **Log output** section shows the same logs.

Summary		Log output	
Request ID	9a6e720c-66f8-11e5-8a00-39ccdf04a344	The area below shows the logging calls in your code. These correspond to a single row within the CloudWatch log group corresponding to this Lambda function. Click here to view the CloudWatch log group.	
Duration	11.45 ms	START RequestId: 9a6e720c-66f8-11e5-8a00-39ccdf04a344 Version: HEAD	
Billed duration	100 ms	2015-09-29T22:22:44.393Z 9a6e720c-66f8-11e5-8a00-39ccdf04a344 value1 = value1	
Resources configured	128 MB	2015-09-29T22:22:44.393Z 9a6e720c-66f8-11e5-8a00-39ccdf04a344 value2 = value2	
Max memory used	27 MB	2015-09-29T22:22:44.393Z 9a6e720c-66f8-11e5-8a00-39ccdf04a344 value3 = value3	
		2015-09-29T22:22:44.395Z 9a6e720c-66f8-11e5-8a00-39ccdf04a344 {"errorMessage":"some is wrong","errorType":	
		"stackTrace":["exports.handler (/var/task/index.js:10:17)"]}	
		END RequestId: 9a6e720c-66f8-11e5-8a00-39ccdf04a344	
		REPORT RequestId: 9a6e720c-66f8-11e5-8a00-39ccdf04a344 Duration: 11.45 ms Billed Duration: 100 ms	
		128 MB Max Memory Used: 27 MB	

- If a client specifies the `Event` invocation type (that is, asynchronous execution), AWS Lambda will not return anything. Instead, it logs the error information to CloudWatch Logs. You can also see the error metrics in CloudWatch Metrics.

Depending on the event source, AWS Lambda may retry the failed Lambda function. For example, if Amazon Kinesis is the event source, AWS Lambda will retry the failed invocation until the Lambda function succeeds or the records in the stream expire. For more information on retries, see [Retries on Errors \(p. 29\)](#).

To test the preceding Node.js code (console)

1. In the console, create a Lambda function using the hello-world blueprint. In **runtime**, choose **Node.js** and, in **Role**, choose **Basic execution role**. For instructions on how to do this, see [Step 2.1: Create a Hello World Lambda Function \(p. 39\)](#).
2. Replace the template code with the code provided in this section.
3. Test the Lambda function using the **Sample event template** called **Hello World** provided in the Lambda console. For instructions on how to do this, see [Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics \(p. 42\)](#).

Using the Earlier Node.js Runtime v0.10.42

As of April 2016, AWS Lambda supports Node.js runtime v4.3. For information about specifying this runtime when you create your Lambda function, see the `runtime` parameter of [CreateFunction \(p. 282\)](#).

AWS Lambda continues to support the earlier runtime v0.10.42 (launched Nov 2014), which you can refer to using `runtime=nodejs` while creating a function. Given the upcoming end of life for this version, you will no longer be able to create new functions using this version on October 2016. We recommend you use the new runtime (nodejs4.3) while creating new functions. The section highlights behavior unique to the earlier runtime v0.10.42 and how to transition your existing functions to runtime v4.3.

Topics

- [The Context Methods in Node.js Runtime v0.10.42 \(p. 61\)](#)
- [Transitioning Lambda Function Code to Node.js Runtime v4.3 \(p. 62\)](#)

The Context Methods in Node.js Runtime v0.10.42

The earlier Node.js runtime v0.10.42 does not support the callback parameter for your Lambda function that runtime v4.3 supports. When using runtime v0.10.42, you use the following context object methods to properly terminate your Lambda function. The context object supports the `done()`, `succeed()`, and `fail()` methods that you can use to terminate your Lambda function. These methods are also present in runtime v4.3 for backward compatibility. For information about transitioning your code to use runtime v4.3, see [Transitioning Lambda Function Code to Node.js Runtime v4.3](#) (p. 62).

`context.succeed()`

Indicates the Lambda function execution and all callbacks completed successfully. Here's the general syntax:

```
context.succeed(Object result);
```

Where:

`result` – is an optional parameter and it can be used to provide the result of the function execution.

The `result` provided must be `JSON.stringify` compatible. If AWS Lambda fails to stringify or encounters another error, an unhandled exception is thrown, with the `X-Amz-Function-Error` response header set to `Unhandled`.

You can call this method without any parameters (`succeed()`) or pass a null value (`succeed(null)`).

The behavior of this method depends on the invocation type specified in the Lambda function invocation. For more information about invocation types, see [Invoke](#) (p. 303).

- If the Lambda function is invoked using the `Event` invocation type (asynchronous invocation), the method will return HTTP status 202, request accepted response.
- If the Lambda function is invoked using the `RequestResponse` invocation type (synchronous invocation), the method will return HTTP status 200 (OK) and set the response body to the string representation of the `result`.

`context.fail()`

Indicates the Lambda function execution and all callbacks completed unsuccessfully, resulting in a handled exception. The general syntax is shown following:

```
context.fail(Error error);
```

Where:

`error` – is an optional parameter that you can use to provide the result of the Lambda function execution.

If the `error` value is non-null, the method will set the response body to the string representation of `error` and also write corresponding logs to CloudWatch. If AWS Lambda fails to stringify or encounters another error, an unhandled error occurs with the `X-Amz-Function-Error` header set to `Unhandled`.

Note

For the error from `context.fail(error)` and `context.done(error, null)`, Lambda logs the first 256 KB of the error object. For larger error objects, AWS Lambda truncates the error and displays the text: `Truncated by Lambda` next to the error object.

You can call this method without any parameters (`fail()`) or pass a null value (`fail(null)`).

`context.done()`

Causes the Lambda function execution to terminate.

Note

This method complements the `succeed()` and `fail()` methods by allowing the use of the "error first" callback design pattern. It provides no additional functionality.

The general syntax is:

```
context.done(Error error, Object result);
```

Where:

- `error` – is an optional parameter that you can use to provide results of the failed Lambda function execution.
- `result` – is an optional parameter that you can use to provide the result of a successful function execution. The result provided must be `JSON.stringify` compatible. If an error is provided, this parameter is ignored.

You can call this method without any parameters (`done()`), or pass null (`done(null)`).

AWS Lambda treats any non-null value for the `error` parameter as a handled exception.

The function behavior depends on the invocation type specified at the time of the Lambda invocation. For more information about invocation types, see [Invoke \(p. 303\)](#).

- Regardless of the invocation type, the method automatically logs the string representation of non-null values of `error` to the Amazon CloudWatch Logs stream associated with the Lambda function.
- If the Lambda function was invoked using the `RequestResponse` (synchronous) invocation type, the method returns response body as follows:
 - If `error` is null, set the response body to the JSON representation of `result`. This is similar to `context.succeed()`.
 - If the `error` is not null or the function is called with a single argument of type `error`, the `error` value will be populated in the response body.

Note

For the error from both the `done(error, null)` and `fail(error)`, Lambda logs the first 256 KB of the error object, and for larger error object, AWS Lambda truncates the log and displays the text `Truncated by Lambda` next to the error object.

Transitioning Lambda Function Code to Node.js Runtime v4.3

You can update your existing Lambda function to use Node.js runtime v4.3 using [UpdateFunctionConfiguration \(p. 332\)](#) or using the console.

Note

You might need to update your Lambda code to work in the new runtime. For a list of changes in Node.js v4.3, see [API changes between v0.10 and v4](#) on GitHub.

If you previously created Lambda functions using Node.js runtime v0.10.42, you used one of the `context` object methods (`done()`, `succeed()`, and `fail()`) to terminate your Lambda function. In Node.js runtime v4.3, these methods are supported primarily for backward compatibility. We recommend you use the `callback` (see [Using the Callback Parameter \(p. 54\)](#)). The following are `callback` examples equivalent to the `context` object methods:

- The following example shows the `context.done()` method and corresponding equivalent `callback` supported in the newer runtime.

```
// Old way (Node.js runtime v0.10.42).
context.done(null, 'Success message');

// New way (Node.js runtime v4.3).
context.callbackWaitsForEmptyEventLoop = false;
callback(null, 'Success message');
```

Important

For performance reasons, AWS Lambda may reuse the same Node.js process for multiple executions of the Lambda function. If this happens, AWS Lambda freezes the Node process between execution, retaining the state information it needs to continue execution.

When the `context` methods are called, AWS Lambda freezes the Node process immediately, without waiting for the event loop associated with the process to empty. The process state and any events in the event loop are frozen. When the function is invoked again, if AWS Lambda re-uses the frozen process, the function execution continues with its same global state (for example, events that remained in the event loop will begin to get processed). However, when you use `callback`, AWS Lambda continues the Lambda function execution until the event loop is empty. After all events in the event loop are processed, AWS Lambda then freezes the Node process, including any state variables in the Lambda function. Therefore, if you want the same behavior as the `context` methods, you must set the `context` object property, `callbackWaitsForEmptyEventLoop`, to `false`.

- The following example shows the `context.succeed()` method and corresponding equivalent `callback` supported in the newer runtime.

```
// Old way (Node.js runtime v0.10.42).
context.succeed('Success message');

// New way (Node.js runtime v4.3).
context.callbackWaitsForEmptyEventLoop = false;
callback(null, 'Success message');
```

- The following example shows the `context.fail()` method and corresponding equivalent `callback` supported in the newer runtime.

```
// Old way (Node.js runtime v0.10.42).
context.fail('Fail object');

// New way (Node.js runtime v4.3).
context.callbackWaitsForEmptyEventLoop = false;
callback('Fail object', 'Failed result');
```

Programming Model for Authoring Lambda Functions in Java

The following sections explain how [common programming patterns and core concepts](#) apply when authoring Lambda function code in Java.

Topics

- [Lambda Function Handler \(Java\)](#) (p. 64)
- [The Context Object \(Java\)](#) (p. 74)
- [Logging \(Java\)](#) (p. 76)
- [Exceptions \(Java\)](#) (p. 81)

Additionally, note that AWS Lambda provides the following libraries:

- **aws-lambda-java-core** – This library provides the Context object, `RequestStreamHandler`, and the `RequestHandler` interfaces. The Context object ([The Context Object \(Java\)](#) (p. 74)) provides runtime information about your Lambda function. The predefined interfaces provide one way of defining your Lambda function handler. For more information, see [Leveraging Predefined Interfaces for Creating Handler \(Java\)](#) (p. 70).
- **aws-lambda-java-events** – This library provides predefined types that you can use when writing Lambda functions to process events published by Amazon S3, Amazon Kinesis, Amazon SNS, and Amazon Cognito. These classes help you process the event without having to write your own custom serialization logic.
- **Custom Appender for Log4j 1.2** – You can use the custom Log4j (see [Apache log4j](#)) appender provided by AWS Lambda for logging from your lambda functions. For more information, see [Logging \(Java\)](#) (p. 76).

These libraries are available through the Maven Central Repository and can also be found on GitHub.

Lambda Function Handler (Java)

At the time you create a Lambda function you specify a handler that AWS Lambda can invoke when the service executes the Lambda function on your behalf.

Lambda supports two approaches for creating a handler:

- Loading the handler method directly without having to implement an interface. This section describes this approach.
- Implementing standard interfaces provided as part of `aws-lambda-java-core` library (interface approach). For more information, see [Leveraging Predefined Interfaces for Creating Handler \(Java\)](#) (p. 70).

The general syntax for the handler is as follows:

```
outputType handler-name(inputType input, Context context) {  
    ...  
}
```

In order for AWS Lambda to successfully invoke a handler it must be invoked with input data that can be serialized into the data type of the `input` parameter.

In the syntax, note the following:

- *inputType* – The first handler parameter is the input to the handler, which can be event data (published by an event source) or custom input that you provide such as a string or any custom data object. In order for AWS Lambda to successfully invoke this handler, the function must be invoked with input data that can be serialized into the data type of the `input` parameter.
- *outputType* – If you plan to invoke the Lambda function synchronously (using the `RequestResponse` invocation type), you can return the output of your function using any of the supported data types. For

example, if you use a Lambda function as a mobile application backend, you are invoking it synchronously. Your output data type will be serialized into JSON.

If you plan to invoke the Lambda function asynchronously (using the `Event` invocation type), the `outputType` should be `void`. For example, if you use AWS Lambda with event sources such as Amazon S3, Amazon Kinesis, and Amazon SNS, these event sources invoke the Lambda function using the `Event` invocation type.

- The `inputType` and `outputType` can be one of the following:
 - Primitive Java types (such as `String` or `int`).
 - Predefined AWS event types defined in the `aws-lambda-java-events` library.

For example `S3Event` is one of the POJOs predefined in the library that provides methods for you to easily read information from the incoming Amazon S3 event.

- You can also write your own POJO class. AWS Lambda will automatically serialize and deserialize input and output JSON based on the POJO type.

For more information, see [Handler Input/Output Types \(Java\)](#) (p. 66).

- You can omit the `Context` object from the handler method signature if it isn't needed. For more information, see [The Context Object \(Java\)](#) (p. 74).

For example, consider the following Java example code.

```
package example;

import com.amazonaws.services.lambda.runtime.Context;

public class Hello {
    public String myHandler(int myCount, Context context) {
        return String.valueOf(myCount);
    }
}
```

In this example input is of type `int` and output is of type `String`. If you package this code and dependencies, and create your Lambda function, you specify `example.Hello::myHandler` (`package.class::method-reference`) as the handler.

In the example Java code, the first handler parameter is the input to the handler (`myHandler`), which can be event data (published by an event source such as Amazon S3) or custom input you provide such as an `int` (as in this example) or any custom data object.

For instructions to create a Lambda function using this Java code, see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java](#) (p. 45).

Handler Overload Resolution

If your Java code contains multiple methods with same name as the `handler` name, then AWS Lambda uses the following rules to pick a method to invoke:

1. Select the method with the largest number of parameters.
2. If two or more methods have the same number of parameters, AWS Lambda selects the method that has the `Context` as the last parameter.

If none or all of these methods have the `Context` parameter, then the behavior is undefined.

Additional Information

The following topics provide more information about the handler.

- For more information about the handler input and output types, see [Handler Input/Output Types \(Java\)](#) (p. 66).
- For information about using predefined interfaces to create a handler, see [Leveraging Predefined Interfaces for Creating Handler \(Java\)](#) (p. 70).

If you implement these interfaces, you can validate your handler method signature at compile time.

- If your Lambda function throws an exception, AWS Lambda records metrics in CloudWatch indicating that an error occurred. For more information, see [Exceptions \(Java\)](#) (p. 81).

Handler Input/Output Types (Java)

When AWS Lambda executes the Lambda function, it invokes the handler. The first parameter is the input to the handler which can be event data (published by an event source) or custom input you provide such as a string or any custom data object.

AWS Lambda supports the following input/output types for a handler:

- Simple Java types (AWS Lambda supports the String, Integer, Boolean, Map, and List types)
- POJO (Plain Old Java Object) type
- Stream type (If you do not want to use POJOs or if Lambda's serialization approach does not meet your needs, you can use the byte stream implementation. For more information, see [Example: Using Stream for Handler Input/Output \(Java\)](#) (p. 69).)

Handler Input/Output: String Type

The following Java class shows a handler called `myHandler` that uses String type for input and output.

```
package example;

import com.amazonaws.services.lambda.runtime.Context;

public class Hello {
    public String myHandler(String name, Context context) {
        return String.format("Hello %s.", name);
    }
}
```

You can have similar handler functions for other simple Java types.

Note

When you invoke a Lambda function asynchronously, any return value by your Lambda function will be ignored. Therefore you might want to set the return type to void to make this clear in your code. For more information, see [Invoke](#) (p. 303).

To test an end-to-end example, see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java](#) (p. 45).

Handler Input/Output: POJO Type

The following Java class shows a handler called `myHandler` that uses POJOs for input and output.


```
package example;

import com.amazonaws.services.lambda.runtime.Context;

public class HelloPojo {

    // Define two classes/POJOs for use with Lambda function.
    public static class RequestClass {
        ...
    }

    public static class ResponseClass {
        ...
    }

    public static ResponseClass myHandler(RequestClass request, Context context)
    {
        String greetingString = String.format("Hello %s, %s.", request.getFirst
Name(), request.getLastName());
        return new ResponseClass(greetingString);
    }
}
```

AWS Lambda serializes based on standard bean naming conventions (see [The Java EE 6 Tutorial](#)). You should use mutable POJOs with public getters and setters.

Note

You shouldn't rely on any other features of serialization frameworks such as annotations. If you need to customize the serialization behavior, you can use the raw byte stream to use your own serialization.

If you use POJOs for input and output, you need to provide implementation of the `RequestClass` and `ResponseClass` types. For an example, see [Example: Using POJOs for Handler Input/Output \(Java\)](#) (p. 67).

Example: Using POJOs for Handler Input/Output (Java)

Suppose your application events generate data that includes first name and last name as shown:

```
{ "firstName": "John", "lastName": "Doe" }
```

For this example, the handler receives this JSON and returns the string "Hello John Doe".

```
public static ResponseClass handleRequest(RequestClass request, Context context){

    String greetingString = String.format("Hello %s, %s.", request.firstName,
request.lastName);
    return new ResponseClass(greetingString);
}
```

To create a Lambda function with this handler, you must provide implementation of the input and output types as shown in the following Java example. The `HelloPojo` class defines the handler method.

```
package example;
```

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;

public class HelloPojo implements RequestHandler<RequestClass, ResponseClass>{

    public ResponseClass handleRequest(RequestClass request, Context context){

        String greetingString = String.format("Hello %s, %s.", request.firstName,
request.lastName);
        return new ResponseClass(greetingString);
    }
}
```

In order to implement the input type, add the following code to a separate file and name it *RequestClass.java*. Place it next to the *HelloPojo.java* class in your directory structure:

```
package example;

public class RequestClass {
    String firstName;
    String lastName;

    public String getFirstName() {
        return firstName;
    }

    public void setFirstName(String firstName) {
        this.firstName = firstName;
    }

    public String getLastName() {
        return lastName;
    }

    public void setLastName(String lastName) {
        this.lastName = lastName;
    }

    public RequestClass(String firstName, String lastName) {
        this.firstName = firstName;
        this.lastName = lastName;
    }

    public RequestClass() {
    }
}
```

In order to implement the output type, add the following code to a separate file and name it *ResponseClass.java*. Place it next to the *HelloPojo.java* class in your directory structure:

```
package example;

public class ResponseClass {
    String greetings;
```

```
public String getGreetings() {  
    return greetings;  
}  
  
public void setGreetings(String greetings) {  
    this.greetings = greetings;  
}  
  
public ResponseClass(String greetings) {  
    this.greetings = greetings;  
}  
  
public ResponseClass() {  
}  
  
}
```

Note

The `get` and `set` methods are required in order for the POJOs to work with AWS Lambda's built in JSON serializer. The constructors that take no arguments are usually not required, however in this example we provided other constructors and therefore we need to explicitly provide the zero argument constructors.

You can upload this code as your Lambda function and test as follows:

- Using the preceding code files, create a deployment package.
- Upload the deployment package to AWS Lambda and create your Lambda function. You can do this using the console or AWS CLI.
- Invoke the Lambda function manually using the console or the CLI. You can use provide sample JSON event data when you manually invoke your Lambda function. For example:

```
{ "firstName":"John", "lastName":"Doe" }
```

Follow instructions provided in the Getting Started. For more information, see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java \(p. 45\)](#). Note the following differences:

- When you create a deployment package, don't forget the `aws-lambda-java-core` library dependency.
- When you create the Lambda function, specify `example.HelloPojo::myHandler` (*package.class::method*) as the handler value.

Example: Using Stream for Handler Input/Output (Java)

If you do not want to use POJOs or if Lambda's serialization approach does not meet your needs, you can use the byte stream implementation. In this case, you can use the `InputStream` and `OutputStream` as the input and output types for the handler. An example handler function is shown:

```
public void handler(InputStream inputStream, OutputStream outputStream, Context  
context) {  
    ...  
}
```

Note that in this case the handler function uses parameters for both the request and response streams.

The following is a Lambda function example that implements the handler that uses `InputStream` and `OutputStream` types for the `input` and `output` parameters.

Note

The input payload must be valid JSON but the output stream does not carry such a restriction. Any bytes are supported.

```
package example;

import java.io.InputStream;
import java.io.OutputStream;
import com.amazonaws.services.lambda.runtime.RequestStreamHandler;
import com.amazonaws.services.lambda.runtime.Context;

public class Hello implements RequestStreamHandler{
    public static void handler(InputStream inputStream, OutputStream output
Stream, Context context) throws IOException {
        int letter;
        while((letter = inputStream.read()) != -1)
        {
            outputStream.write(Character.toUpperCase(letter));
        }
    }
}
```

You can do the following to test the code:

- Using the preceding code, create a deployment package.
- Upload the deployment package to AWS Lambda and create your Lambda function. You can do this using the console or AWS CLI.
- You can manually invoke the code by providing sample input. For example:

```
test
```

Follow instructions provided in the Getting Started. For more information, see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java \(p. 45\)](#). Note the following differences:

- When you create a deployment package, don't forget the `aws-lambda-java-core` library dependency.
- When you create the Lambda function, specify `example.Hello::handler` (*package.class::method*) as the handler value.

Leveraging Predefined Interfaces for Creating Handler (Java)

You can use one of the predefined interfaces provided by the AWS Lambda Java core library (`aws-lambda-java-core`) to create your Lambda function handler, as an alternative to writing your own handler method with an arbitrary name and parameters. For more information about handlers, see (see [Lambda Function Handler \(Java\) \(p. 64\)](#)).

You can implement one of the predefined interfaces, `RequestStreamHandler` or `RequestHandler` and provide implementation for the `handleRequest` method that the interfaces provide. You implement one of these interfaces depending on whether you want to use standard Java types or custom POJO types for your handler input/output (where AWS Lambda automatically serializes and deserializes the input and output to Match your data type), or customize the serialization using the `Stream` type.

Note

These interfaces are available in the `aws-lambda-java-core` library.

When you implement standard interfaces, they help you validate your method signature at compile time.

If you implement one of the interfaces, you specify `package.class` in your Java code as the handler when you create the Lambda function. For example, the following is the modified `create-function` CLI command from the getting started. Note that the `--handler` parameter specifies "example.Hello" value:

```
aws lambda create-function \
--region us-west-2 \
--function-name getting-started-lambda-function-in-java \
--zip-file fileb://deployment-package (zip or jar)
    path \
--role arn:aws:iam::account-id:role/lambda_basic_execution \
--handler example.Hello \
--runtime java8 \
--timeout 15 \
--memory-size 512
```

The following sections provide examples of implementing these interfaces.

Example 1: Creating Handler with Custom POJO Input/Output (Leverage the RequestHandler Interface)

The example `Hello` class in this section implements the `RequestHandler` interface. The interface defines `handleRequest()` method that takes in event data as input parameter of the `Request` type and returns an POJO object of the `Response` type:

```
public Response handleRequest(Request request, Context context) {
    ...
}
```

The `Hello` class with sample implementation of the `handleRequest()` method is shown. For this example, we assume event data consists of first name and last name.

```
package example;

import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.Context;

public class Hello implements RequestHandler<Request, Response> {

    public Response handleRequest(Request request, Context context) {
        String greetingString = String.format("Hello %s %s.", request.firstName,
request.lastName);
        return new Response(greetingString);
    }
}
```

For example, if the event data in the `Request` object is:

```
{
  "firstName": "value1",
```

```
"lastName" : "value2"  
}
```

The method returns a `Response` object as follows:

```
{  
  "greetings": "Hello value1 value2."  
}
```

Next, you need to implement the `Request` and `Response` classes. You can use the following implementation for testing:

The `Request` class:

```
package example;  
  
public class Request {  
    String firstName;  
    String lastName;  
  
    public String getFirstName() {  
        return firstName;  
    }  
  
    public void setFirstName(String firstName) {  
        this.firstName = firstName;  
    }  
  
    public String getLastName() {  
        return lastName;  
    }  
  
    public void setLastName(String lastName) {  
        this.lastName = lastName;  
    }  
  
    public Request(String firstName, String lastName) {  
        this.firstName = firstName;  
        this.lastName = lastName;  
    }  
  
    public Request() {  
    }  
}
```

The `Response` class:

```
package example;  
  
public class Response {  
    String greetings;  
  
    public String getGreetings() {  
        return greetings;  
    }  
}
```

```
public void setGreetings(String greetings) {
    this.greetings = greetings;
}

public Response(String greetings) {
    this.greetings = greetings;
}

public Response() {
}
}
```

You can create a Lambda function from this code and test the end-to-end experience as follows:

- Using the preceding code, create a deployment package.
- Upload the deployment package to AWS Lambda and create your Lambda function.
- Test the Lambda function using either the console or CLI. You can specify any sample JSON data that conform to the getter and setter in your `Request` class, for example:

```
{
  "firstName": "John",
  "lastName" : "Doe"
}
```

The Lambda function will return the following JSON in response.

```
{
  "greetings": "Hello John, Doe."
}
```

Follow instructions provided in the getting started (see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java \(p. 45\)](#)). Note the following differences:

- When you create a deployment package, don't forget the `aws-lambda-java-core` library dependency.
- When you create the Lambda function specify `example.Hello` (*package.class*) as the handler value.

Example 2: Creating Handler with Stream Input/Output (Leverage the `RequestStreamHandler` Interface)

The `Hello` class in this example implements the `RequestStreamHandler` interface. The interface defines `handleRequest` method as follows:

```
public void handleRequest(InputStream inputStream, OutputStream outputStream,
Context context)
    throws IOException {
    ...
}
```

The `Hello` class with sample implementation of the `handleRequest()` handler is shown. The handler processes incoming event data (for example, a string "hello") by simply converting it to uppercase and return it.

```
package example;

import java.io.IOException;
import java.io.InputStream;
import java.io.OutputStream;

import com.amazonaws.services.lambda.runtime.RequestStreamHandler;
import com.amazonaws.services.lambda.runtime.Context;

public class Hello implements RequestStreamHandler {
    public void handleRequest(InputStream inputStream, OutputStream outputStream,
        Context context)
        throws IOException {
        int letter;
        while((letter = inputStream.read()) != -1)
        {
            outputStream.write(Character.toUpperCase(letter));
        }
    }
}
```

You can create a Lambda function from this code and test the end-to-end experience as follows:

- Use the preceding code to create deployment package.
- Upload the deployment package to AWS Lambda and create your Lambda function.
- Test the Lambda function using either the console or CLI. You can specify any sample string data, for example:

```
"test"
```

The Lambda function will return `TEST` in response.

Follow instructions provided in the getting started (see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java \(p. 45\)](#)). Note the following differences:

- When you create a deployment package, don't forget the `aws-lambda-java-core` library dependency.
- When you create the Lambda function specify `example.Hello` (*package.class*) as the handler value.

The Context Object (Java)

You interact with AWS Lambda execution environment via the context parameter. The context object allows you to access useful information available within the Lambda execution environment. For example, you can use the context parameter to determine the CloudWatch log stream associated with the function, or use the `clientContext` property of the context object to learn more about the application calling the Lambda function (when invoked through the AWS Mobile SDK).

The context object properties are:

- `getMemoryLimitInMB()`: Memory limit, in MB, you configured for the Lambda function.

- `getFunctionName()`: Name of the Lambda function that is running.
- `getFunctionVersion()`: The Lambda function version that is executing. If an alias is used to invoke the function, then `getFunctionVersion` will be the version the alias points to.
- `getInvokedFunctionArn()`: The ARN used to invoke this function. It can be function ARN or alias ARN. An unqualified ARN executes the `$LATEST` version and aliases execute the function version it is pointing to.
- `getAwsRequestId()`: AWS request ID associated with the request. This is the ID returned to the client called the `invoke()`. You can use the request ID for any follow up enquiry with AWS support. Note that if AWS Lambda retries the function (for example, in a situation where the Lambda function processing Amazon Kinesis records throw an exception), the request ID remains the same.
- `getLogStreamName()`: The CloudWatch log stream name for the particular Lambda function execution. It can be null if the IAM user provided does not have permission for CloudWatch actions.
- `getLogGroupName()`: The CloudWatch log group name associated with the Lambda function invoked. It can be null if the IAM user provided does not have permission for CloudWatch actions.
- `getClientContext()`: Information about the client application and device when invoked through the AWS Mobile SDK. It can be null. Client context provides client information such as client ID, application title, version name, version code, and the application package name.
- `getIdentity()`: Information about the Amazon Cognito identity provider when invoked through the AWS Mobile SDK. It can be null.
- `getRemainingTimeInMillis()`: Remaining execution time till the function will be terminated, in milliseconds. At the time you create the Lambda function you set maximum time limit, at which time AWS Lambda will terminate the function execution. Information about the remaining time of function execution can be used to specify function behavior when nearing the timeout.
- `getLogger()`: Returns the Lambda logger associated with the Context object. For more information, see [Logging \(Java\)](#) (p. 76).

The following Java code snippet shows a handler function that prints some of the context information.

```
public static void handler(InputStream inputStream, OutputStream outputStream,
    Context context) {

    ...

    System.out.println("Function name: " + context.getFunctionName());
    System.out.println("Max mem allocated: " + context.getMemoryLimitInMB());

    System.out.println("Time remaining in milliseconds: " + context.getRe
mainingTimeInMillis());
    System.out.println("CloudWatch log stream name: " + context.getLogStream
Name());
    System.out.println("CloudWatch log group name: " + context.getLogGroup
Name());
}
```

Example: Using Context Object (Java)

The following Java code example shows how to use the `Context` object to retrieve runtime information of your Lambda function, while it is running.

```
package example;
import java.io.InputStream;
import java.io.OutputStream;
import com.amazonaws.services.lambda.runtime.Context;
```

```
public class Hello {
    public static void myHandler(InputStream inputStream, OutputStream outputStream, Context context) {

        int letter;
        try {
            while((letter = inputStream.read()) != -1)
            {
                outputStream.write(Character.toUpperCase(letter));
            }
            Thread.sleep(3000); // Intentional delay for testing the getRemainingTimeInMillis() result.
        }
        catch (Exception e)
        {
            e.printStackTrace();
        }

        // For fun, let us get function info using the context object.
        System.out.println("Function name: " + context.getFunctionName());
        System.out.println("Max mem allocated: " + context.getMemoryLimitInMB());

        System.out.println("Time remaining in milliseconds: " + context.getRemainingTimeInMillis());
        System.out.println("CloudWatch log stream name: " + context.getLogStreamName());
        System.out.println("CloudWatch log group name: " + context.getLogGroupName());
    }
}
```

You can do the following to test the code:

- Using the preceding code, create a deployment package.
- Upload the deployment package to AWS Lambda to create your Lambda function. You can do this using the console or AWS CLI.
- To test your Lambda function use the "Hello World" **Sample event** that the Lambda console provides.

You can type any string and the function will return the same string in uppercase. In addition, you will also get the useful function information provided by the `context` object.

Follow the instructions provided in the Getting Started. For more information, see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java \(p. 45\)](#). Note the following differences:

- When you create a deployment package, don't forget the `aws-lambda-java-core` library dependency.
- When you create the Lambda function, specify `example.Hello::myHandler` (`package.class::method`) as the handler value.

Logging (Java)

Your Lambda function can contain logging statements. AWS Lambda writes these logs to CloudWatch. We recommend you use one of the following to write logs.

- Custom Appender for Log4j™ 1.2

AWS Lambda supports Log4j 1.2 by providing a custom appender. You can use the custom Log4j (see [Apache log4j](#)) appender provided by Lambda for logging from your lambda functions. Every call to Log4j methods, such as `log.debug()` or `log.error()`, will result in a CloudWatch Logs event. The custom appender is called `LambdaAppender` and must be used in the `log4j.properties` file. You must include the `aws-lambda-java-log4j` artifact (`artifactId:aws-lambda-java-log4j`) in the deployment package (.jar file). For an example, see [Example 1: Writing Logs Using Log4J \(Java\)](#) (p. 78).

Note

Currently, AWS Lambda supports Log4j 1.2 version.

- `LambdaLogger.log()`

Each call to `LambdaLogger.log()` results in a CloudWatch Logs event, provided the event size is within the allowed limits. For information about CloudWatch limits, see [CloudWatch Limits](#) in the *Amazon CloudWatch Developer Guide*. For an example, see [Example 2: Writing Logs Using LambdaLogger \(Java\)](#) (p. 79).

In addition, you can also use the following statements in your Lambda function code to generate log entries:

- `System.out()`
- `System.err()`

However, note that AWS Lambda treats each line returned by `System.out` and `System.err` as a separate event. This works well when each output line corresponds to a single log entry. When a log entry has multiple lines of output, AWS Lambda attempts to parse them using line breaks to identify separate events. For example, the following logs the two words ("Hello" and "world") as two separate events:

```
System.out.println("Hello \n world");
```

How to Find Logs

You can find the logs that your Lambda function writes, as follows:

- Find logs in CloudWatch Logs. The `context` object (in the `aws-lambda-java-core` library) provides the `getLogStreamName()` and the `getLogGroupName()` methods. Using these methods, you can find the specific log stream where logs are written.
- If you invoke a Lambda function via the console, the invocation type is always `RequestResponse` (that is, synchronous execution) and the console displays the logs that the Lambda function writes using the `LambdaLogger` object. AWS Lambda also returns logs from `System.out` and `System.err` methods.
- If you invoke a Lambda function programmatically, you can add the `LogType` parameter to retrieve the last 4 KB of log data that is written to CloudWatch Logs. For more information, see [Invoke](#) (p. 303). AWS Lambda returns this log information in the `x-amz-log-results` header in the response. If you use the AWS Command Line Interface to invoke the function, you can specify the `--log-type` parameter with value `Tail`.

Logging Examples (Java)

This section provides examples of using Custom Appender for Log4j and the `LambdaLogger` objects for logging information.

Example 1: Writing Logs Using Log4J (Java)

The following Java code example writes logs using both the System methods and Log4j to illustrate how they differ when AWS Lambda logs information to CloudWatch.

```
package example;

import com.amazonaws.services.lambda.runtime.Context;

import org.apache.log4j.Logger;

public class Hello {
    // Initialize the Log4j logger.
    static final Logger log = Logger.getLogger(Hello.class);

    public String myHandler(String name, Context context) {
        // System.out: One log statement but with a line break (AWS Lambda
        // writes two events to CloudWatch).
        System.out.println("log data from stdout \n this is continuation of
        system.out");

        // System.err: One log statement but with a line break (AWS Lambda writes
        // two events to CloudWatch).
        System.err.println("log data from stderr. \n this is a continuation of
        system.err");

        // Use log4j to log the same thing as above and AWS Lambda will log
        // only one event in CloudWatch.
        log.debug("log data from log4j debug \n this is continuation of log4j
        debug");

        log.error("log data from log4j err. \n this is a continuation of
        log4j.err");


        // Return will include the log stream name so you can look
        // up the log later.
        return String.format("Hello %s. log stream = %s", name, context.getLog
        StreamName());
    }
}
```

The example uses the following log4j.properties file ([project-dir/src/main/resources/](#) directory).

```
log = .
log4j.rootLogger = DEBUG, LAMBDA

#Define the LAMBDA appender
log4j.appender.LAMBDA=com.amazonaws.services.lambda.runtime.log4j.LambdaAppender
log4j.appender.LAMBDA.layout=org.apache.log4j.PatternLayout
log4j.appender.LAMBDA.layout.conversionPattern=%d{yyyy-MM-dd HH:mm:ss}
<%X{AWSRequestId}> %-5p %c{1}:%L - %m%n
```

The following is sample of log entries in CloudWatch Logs.

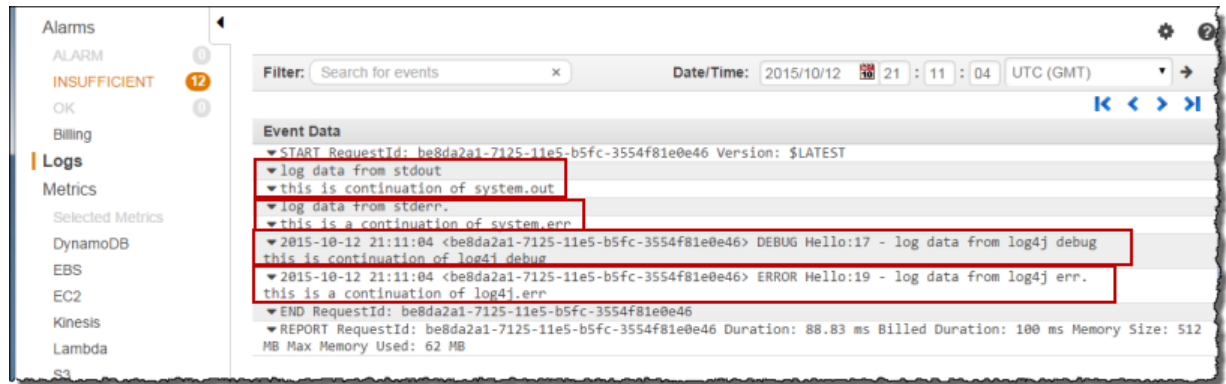

Note:

- AWS Lambda parses the log string in each of the `System.out.println()` and `System.err.println()` statements logs as two separate events (note the two down arrows in the screenshot) because of the line break.
- The Log4j methods (`log.debug()` and `log.error()`) produce one CloudWatch event.
- AWS Lambda runtime adds the `AWSRequestId` in the MDC (see [Class MDC](#)). To get this value in the log as shown, we added `%X{AWSRequestId}` in the conversion pattern in the `log4j.properties` file.

You can do the following to test the code:

- Using the code, create a deployment package. In your project, don't forget to add the `log4j.properties` files in the `project-dir/src/main/resources/` directory.
- Upload the deployment package to AWS Lambda to create your Lambda function.
- To test your Lambda function use a string ("this is a test") as sample event. The handler code receives the sample event but does nothing with it. It only shows how to write logs.

Follow the instructions provided in the Getting Started. For more information, see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java \(p. 45\)](#). Note the following differences:

- When you create a deployment package, don't forget the `aws-lambda-java-log4j` library dependency.
- When you create the Lambda function, specify `example.Hello::myHandler` (`package.class::method`) as the handler value.

Example 2: Writing Logs Using LambdaLogger (Java)

The following Java code example writes logs using both the System methods and the `LambdaLogger` object to illustrate how they differ when AWS Lambda information to CloudWatch.

```
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;

public class Hello {
    public String myHandler(String name, Context context) {

        // System.out: One log statement but with a line break (AWS Lambda
        // writes two events to CloudWatch).
```


```
        System.out.println("log data from stdout \n this is continuation of
system.out");

        // System.err: One log statement but with a line break (AWS Lambda
writes two events to CloudWatch).
        System.err.println("log data from stderr \n this is continuation of
system.err");

        LambdaLogger logger = context.getLogger();
        // Write log to CloudWatch using LambdaLogger.
        logger.log("log data from LambdaLogger \n this is continuation of log
ger.log");

        // Return will include the log stream name so you can look
        // up the log later.
        return String.format("Hello %s. log stream = %s", name, context.getLog
StreamName());
    }
}
```

The following is sample of log entries in CloudWatch Logs.

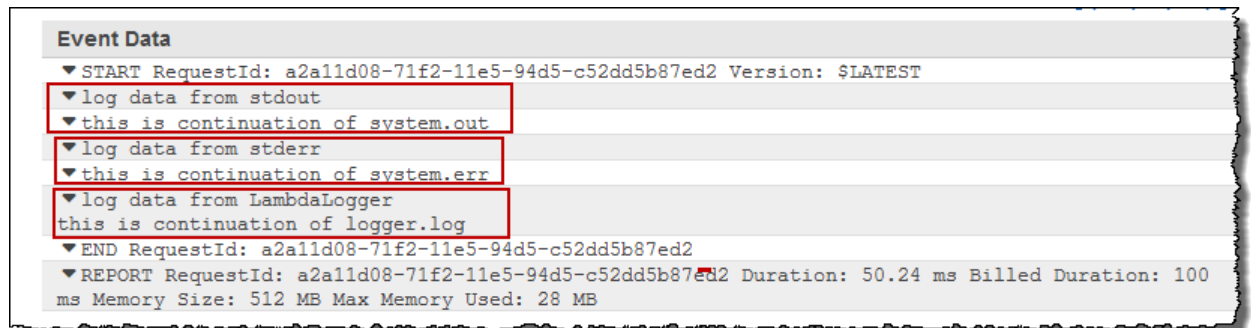

Note:

- AWS Lambda parses the log string in each of the `System.out.println()` and `System.err.println()` statements logs as two separate events (note the two down arrows in the screenshot) because of the line break.
- The `LambdaLogger.log()` produce one CloudWatch event.

You can do the following to test the code:

- Using the code, create a deployment package.
- Upload the deployment package to AWS Lambda to create your Lambda function.
- To test your Lambda function use a string ("this is a test") as sample event. The handler code receives the sample event but does nothing with it. It only shows how to write logs.

Follow the instructions provided in the Getting Started. For more information, see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java \(p. 45\)](#). Note the following differences:

- When you create a deployment package, don't forget the `aws-lambda-java-core` library dependency.
- When you create the Lambda function, specify `example.Hello::myHandler` (`package.class::method`) as the handler value.

Exceptions (Java)

If your Lambda function throws an exception, AWS Lambda recognizes the failure and serializes the exception information into JSON and returns it. Following is an example error message:

```
{
  "errorMessage": "Name John Doe is invalid. Exception occurred...",
  "errorType": "java.lang.Exception",
  "stackTrace": [
    "example.Hello.handler(Hello.java:9)",
    "sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)",
    "sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)",
    "sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)",
    "java.lang.reflect.Method.invoke(Method.java:497)"
  ]
}
```

Note that the stack trace is returned as the `stackTrace` JSON array of stack trace elements.

The method in which you get the error information back depends on the invocation type that you specified at the time you invoked the function:

- **RequestResponse** invocation type (that is, synchronous execution): In this case, you get the error message back.

For example, if you invoke a Lambda function using the Lambda console, the **RequestResponse** is always the invocation type and the console displays the error information returned by AWS Lambda in the **Execution result** section as shown in the following image.



- **Event** invocation type (that is, asynchronous execution): In this case AWS Lambda does not return anything. Instead, it logs the error information in CloudWatch Logs and CloudWatch metrics.

Depending on the event source, AWS Lambda may retry the failed Lambda function. For example, if Amazon Kinesis is the event source for the Lambda function, AWS Lambda retries the failed function until the Lambda function succeeds or the records in the stream expire.

Programming Model for Authoring Lambda Functions in Python

The following sections explain how [common programming patterns and core concepts](#) apply when authoring Lambda function code in Python.

Topics

- [Lambda Function Handler \(Python\) \(p. 82\)](#)
- [The Context Object \(Python\) \(p. 83\)](#)
- [Logging \(Python\) \(p. 85\)](#)
- [Exceptions \(Python\) \(p. 88\)](#)

Lambda Function Handler (Python)

At the time you create a Lambda function, you specify a *handler*, which is a function in your code, that AWS Lambda can invoke when the service executes your code. Use the following general syntax structure when creating a handler function in Python.

```
def handler_name(event, context):  
    ...  
    return some_value
```

In the syntax, note the following:

- `event` – AWS Lambda uses this parameter to pass in event data to the handler. This parameter is usually of the Python `dict` type. It can also be `list`, `str`, `int`, `float`, or `NoneType` type.
- `context` – AWS Lambda uses this parameter to provide runtime information to your handler. This parameter is of the `LambdaContext` type.
- Optionally, the handler can return a value. What happens to the returned value depends on the invocation type you use when invoking the Lambda function:
 - If you use the `RequestResponse` invocation type (synchronous execution), AWS Lambda returns the result of the Python function call to the client invoking the Lambda function (in the HTTP response to the invocation request, serialized into JSON). For example, AWS Lambda console uses the `RequestResponse` invocation type, so when you invoke the function using the console, the console will display the returned value.

If the handler does not return anything, AWS Lambda returns null.

- If you use the `Event` invocation type (asynchronous execution), the value is discarded.

For example, consider the following Python example code.

```
def my_handler(event, context):  
    message = 'Hello {} {}!'.format(event['first_name'],  
                                    event['last_name'])  
  
    return {  
        'message' : message  
    }
```

This example has one function called `my_handler`. The function returns a message containing data from the event it received as input.

To upload and test this code as a Lambda function

1. Save this file (for example, as `hello_python.py`).
2. Package the file and any dependencies into a `.zip` file. When creating the zip, include only the code and its dependencies, not the containing folder.

For instructions, see [Creating a Deployment Package \(Python\) \(p. 98\)](#).

3. Upload the .zip file using either the console or AWS CLI to create a Lambda function. You specify the function name in the Python code to be used as the handler when you create a Lambda function. For instructions to create a Lambda function using the console, see [Step 2.1: Create a Hello World Lambda Function](#) (p. 39). In this example, the handler is `hello_python.my_handler` (*file-name.function-name*). Note that the [Getting Started](#) (p. 35) uses a blueprint that provides sample code for a Lambda function. In this case you already have a deployment package. Therefore, in the configure function step you choose to upload a zip.

The following `create-function` AWS CLI command creates a Lambda function. Among other parameters, it specifies the `--handler` parameter to specify the handler name.

```
aws lambda create-function \
--region us-west-2 \
--function-name HelloPython \
--zip-file fileb://deployment-package.zip \
--role arn:aws:iam::account-id:role/lambda_basic_execution \
--handler hello_python.my_handler \
--runtime python2.7 \
--timeout 15 \
--memory-size 512
```

The Context Object (Python)

Topics

- [Example](#) (p. 83)
- [The Context Object Methods \(Python\)](#) (p. 84)
- [The Context Object Attributes \(Python\)](#) (p. 84)

While a Lambda function is executing, it can interact with the AWS Lambda service to get useful runtime information such as:

- How much time is remaining before AWS Lambda terminates your Lambda function (timeout is one of the Lambda function configuration properties).
- The CloudWatch log group and log stream associated with the Lambda function that is executing.
- The AWS request ID returned to the client that invoked the Lambda function. You can use the request ID for any follow up inquiry with AWS support.
- If the Lambda function is invoked through AWS Mobile SDK, you can learn more about the mobile application calling the Lambda function.

AWS Lambda provides this information via the `context` object that the service passes as the second parameter to your Lambda function handler. For more information, see [Lambda Function Handler \(Python\)](#) (p. 82).

The following sections provide an example Lambda function that uses the `context` object, and then lists all of the available methods and attributes.

Example

Consider the following Python example. It has one function that is also the handler. The handler receives runtime information via the `context` object passed as parameter.

```
from __future__ import print_function

import time
def get_my_log_stream(event, context):
    print("Log stream name:", context.log_stream_name)
    print("Log group name:", context.log_group_name)
    print("Request ID:", context.aws_request_id)
    print("Mem. limits(MB):", context.memory_limit_in_mb)
    # Code will execute quickly, so we add a 1 second intentional delay so you
    # can see that in time remaining value.
    time.sleep(1)
    print("Time remaining (MS):", context.get_remaining_time_in_millis())
```

The handler code in this example simply prints some of the runtime information. Each print statement creates a log entry in CloudWatch. If you invoke the function using the Lambda console, the console displays the logs. The `from __future__` statement enables you to write code that is compatible with Python 2 or 3.

To test this code in the AWS Lambda console

1. In the console, create a Lambda function using the hello-world blueprint. In **runtime**, choose **Python 2.7**. In **Handler**, replace `lambda_function.lambda_handler` with `lambda_function.get_my_log_stream`. For instructions on how to do this, see [Step 2.1: Create a Hello World Lambda Function \(p. 39\)](#).
2. Test the function, and then you can also update the code to get more context information.

The following sections provide a list of available `context` object methods and attributes that you can use to get runtime information of your Lambda function.

The Context Object Methods (Python)

The context object provides the following methods:

`get_remaining_time_in_millis()`

Returns the remaining execution time, in milliseconds, until AWS Lambda terminates the function.

The Context Object Attributes (Python)

The context object provides the following attributes:

`function_name`

Name of the Lambda function that is executing.

`function_version`

The Lambda function version that is executing. If an alias is used to invoke the function, then `function_version` will be the version the alias points to.

`invoked_function_arn`

The ARN used to invoke this function. It can be function ARN or alias ARN. An unqualified ARN executes the `$LATEST` version and aliases execute the function version it is pointing to.

`memory_limit_in_mb`

Memory limit, in MB, you configured for the Lambda function. You set the memory limit at the time you create a Lambda function and you can change it later.

`aws_request_id`

AWS request ID associated with the request. This is the ID returned to the client that called the `invoke` method.

Note

If AWS Lambda retries the invocation (for example, in a situation where the Lambda function that is processing Amazon Kinesis records throws an exception), the request ID remains the same.

log_group_name

The name of the CloudWatch log group where you can find logs written by your Lambda function.

log_stream_name

The name of the CloudWatch log stream where you can find logs written by your Lambda function. The log stream may or may not change for each invocation of the Lambda function.

The value is null if your Lambda function is unable to create a log stream, which can happen if the execution role that grants necessary permissions to the Lambda function does not include permissions for the CloudWatch Logs actions.

identity

Information about the Amazon Cognito identity provider when invoked through the AWS Mobile SDK. It can be null.

- **identity.cognito_identity_id**
- **identity.cognito_identity_pool_id**

client_context

Information about the client application and device when invoked through the AWS Mobile SDK. It can be null.

- **client_context.client.installation_id**
- **client_context.client.app_title**
- **client_context.client.app_version_name**
- **client_context.client.app_version_code**
- **client_context.client.app_package_name**
- **client_context.custom**

A dict of custom values set by the mobile client application.

- **client_context.env**

A dict of environment information provided by the AWS Mobile SDK.

Logging (Python)

Your Lambda function can contain logging statements. AWS Lambda writes these logs to CloudWatch. If you use the Lambda console to invoke your Lambda function, the console displays the same logs.

The following Python statements generate log entries:

- `print` statements.
- Logger functions in the `logging` module (for example, `logging.Logger.info` and `logging.Logger.error`).

Both `print` and `logging.*` functions write logs to CloudWatch Logs but the `logging.*` functions write additional information to each log entry, such as time stamp and log level.

For example, consider the following Python code example.

```
import logging
logger = logging.getLogger()
logger.setLevel(logging.INFO)
```

```
def my_logging_handler(event, context):  
    logger.info('got event{}'.format(event))  
    logger.error('something went wrong')  
    return 'Hello World!'
```

Because the code example uses the `logging` module to write message to the logs, you also get some additional information in the log such as the time stamp and the log levels. The log level identifies the type of log, such as `[INFO]`, `[ERROR]`, and `[DEBUG]`, as shown:

The screenshot displays the AWS Lambda console interface for a function execution. At the top, a green checkmark indicates the "Execution result: succeeded (logs)". Below this, a message states: "The area below shows the result returned by your function execution." A dashed box contains the return value: "Hello World!".

The interface is divided into two main sections: "Summary" and "Log output".

Summary:

- Request ID:** c0c9bad0-5424-11e5-9d69-d14c55e70202
- Duration:** 0.48 ms
- Billed duration:** 100 ms
- Resources:** 128 MB configured
- Max memory used:** 18 MB

Log output:

The area below shows the logging calls in your code. These correspond to a single row within the CloudWatch log group corresponding to this Lambda function. [Click here](#) to view the CloudWatch log group.

The log output is displayed in a dashed box and includes the following entries:


```
START RequestId: c0c9bad0-5424-11e5-9d69-d14c55e70202  
[INFO] 2015-09-05T23:20:54.345Z c0c9bad0-5424-11e5-9d69-d14c55e70202 got even  
{'key2': 'value2', 'key3': 'value3', 'key1': 'value1'}  
[ERROR] 2015-09-05T23:20:54.345Z c0c9bad0-5424-11e5-9d69-d14c55e70202 somethin  
went wrong  
END RequestId: c0c9bad0-5424-11e5-9d69-d14c55e70202  
REPORT RequestId: c0c9bad0-5424-11e5-9d69-d14c55e70202 Duration: 0.48 ms Billed D  
uration: 100 ms Memory Size: 128 MB Max Memory Used: 18 MB
```

The screen shot shows an example **Log output** section in the Lambda console; you can also find these logs in CloudWatch. For more information, see [Accessing Amazon CloudWatch Logs for AWS Lambda \(p. 122\)](#).

Instead of using the `logging` module, you can use the `print` statements in your code as shown in the following Python example:

```
from __future__ import print_function  
def my_other_logging_handler(event, context):  
    print('this will also show up in cloud watch')  
    return 'Hello World!'
```

In this case only the text passed to the `print` method is sent to CloudWatch. The log entries will not have additional information that the `logging.*` function returns. The `from __future__` statement enables you to write code that is compatible with Python 2 or 3.

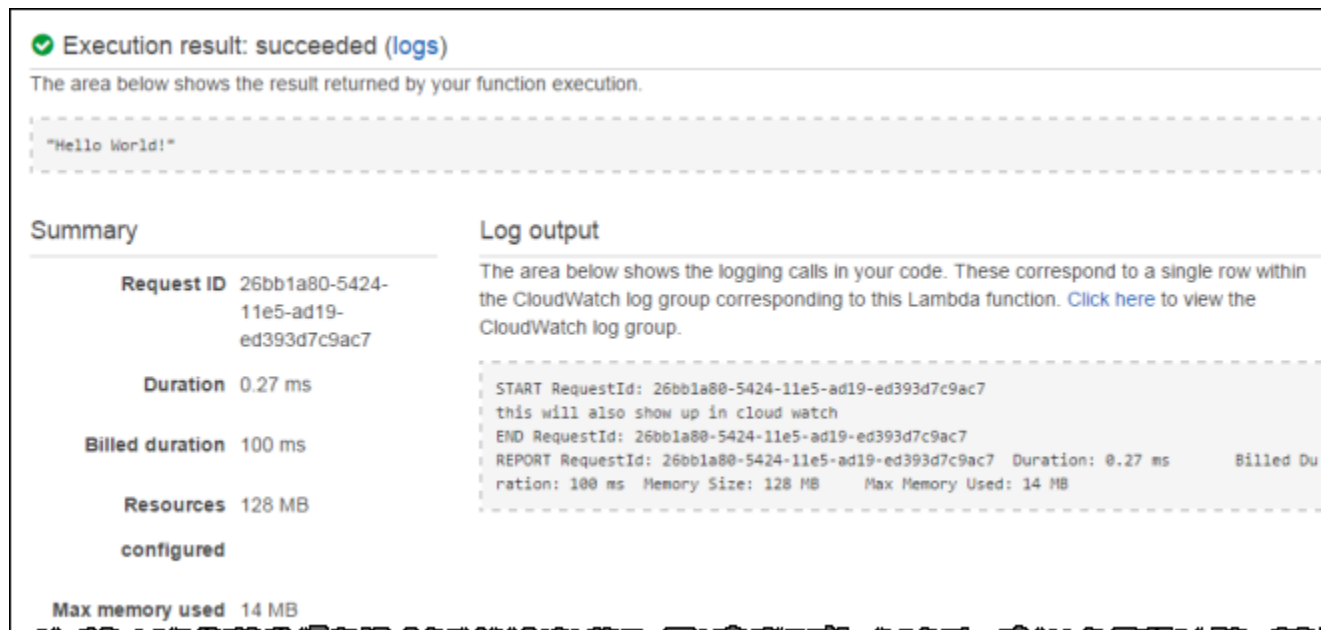

The console uses the `RequestResponse` invocation type (synchronous invocation) when invoking the function. And therefore it gets the return value ("Hello world!") back from AWS Lambda which the console displays.

To test the preceding Python code (console)

1. In the console, create a Lambda function using the `hello-world-python` blueprint. In **runtime**, choose **Python 2.7**. In **Handler**, replace `lambda_function.lambda_handler` with `lambda_function.my_other_logging_handler` and in **Role**, choose **Basic execution role**. You also replace the code provided by the blueprint by the code in this section. For step-by-step instructions to create a Lambda function using the console, see [Step 2.1: Create a Hello World Lambda Function](#) (p. 39).
2. Replace the template code with the code provided in this section.
3. Test the Lambda function using the **Sample event template** called **Hello World** provided in the Lambda console.

Finding Logs

You can find the logs that your Lambda function writes, as follows:

- **In the AWS Lambda console** – The **Log output** section in AWS Lambda console shows the logs.
- **In the response header, when you invoke a Lambda function programmatically** – If you invoke a Lambda function programmatically, you can add the `LogType` parameter to retrieve the last 4 KB of log data that is written to CloudWatch Logs. AWS Lambda returns this log information in the `x-amz-log-results` header in the response. For more information, see [Invoke](#) (p. 303).

If you use AWS CLI to invoke the function, you can specify the `--log-type` parameter with value `Tail` to retrieve the same information.

- **In CloudWatch Logs** – To find your logs in CloudWatch you need to know the log group name and log stream name. You can use the `context.logGroupName`, and `context.logStreamName` properties in your code to get this information. When you run your Lambda function, the resulting logs in the console or CLI will show you the log group name and log stream name.

Exceptions (Python)

If your Lambda function raises an exception, AWS Lambda recognizes the failure and serializes the exception information into JSON and returns it. Consider the following example:

```
def always_failed_handler(event, context):  
    raise Exception('I failed!')
```

When you invoke this Lambda function, it will raise an exception and AWS Lambda returns the following error message:

```
{  
  "errorMessage": "I failed!",  
  "stackTrace": [  
    [  
      "/var/task/lambda_function.py",  
      3,  
      "my_always_fails_handler",  
      "raise Exception('I failed!')"  
    ]  
  ],  
  "errorType": "Exception"  
}
```

Note that the stack trace is returned as the `stackTrace` JSON array of stack trace elements.

How you get the error information back depends on the invocation type that the client specifies at the time of function invocation:

- If a client specifies the `RequestResponse` invocation type (that is, synchronous execution), it returns the result to the client that made the `invoke` call.

For example, the console always use the `RequestResponse` invocation type, so the console will display the error in the **Execution result** section as shown:



The same information is also sent to CloudWatch and the **Log output** section shows the same logs.

Summary		Log output
Request ID	36a4368e-5426-11e5-bbbb-df4437e9fee1	<p>The area below shows the logging calls in your code. These correspond to a single row within the CloudWatch log group corresponding to this Lambda function. Click here to view the CloudWatch log group.</p> <pre>START RequestId: 36a4368e-5426-11e5-bbbb-df4437e9fee1 I failed!: Exception Traceback (most recent call last): File "/var/task/lambda_function.py", line 3, in my_always_fails_handler raise Exception('I failed!') Exception: I failed! END RequestId: 36a4368e-5426-11e5-bbbb-df4437e9fee1 REPORT RequestId: 36a4368e-5426-11e5-bbbb-df4437e9fee1 Duration: 0.68 ms Billed Duration: 100 ms Memory Size: 128 MB Max Memory Used: 18 MB</pre>
Duration	0.68 ms	
Billed duration	100 ms	
Resources configured	128 MB	
Max memory used	18 MB	

- If a client specifies the `Event` invocation type (that is, asynchronous execution), AWS Lambda will not return anything. Instead, it logs the error information to CloudWatch Logs. You can also see the error metrics in CloudWatch Metrics.

Depending on the event source, AWS Lambda may retry the failed Lambda function. For example, if Amazon Kinesis is the event source, AWS Lambda will retry the failed invocation until the Lambda function succeeds or the records in the stream expire.

To test the preceding Python code (console)

1. In the console, create a Lambda function using the hello-world blueprint. In **runtime**, choose **Python 2.7**. In **Handler**, replace `lambda_function.lambda_handler` with `lambda_function.always_failed_handler`. For instructions on how to do this, see [Step 2.1: Create a Hello World Lambda Function \(p. 39\)](#).
2. Replace the template code with the code provided in this section.
3. Test the Lambda function using the **Sample event template** called **Hello World** provided in the Lambda console.

Creating a Deployment Package

To create a Lambda function you first create a Lambda function deployment package, a .zip or .jar file consisting of your code and any dependencies. When creating the zip, include only the code and its dependencies, not the containing folder.

- [Creating a Deployment Package \(Node.js\) \(p. 89\)](#)
- [Creating a Deployment Package \(Java\) \(p. 91\)](#)
- [Creating a Deployment Package \(Python\) \(p. 98\)](#)

Creating a Deployment Package (Node.js)

To create a Lambda function you first create a Lambda function deployment package, a .zip file consisting of your code and any dependencies.

You can create a deployment package yourself or write your code directly in the Lambda console, in which case the console creates the deployment package for you and uploads it, creating your Lambda function. Note the following to determine if you can use the console to create your Lambda function:

- **Simple scenario** – If your custom code requires only the AWS SDK library, then you can use the inline editor in the AWS Lambda console. Using the console, you can edit and upload your code to AWS

Lambda. The console will zip up your code with the relevant configuration information into a deployment package that the Lambda service can run.

You can also test your code in the console by manually invoking it using sample event data.

Note

The Lambda service has preinstalled the AWS SDK for Node.js.

- **Advanced scenario** – If you are writing code that uses other resources, such as a graphics library for image processing, or you want to use the AWS CLI instead of the console, you need to first create the Lambda function deployment package, and then use the console or the CLI to upload the package.

Note

After you create a deployment package, you may either upload it directly or upload the .zip file first to an Amazon S3 bucket in the same AWS region where you want to create the Lambda function, and then specify the bucket name and object key name when you create the Lambda function using the console or the AWS CLI.

The following is an example procedure to create a deployment package (outside the console). Suppose you want to create a deployment package that includes a `filename.js` code file and your code uses the `async` library.

1. Open a text editor, and write your code. Save the file (for example, `filename.js`).

You will use the file name to specify the handler at the time of creating the Lambda function.

2. In the same directory, use **npm** to install the libraries that your code depends on. For example, if your code uses the `async` library, use the following **npm** command.

```
npm install async
```

3. Your directory will then have the following structure:

```
filename.js
node_modules/async
node_modules/async/lib
node_modules/async/lib/async.js
node_modules/async/package.json
```

4. Zip the content of the folder, that is your deployment package (for example, `sample.zip`).

Then, specify the .zip file name as your deployment package at the time you create your Lambda function.

If you want to include your own binaries, including native ones, just package them in the Zip file you upload and then reference them (including the relative path within the Zip file you created) when you call them from Node.js or from other processes that you've previously started. Ensure that you include the following at the start of your function code: `process.env['PATH'] = process.env['PATH'] + ':' + process.env['LAMBDA_TASK_ROOT']`

For more information on including native binaries in your Lambda function package, see [Running Executables in AWS Lambda](#).

Creating a Deployment Package (Java)

Your deployment package can be a .zip file or a standalone jar; it is your choice. You can use any build and packaging tool you are familiar with to create a deployment package.

We provide examples of using Maven to create standalone jars and using Gradle to create a .zip file. For more information, see the following topics:

Topics

- [Creating a .jar Deployment Package Using Maven without any IDE \(Java\) \(p. 91\)](#)
- [Creating a .jar Deployment Package Using Maven and Eclipse IDE \(Java\) \(p. 93\)](#)
- [Creating a .zip Deployment Package \(Java\) \(p. 96\)](#)
- [Authoring Lambda Functions Using Eclipse IDE and AWS SDK Plugin \(Java\) \(p. 98\)](#)

Creating a .jar Deployment Package Using Maven without any IDE (Java)

This section shows how to package your Java code into a deployment package using Maven at the command line.

Topics

- [Before You Begin \(p. 91\)](#)
- [Project Structure Overview \(p. 91\)](#)
- [Step 1: Create Project \(p. 92\)](#)
- [Step 2: Build Project \(Create Deployment Package\) \(p. 93\)](#)

Before You Begin

You will need to install the Maven command-line build tool. For more information, go to [Maven](#). If you are using Linux, check your package manager.

```
sudo apt-get install mvn
```

if you are using Homebrew

```
brew install maven
```

Project Structure Overview

After you set up the project, you should have the following folder structure:

```
project-dir/pom.xml  
project-dir/src/main/java/  (your code goes here)
```

Your code will then be in the /java folder. For example, if your package name is `example` and you have a `Hello.java` class in it, the structure will be:

```
project-dir/src/main/java/example/Hello.java
```

After you build the project, the resulting .jar file (that is, your deployment package), will be in the *project-dir*/target subdirectory.

Step 1: Create Project

Follow the steps in this section to create a Java project.

1. Create a project directory (*project-dir*).
2. In the *project-dir* directory, create the following:
 - Project Object Model file, pom.xml. Add the following project information and configuration details for Maven to build the project.

```
<project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/maven-v4_0_0.xsd">
  <modelVersion>4.0.0</modelVersion>

  <groupId>doc-examples</groupId>
  <artifactId>lambda-java-example</artifactId>
  <packaging>jar</packaging>
  <version>1.0-SNAPSHOT</version>
  <name>lambda-java-example</name>

  <dependencies>
    <dependency>
      <groupId>com.amazonaws</groupId>
      <artifactId>aws-lambda-java-core</artifactId>
      <version>1.1.0</version>
    </dependency>
  </dependencies>

  <build>
    <plugins>
      <plugin>
        <groupId>org.apache.maven.plugins</groupId>
        <artifactId>maven-shade-plugin</artifactId>
        <version>2.3</version>
        <configuration>
          <createDependencyReducedPom>>false</createDependencyReducedPom>
        </configuration>
        <executions>
          <execution>
            <phase>package</phase>
            <goals>
              <goal>shade</goal>
            </goals>
          </execution>
        </executions>
      </plugin>
    </plugins>
  </build>
</project>
```

Note

- In the `dependencies` section, the `groupId` (that is, `com.amazonaws`) is the Amazon AWS group ID for Maven artifacts in the Maven Central Repository. The `artifactId` (that is, `aws-lambda-java-core`) is the AWS Lambda core library that provides definitions of the `RequestHandler`, `RequestStreamHandler`, and the `Context` AWS Lambda interfaces for use in your Java application. At the build time Maven resolves these dependencies.
- In the `plugins` section, the Apache `maven-shade-plugin` is a plugin that Maven will download and use during your build process. This plugin is used for packaging jars to create a standalone `.jar` (a `.zip` file), your deployment package.
- If you are following other tutorial topics in this guide, the specific tutorials might require you to add more dependencies. Make sure to add those dependencies as required.

3. In the `project-dir`, create the following structure:

```
project-dir/src/main/java
```

4. Under the `/java` subdirectory you add your Java files and folder structure, if any. For example, if you Java package name is `example`, and source code is `Hello.java`, your directory structure looks like this:

```
project-dir/src/main/java/example/Hello.java
```

Step 2: Build Project (Create Deployment Package)

Now you can build the project using Maven at the command line.

1. At a command prompt, change directory to the project directory (`project-dir`).
2. Run the following `mvn` command to build the project:

```
$ mvn package
```

The resulting `.jar` is saved as `project-dir/target/lambda-java-example-1.0-SNAPSHOT.jar`. The `.jar` name is created by concatenating the `artifactId` and `version` in the `pom.xml` file.

The build creates this resulting `.jar`, using information in the `pom.xml` to do the necessary transforms. This is a standalone `.jar` (`.zip` file) that includes all the dependencies. This is your deployment package that you can upload to AWS Lambda to create a Lambda function.

Creating a .jar Deployment Package Using Maven and Eclipse IDE (Java)

This section shows how to package your Java code into a deployment package using Eclipse IDE and Maven plugin for Eclipse.

Topics

- [Before You Begin \(p. 94\)](#)
- [Step 1: Create and Build a Project \(p. 94\)](#)

Before You Begin

Install the **Maven** Plugin for Eclipse.

1. Start Eclipse. From the **Help** menu in Eclipse, choose **Install New Software**.
2. In the **Install** window, type `http://download.eclipse.org/technology/m2e/releases` in the **Work with:** box, and choose **Add**.
3. Follow the steps to complete the setup.

Step 1: Create and Build a Project

In this step, you start Eclipse and create a Maven project. You will add the necessary dependencies, and build the project. The build will produce a `.jar`, which is your deployment package.

1. Create a new Maven project in Eclipse.
 - a. From the **File** menu, choose **New**, and then choose **Project**.
 - b. In the **New Project** window, choose **Maven Project**.
 - c. In the **New Maven Project** window, choose **Create a simple project**, and leave other default selections.
 - d. In the **New Maven Project, Configure project** windows, type the following **Artifact** information:
 - **Group Id:** `doc-examples`
 - **Artifact Id:** `lambda-java-example`
 - **Version:** `0.0.1-SNAPSHOT`
 - **Packaging:** `jar`
 - **Name:** `lambda-java-example`

2. Add the `aws-lambda-java-core` dependency to the `pom.xml` file.

It provides definitions of the `RequestHandler`, `RequestStreamHandler`, and `Context` interfaces. This allows you to compile code that you can use with AWS Lambda.

- a. Open the context (right-click) menu for the `pom.xml` file, choose **Maven**, and then choose **Add Dependency**.
- b. In the **Add Dependency** windows, type the following values:

Group Id: `com.amazonaws`

Artifact Id: `aws-lambda-java-core`

Version: `1.1.0`

Caution

If you are following other tutorial topics in this guide, the specific tutorials might require you to add more dependencies. Make sure to add those dependencies as required.

3. Add Java class to the project.
 - a. Open the context (right-click) menu for the `src/main/java` subdirectory in the project, choose **New**, and then choose **Class**.
 - b. In the **New Java Class** window, type the following values:

- **Package:** `example`
- **Name:** `Hello`

Caution

If you are following other tutorial topics in this guide, the specific tutorials might recommend different package name or class name.

- c. Add your Java code. If you are following other tutorial topics in this guide, add the provided code.

4. Build the project.

Open the context (right-click) menu for the project in **Package Explorer**, choose **Run As**, and then choose **Maven Build ...**. In the **Edit Configuration** window, type `package` in the **Goals** box.

Note

The resulting `.jar`, `lambda-java-example-0.0.1-SNAPSHOT.jar`, is not the final standalone `.jar` that you can use as your deployment package. In the next step, you add the Apache `maven-shade-plugin` to create the standalone `.jar`. For more information, go to [Apache Maven Shade Plugin](#).

5. Add the `maven-shade-plugin` plugin and rebuild.

The `maven-shade-plugin` will take artifacts (jars) produced by the `package` goal (produces customer code `.jar`), and created a standalone `.jar` that contains the compiled customer code, and the resolved dependencies from the `pom.xml`.

- a. Open the context (right-click) menu for the `pom.xml` file, choose **Maven**, and then choose **Add Plugin**.
- b. In the **Add Plugin** window, type the following values:
 - **Group Id:** `org.apache.maven.plugins`
 - **Artifact Id:** `maven-shade-plugin`
 - **Version:** `2.3`

- c. Now build again.

This time we will create the `jar` as before, and then use the `maven-shade-plugin` to pull in dependencies to make the standalone `.jar`.

- i. Open the context (right-click) menu for the project, choose **Run As**, and then choose **Maven build ...**.
- ii. In the **Edit Configuration** windows, type `package shade:shade` in the **Goals** box.
- iii. Choose **Run**.

You can find the resulting standalone `.jar` (that is, your deployment package), in the `/target` subdirectory.

Open the context (right-click) menu for the `/target` subdirectory, choose **Show In**, choose **System Explorer**, and you will find the `lambda-java-example-0.0.1-SNAPSHOT.jar`.

Creating a .zip Deployment Package (Java)

This section provides examples of creating .zip file as your deployment package. You can use any build and packaging tool you like to create this zip. Regardless of the tools you use, the resulting .zip file must have the following structure:

- All compiled class files and resource files at the root level.
- All required jars to run the code in the `/lib` directory.

Note

You can also build a standalone .jar (also a zipped file) as your deployment package. For examples of creating standalone .jar using Maven, see [Creating a Deployment Package \(Java\)](#) (p. 91).

The following examples use Gradle build and deployment tool to create the .zip.

Important

Gradle version 2.0 or later is required.

Before You Begin

You will need to download Gradle. For instructions, go to the gradle website, <https://gradle.org/>.

Example 1: Creating .zip Using Gradle and the Maven Central Repository

At the end of this walkthrough, you will have a project directory (*project-dir*) with content having the following structure:

```
project-dir/build.gradle  
project-dir/src/main/java/
```

The `/java` folder will contain your code. For example, if your package name is `example`, and you have a `Hello.java` class in it, the structure will be:

```
project-dir/src/main/java/example/Hello.java
```

After you build the project, the resulting .zip file (that is, your deployment package), will be in the *project-dir*/build/distributions subdirectory.

1. Create a project directory (*project-dir*).
2. In the *project-dir*, create `build.gradle` file and add the following content:

```
apply plugin: 'java'  
  
repositories {  
    mavenCentral()  
}  
  
dependencies {  
    compile (  
        'com.amazonaws:aws-lambda-java-core:1.1.0',  
        'com.amazonaws:aws-lambda-java-events:1.1.0'  
    )  
}
```

```
task buildZip(type: Zip) {
    from compileJava
    from processResources
    into('lib') {
        from configurations.runtime
    }
}

build.dependsOn buildZip
```

Note

- The repositories section refers to Maven Central Repository. At the build time, it fetches the dependencies (that is, the two AWS Lambda libraries) from Maven Central.
- The `buildZip` task describes how to create the deployment package `.zip` file.

For example, if you unzip the resulting `.zip` file you should find any of the compiled class files and resource files at the root level. You should also find a `/lib` directory with the required jars for running the code.

- If you are following other tutorial topics in this guide, the specific tutorials might require you to add more dependencies. Make sure to add those dependencies as required.

3. In the `project-dir`, create the following structure:

```
project-dir/src/main/java/
```

4. Under the `/java` subdirectory you add your Java files and folder structure, if any. For example, if you Java package name is `example`, and source code is `Hello.java`, then your directory structure looks like this:

```
project-dir/src/main/java/example/Hello.java
```

5. Run the following gradle command to build and package the project in a `.zip` file.

```
project-dir> gradle build
```

6. Verify the resulting `project-dir.zip` file in the `project-dir/build/distributions` subdirectory.
7. Now you can upload the `.zip` file, your deployment package to AWS Lambda to create a Lambda function and test it by manually invoking it using sample event data. For instruction, see [Step 2.4: \(Optional\) Create a Lambda Function Authored in Java \(p. 45\)](#).

Example 2: Creating .zip Using Gradle Using Local Jars

You may choose not to use the Maven Central repository. Instead have all the dependencies in the project folder. In this case your project folder (`project-dir`) will have the following structure:

```
project-dir/jars/           (all jars go here)
project-dir/build.gradle
project-dir/src/main/java/  (your code goes here)
```

So if your Java code has `example` package and `Hello.java` class, the code will be in the following subdirectory:

```
project-dir/src/main/java/example/Hello.java
```

Your `build.gradle` file should be as follows:

```
apply plugin: 'java'

dependencies {
    compile fileTree(dir: 'jars', include: '*.jar')
}

task buildZip(type: Zip) {
    from compileJava
    from processResources
    into('lib') {
        from configurations.runtime
    }
}

build.dependsOn buildZip
```

Note that the dependencies specify `fileTree` which identifies `project-dir/jars` as the subdirectory that will include all the required jars.

Now you build the package. Run the following gradle command to build and package the project in a .zip file.

```
project-dir> gradle build
```

Authoring Lambda Functions Using Eclipse IDE and AWS SDK Plugin (Java)

Topics

AWS SDK Eclipse Toolkit provides an Eclipse plugin for you to both create a deployment package and also upload it to create a Lambda function. If you can use Eclipse IDE as your development environment, this plugin enables you to author Java code, create and upload a deployment package, and create your Lambda function. For more information, see the [AWS Toolkit for Eclipse Getting Started Guide](#). For an example of using the toolkit for authoring Lambda functions, see [Using AWS Lambda with the AWS Toolkit for Eclipse](#).

Creating a Deployment Package (Python)

To create a Lambda function you first create a Lambda function deployment package, a .zip file consisting of your code and any dependencies.

You can create a deployment package yourself or write your code directly in the Lambda console, in which case the console creates the deployment package for you and uploads it, creating your Lambda function. Note the following to determine if you can use the console to create your Lambda function:

- **Simple scenario** – If your custom code requires only the AWS SDK library, then you can use the inline editor in the AWS Lambda console. Using the console, you can edit and upload your code to AWS Lambda. The console will zip up your code with the relevant configuration information into a deployment package that the Lambda service can run.

You can also test your code in the console by manually invoking it using sample event data.

Note

The Lambda service has preinstalled the AWS SDK for Python.

- **Advanced scenario** – If you are writing code that uses other resources, such as a graphics library for image processing, or you want to use the AWS CLI instead of the console, you need to first create the Lambda function deployment package, and then use the console or the CLI to upload the package.

Note

After you create a deployment package, you may either upload it directly or upload the .zip file first to an Amazon S3 bucket in the same AWS region where you want to create the Lambda function, and then specify the bucket name and object key name when you create the Lambda function using the console or the AWS CLI.

The following is an example procedure to create a deployment package (outside the console).

Note

This should work for most standard installations of Python and pip when using pure Python modules in your Lambda function. If you are including modules that have native dependencies or have Python installed with Homebrew on OS X, you should see the next section which provides instructions to create a deployment package when using Virtualenv. For more information, see [Create Deployment Package Using a Python Environment Created with Virtualenv \(p. 100\)](#) and the [Virtualenv](#) website.

You will use `pip` to install dependencies/libraries. For information to install `pip`, go to [Installation](#).

1. You create a directory, for example `project-dir`.
2. Save all of your Python source files (the .py files) at the root level of this directory.
3. Install any libraries using **pip**. Again, you install these libraries at the root level of the directory.

```
pip install module-name -t /path/to/project-dir
```

For example, the following command installs the `requests` HTTP library in the `project-dir` directory.

```
pip install requests -t /path/to/project-dir
```

If using Mac OS X and you have Python installed using Homebrew (see [Homebrew](#)), the preceding command will not work. A simple workaround is to add a `setup.cfg` file in your `/path/to/project-dir` with the following content.

```
[install]
prefix=
```

4. Zip the content of the `project-dir` directory, which is your deployment package.

Important

Zip the directory *content*, not the directory. The contents of the Zip file are available as the current working directory of the Lambda function. For example:
/project-dir/codefile.py/lib/yourlibraries

Note

AWS Lambda includes the AWS SDK for Python (Boto 3), so you don't need to include it in your deployment package. However, if you want to use a version of Boto3 other than the one included by default, you can include it in your deployment package.

Create Deployment Package Using a Python Environment Created with Virtualenv

This section explains how to create a deployment package if you are using a Python environment that you created with the Virtualenv tool. Consider the following example:

- Created the following isolated Python environment using the Virtualenv tool and activated the environment:

```
virtualenv path/to/my/virtual-env
```

You can activate the environment on Windows, OS X, and Linux as follows:

- On Windows, you activate using the `activate.bat`:

```
path\to\my\virtual-env\Scripts\activate.bat
```

- On OS X and Linux, you source the `activate` script:

```
source path/to/my/virtual-env/bin/activate
```

- Also, suppose you have installed the **requests** package in the activated environment (assume that you will use these in your code). You can install these packages as follows :

```
pip install requests
```

Now, to create a deployment package you do the following:

1. First, create `.zip` file with your Python code you want to upload to AWS Lambda.
2. Add the libraries from preceding activated virtual environment to the `.zip` file. That is, you add the content of the following directory to the `.zip` file (note again that you add the content of the directory and not the directory itself).

For Windows the directory is:

```
%VIRTUAL_ENV%\Lib\site-packages
```

For OS X, Linux, the directory is:

```
$VIRTUAL_ENV/lib/python2.7/site-packages
```

Note

If you don't find the packages in the `site-packages` directory in your virtual environment, you might find it in the `dist-packages` directory.


For an example of creating a Python deployment package, see [Python \(p. 136\)](#).

AWS Lambda Function Versioning and Aliases

Versioning allows you to better manage your in-production Lambda function code by enabling you to publish one or more versions of your Lambda function. As a result, you can work with different variations of your Lambda function in your development workflow, such as development, beta, and production. Each Lambda function version has a unique Amazon Resource Name (ARN). After you publish a version, it is immutable (that is, it can't be changed).

AWS Lambda supports creating aliases for each of your Lambda function versions. Conceptually, an AWS Lambda alias is a pointer to a specific Lambda function version, but it is also a resource similar to a Lambda function, and each alias has a unique ARN. Each alias maintains an ARN for a function version to which it points (note that an alias can only point to a function version, not to another alias). Unlike versions, which are immutable, aliases are mutable (that is, they can be changed) and can be updated to point to different versions.

The following example shows two versions of a `helloworld` Lambda function (version `$LATEST`, and version 1). Each of these function versions has an alias (`DEV` and `PROD`) pointing to it.

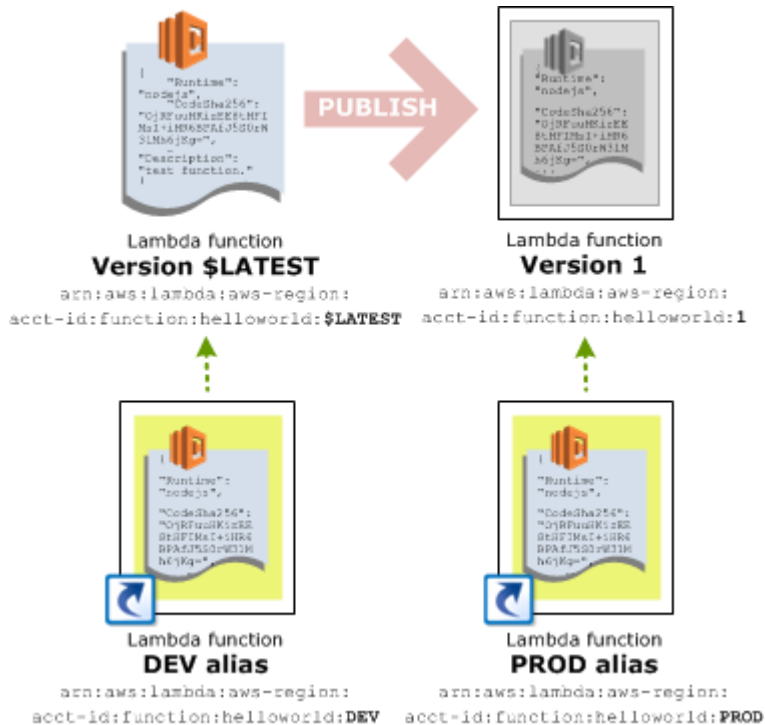

Aliases enable you to abstract the process of promoting new Lambda function versions into production from the mapping of the Lambda function version and its event source. For more information, see [How It Works](#) (p. 3).

For example, suppose Amazon S3 is the event source that invokes your Lambda function when new objects are created in a bucket. When Amazon S3 is your event source, you store the event source mapping information in the bucket notification configuration. In the configuration you can identify the Lambda function ARN that Amazon S3 can invoke, but, in this case, each time you publish a new version of your Lambda function you need to update the notification configuration so that Amazon S3 invokes the correct version. Instead of specifying the function ARN, you can specify an alias ARN in the notification configuration (for example, PROD alias ARN). As you promote new versions of your Lambda function into production, you only need to update the PROD alias to point to the latest stable version, and you don't need to update the notification configuration in Amazon S3.

The same applies when you need to roll back to a previous version of your Lambda function. In this scenario, you just update the PROD alias to point to a different function version, and there is no need to update event source mappings.

We recommend you use versioning and aliases to deploy your Lambda functions when building applications with multiple dependencies and developers involved.

For detailed information, see the following topics:

Topics

- [Versioning](#) (p. 102)
- [Aliases](#) (p. 106)
- [Versioning, Aliases, and Resource Policies](#) (p. 114)
- [Managing Versioning](#) (p. 116)

Introduction to AWS Lambda Versioning

This section explains how to create a Lambda function and publish a version from it. It also explains how to update function code and configuration information when you have one or more published versions. In addition, this section includes information on how to delete function versions, either specific versions or the entire Lambda function (with all of its versions and associated aliases).

Creating a Lambda Function (the `$LATEST` version)

When you create a Lambda function, there is only one version. It is the `$LATEST` version.



You can refer to this function using its Amazon Resource Name (ARN). There are two ARNs associated with this initial version:

- **Qualified ARN** – The function ARN with the version suffix.

```
arn:aws:lambda:aws-region:acct-id:function:helloworld:$LATEST
```

- **Unqualified ARN** – The function ARN without the version suffix.

You can use this ARN in all relevant operations however you cannot use it to create an alias. For more information, see [Introduction to AWS Lambda Aliases \(p. 106\)](#).

The unqualified ARN has its own resource policies.

```
arn:aws:lambda:aws-region:acct-id:function:helloworld
```

Note

Unless you choose to publish versions, the `$LATEST` version is the only Lambda function version you have. You can use either the qualified or unqualified ARN in your event source mapping to invoke this `$LATEST` version.

The following is an example response of a `CreateFunction` API call:

```
{
  "CodeSize": 287,
  "Description": "test function.",
  "FunctionArn": "arn:aws:lambda:aws-region:acct-id:function:helloworld",
  "FunctionName": "helloworld",
  "Handler": "helloworld.handler",
  "LastModified": "2015-07-16T00:34:31.322+0000",
  "MemorySize": 128,
  "Role": "arn:aws:iam::acct-id:role/lambda_basic_execution",
  "Runtime": "nodejs4.3",
  "Timeout": 3,
  "CodeSHA256": "OjRFuuHKizEE8tHFIMsI+iHR6BPafJ5S0rW31Mh6jKg=",
  "Version": "$LATEST"
}
```

For more information, see [CreateFunction \(p. 282\)](#).

In this response, AWS Lambda returns the unqualified ARN of the newly created function as well as its version, `$LATEST`. The response also shows that the `Version` is `$LATEST`. The `CodeSha256` is the checksum of the deployment package that you uploaded.

Publishing a Lambda Function Version

When you publish a version, AWS Lambda makes a snapshot copy of the Lambda function code (and configuration) in the `$LATEST` version. A published version is immutable. That is, you can't change the code or configuration information. The new version has a unique ARN that includes a version number suffix as shown:



You can publish a version using any of the following methods:

- **Publish a version explicitly** – Use the `PublishVersion` API to explicitly publish a version. For more information, see [PublishVersion](#) (p. 317). This action creates a new version using the code and configuration in the `$LATEST` version.
- **Publish a version at the time you create or update a Lambda function** – Use the `CreateFunction` or `UpdateFunctionCode` requests to also publish a version by adding the optional `publish` parameter in the request:
 - Specify the `publish` parameter in your `CreateFunction` request to create a new Lambda function (the `$LATEST` version), and then immediately publish it by creating a snapshot and assigning it to be version 1. For more information about `CreateFunction`, see [CreateFunction](#) (p. 282).
 - Specify the `publish` parameter in your `UpdateFunctionCode` request to update the code in the `$LATEST` version, and then publish a version from the `$LATEST`. For more information about `UpdateFunctionCode`, see [UpdateFunctionCode](#) (p. 328).

If you specify the `publish` parameter at the time you create a Lambda function, the function configuration information that AWS Lambda returns in response shows the version number of the newly published version, as shown following (in the example, the version is 1):

```
{
  "CodeSize": 287,
  "Description": "test function.",
  "FunctionArn": "arn:aws:lambda:aws-region:acct-id:function:helloworld",
  "FunctionName": "helloworld",
  "Handler": "helloworld.handler",
  "LastModified": "2015-07-16T00:34:31.322+0000",
  "MemorySize": 128,
  "Role": "arn:aws:iam::acct-id:role/lambda_basic_execution",
  "Runtime": "nodejs4.3",
  "Timeout": 3,
  "CodeSHA256": "OjRFuuHKizEE8tHFIMsI+iHR6BPafJ5S0rW31Mh6jKg=",
  "Version": "1"
}
```

Note

Lambda will only publish a new version if the code has not yet been published or if the code has changed when compared against the `$LATEST` version. If there is no change, the `$LATEST` published version will be returned.

We recommend that you publish a version at the same time that you create your Lambda function or update your Lambda function code, especially when multiple developers contribute to the same Lambda

function development. You can use the `publish` parameter in your request to do this. When you have multiple developers working on a project, it is possible for developer A to create a Lambda function (\$LATEST version) and before developer A publishes a version, developer B updates the code (deployment package) associated with the \$LATEST version. In this case, you lose the original code that developer A uploaded. When both developers add the `publish` parameter it prevents the race condition described.

Note

The published versions are immutable. That is, you cannot change code or configuration information associated with a version.


Each version of a Lambda function is a unique resource with a Amazon Resource Name (ARN). The following example shows the ARN of version number 1 of the `helloworld` Lambda function:

```
arn:aws:lambda:aws-region:acct-id:function:helloworld:1
```

Note

This is a qualified ARN, where the version number is a suffix. Published versions can have only qualified ARN.

You can publish multiple versions. Each time you publish a version, AWS Lambda copies \$LATEST version (code and configuration information) to create a new version. When you publish additional versions, AWS Lambda assigns a monotonically increasing sequence number for versioning, even if the function was deleted and re-created. Version numbers are never reused, even for a function that has been deleted and re-created, so that the consumer of that version can depend on the executable of that version to never change (except if it's deleted). If you want to re-use a qualifier, use aliases with your versions. Aliases can be deleted and re-created with the same name.

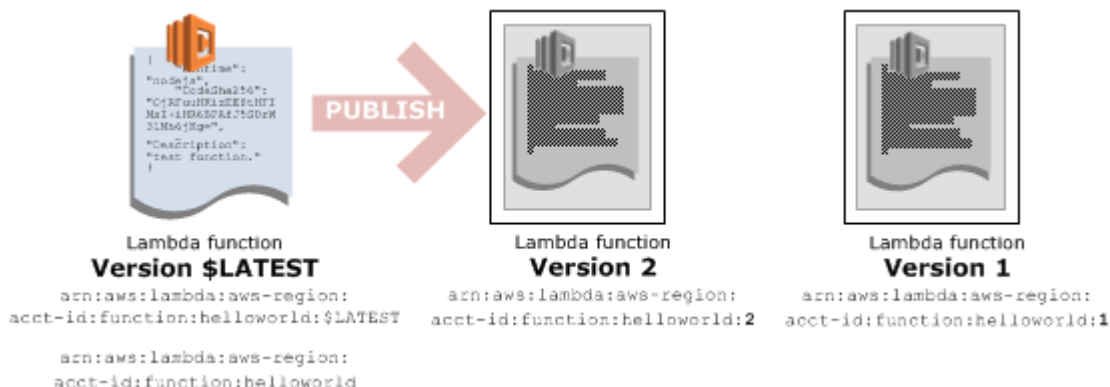

Updating Lambda Function Code and Configuration

AWS Lambda maintains your latest function code in the \$LATEST version. When you update your function code, AWS Lambda replaces the code in the \$LATEST version of the Lambda function. For more information, see [UpdateFunctionCode](#) (p. 328).

Published versions are immutable. You cannot update code or configuration information associated with a published version.

You have the following options of publishing a new version as you update your Lambda function code:

- **Publish a version in the same update code request** – Use the `UpdateFunctionCode` API (recommended).
- **First update the code, and then explicitly publish a version** – Use the `PublishVersion` API.

You can update code and configuration information (such as description, memory size, and execution timeout) of the `$LATEST` version of the Lambda function. However, published versions are immutable. That is, you cannot change code or configuration information.

Deleting a Lambda Function and a Specific Version

With versioning, you have the following choices:

- **Delete a specific version** – You can delete a Lambda function version by specifying the version you want to delete in your `DeleteFunction` request. If there are aliases dependent on this version, the request will fail. AWS Lambda deletes the version only if there are no aliases dependent on this version. For more information about aliases, see [Introduction to AWS Lambda Aliases \(p. 106\)](#).
- **Delete the entire Lambda function (all of its versions and aliases)** – To delete the Lambda function and all of its versions, do not specify any version in your `DeleteFunction` request. This deletes the entire function including all of its versions and aliases.

Important

You can delete a specific function version, but you cannot delete the `$LATEST`.

Related Topics

[Introduction to AWS Lambda Aliases \(p. 106\)](#)

[Managing Versioning Using the AWS Management Console, the AWS CLI, or Lambda APIs \(p. 116\)](#)

Introduction to AWS Lambda Aliases

You can create aliases for your Lambda function. An AWS Lambda alias is like a pointer to a specific Lambda function version. For more information about versioning, see [Introduction to AWS Lambda Versioning \(p. 102\)](#). By using aliases, you can access the Lambda function it is pointing to (for example, to invoke the function) without the caller having to know the specific version the alias is pointing to.

AWS Lambda aliases enable the following use cases:

- **Easier support for promotion of new versions of Lambda functions and roll back when needed** – After initially creating a Lambda function (the `$LATEST` version) you can first publish a version 1 of it. By creating an alias named `PROD` that points to version 1, you can now use the `PROD` alias to invoke version 1 of the Lambda function.

Now, you can update the code (the `$LATEST` version) with all of your improvements, and then publish another stable and improved version (version 2). You can promote version 2 to production by remapping the `PROD` alias so that it points to version 2. If you find something wrong, you can easily roll back the production version to version 1 by remapping the `PROD` alias so that it points to version 1.


Note

In this context, the terms *promotion* and *roll back* refer to the remapping of aliases to different function versions.

- **Simplify management of event source mappings** – Instead of using Lambda function ARNs in event source mappings, by using an alias ARN you ensure that you don't need to update your event source mappings when you promote a new version or roll back to a previous version.

An AWS Lambda alias is a resource similar to a Lambda function. However, you can't create an alias independently. You create an alias for an existing Lambda function. If a Lambda function is a resource, you can think of an AWS Lambda alias as a subresource that is associated with a Lambda function.

Both the Lambda function and alias are AWS Lambda resources, and like all other AWS resources they both have unique Amazon Resource Names (ARNs). The following example shows a Lambda function (the `$LATEST` version), with one published version. Each version has an alias pointing to it.

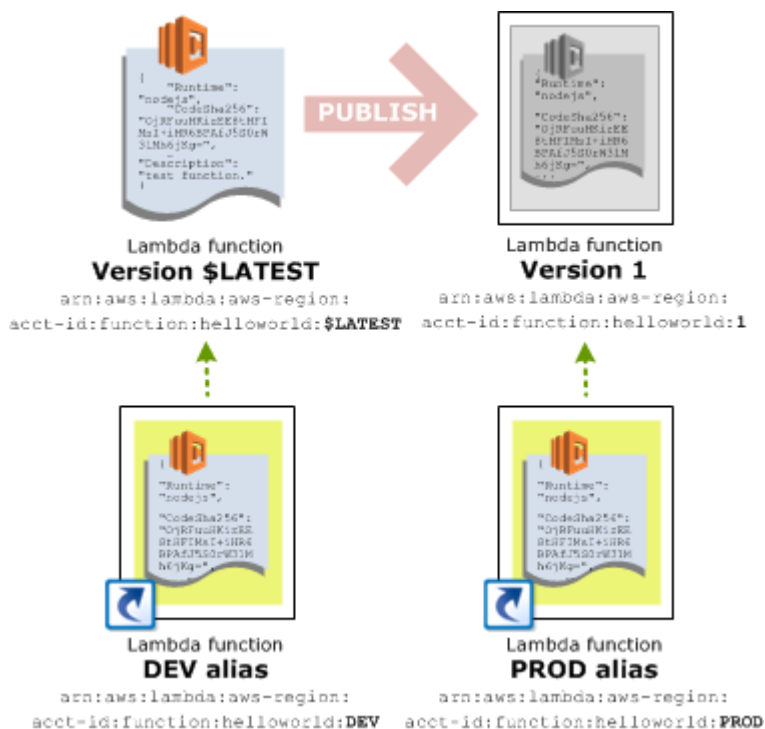

You can access the function using either the function ARN or the alias ARN.

- Because the function version is `$LATEST`, you can access it using the qualified or unqualified function ARN.
- Qualified function ARN (with the `$LATEST` version suffix):

```
arn:aws:lambda:aws-region:acct-id:function:helloworld:$LATEST
```

- When using any of the alias ARNs, you are using a qualified ARN. Each alias ARN has an alias name suffix.

```
arn:aws:lambda:aws-region:acct-id:function:helloworld:PROD
arn:aws:lambda:aws-region:acct-id:function:helloworld:BETA
arn:aws:lambda:aws-region:acct-id:function:helloworld:DEV
```

AWS Lambda provides the following APIs for you to create and manages aliases:

- [CreateAlias](#) (p. 275)
- [UpdateAlias](#) (p. 323)
- [GetAlias](#) (p. 292)
- [ListAliases](#) (p. 309)
- [DeleteAlias](#) (p. 287)

Example: Using Aliases to Manage Lambda Function Versions

The following is an example scenario of how to use versioning and aliases to promote new versions of Lambda functions into production.


Initially, you create a Lambda function.

It is the `$LATEST` version. You also create an alias (`DEV`, for development) that points to the newly created function. Developers can use this alias to test the function with the event sources in a development environment.




Test the function version using event sources in a beta environment, in a stable way while continuing to develop newer versions.

You publish a version from the `$LATEST` and have another alias (`BETA`) point to it. This allows you to associate your beta event sources to this specific alias. In the event source mappings, use the `BETA` alias to associate your Lambda function with the event source.

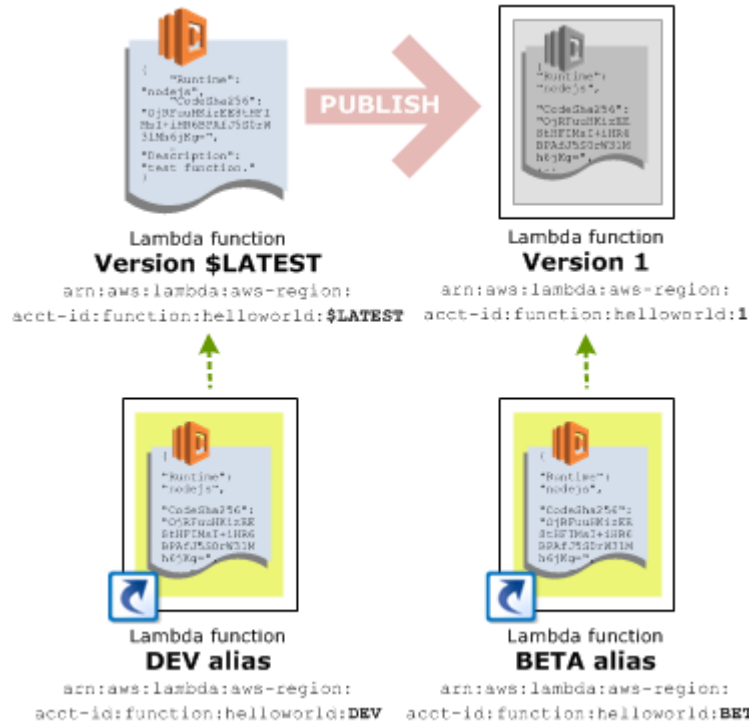


Promote the Lambda function version in production to work with event sources in production environment.

After testing the BETA version you can define the production version by creating an alias that maps to version 1. This means you want to point your production event sources to this specific version. You do this by creating a PROD alias and using the PROD alias ARN in all of your production event source mappings.

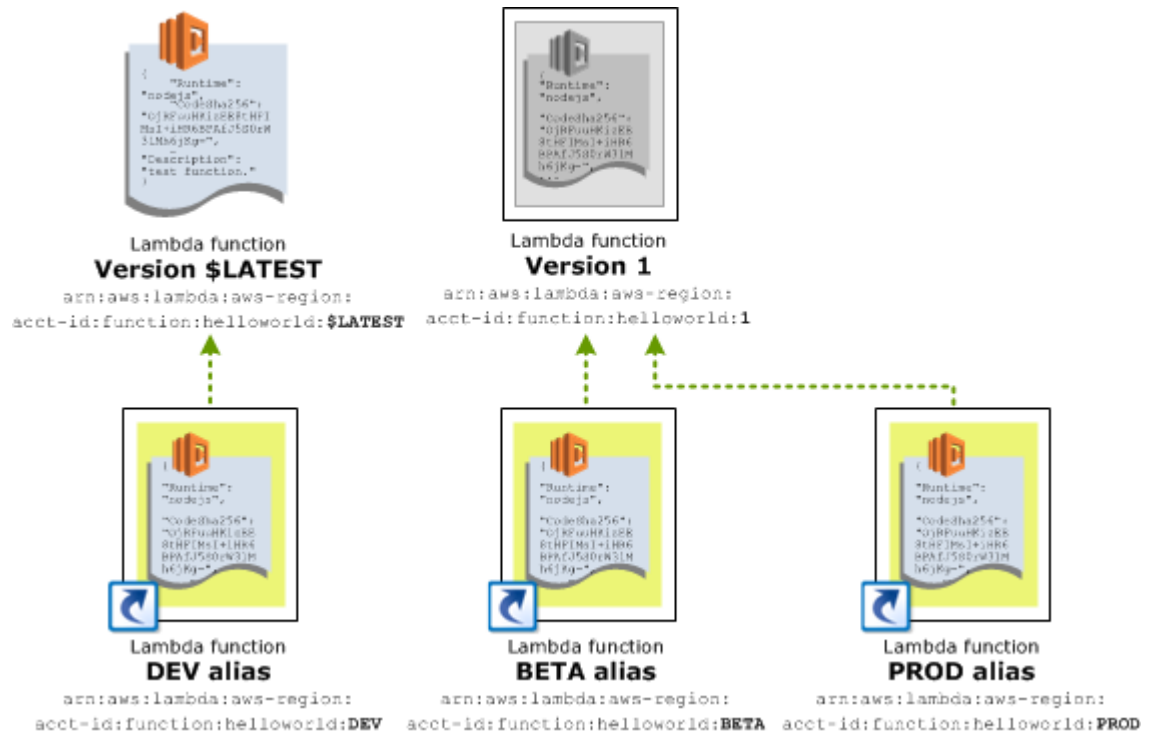

Continue development, publish more versions, and test.

As you develop your code you can update the `$LATEST` version by uploading updated code and then publish to beta testing by having the BETA alias point to it. This simple remapping of the beta alias enables you put version 2 of your Lambda function into beta without changing any of your event sources. This is how aliases enable you to control which versions of your function are used with specific event sources in your development environment.

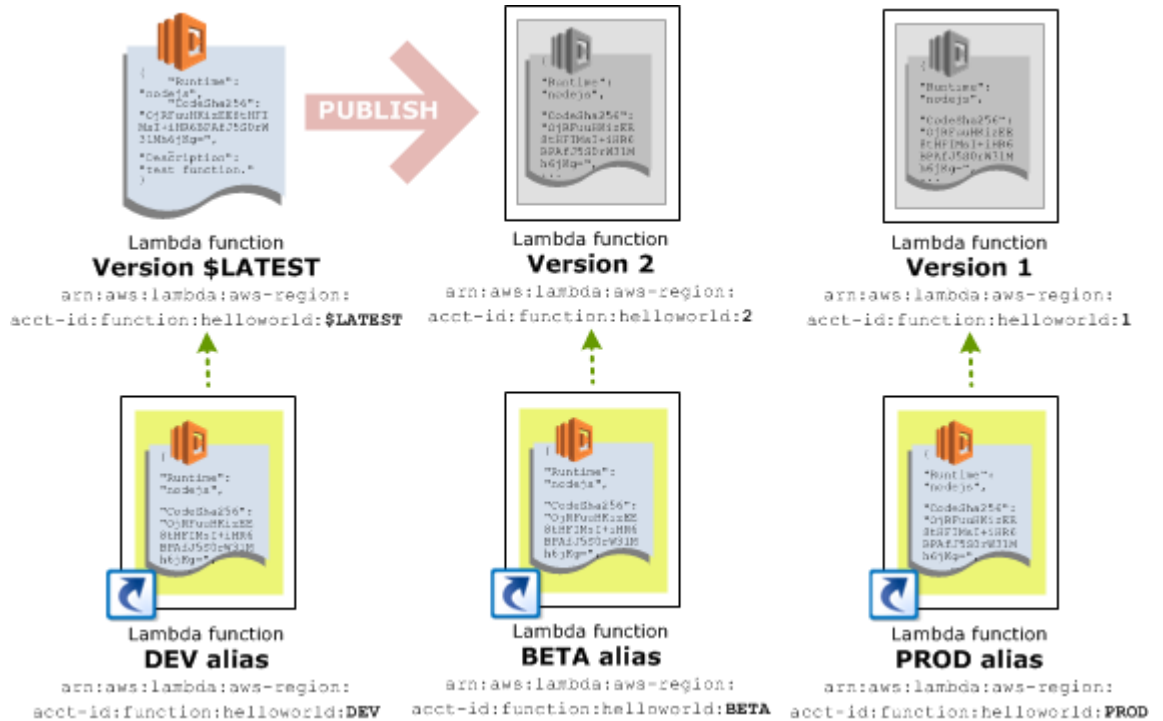

If you want to try creating this setup using AWS CLI, see [Tutorial: Using AWS Lambda Aliases \(p. 110\)](#).

Related Topics

[Introduction to AWS Lambda Versioning \(p. 102\)](#)

[Tutorial: Using AWS Lambda Aliases \(p. 110\)](#)

[Managing Versioning Using the AWS Management Console, the AWS CLI, or Lambda APIs \(p. 116\)](#)

Tutorial: Using AWS Lambda Aliases

This AWS CLI-based tutorial creates Lambda function versions and aliases that point to it as described in the [Example: Using Aliases to Manage Lambda Function Versions \(p. 108\)](#).

This example uses the us-west-2 (US West, Oregon) region to create the Lambda function and aliases.

1. First, you need to create a deployment package that you can upload to create your Lambda function.
 - a. Open a text editor, and then copy the following code.

```
console.log('Loading function');

exports.handler = function(event, context, callback) {
```

```
console.log('value1 =', event.key1);
console.log('value2 =', event.key2);
console.log('value3 =', event.key3);
callback(null, "message");

};
```

- b. Save the file as `helloworld.js`.
 - c. Zip the `helloworld.js` file as `helloworld.zip`.
2. Create an IAM role (execution role) that you can specify at the time you create your Lambda function.
 - a. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
 - b. Follow the steps in [IAM Roles](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**.
 - In **Attach Policy**, choose the policy named **AWSLambdaBasicExecutionRole**.
 - c. Write down the Amazon Resource Name (ARN) of the IAM role. You need this value when you create your Lambda function in the next step.
3. Create a Lambda function (`helloworld`).

```
aws lambda create-function \
--region us-west-2 \
--function-name helloworld \
--zip-file fileb://file-path/helloworld.zip \
--role arn:aws:iam::account-id:role/lambda_basic_execution \
--handler helloworld.handler \
--runtime nodejs4.3 \
--profile adminuser
```

The response returns the configuration information showing `$LATEST` as the function version as shown in the following example response:

```
{
  "CodeSha256": "OjRFuuHKizEE8tHFIMsI+iHR6BPafJ5S0rW31Mh6jKg=",
  "FunctionName": "helloworld",
  "CodeSize": 287,
  "MemorySize": 128,
  "FunctionArn": "arn:aws:lambda:us-west-2:account-id:function:helloworld",

  "Version": "$LATEST",
  "Role": "arn:aws:iam::account-id:role/lambda_basic_execution",
  "Timeout": 3,
  "LastModified": "2015-09-30T18:39:53.873+0000",
  "Handler": "helloworld.handler",
  "Runtime": "nodejs4.3",
  "Description": ""
}
```

4. Create an alias (DEV) that points to the `$LATEST` version of the `helloworld` Lambda function:

```
aws lambda create-alias \  
--region us-west-2 \  
--function-name helloworld \  
--description "sample alias" \  
--function-version "$LATEST" \  
--name DEV \  
--profile adminuser
```

The response returns the alias information, including the function version it is pointing to and the alias ARN. The ARN is the same as the function ARN with an alias name suffix. The following is an example response:

```
{  
  "AliasArn": "arn:aws:lambda:us-west-2:account-id:function:helloworld:DEV",  
  "FunctionVersion": "$LATEST",  
  "Name": "DEV",  
  "Description": "sample alias"  
}
```

5. Publish a version of the `helloworld` Lambda function.

```
aws lambda publish-version \  
--region us-west-2 \  
--function-name helloworld \  
--profile adminuser
```

The response returns configuration information of the function version, including the version number, and the function ARN with the version suffix. The following is an example response:

```
{  
  "CodeSha256": "OjRFuuHKizEE8tHFIMsI+iHR6BPafJ5S0rW31Mh6jKg=",  
  "FunctionName": "helloworld",  
  "CodeSize": 287,  
  "MemorySize": 128,  
  "FunctionArn": "arn:aws:lambda:us-west-2:account-id:function:hello  
world:1",  
  "Version": "1",  
  "Role": "arn:aws:iam::account-id:role/lambda_basic_execution",  
  "Timeout": 3,  
  "LastModified": "2015-10-03T00:48:00.435+0000",  
  "Handler": "helloworld.handler",  
  "Runtime": "nodejs4.3",  
  "Description": ""  
}
```

6. Create an alias (BETA) for the `helloworld` Lambda function version 1.

```
aws lambda create-alias \  
--region us-west-2 \  
--function-name helloworld \  

```

```
--description "sample alias" \  
--function-version 1 \  
--name BETA \  
--profile adminuser
```

Now you have two aliases for the `helloworld` function. The `DEV` alias points to the `$LATEST` function version, and the `BETA` alias points to version 1 of the Lambda function.

7. Now suppose you want to put the version 1 of the `helloworld` function in production. Create another alias (`PROD`) that points to version 1.

```
aws lambda create-alias \  
--region us-west-2 \  
--function-name helloworld \  
--description "sample alias" \  
--function-version 1 \  
--name PROD \  
--profile adminuser
```

At this time you have both the `BETA` and `PROD` aliases pointing to version 1 of the Lambda function.

8. You can now publish a newer version (for example, version 2), but first you need to update your code and upload a modified deployment package. If the `$LATEST` version is not changed, you cannot publish more than one version of it. Assuming you updated the deployment package, uploaded it, and published version 2, you can now change the `BETA` alias to point to version 2 of the Lambda function.

```
aws lambda update-alias \  
--region us-west-2 \  
--function-name helloworld \  
--function-version 2 \  
--name BETA \  
--profile adminuser
```

Now you have three aliases pointing to a different version of the Lambda function (`DEV` alias points to the `$LATEST` version, `BETA` alias points to version 2, and the `PROD` alias points to version 1 of the Lambda function).

For information about using the AWS Lambda console to manage versioning, see [Managing Versioning Using the AWS Management Console, the AWS CLI, or Lambda APIs \(p. 116\)](#).

Granting Permissions in a Push Model

In a push model (see [Event Source Mapping \(p. 10\)](#)), event sources such as Amazon S3 invoke your Lambda function. These event sources maintain a mapping that identifies a function version or alias they will invoke when events occur. Note the following:

- We recommend that you specify an existing Lambda function alias in the mapping configuration (see [Introduction to AWS Lambda Aliases \(p. 106\)](#)). For example, if the event source is Amazon S3, you specify the alias ARN in the bucket notification configuration so that Amazon S3 can invoke the alias when it detects specific events.

- In the push model, you grant event sources permissions using a resource policy that you attach to your Lambda function. In versioning, the permissions you add are specific to the qualifier that you specify in the `AddPermission` request (see [Versioning, Aliases, and Resource Policies \(p. 114\)](#)).

For example, the following AWS CLI command grants Amazon S3 permissions to invoke the PROD alias of the helloworld Lambda function (note that the `--qualifier` parameter specifies the alias name).

```
aws lambda add-permission \  
--region us-west-2 \  
--function-name helloworld \  
--qualifier PROD \  
--statement-id 1 \  
--principal s3.amazonaws.com \  
--action lambda:InvokeFunction \  
--source-arn arn:aws:s3:::examplebucket \  
--source-account 111111111111 \  
--profile adminuser
```

In this case, Amazon S3 is now able to invoke the PROD alias and AWS Lambda can then execute the helloworld Lambda function version that the PROD alias points to. For this to work, you must use the PROD alias ARN in the S3 bucket's notification configuration.


For information about how to handle Amazon S3 events, see [Tutorial: Using AWS Lambda with Amazon S3 \(p. 127\)](#).

Note

If you use the AWS Lambda console to add an event source for your Lambda function, the console adds the necessary permissions for you.

Versioning, Aliases, and Resource Policies

With versioning and aliases you can access a Lambda function using various ARNs. For example, consider the following scenario:

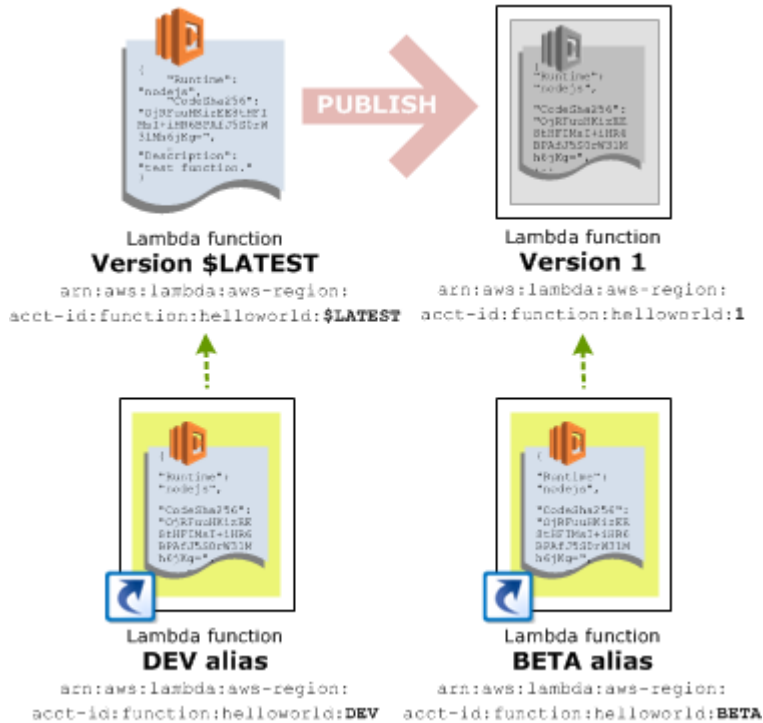

You can invoke for example the helloworld function version 1 using any of the following two ARNs:

- Using the qualified function ARN:

```
arn:aws:lambda:aws-region:acct-id:function:helloworld:1
```

Note

An unqualified function ARN (function ARN without a version or alias suffix), maps to the \$LATEST version.

- Using the BETA alias ARN:

```
arn:aws:lambda:aws-region:acct-id:function:helloworld:BETA
```

In a *push* model, event sources (such as Amazon S3 and custom applications) can invoke any of the Lambda function versions as long you grant the necessary permissions to these event sources by using an access policy associated with the Lambda function. For more information about the push model, see [Event Source Mapping](#) (p. 10).

Assuming that you grant permission, the next question is, "can an event source invoke a function version using any of the associated ARNs?" The answer is, it depends on how you identified function in your add permissions request (see [AddPermission](#) (p. 272)). The key to understanding this is that the permission you grant apply only to the ARN used in the add permission request:

- If you use a qualified function name (such as helloworld:1), the permission is valid for invoking the helloworld function version 1 *only* using its qualified ARN (using any other ARNs will result in a permission error).

- If you use an alias name (such as `helloworld:BETA`), the permission is valid only for invoking the `helloworld` function using the BETA alias ARN (using any other ARNs will result in a permission error, including the function version ARN to which the alias points).
- If you use an unqualified function name (such as `helloworld`), the permission is valid only for invoking the `helloworld` function using the unqualified function ARN (using any other ARNs will result in a permission error).

Note

Note that even though the access policy is only on the unqualified ARN, the code and configuration of the invoked Lambda function is still from function version `$LATEST`. The unqualified function ARN maps to the `$LATEST` version but the permissions you add are ARN-specific.

- If you use a qualified function name using the `$LATEST` version (`helloworld:$LATEST`), the permission is valid for invoking the `helloworld` function version `$LATEST` *only* using its qualified ARN (using unqualified ARN will result in a permission error).

Managing Versioning Using the AWS Management Console, the AWS CLI, or Lambda APIs

You can manage Lambda function versioning programmatically using AWS SDKs (or make the AWS Lambda API calls directly, if you need to), using AWS Command Line Interface (AWS CLI), or the AWS Lambda console.

AWS Lambda provides the following APIs to manage versioning and aliases:

[PublishVersion](#) (p. 317)

[ListVersionsByFunction](#) (p. 315)

[CreateAlias](#) (p. 275)

[UpdateAlias](#) (p. 323)

[DeleteAlias](#) (p. 287)


[GetAlias](#) (p. 292)

[ListAliases](#) (p. 309)


In addition to these APIs, existing relevant APIs also support versioning related operations.

For an example of how you can use the AWS CLI, see [Tutorial: Using AWS Lambda Aliases](#) (p. 110).


This section explains how you can use the AWS Lambda console to manage versioning. In the AWS Lambda console, choose a function and then choose **Qualifiers**.

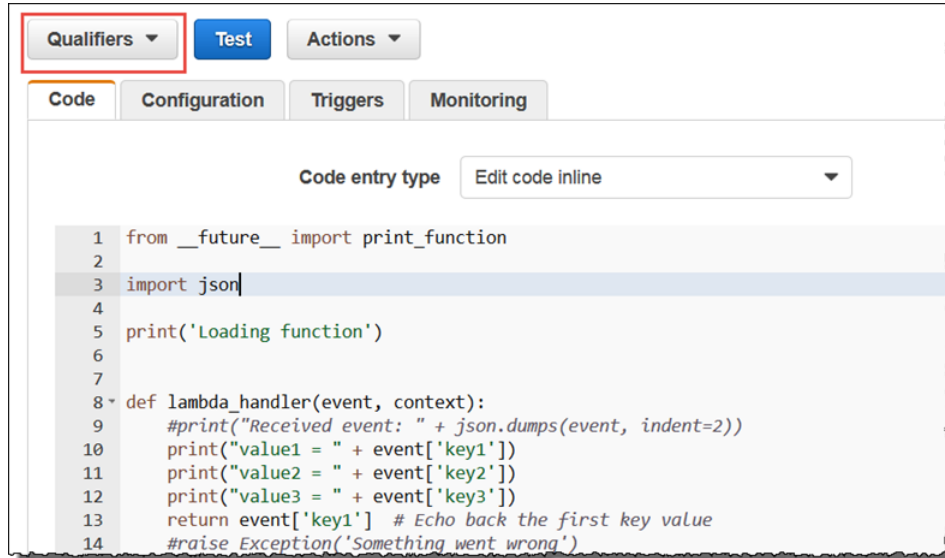


The expanded **Qualifiers** menu displays a **Versions** and **Aliases** tab, as shown in the following screen shot. In the **Versions** pane, you can see a list of versions for the selected function. If you have not previously published a version for the selected function, the **Versions** pane lists only the `$LATEST` version, as shown:

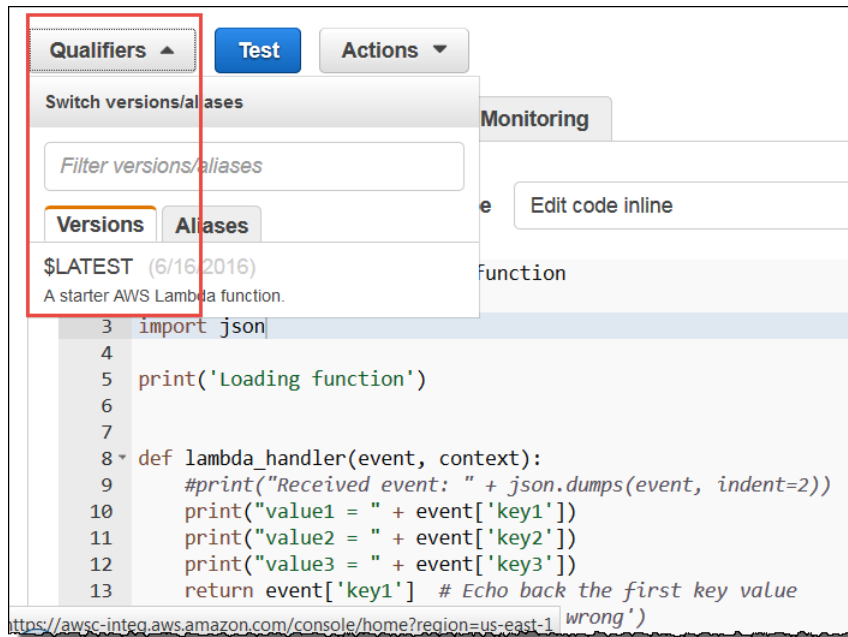

Choose the **Aliases** tab to see a list of aliases for the function. Initially, you won't have any aliases, as shown following:

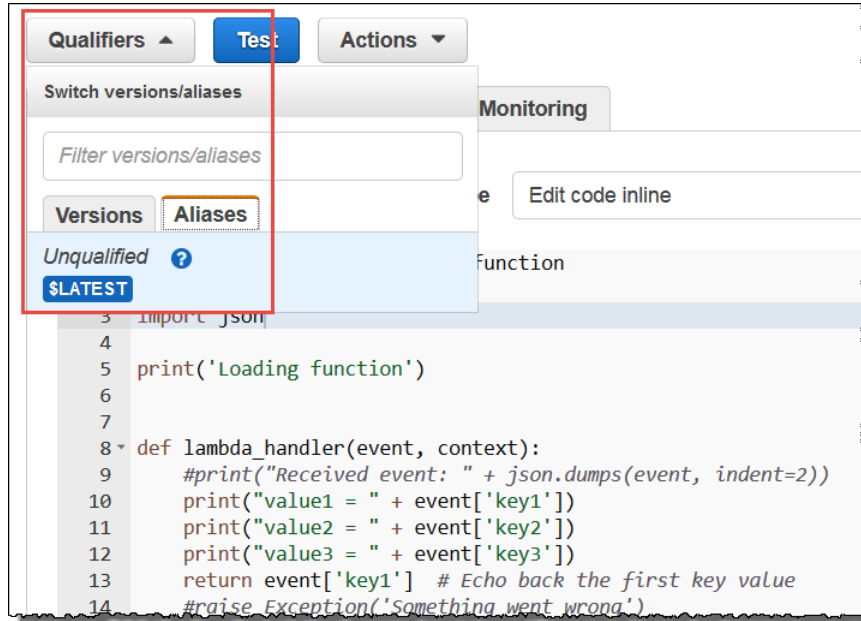

Now, you can publish a version or create aliases for the selected Lambda function using the **Actions** menu.

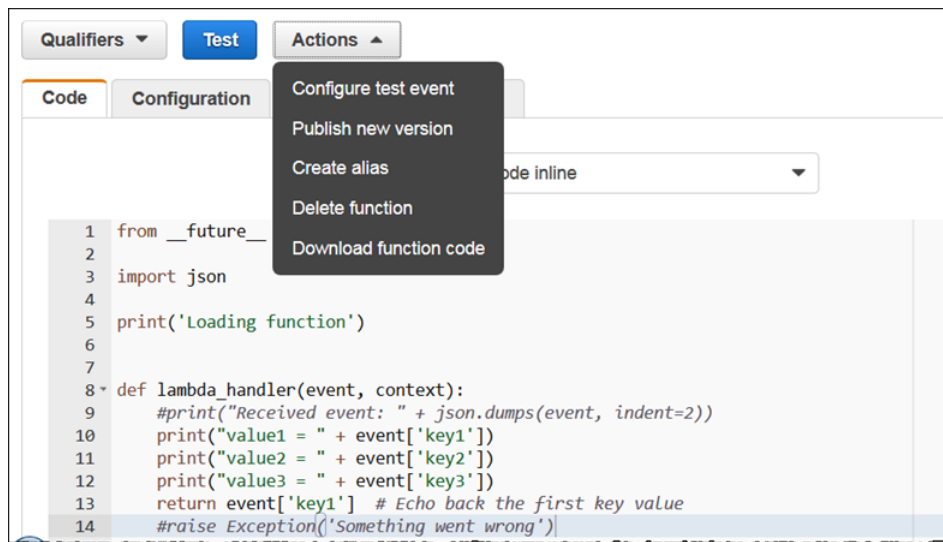

To learn about versioning and aliases, see [AWS Lambda Function Versioning and Aliases \(p. 101\)](#).

Troubleshooting and Monitoring AWS Lambda Functions with Amazon CloudWatch

AWS Lambda automatically monitors Lambda functions on your behalf, reporting metrics through Amazon CloudWatch. To help you monitor your code as it executes, Lambda automatically tracks the number of requests, the latency per request, and the number of requests resulting in an error and publishes the

associated CloudWatch metrics. You can leverage these metrics to set CloudWatch custom alarms. For more information about CloudWatch, see the [Amazon CloudWatch Developer Guide](#).

You can view request rates and error rates for each of your Lambda functions by using the AWS Lambda console, the CloudWatch console, and other Amazon Web Services (AWS) resources. The following topics describe Lambda CloudWatch metrics and how to access them.

- [Accessing Amazon CloudWatch Metrics for AWS Lambda](#) (p. 120)
- [AWS Lambda Metrics](#) (p. 123)

You can insert logging statements into your code to help you validate that your code is working as expected. Lambda automatically integrates with Amazon CloudWatch Logs and pushes all logs from your code to a CloudWatch Logs group associated with a Lambda function (`/aws/lambda/<function name>`). To learn more about log groups and accessing them through the CloudWatch console, see the [Monitoring System, Application, and Custom Log Files](#) in the *Amazon CloudWatch Developer Guide*. For information about how to access CloudWatch log entries, see [Accessing Amazon CloudWatch Logs for AWS Lambda](#) (p. 122).

Note

If your Lambda function code is executing, but you don't see any log data being generated after several minutes, this could mean your execution role for the Lambda function did not grant permissions to write log data to CloudWatch Logs. For information about how to make sure that you have set up the execution role correctly to grant these permissions, see [Manage Permissions: Using an IAM Role \(Execution Role\)](#) (p. 31).

AWS Lambda Troubleshooting Scenarios

This section describes examples of how to monitor and troubleshoot your Lambda functions using the logging and monitoring capabilities of CloudWatch.

Troubleshooting Scenario 1: Lambda Function Not Working as Expected

In this scenario, you have just finished [Tutorial: Using AWS Lambda with Amazon S3](#) (p. 127). However, the Lambda function you created to upload a thumbnail image to Amazon S3 when you create an S3 object is not working as expected. When you upload objects to Amazon S3, you see that the thumbnail images are not being uploaded. You can troubleshoot this issue in the following ways.

To determine why your Lambda function is not working as expected

1. Check your code and verify that it is working correctly. An increased error rate would indicate that it is not.

You can test your code locally as you would any other Node.js function, or you can test it within the Lambda console using the console's test invoke functionality, or you can use the AWS CLI `Invoke` command. Each time the code is executed in response to an event, it writes a log entry into the log group associated with a Lambda function, which is `/aws/lambda/<function name>`.

Following are some examples of errors that might show up in the logs:

- If you see a stack trace in your log, there is probably an error in your code. Review your code and debug the error that the stack trace refers to.
- If you see a `permissions denied` error in the log, the IAM role you have provided as an execution role may not have the necessary permissions. Check the IAM role and verify that it has all of the necessary permissions to access any AWS resources that your code references. To ensure that you have correctly set up the execution role, see [Manage Permissions: Using an IAM Role \(Execution Role\)](#) (p. 31).

- If you see a `timeout exceeded` error in the log, your timeout setting exceeds the run time of your function code. This may be because the timeout is too low, or the code is taking too long to execute.
- If you see a `memory exceeded` error in the log, your memory setting is too low. Set it to a higher value. For information about memory size limits, see [CreateFunction \(p. 282\)](#). When you change the memory setting, it can also change how you are charged for duration. For information about pricing, see the [AWS Lambda product website](#).

2. Check your Lambda function and verify that it is receiving requests.

Even if your function code is working as expected and responding correctly to test invokes, the function may not be receiving requests from Amazon S3. If Amazon S3 is able to invoke the function, you should see an increase in your CloudWatch requests metrics. If you do not see an increase in your CloudWatch requests, check the access permissions policy associated with the function.

Troubleshooting Scenario 2: Increased Latency in Lambda Function Execution

In this scenario, you have just finished [Tutorial: Using AWS Lambda with Amazon S3 \(p. 127\)](#). However, the Lambda function you created to upload a thumbnail image to Amazon S3 when you create an S3 object is not working as expected. When you upload objects to Amazon S3, you can see that the thumbnail images are being uploaded, but your code is taking much longer to execute than expected. You can troubleshoot this issue in a couple of different ways. For example, you could monitor the latency CloudWatch metric for the Lambda function to see if the latency is increasing. Or you could see an increase in the CloudWatch errors metric for the Lambda function, which might be due to timeout errors.

To determine why there is increased latency in the execution of a Lambda function

1. Test your code with different memory settings.

If your code is taking too long to execute, it could be that it does not have enough compute resources to execute its logic. Try increasing the memory allocated to your function and testing the code again, using the Lambda console's test invoke functionality. You can see the memory used, code execution time, and memory allocated in the function log entries. Changing the memory setting can change how you are charged for duration. For information about pricing, see [AWS Lambda](#).

2. Investigate the source of the execution bottleneck that is using logs.

You can test your code locally, as you would with any other Node.js function, or you can test it within Lambda using the test invoke capability on the Lambda console, or using the `asyncInvoke` command by using AWS CLI. Each time the code is executed in response to an event, it writes a log entry into the log group associated with a Lambda function, which is named `aws/lambda/<function name>`. Add logging statements around various parts of your code, such as callouts to other services, to see how much time it takes to execute different parts of your code.


Accessing Amazon CloudWatch Metrics for AWS Lambda

AWS Lambda automatically monitors functions on your behalf, reporting metrics through Amazon CloudWatch. These metrics include total requests, latency, and error rates. For more information about Lambda metrics, see [AWS Lambda Metrics \(p. 123\)](#). For more information about CloudWatch, see the [Amazon CloudWatch Developer Guide](#).

You can monitor metrics for Lambda and view logs by using the Lambda console, the CloudWatch console, the AWS CLI, or the CloudWatch API. The following procedures show you how to access metrics using these different methods.

To access metrics using the Lambda console

1. Sign in to the AWS Management Console and open the AWS Lambda console at <https://console.aws.amazon.com/lambda/>.
2. If you have not created a Lambda function before, see [Getting Started \(p. 35\)](#).
3. On the **Functions** page, choose the function name and then choose the **Monitoring** tab.

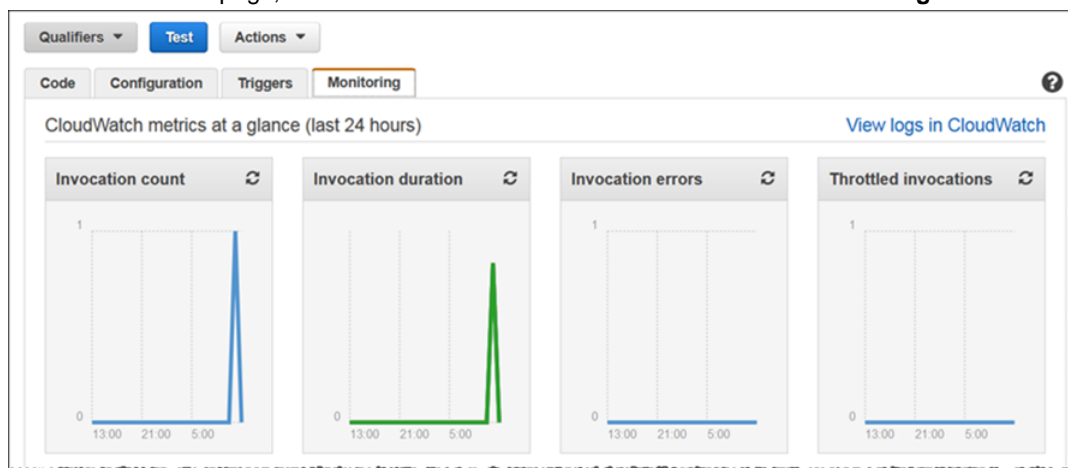

A graphical representation of the metrics for the Lambda function are shown.

4. Choose **View logs in CloudWatch** to view the logs.

To access metrics using the CloudWatch console

1. Open the CloudWatch console at <https://console.aws.amazon.com/cloudwatch/>.
2. From the navigation bar, choose a region.
3. In the navigation pane, choose **Metrics**.
4. In the **CloudWatch Metrics by Category** pane, choose **Lambda Metrics**.
5. (Optional) In the graph pane, choose a statistic and a time period, and then create a CloudWatch alarm using these settings.

To access metrics using the AWS CLI

Use the `list-metrics` and `get-metric-statistics` commands.

To access metrics using the CloudWatch CLI

Use the `mon-list-metrics` and `mon-get-stats` commands.

To access metrics using the CloudWatch API

Use the `ListMetrics` and `GetMetricStatistics` operations.

Accessing Amazon CloudWatch Logs for AWS Lambda


AWS Lambda automatically monitors Lambda functions on your behalf, reporting metrics through Amazon CloudWatch. To help you troubleshoot failures in a function, Lambda logs all requests handled by your function and also automatically stores logs generated by your code through Amazon CloudWatch Logs.

You can insert logging statements into your code to help you validate that your code is working as expected. Lambda automatically integrates with CloudWatch Logs and pushes all logs from your code to a CloudWatch Logs group associated with a Lambda function, which is named `/aws/lambda/<function name>`. To learn more about log groups and accessing them through the CloudWatch console, see the [Monitoring System, Application, and Custom Log Files](#) in the *Amazon CloudWatch Developer Guide*.

You can view logs for Lambda by using the Lambda console, the CloudWatch console, the AWS CLI, or the CloudWatch API. The following procedure shows you how to view the logs by using the Lambda console.

To view logs using the Lambda console

1. Sign in to the AWS Management Console and open the AWS Lambda console at <https://console.aws.amazon.com/lambda/>.
2. If you have not created a Lambda function before, see [Getting Started \(p. 35\)](#).
3. On the **Functions** page, choose the function name and then choose the **Monitoring** tab.

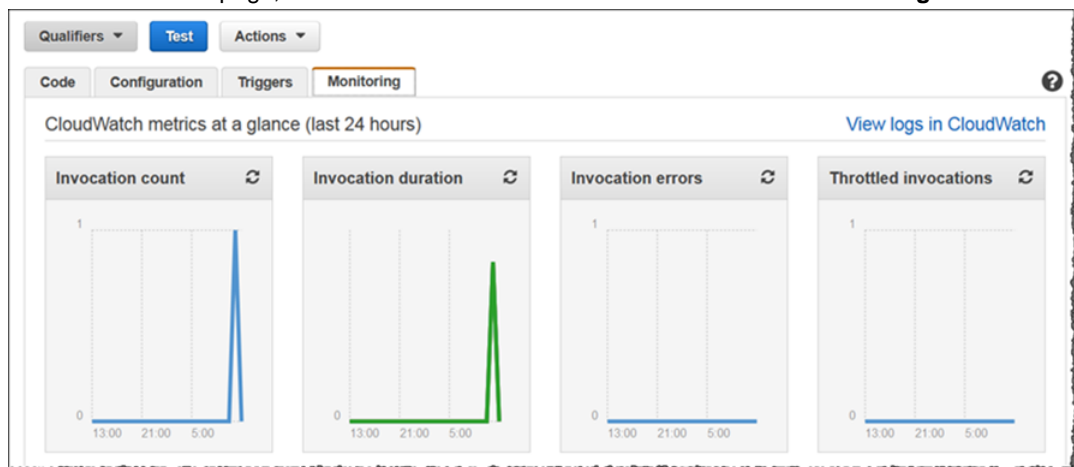

A graphical representation of the metrics for the Lambda function are shown.

4. Choose **View logs in CloudWatch** to view the logs.

For more information on accessing CloudWatch Logs, see the following guides:

- [Amazon CloudWatch Developer Guide](#)
- [Amazon CloudWatch Logs API Reference](#)
- [Monitoring Log Files](#) in the *Amazon CloudWatch Developer Guide*

AWS Lambda Metrics

This topic describes the AWS Lambda namespace, metrics, and dimensions. AWS Lambda automatically monitors functions on your behalf, reporting metrics through Amazon CloudWatch (CloudWatch). These metrics include total invocations, errors, duration, and throttles.

CloudWatch is basically a metrics repository. A metric is the fundamental concept in CloudWatch and represents a time-ordered set of data points. You (or AWS services) publish metrics data points into CloudWatch and you retrieve statistics about those data points as an ordered set of time-series data.

Metrics are uniquely defined by a name, a namespace, and one or more dimensions. Each data point has a time stamp, and, optionally, a unit of measure. When you request statistics, the returned data stream is identified by namespace, metric name, and dimension. For more information about CloudWatch, see the [Amazon CloudWatch Developer Guide](#).

AWS Lambda CloudWatch Metrics

The AWS Lambda namespace for CloudWatch is **AWS/Lambda**.

The following metrics are available from the AWS Lambda service.

Metric	Description
Invocations	<p>Measures the number of times a function is invoked in response to an event or invocation API call. This replaces the deprecated RequestCount metric. This includes successful and failed invocations, but does not include throttled attempts. This equals the billed requests for the function. Note that AWS Lambda only sends these metrics to CloudWatch if they have a nonzero value.</p> <p>Units: Count</p>
Errors	<p>Measures the number of invocations that failed due to errors in the function (response code 4XX). This replaces the deprecated ErrorCount metric. Failed invocations may trigger a retry attempt that succeeds. This includes:</p> <ul style="list-style-type: none">• Handled exceptions (e.g., context.fail(error))• Unhandled exceptions causing the code to exit• Out of memory exceptions• Timeouts• Permissions errors <p>This does not include invocations that fail due to invocation rates exceeding default concurrent limits (error code 429) or failures due to internal service errors (error code 500).</p> <p>Units: Count</p>
Duration	<p>Measures the elapsed wall clock time from when the function code starts executing as a result of an invocation to when it stops executing. This replaces the deprecated Latency metric. The maximum data point value possible is the function timeout configuration. The billed duration will be rounded up to the nearest 100 millisecond. Note that AWS Lambda only sends these metrics to CloudWatch if they have a nonzero value.</p> <p>Units: Milliseconds</p>

Metric	Description
Throttles	Measures the number of Lambda function invocation attempts that were throttled due to invocation rates exceeding the customer's concurrent limits (error code 429). Failed invocations may trigger a retry attempt that succeeds. Units: Count

Errors/Invocations Ratio

When calculating the error rate on Lambda function invocations, it's important to distinguish between an invocation request and an actual invocation. It is possible for the error rate to exceed the number of billed Lambda function invocations. Lambda reports an invocation metric only if the Lambda function code is executed. If the invocation request yields a throttling or other initialization error that prevents the Lambda function code from being invoked, Lambda will report an error, but it does not log an invocation metric.

- Lambda emits `Invocations=1` when the function is executed. If the Lambda function is not executed, nothing is emitted.
- Lambda emits a data point for `Errors` for each invoke request. `Errors=0` means that there is no function execution error. `Errors=1` means that there is a function execution error.
- Lambda emits a data point for `Throttles` for each invoke request. `Throttles=0` means there is no invocation throttle. `Throttles=1` means there is an invocation throttle.

AWS Lambda CloudWatch Dimensions

You can use the dimensions in the following table to refine the metrics returned for your Lambda functions.

Dimension	Description
FunctionName	Filters the data you request for a Lambda function.
Resource	Filters the data you request for a Lambda function resource.
Version	Filters the data you request for a Lambda version.
Alias	Filters the data you request for a Lambda alias.

Examples of How to Use AWS Lambda

The use cases for AWS Lambda can be grouped into the following categories:

- **Using AWS Lambda with AWS services as event sources** – *Event sources* publish events that cause the Lambda function to be invoked. These can be AWS services such as Amazon S3. For more information and tutorials, see the following topics:

[Using AWS Lambda with Amazon S3 \(p. 125\)](#)

[Using AWS Lambda with Amazon Kinesis \(p. 142\)](#)

[Using AWS Lambda with Amazon DynamoDB \(p. 151\)](#)

[Using AWS Lambda with AWS CloudTrail \(p. 161\)](#)

[Using AWS Lambda with Amazon SNS from Different Accounts \(p. 175\)](#)

- **On-demand Lambda function invocation over HTTPS (Amazon API Gateway)** – In addition to invoking Lambda functions using event sources, you can also invoke your Lambda function over HTTPS. You can do this by defining a custom REST API and endpoint using API Gateway. For more information and a tutorial, see [Using AWS Lambda with Amazon API Gateway \(On-Demand Over HTTPS\) \(p. 180\)](#).
- **On-demand Lambda function invocation (build your own event sources using custom apps)** – User applications such as client, mobile, or web applications can publish events and invoke Lambda functions using the AWS SDKs or AWS Mobile SDKs, such as the AWS Mobile SDK for Android. For more information and a tutorial, see [Getting Started \(p. 35\)](#) and [Using AWS Lambda as Mobile Application Backend \(Custom Event Source: Android\) \(p. 193\)](#)
- **Scheduled events** – You can also set up AWS Lambda to invoke your code on a regular, scheduled basis using the AWS Lambda console. You can specify a fixed rate (number of hours, days, or weeks) or you can specify a cron expression. For more information and a tutorial, see [Using AWS Lambda with Scheduled Events \(p. 207\)](#).

Using AWS Lambda with Amazon S3

Amazon S3 can publish events (for example, when an object is created in a bucket) to AWS Lambda and invoke your Lambda function by passing the event data as a parameter. This integration enables you to write Lambda functions that process Amazon S3 events. In Amazon S3, you add bucket notification

configuration that identifies the type of event that you want Amazon S3 to publish and the Lambda function that you want to invoke.


Note the following about how the Amazon S3 and AWS Lambda integration works:

- **Non-stream based (async) model** – This is a model (see [Event Source Mapping \(p. 10\)](#)), where Amazon S3 monitors a bucket and invokes the Lambda function by passing the event data as a parameter. In a push model, you maintain event source mapping within Amazon S3 using the bucket notification configuration. In the configuration, you specify the event types that you want Amazon S3 to monitor and which AWS Lambda function you want Amazon S3 to invoke. For more information, see [Configuring Amazon S3 Event Notifications](#) in the *Amazon Simple Storage Service Developer Guide*.
- **Asynchronous invocation** – AWS Lambda invokes a Lambda function using the `Event` invocation type (asynchronous invocation). For more information about invocation types, see [Invocation Types \(p. 9\)](#).
- **Event structure** – The event your Lambda function receives is for a single object and it provides information, such as the bucket name and object key name.

Note that there are two types of permissions policies that you work with when you set up the end-to-end experience:

- **Permissions for your Lambda function** – Regardless of what invokes a Lambda function, AWS Lambda executes the function by assuming the IAM role (execution role) that you specify at the time you create the Lambda function. Using the permissions policy associated with this role, you grant your Lambda function the permissions that it needs. For example, if your Lambda function needs to read an object, you grant permissions for the relevant Amazon S3 actions in the permissions policy. For more information, see [Manage Permissions: Using an IAM Role \(Execution Role\) \(p. 31\)](#).
- **Permissions for Amazon S3 to invoke your Lambda function** – Amazon S3 cannot invoke your Lambda function without your permission. You grant this permission via the permissions policy associated with the Lambda function.

The following diagram summarizes the flow:

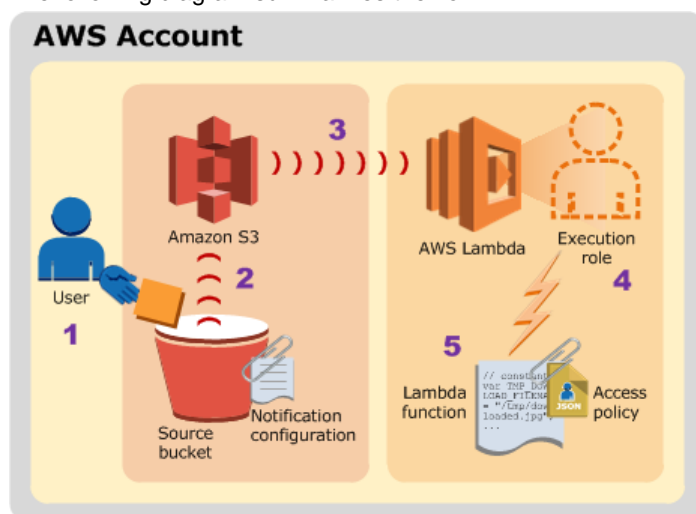

1. User uploads an object to an S3 bucket (object-created event).
2. Amazon S3 detects the object-created event.
3. Amazon S3 invokes a Lambda function that is specified in the bucket notification configuration.
4. AWS Lambda executes the Lambda function by assuming the execution role that you specified at the time you created the Lambda function.

5. The Lambda function executes.

For a tutorial that walks you through an example setup, see [Tutorial: Using AWS Lambda with Amazon S3](#) (p. 127).

Tutorial: Using AWS Lambda with Amazon S3


Suppose you want to create a thumbnail for each image (.jpg and .png objects) that is uploaded to a bucket. You can create a Lambda function (`CreateThumbnail`) that Amazon S3 can invoke when objects are created. Then, the Lambda function can read the image object from the *source* bucket and create a thumbnail image target bucket (in this tutorial, it's called the *source*resized bucket).

Important

You must use two buckets. If you use the same bucket as the source and the target, each thumbnail uploaded to the source bucket triggers another object-created event, which then invokes the Lambda function again, creating an unwanted recursion.


Implementation Summary

The following diagram illustrates the application flow:

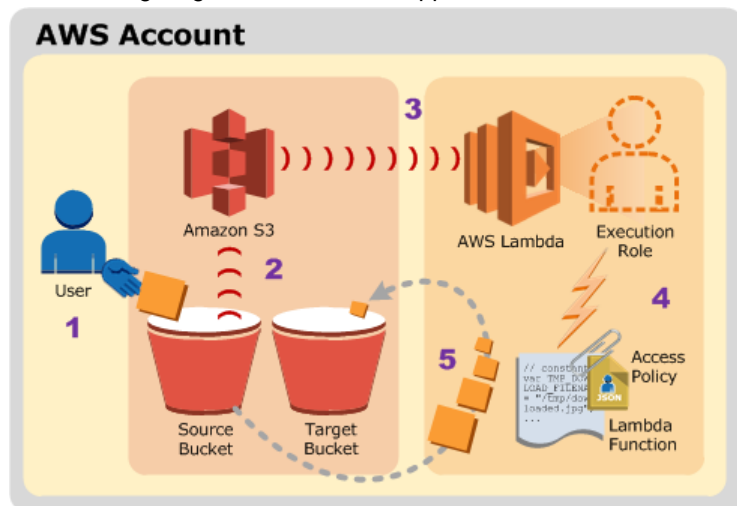

1. A user uploads an object to the source bucket in Amazon S3 (object-created event).
2. Amazon S3 detects the object-created event.
3. Amazon S3 publishes the `s3:ObjectCreated:*` event to AWS Lambda by invoking the Lambda function and passing event data as a function parameter.
4. AWS Lambda executes the Lambda function by assuming the execution role that you specified at the time you created the Lambda function.
5. From the event data it receives, the Lambda function knows the source bucket name and object key name. The Lambda function reads the object and creates a thumbnail using graphics libraries, and saves it to the target bucket.

Note that upon completing this tutorial, you will have the following Amazon S3, Lambda, and IAM resources in your account:

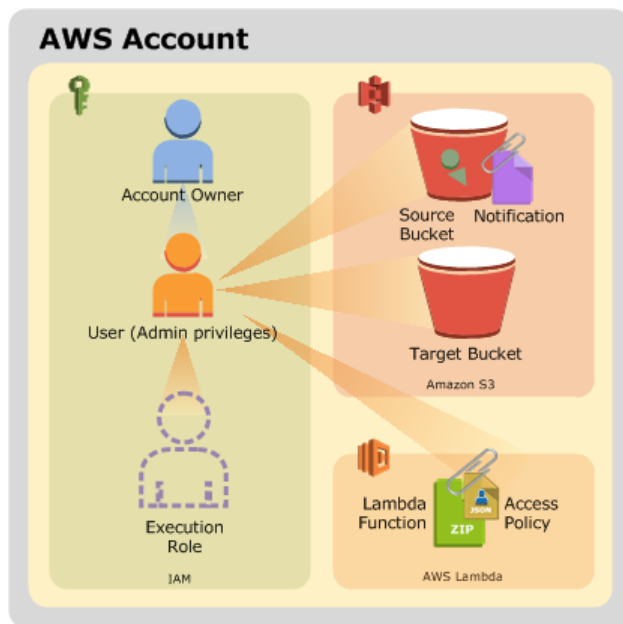

In Lambda:

- A Lambda function.
- An access permissions policy associated with your Lambda function – You grant Amazon S3 permissions to invoke the Lambda function using this permissions policy. You will also restrict the permissions so that Amazon S3 can invoke the Lambda function only for object-created events from a specific bucket that is owned by a specific AWS account.

Note

It is possible for an AWS account to delete a bucket and some other AWS account to later create a bucket with the same name. The additional conditions ensure that Amazon S3 can invoke the Lambda function only if Amazon S3 detects object-created events from a specific bucket owned by a specific AWS account.

For more information, see [How It Works \(p. 3\)](#).

In IAM:

- Administrator user – Called **adminuser**. Using root credentials of an AWS account is not recommended. Instead, use the **adminuser** credentials to perform the steps in this tutorial.
- An IAM role (execution role) – You grant permissions that your Lambda function needs through the permissions policy associated with this role.

In Amazon S3:

- Two buckets named *source* and *source*resized. Note that *source* is a placeholder name and you need to replace it with your actual bucket name. For example, if you have a bucket named `example` as your source, you will create `examplesized` as the target bucket.
- Notification configuration on the source bucket – You add notification configuration on your source bucket identifying the type of events (object-created events) you want Amazon S3 to publish to AWS Lambda and the Lambda function to invoke. For more information about the Amazon S3 notification feature, see [Setting Up Notification of Bucket Events](#) in *Amazon Simple Storage Service Developer Guide*.

Now you are ready to start the tutorial. Note that after the initial preparation, the tutorial is divided into two main sections:

- First, you complete the necessary setup steps to create a Lambda function and invoke it manually using Amazon S3 sample event data. This intermediate testing verifies that the function works.
- Second, you add notification configuration to your source bucket so that Amazon S3 can invoke your Lambda function when it detects object-created events.

Next Step

[Step 1: Prepare \(p. 129\)](#)

Step 1: Prepare

In this section, you do the following:

- Sign up for an AWS account and set up the AWS CLI.
- Create two buckets (*source* and *source*resized bucket) with a sample .jpg object (`HappyFace.jpg`) in the source bucket. For instructions, see the following procedure.

Step 1.1: Sign Up for AWS and Set Up the AWS CLI

Make sure you have completed the following steps:

- Signed up for an AWS account and created an administrator user in the account (called **adminuser**).
- Installed and set up the AWS CLI.

For instructions, see [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#).

Step 1.2: Create Buckets and Upload a Sample Object

Follow the steps to create buckets and upload an object.

Important

Both the source bucket and your Lambda function must be in the same AWS region. In addition, the example code used for the Lambda function also assumes that both of the buckets are in the same region. In this tutorial, we use the `us-west-2` region.

1. Using the IAM User Sign-In URL, sign in to the Amazon S3 console as **adminuser**.
2. Create two buckets. The target bucket name must be *source* followed by *resized*, where *source* is the name of the bucket you want to use for the source. For example, `mybucket` and `mybucketresized`.

For instructions, see [Create a Bucket](#) in the *Amazon Simple Storage Service Getting Started Guide*.

3. In the source bucket, upload a .jpg object, `HappyFace.jpg`.

When you invoke the Lambda function manually before you connect to Amazon S3, you pass sample event data to the function that specifies the source bucket and `HappyFace.jpg` as the newly created object so you need to create this sample object first.

Next Step

[Step 2: Create a Lambda Function and Invoke It Manually \(Using Sample Event Data\) \(p. 130\)](#)

Step 2: Create a Lambda Function and Invoke It Manually (Using Sample Event Data)

In this section, you do the following:

- Create a Lambda function deployment package using the sample code provided.

Note

To see more examples of using other AWS services within your function, including calling other Lambda functions, see [AWS SDK for JavaScript](#)

- Create an IAM role (execution role). At the time you upload the deployment package, you need to specify an IAM role (execution role) that Lambda can assume to execute the function on your behalf.
- Create the Lambda function by uploading the deployment package, and then test it by invoking it manually using sample Amazon S3 event data.

Topics

- [Step 2.1: Create a Deployment Package](#) (p. 130)
- [Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 137)
- [Step 2.3: Create the Lambda Function and Test It Manually](#) (p. 138)

Step 2.1: Create a Deployment Package

From the **Filter View** list, choose the language you want to use for your Lambda function. The appropriate section appears with code and specific instructions for creating a deployment package.

Node.js

The deployment package is a .zip file containing your Lambda function code and dependencies.

1. Create a folder (`examplefolder`), and then create a subfolder (`node_modules`).
2. Install the Node.js platform. For more information, see the [Node.js](#) website.
3. Install dependencies. The code examples use the following libraries:
 - AWS SDK for JavaScript in Node.js
 - gm, GraphicsMagick for node.js
 - Async utility module

The AWS Lambda runtime already has the AWS SDK for JavaScript in Node.js, so you only need to install the other libraries. Open a command prompt, navigate to the `examplefolder`, and install the libraries using the `npm` command, which is part of Node.js.

```
npm install async gm
```

4. Open a text editor, and then copy the following code.

```
// dependencies
var async = require('async');
var AWS = require('aws-sdk');
var gm = require('gm')
    .subclass({ imageMagick: true }); // Enable ImageMagick integra
tion.
```



```
var util = require('util');

// constants
var MAX_WIDTH = 100;
var MAX_HEIGHT = 100;

// get reference to S3 client
var s3 = new AWS.S3();

exports.handler = function(event, context, callback) {
    // Read options from the event.
    console.log("Reading options from event:\n", util.inspect(event, {depth:
5}));
    var srcBucket = event.Records[0].s3.bucket.name;
    // Object key may have spaces or unicode non-ASCII characters.
    var srcKey =
decodeURIComponent(event.Records[0].s3.object.key.replace(/\+/g, " "));

    var dstBucket = srcBucket + "resized";
    var dstKey = "resized-" + srcKey;

    // Sanity check: validate that source and destination are different
buckets.
    if (srcBucket == dstBucket) {
        callback("Source and destination buckets are the same.");
        return;
    }

    // Infer the image type.
    var typeMatch = srcKey.match(/\.([\^\.]*)$/);
    if (!typeMatch) {
        callback("Could not determine the image type.");
        return;
    }
    var imageType = typeMatch[1];
    if (imageType != "jpg" && imageType != "png") {
        callback('Unsupported image type: ${imageType}');
        return;
    }

    // Download the image from S3, transform, and upload to a different S3
bucket.
    async.waterfall([
        function download(next) {
            // Download the image from S3 into a buffer.
            s3.getObject({
                Bucket: srcBucket,
                Key: srcKey
            },
            next);
        },
        function transform(response, next) {
            gm(response.Body).size(function(err, size) {
                // Infer the scaling factor to avoid stretching the image
unnaturally.
                var scalingFactor = Math.min(
                    MAX_WIDTH / size.width,
                    MAX_HEIGHT / size.height
```

```
    );  
    var width = scalingFactor * size.width;  
    var height = scalingFactor * size.height;  
  
    // Transform the image buffer in memory.  
    this.resize(width, height)  
    .toBuffer(imageType, function(err, buffer) {  
        if (err) {  
            next(err);  
        } else {  
            next(null, response.ContentType, buffer);  
        }  
    });  
});  
},  
function upload(contentType, data, next) {  
    // Stream the transformed image to a different S3 bucket.  
    s3.putObject({  
        Bucket: dstBucket,  
        Key: dstKey,  
        Body: data,  
        ContentType: contentType  
    },  
    next);  
}  
], function (err) {  
    if (err) {  
        console.error(  
            'Unable to resize ' + srcBucket + '/' + srcKey +  
            ' and upload to ' + dstBucket + '/' + dstKey +  
            ' due to an error: ' + err  
        );  
    } else {  
        console.log(  
            'Successfully resized ' + srcBucket + '/' + srcKey +  
            ' and uploaded to ' + dstBucket + '/' + dstKey  
        );  
    }  
}  
    callback(null, "message");  
}  
);  
};
```

Note

The code sample is compliant with the Node.js runtime v4.3. For more information, see [Programming Model \(Node.js\) \(p. 51\)](#)

5. Review the preceding code and note the following:

- The function knows the source bucket name and the key name of the object from the event data it receives as parameters. If the object is a .jpg, the code creates a thumbnail and saves it to the target bucket.
- The code assumes that the destination bucket exists and its name is a concatenation of the source bucket name followed by the string `resized`. For example, if the source bucket identified in the event data is `examplebucket`, the code assumes you have an `examplebucketresized` destination bucket.

- For the thumbnail it creates, the code derives its key name as the concatenation of the string `resized-` followed by the source object key name. For example, if the source object key is `sample.jpg`, the code creates a thumbnail object that has the key `resized-sample.jpg`.
6. Save the file as `CreateThumbnail.js` in `examplefolder`. After you complete this step, you will have the following folder structure:

```
CreateThumbnail.js
/node_modules/gm
/node_modules/async
```

7. Zip the `CreateThumbnail.js` file and the `node_modules` folder as `CreateThumbnail.zip`.

This is your Lambda function deployment package.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 137\)](#)

Java

The following is example Java code that reads incoming Amazon S3 events and creates a thumbnail. Note that it implements the `RequestHandler` interface provided in the `aws-lambda-java-core` library. Therefore, at the time you create a Lambda function you specify the class as the handler (that is, `example.S3EventProcessorCreateThumbnail`). For more information about using interfaces to provide a handler, see [Leveraging Predefined Interfaces for Creating Handler \(Java\) \(p. 70\)](#).

The `S3Event` type that the handler uses as the input type is one of the predefined classes in the `aws-lambda-java-events` library that provides methods for you to easily read information from the incoming Amazon S3 event. The handler returns a string as output.

```
package example;

import java.awt.Color;
import java.awt.Graphics2D;
import java.awt.RenderingHints;
import java.awt.image.BufferedImage;
import java.io.ByteArrayInputStream;
import java.io.ByteArrayOutputStream;
import java.io.IOException;
import java.io.InputStream;
import java.net.URLDecoder;
import java.util.regex.Matcher;
import java.util.regex.Pattern;

import javax.imageio.ImageIO;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.S3Event;
import com.amazonaws.services.s3.AmazonS3;
import com.amazonaws.services.s3.AmazonS3Client;
import com.amazonaws.services.s3.event.S3EventNotification.S3EventNotificationRecord;
```

```
import com.amazonaws.services.s3.model.GetObjectRequest;
import com.amazonaws.services.s3.model.ObjectMetadata;
import com.amazonaws.services.s3.model.S3Object;

public class S3EventProcessorCreateThumbnail implements
    RequestHandler<S3Event, String> {
    private static final float MAX_WIDTH = 100;
    private static final float MAX_HEIGHT = 100;
    private final String JPG_TYPE = (String) "jpg";
    private final String JPG_MIME = (String) "image/jpeg";
    private final String PNG_TYPE = (String) "png";
    private final String PNG_MIME = (String) "image/png";

    public String handleRequest(S3Event s3event, Context context) {
        try {
            S3EventNotificationRecord record = s3event.getRecords().get(0);

            String srcBucket = record.getS3().getBucket().getName();
            // Object key may have spaces or unicode non-ASCII characters.
            String srcKey = record.getS3().getObject().getKey()
                .replace('+', ' ');
            srcKey = URLDecoder.decode(srcKey, "UTF-8");

            String dstBucket = srcBucket + "resized";
            String dstKey = "resized-" + srcKey;

            // Sanity check: validate that source and destination are different
            // buckets.
            if (srcBucket.equals(dstBucket)) {
                System.out
                    .println("Destination bucket must not match source
bucket.");
                return "";
            }

            // Infer the image type.
            Matcher matcher = Pattern.compile(".*\\.([^\.\.]*)").matcher(srcKey);

            if (!matcher.matches()) {
                System.out.println("Unable to infer image type for key "
                    + srcKey);
                return "";
            }
            String imageType = matcher.group(1);
            if (!(JPG_TYPE.equals(imageType)) && !(PNG_TYPE.equals(imageType)))
            {
                System.out.println("Skipping non-image " + srcKey);
                return "";
            }

            // Download the image from S3 into a stream
            AmazonS3 s3Client = new AmazonS3Client();
            S3Object s3Object = s3Client.getObject(new GetObjectRequest(
                srcBucket, srcKey));
            InputStream objectData = s3Object.getObjectContent();

            // Read the source image
```

```
BufferedImage srcImage = ImageIO.read(objectData);
int srcHeight = srcImage.getHeight();
int srcWidth = srcImage.getWidth();
// Infer the scaling factor to avoid stretching the image
// unnaturally
float scalingFactor = Math.min(MAX_WIDTH / srcWidth, MAX_HEIGHT
    / srcHeight);
int width = (int) (scalingFactor * srcWidth);
int height = (int) (scalingFactor * srcHeight);

BufferedImage resizedImage = new BufferedImage(width, height,
    BufferedImage.TYPE_INT_RGB);
Graphics2D g = resizedImage.createGraphics();
// Fill with white before applying semi-transparent (alpha) images

g.setPaint(Color.white);
g.fillRect(0, 0, width, height);
// Simple bilinear resize
// If you want higher quality algorithms, check this link:
// https://today.java.net/pub/a/today/2007/04/03/perils-of-image-
getscaledinstance.html
g.setRenderingHint(RenderingHints.KEY_INTERPOLATION,
    RenderingHints.VALUE_INTERPOLATION_BILINEAR);
g.drawImage(srcImage, 0, 0, width, height, null);
g.dispose();

// Re-encode image to target format
ByteArrayOutputStream os = new ByteArrayOutputStream();
ImageIO.write(resizedImage, imageType, os);
InputStream is = new ByteArrayInputStream(os.toByteArray());
// Set Content-Length and Content-Type
ObjectMetadata meta = new ObjectMetadata();
meta.setContentLength(os.size());
if (JPG_TYPE.equals(imageType)) {
    meta.setContentType(JPG_MIME);
}
if (PNG_TYPE.equals(imageType)) {
    meta.setContentType(PNG_MIME);
}

// Uploading to S3 destination bucket
System.out.println("Writing to: " + dstBucket + "/" + dstKey);
s3Client.putObject(dstBucket, dstKey, is, meta);
System.out.println("Successfully resized " + srcBucket + "/"
    + srcKey + " and uploaded to " + dstBucket + "/" + dstKey);

return "Ok";
} catch (IOException e) {
    throw new RuntimeException(e);
}
}
```

Amazon S3 invokes your Lambda function using the `Event` invocation type, where AWS Lambda executes the code asynchronously. What you return does not matter. However, in this case we are implementing an interface that requires us to specify a return type, so in this example the handler uses `String` as the return type.

Using the preceding code (in a file named `ProcessKinesisEvents.java`), create a deployment package. Make sure that you add the following dependencies:

- `aws-lambda-java-core`.
- `aws-lambda-java-events`

These can be found at [aws-lambda-java-libs](#).

For more information, see [Programming Model for Authoring Lambda Functions in Java](#) (p. 63).

Your deployment package can be a .zip file or a standalone .jar. You can use any build and packaging tool you are familiar with to create a deployment package. For examples of how to use the Maven build tool to create a standalone .jar, see [Creating a .jar Deployment Package Using Maven without any IDE \(Java\)](#) (p. 91) and [Creating a .jar Deployment Package Using Maven and Eclipse IDE \(Java\)](#) (p. 93). For an example of how to use the Gradle build tool to create a .zip file, see [Creating a .zip Deployment Package \(Java\)](#) (p. 96).

After you verify that your deployment package is created, go to the next step to create an IAM role (execution role). You specify this role at the time you create your Lambda function.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 137)

Python

In this section, you create an example Python function and install dependencies.

1. Open a text editor, and copy the following code. The code uploads the resized image to a different bucket with the same image name, as shown following:

```
source-bucket/image.png -> source-bucketresized/image.png
```

```
from __future__ import print_function
import boto3
import os
import sys
import uuid
from PIL import Image
import PIL.Image

s3_client = boto3.client('s3')

def resize_image(image_path, resized_path):
    with Image.open(image_path) as image:
        image.thumbnail(tuple(x / 2 for x in image.size))
        image.save(resized_path)

def handler(event, context):
    for record in event['Records']:
        bucket = record['s3']['bucket']['name']
        key = record['s3']['object']['key']
        download_path = '/tmp/{}'.format(uuid.uuid4(), key)
        upload_path = '/tmp/resized-{}'.format(key)

        s3_client.download_file(bucket, key, download_path)
        resize_image(download_path, upload_path)
        s3_client.upload_file(upload_path, '{}resized'.format(bucket), key)
```

2. Save the file as `CreateThumbnail.py`.
3. If your source code is on a local host, copy it over.

```
scp -i key.pem /path/to/my_code.py  
ec2-user@public-ip-address:~/CreateThumbnail.py
```

4. Connect to a 64-bit Amazon Linux instance via SSH.

```
ssh -i key.pem ec2-user@public-ip-address
```

5. Ensure basic build requirements are installed.

```
sudo yum install python27-devel python27-pip gcc
```

6. Install native dependencies required by Pillow.

```
sudo yum install libjpeg-devel zlib-devel
```

7. Create and activate a virtual environment.

```
virtualenv ~/shrink_venv  
  
source ~/shrink_venv/bin/activate
```

8. Install libraries in the virtual environment.

```
pip install Pillow  
  
pip install boto3
```

Note

AWS Lambda includes the AWS SDK for Python (Boto 3), so you don't need to include it in your deployment package, but you can optionally include it for local testing.

9. Create a `.zip` file

```
zip -9 ~/CreateThumbnail.zip
```

10. Add the contents of `lib` and `lib64` site-packages to your `.zip` file.

```
cd $VIRTUAL_ENV/lib/python2.7/site-packages  
  
zip -r9 ~/CreateThumbnail.zip *  
  
cd $VIRTUAL_ENV/lib64/python2.7/site-packages  
  
zip -r9 ~/CreateThumbnail.zip *
```

11. Add your python code to the `.zip` file

```
cd ~  
  
zip -g CreateThumbnail.zip CreateThumbnail.py
```

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 137\)](#)

Step 2.2: Create the Execution Role (IAM Role)

In this section, you create an IAM role using the following predefined role type and access permissions policy:

- AWS service role of the type **AWS Lambda** – This role grants AWS Lambda permissions to assume the role.

- **AWSLambdaExecute** access permissions policy that you attach to the role.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. Use the following procedure to create the IAM role.

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-s3-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**. This grants the AWS Lambda service permissions to assume the role.
 - In **Attach Policy**, choose **AWSLambdaExecute**.
3. Write down the role ARN. You will need it in the next step when you create your Lambda function.

Next Step

[Step 2.3: Create the Lambda Function and Test It Manually \(p. 138\)](#)

Step 2.3: Create the Lambda Function and Test It Manually

In this section, you do the following:

- Create a Lambda function by uploading the deployment package.
- Test the Lambda function by invoking it manually and passing sample Amazon S3 event data as a parameter.

Step 2.3.1: Create the Lambda Function (Upload the Deployment Package)

In this step, you upload the deployment package using the AWS CLI.

1. At the command prompt, run the following Lambda AWS CLI `create-function` command using the `adminuser` as the `--profile`. You need to update the command by providing the `.zip` file path and the execution role ARN. For the runtime parameter, choose between `nodejs4.3`, `python2.7` or `java8`, depending on the code sample you when you created your deployment package.

```
$ aws lambda create-function \
--region us-west-2 \
--function-name CreateThumbnail \
--zip-file fileb://file-path/CreateThumbnail.zip \
--role role-arn \
--handler CreateThumbnail.handler \
--runtime runtime \
--profile adminuser \
--timeout 10 \
--memory-size 1024
```


Optionally, you can upload the .zip file to an Amazon S3 bucket in the same AWS region, and then specify the bucket and object name in the preceding command. You need to replace the `--zip-file` parameter by the `--code` parameter, as shown following:

```
--code S3Bucket=bucket-name,S3Key=zip-file-object-key
```

2. Write down the function ARN. You will need this in the next section when you add notification configuration to your Amazon S3 bucket.
3. (Optional) The preceding command specifies a 10-second timeout value as the function configuration. Depending on the size of objects you upload, you might need to increase the timeout value using the following AWS CLI command.

```
$ aws lambda update-function-configuration \  
  --function-name CreateThumbnail \  
  --region us-west-2 \  
  --timeout timeout-in-seconds \  
  --profile adminuser
```

Note

You can create the Lambda function using the AWS Lambda console, in which case note the value of the `create-function` AWS CLI command parameters. You provide the same values in the console UI.

Step 2.3.2: Test the Lambda Function (Invoke Manually)

In this step, you invoke the Lambda function manually using sample Amazon S3 event data. You can test the function using the AWS Management Console or the AWS CLI.

To test the Lambda function (console)

1. Follow the steps in the Getting Started to create and invoke the Lambda function at [Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics \(p. 42\)](#). For the sample event for testing, choose **S3 Put** in **Sample event template**.
2. Verify that the thumbnail was created in the target bucket and monitor the activity of your Lambda function in the AWS Lambda console as follows:
 - The AWS Lambda console shows a graphical representation of some of the CloudWatch metrics in the **Cloudwatch Metrics at a glance** section for your function.
 - For each graph, you can also click the **logs** link to view the CloudWatch Logs directly.

To test the Lambda function (AWS CLI)

1. Save the following Amazon S3 sample event data in a file and save it as `input.txt`. You need to update the JSON by providing your *sourcebucket* name and a .jpg object key.

```
{  
  "Records": [  
    {  
      "eventVersion": "2.0",  
      "eventSource": "aws:s3",  
      "awsRegion": "us-west-2",
```

```
"eventTime": "1970-01-01T00:00:00.000Z",
"eventName": "ObjectCreated:Put",
"userIdentity": {
  "principalId": "AIDAJDPLRKLG7UEXAMPLE"
},
"requestParameters": {
  "sourceIPAddress": "127.0.0.1"
},
"responseElements": {
  "x-amz-request-id": "C3D13FE58DE4C810",
  "x-amz-id-2": "FMMyUVURIY8/IgAtTv8xRjskZQpcIZ9KG4V5Wp6S7S/JRWeUWer
MUE5JgHvANOjpD"
},
"s3": {
  "s3SchemaVersion": "1.0",
  "configurationId": "testConfigRule",
  "bucket": {
    "name": "sourcebucket",
    "ownerIdentity": {
      "principalId": "A3NL1KOZZKExample"
    },
    "arn": "arn:aws:s3:::sourcebucket"
  },
  "object": {
    "key": "HappyFace.jpg",
    "size": 1024,
    "eTag": "d41d8cd98f00b204e9800998ecf8427e",
    "versionId": "096fKKXTRTtl3on89fVO.nfljtsv6qko"
  }
}
}
```

2. Run the following Lambda CLI `invoke` command to invoke the function. Note that the command requests asynchronous execution. You can optionally invoke it synchronously by specifying `RequestResponse` as the `invocation-type` parameter value.

```
$ aws lambda invoke \
--invocation-type Event \
--function-name CreateThumbnail \
--region us-west-2 \
--payload file://file-path/inputfile.txt \
--profile adminuser \
outputfile.txt
```

Note

You are able to invoke this function because you are using your own credentials to invoke your own function. In the next section, you configure Amazon S3 to invoke this function on your behalf, which requires you to add permissions to the access policy associated with your Lambda function to grant Amazon S3 permissions to invoke your function.

3. Verify that the thumbnail was created in the target bucket and monitor the activity of your Lambda function in the AWS Lambda console as follows:
 - The AWS Lambda console shows a graphical representation of some of the CloudWatch metrics in the **Cloudwatch Metrics at a glance** section for your function.

- For each graph, you can also click the **logs** link to view the CloudWatch Logs directly.

Next Step

[Step 3: Add an Event Source \(Configure Amazon S3 to Publish Events\)](#) (p. 141)

Step 3: Add an Event Source (Configure Amazon S3 to Publish Events)

In this step, you add the remaining configuration so that Amazon S3 can publish object-created events to AWS Lambda and invoke your Lambda function. You do the following in this step:

- Add permissions to the Lambda function access policy to allow Amazon S3 to invoke the function.
- Add notification configuration to your source bucket. In the notification configuration, you provide the following:
 - Event type for which you want Amazon S3 to publish events. For this tutorial, you specify the `s3:ObjectCreated:*` event type so that Amazon S3 publishes events when objects are created.
 - Lambda function to invoke.

Step 3.1: Add Permissions to the Lambda Function's Access Permissions Policy

1. Run the following Lambda CLI `add-permission` command to grant Amazon S3 service principal (`s3.amazonaws.com`) permissions to perform the `lambda:InvokeFunction` action. Note that permission is granted to Amazon S3 to invoke the function only if the following conditions are met:
 - An object-created event is detected on a specific bucket.
 - The bucket is owned by a specific AWS account. If a bucket owner deletes a bucket, some other AWS account can create a bucket with the same name. This condition ensures that only a specific AWS account can invoke your Lambda function.

```
$ aws lambda add-permission \
--function-name CreateThumbnail \
--region us-west-2 \
--statement-id some-unique-id \
--action "lambda:InvokeFunction" \
--principal s3.amazonaws.com \
--source-arn arn:aws:s3:::sourcebucket \
--source-account bucket-owner-account-id \
--profile adminuser
```

2. Verify the function's access policy by running the AWS CLI `get-policy` command.

```
$ aws lambda get-policy \
--function-name function-name \
--profile adminuser
```

Step 3.2: Configure Notification on the Bucket

Add notification configuration on the source bucket to request Amazon S3 to publish object-created events to Lambda. In the configuration, you specify the following:

- **Event type** – For this tutorial, select the `ObjectCreated (All)` Amazon S3 event type.
- **Lambda function** – This is your Lambda function that you want Amazon S3 to invoke.

For instructions on adding notification configuration to a bucket, see [Enabling Event Notifications](#) in the *Amazon Simple Storage Service Console User Guide*.

Step 3.3: Test the Setup

You're all done! Now **adminuser** can test the setup as follows:

1. Upload .jpg or .png objects to the source bucket using the Amazon S3 console.
2. Verify that the thumbnail was created in the target bucket using the `CreateThumbnail` function.
3. The **adminuser** can also verify the CloudWatch Logs. You can monitor the activity of your Lambda function in the AWS Lambda console. For example, choose the **logs** link in the console to view logs, including logs your function wrote to CloudWatch Logs.

Using AWS Lambda with Amazon Kinesis

You can create an Amazon Kinesis stream to continuously capture and store terabytes of data per hour from hundreds of thousands of sources such as website click streams, financial transactions, social media feeds, IT logs, and location-tracking events. For more information, see [Amazon Kinesis](#).

You can subscribe Lambda functions to automatically read batches of records off your Amazon Kinesis stream and process them if records are detected on the stream. AWS Lambda then polls the stream periodically (multiple times per second) for new records.

Note the following about how the Amazon Kinesis and AWS Lambda integration works:

- **Stream-based model** – This is a model (see [Event Source Mapping \(p. 10\)](#)), where AWS Lambda polls the stream and, when it detects new records, invokes your Lambda function by passing the new records as a parameter.


In a stream-based model, you maintain event source mapping in AWS Lambda. The event source mapping describes which stream maps to which Lambda function. AWS Lambda provides an API ([CreateEventSourceMapping \(p. 278\)](#)) that you can use to create the mapping. You can also use the AWS Lambda console to create event source mappings.

- **Synchronous invocation** – AWS Lambda invokes a Lambda function using the `RequestResponse` invocation type (synchronous invocation) by polling the Kinesis Stream. For more information about invocation types, see [Invocation Types \(p. 9\)](#).
- **Event structure** – The event your Lambda function receives is a collection of records AWS Lambda reads from your stream. When you configure event source mapping, the batch size you specify is the maximum number of records that you want your Lambda function to receive per invocation.

Regardless of what invokes a Lambda function, AWS Lambda always executes a Lambda function on your behalf. If your Lambda function needs to access any AWS resources, you need to grant the relevant permissions to access those resources. You also need to grant AWS Lambda permissions to poll your Amazon Kinesis stream. You grant all of these permissions to an IAM role (execution role) that AWS Lambda can assume to poll the stream and execute the Lambda function on your behalf. You create this

role first and then enable it at the time you create the Lambda function. For more information, see [Manage Permissions: Using an IAM Role \(Execution Role\)](#) (p. 31).

The following diagram illustrates the application flow:

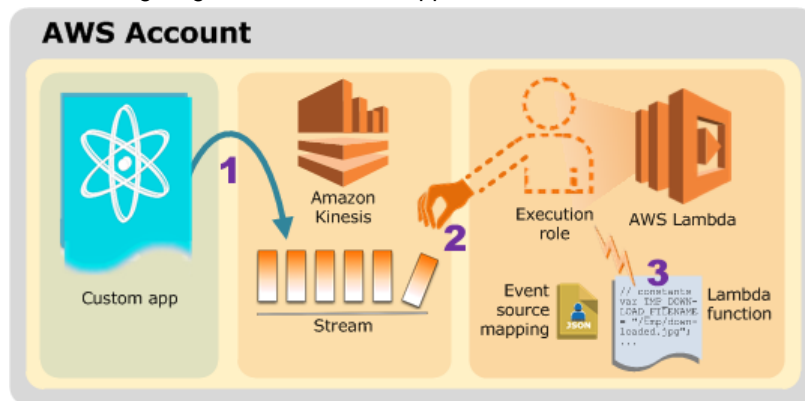

1. Custom app writes records to the stream.
2. AWS Lambda polls the stream and, when it detects new records in the stream, invokes your Lambda function.
3. AWS Lambda executes the Lambda function by assuming the execution role you specified at the time you created the Lambda function.

For a tutorial that walks you through an example setup, see [Tutorial: Using AWS Lambda with Amazon Kinesis](#) (p. 143).

Tutorial: Using AWS Lambda with Amazon Kinesis

In this tutorial, you create a Lambda function to consume events from an Amazon Kinesis stream.

The tutorial is divided into two main sections:

- First, you perform the necessary setup to create a Lambda function and then you test it by invoking it manually using sample event data (you don't need an Amazon Kinesis stream).
- Second, you create an Amazon Kinesis stream (event source). You add an event source mapping in AWS Lambda to associate the stream with your Lambda function. AWS Lambda starts polling the stream, you add test records to the stream using the Amazon Kinesis API, and then you verify that AWS Lambda executed your Lambda function.

Important

Both the Lambda function and the Amazon Kinesis stream must be in the same AWS region. This tutorial assumes that you create these resources in the `us-west-2` region.

In this tutorial, you use the AWS Command Line Interface to perform AWS Lambda operations such as creating a Lambda function, creating a stream, and adding records to the stream. You use the AWS Lambda console to manually invoke the function before you create a Amazon Kinesis stream. You verify return values and logs in the console UI.

Next Step

[Step 1: Prepare](#) (p. 144)

Step 1: Prepare

Make sure you have completed the following steps:

- Signed up for an AWS account and created an administrator user in the account.
- Installed and set up the AWS CLI.

For instructions, see [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#).

Next Step

[Step 2: Create a Lambda Function and Invoke It Manually \(Using Sample Event Data\) \(p. 144\)](#)

Step 2: Create a Lambda Function and Invoke It Manually (Using Sample Event Data)

In this section, you do the following:

- Create a Lambda function deployment package using the sample code provided. The sample Lambda function code that you'll use to process Amazon Kinesis events is provided in various languages. Select one of the languages and follow the corresponding instructions to create a deployment package.

Note

To see more examples of using other AWS services within your function, including calling other Lambda functions, see [AWS SDK for JavaScript](#)

- Create an IAM role (execution role). At the time you upload the deployment package, you need to specify an IAM role (execution role) that Lambda can assume to execute the function on your behalf.
- Create the Lambda function by uploading the deployment package, and then test it by invoking it manually using sample Amazon Kinesis event data.

Topics

- [Step 2.1: Create a Deployment Package \(p. 144\)](#)
- [Step 2.2: Create the Execution Role \(IAM Role\) \(p. 146\)](#)
- [Step 2.3: Create the Lambda Function and Test It Manually \(p. 147\)](#)

Step 2.1: Create a Deployment Package

From the **Filter View** list, choose the language you want to use for your Lambda function. The appropriate section appears with code and specific instructions for creating a deployment package.

Node.js

The following is example Node.js code that receives Amazon Kinesis event records as input and processes them. For illustration, the code writes some of the incoming event data to CloudWatch Logs.

Follow the instructions to create a AWS Lambda function deployment package.

1. Open a text editor, and then copy the following code.

```
console.log('Loading function');

exports.handler = function(event, context, callback) {
    //console.log(JSON.stringify(event, null, 2));
```

```
event.Records.forEach(function(record) {  
    // Kinesis data is base64 encoded so decode here  
    var payload = new Buffer(record.kinesis.data, 'base64').toString('ascii');  
    console.log('Decoded payload:', payload);  
});  
callback(null, "message");  
};
```

Note

The code sample is compliant with the Node.js runtime v4.3. For more information, see [Programming Model \(Node.js\) \(p. 51\)](#)

2. Save the file as `ProcessKinesisRecords.js`.
3. Zip the `ProcessKinesisRecords.js` file as `ProcessKinesisRecords.zip`.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 146\)](#)

Java

The following is example Java code that receives Amazon Kinesis event record data as a input and processes it. For illustration, the code writes some of the incoming event data to CloudWatch Logs.

In the code, `recordHandler` is the handler. The handler uses the predefined `KinesisEvent` class that is defined in the `aws-lambda-java-events` library.

```
package example;  
  
import java.io.IOException;  
  
import com.amazonaws.services.lambda.runtime.events.KinesisEvent;  
import com.amazonaws.services.lambda.runtime.events.KinesisEvent.KinesisEventRecord;  
  
public class ProcessKinesisEvents {  
    public void recordHandler(KinesisEvent event) throws IOException {  
        for(KinesisEventRecord rec : event.getRecords()) {  
            System.out.println(new String(rec.getKinesis().getData().array()));  
        }  
    }  
}
```

If the handler returns normally without exceptions, Lambda considers the input batch of records as processed successfully and begins reading new records in the stream. If the handler throws an exception, Lambda considers the input batch of records as not processed and invokes the function with the same batch of records again.

Using the preceding code (in a file named `ProcessKinesisEvents.java`), create a deployment package. Make sure that you add the following dependencies:

- `aws-lambda-java-core`
- `aws-lambda-java-events`

For more information, see [Programming Model for Authoring Lambda Functions in Java](#) (p. 63).

Your deployment package can be a .zip file or a standalone .jar. You can use any build and packaging tool you are familiar with to create a deployment package. For examples of how to use the Maven build tool to create a standalone .jar, see [Creating a .jar Deployment Package Using Maven without any IDE \(Java\)](#) (p. 91) and [Creating a .jar Deployment Package Using Maven and Eclipse IDE \(Java\)](#) (p. 93). For an example of how to use the Gradle build tool to create a .zip file, see [Creating a .zip Deployment Package \(Java\)](#) (p. 96).

After you verify that your deployment package is created, go to the next step to create an IAM role (execution role). You specify this role at the time you create your Lambda function.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 146)

Python

The following is example Python code that receives Amazon Kinesis event record data as input and processes it. For illustration, the code writes to some of the incoming event data to CloudWatch Logs.

Follow the instructions to create a AWS Lambda function deployment package.

1. Open a text editor, and then copy the following code.

```
from __future__ import print_function
#import json
import base64
def lambda_handler(event, context):
    for record in event['Records']:
        #Kinesis data is base64 encoded so decode here
        payload=base64.b64decode(record["kinesis"]["data"])
        print("Decoded payload: " + payload)
```

2. Save the file as `ProcessKinesisRecords.py`.
3. Zip the `ProcessKinesisRecords.py` file as `ProcessKinesisRecords.zip`.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 146)

Step 2.2: Create the Execution Role (IAM Role)

In this section, you create an IAM role using the following predefined role type and access policy:

- AWS service role of the type **AWS Lambda** – This role grants AWS Lambda permissions to assume the role.
- **AWSLambdaKinesisExecutionRole** – This is the access permissions policy that you attach to the role.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. Use the following procedure to create the IAM role.

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-kinesis-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**. This grants the AWS Lambda service permissions to assume the role.
 - In **Attach Policy**, choose **AWSLambdaKinesisExecutionRole**. The permissions in this policy are sufficient for the Lambda function in this tutorial.
3. Write down the role ARN. You will need it in the next step when you create your Lambda function.

Next Step

[Step 2.3: Create the Lambda Function and Test It Manually \(p. 147\)](#)

Step 2.3: Create the Lambda Function and Test It Manually

In this section, you do the following:

- Create a Lambda function by uploading the deployment package.
- Test the Lambda function by invoking it manually. Instead of creating an event source, you use sample Amazon Kinesis event data.

In the next section, you create an Amazon Kinesis stream and test the end-to-end experience.

Step 2.3.1: Create a Lambda Function (Upload the Deployment Package)

In this step, you upload the deployment package using the AWS CLI.

At the command prompt, run the following Lambda CLI `create-function` command using the **adminuser** profile.

You need to update the command by providing the .zip file path and the execution role ARN. The `--runtime` parameter value can be `python2.7`, `nodejs4.3`, or `java8`, depending on the language you used to author your code.

```
$ aws lambda create-function \
--region us-west-2 \
--function-name ProcessKinesisRecords \
--zip-file fileb://file-path/ProcessKinesisRecords.zip \
--role execution-role-arn \
--handler handler \
--runtime runtime-value \
--profile adminuser
```

The `--handler` parameter value for Java should be `example.ProcessKinesisRecords::recordHandler`. For Node.js and Python, it should be `ProcessKinesisRecords.handler`.

Optionally, you can upload the .zip file to an Amazon S3 bucket in the same AWS region, and then specify the bucket and object name in the preceding command. You need to replace the `--zip-file` parameter by the `--code` parameter, as shown following:

```
--code S3Bucket=bucket-name,S3Key=zip-file-object-key
```

Note

You can create the Lambda function using the AWS Lambda console, in which case note the value of the `create-function` AWS CLI command parameters. You provide the same values in the console UI.

Step 2.3.2: Test the Lambda Function (Invoke Manually)

Invoke the function manually using sample Amazon Kinesis event data. We recommend that you invoke the function using the console because the console UI provides a user-friendly interface for reviewing the execution results, including the execution summary, logs written by your code, and the results returned by the function (because the console always performs synchronous execution—invokes the Lambda function using the `RequestResponse` invocation type).

To test the Lambda function (console)

1. Follow the steps in the Getting Started to create and invoke the Lambda function at [Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics \(p. 42\)](#). For the sample event for testing, choose **Kinesis** in **Sample event template**.
2. Verify the results in the console.

To test the Lambda function (AWS CLI)

1. Copy the following JSON into a file and save it as `input.txt`.

```
{
  "Records": [
    {
      "kinesis": {
        "partitionKey": "partitionKey-3",
        "kinesisSchemaVersion": "1.0",
        "data": "SGVsbG8sIHRoaXMgaXMgYSB0ZXN0IDFyMy4=",
        "sequenceNumber":
"49545115243490985018280067714973144582180062593244200961"
      },
      "eventSource": "aws:kinesis",
      "eventID": "shardId-
000000000000:49545115243490985018280067714973144582180062593244200961",
      "invokeIdentityArn": "arn:aws:iam::account-id:role/testLEBRole",
      "eventVersion": "1.0",
      "eventName": "aws:kinesis:record",
      "eventSourceARN": "arn:aws:kinesis:us-west-2:35667ex
ample:stream/examplestream",
      "awsRegion": "us-west-2"
    }
  ]
}
```

2. Execute the following invoke command:

```
$ aws lambda invoke \  
--invocation-type Event \  
--function-name ProcessKinesisRecords \  
--region us-west-2 \  
--payload file://file-path/input.txt \  
--profile adminuser \  
outputfile.txt
```

Note

In this tutorial example, the message is saved in the `outputfile.txt` file. If you request synchronous execution (RequestResponse as the invocation type), the function returns the string message in the response body.

For Node.js, it could be one of the following (whatever one you specify in the code):

```
context.succeed("message")  
context.fail("message")  
context.done(null, "message")
```

For Python or Java, it is the message in the return statement:

```
return "message"
```

Next Step

[Step 3: Add an Event Source \(Create an Amazon Kinesis Stream and Associate It with Your Lambda Function\)](#) (p. 149)

Step 3: Add an Event Source (Create an Amazon Kinesis Stream and Associate It with Your Lambda Function)

In this section, you create an Amazon Kinesis stream, and then you add an event source in AWS Lambda to associate the Amazon Kinesis stream with your Lambda function.

After you create an event source, AWS Lambda starts polling the stream. You then test the setup by adding events to the stream and verify that AWS Lambda executed your Lambda function on your behalf:

Step 3.1: Create an Amazon Kinesis Stream

Use the following Amazon Kinesis `create-stream` CLI command to create a stream.

```
$ aws kinesis create-stream \  
--stream-name examplestream \  
--shard-count 1 \  
--region us-west-2 \  
--profile adminuser
```

Run the following Amazon Kinesis `describe-stream` AWS CLI command to get the stream ARN.

```
$ aws kinesis describe-stream \  
--stream-name examplestream \  
--region us-west-2 \  
--profile adminuser
```

You need the stream ARN in the next step to associate the stream with your Lambda function. The stream is of the form:

```
arn:aws:kinesis:aws-region:account-id:stream/stream-name
```

Step 3.2: Add an Event Source in AWS Lambda

Run the following AWS CLI `add-event-source` command. After the command executes, note down the UUID. You'll need this UUID to refer to the event source in any commands (for example, when deleting the event source).

```
$ aws lambda create-event-source-mapping \  
--region us-west-2 \  
--function-name ProcessKinesisRecords \  
--event-source kinesis-stream-arn \  
--batch-size 100 \  
--starting-position TRIM_HORIZON \  
--profile adminuser
```

You can get a list of event source mappings by running the following command.

```
$ aws lambda list-event-source-mappings \  
--region us-west-2 \  
--function-name ProcessKinesisRecords \  
--event-source kinesis-stream-arn \  
--profile adminuser \  
--debug
```

In the response, you can verify the status value is `enabled`.

Note

If you disable the event source mapping, AWS Lambda stops polling the Amazon Kinesis stream. If you re-enable event source mapping, it will resume polling from the sequence number where it stopped, so each record is processed either before you disabled the mapping or after you enabled it. If the sequence number falls behind `TRIM_HORIZON`, when you re-enable it polling will start from `TRIM_HORIZON`. However, if you create a new event source mapping, polling will always start from `TRIM_HORIZON` or `LATEST`, depending on the starting position you specify. This applies even if you delete an event source mapping and create a new one with the same configuration as the deleted one.

Step 3.3: Test the Setup

You're all done! Now *adminuser* can test the setup as follows:

1. Using the following AWS CLI command, add event records to your Amazon Kinesis stream. The `--data` value is a base64-encoded value of the "Hello, this is a test." string. You can run the same command more than once to add multiple records to the stream.

```
$ aws kinesis put-record \  
--stream-name examplestream \  
--data "This is a test. final" \  
--partition-key shardId-000000000000 \  
--region us-west-2 \  
--profile adminuser
```

2. AWS Lambda polls the stream and, when it detects updates to the stream, it invokes your Lambda function by passing in the event data from the stream.

AWS Lambda assumes the execution role to poll the stream. You have granted the role permissions for the necessary Amazon Kinesis actions so that AWS Lambda can poll the stream and read events from the stream.

3. Your function executes and adds logs to the log group that corresponds to the Lambda function in Amazon CloudWatch.

The **adminuser** can also verify the logs reported in the Amazon CloudWatch console. Make sure you are checking for logs in the same AWS region where you created the Lambda function.

Using AWS Lambda with Amazon DynamoDB

You can use Lambda functions as triggers for your Amazon DynamoDB table. Triggers are custom actions you take in response to updates made to the DynamoDB table. To create a trigger, first you enable Amazon DynamoDB Streams for your table. Then, you write a Lambda function to process the updates published to the stream.

Note the following about how the Amazon DynamoDB and AWS Lambda integration works:


- **Stream-based model** – This is a model (see [Event Source Mapping \(p. 10\)](#)), where AWS Lambda polls the stream and, when it detects new records, invokes your Lambda function by passing the update event as parameter.

In a stream-based model, you maintain event source mapping in AWS Lambda. The event source mapping describes which stream maps to which Lambda function. AWS Lambda provides an API ([CreateEventSourceMapping \(p. 278\)](#)) for you to create the mapping. You can also use the AWS Lambda console to create event source mappings.

- **Synchronous invocation** – AWS Lambda invokes a Lambda function using the `RequestResponse` invocation type (synchronous invocation). For more information about invocation types, see [Invocation Types \(p. 9\)](#).
- **Event structure** – The event your Lambda function receives is the table update information AWS Lambda reads from your stream. When you configure event source mapping, the batch size you specify is the maximum number of records that you want your Lambda function to receive per invocation.

Regardless of what invokes a Lambda function, AWS Lambda always executes a Lambda function on your behalf. If your Lambda function needs to access any AWS resources, you need to grant the relevant permissions to access those resources. You also need to grant AWS Lambda permissions to poll your DynamoDB stream. You grant all of these permissions to an IAM role (execution role) that AWS Lambda can assume to poll the stream and execute the Lambda function on your behalf. You create this role first and then enable it at the time you create the Lambda function. For more information, see [Manage Permissions: Using an IAM Role \(Execution Role\) \(p. 31\)](#).

The following diagram illustrates the application flow:

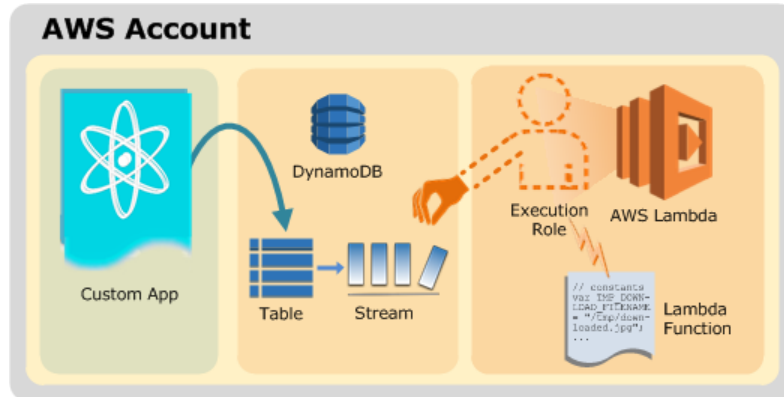

1. Custom app updates the DynamoDB table.
2. Amazon DynamoDB publishes item updates to the stream.
3. AWS Lambda polls the stream and invokes your Lambda function when it detects new records in the stream.
4. AWS Lambda executes the Lambda function by assuming the execution role you specified at the time you created the Lambda function.

For a tutorial that walks you through an example setup, see [Tutorial: Using AWS Lambda with Amazon DynamoDB](#) (p. 152).

Tutorial: Using AWS Lambda with Amazon DynamoDB

In this tutorial, you create a Lambda function to consume events from a DynamoDB stream.

The tutorial is divided into two main sections:

- First, you perform the necessary setup to create a Lambda function and then you test it by invoking it manually using sample event data.
- Second, you create an DynamoDB stream-enabled table and add an event source mapping in AWS Lambda to associate the stream with your Lambda function. AWS Lambda starts polling the stream. Then, you test the end-to-end setup. As you create, update, and delete items from the table, Amazon DynamoDB writes records to the stream. AWS Lambda detects the new records as it polls the stream and executes your Lambda function on your behalf.

Important

Both the Lambda function and the DynamoDB stream must be in the same AWS region. This tutorial assumes that you create these resources in the `us-east-1` region.

In this tutorial, you use the AWS Command Line Interface to perform AWS Lambda operations such as creating a Lambda function, creating a stream, and adding records to the stream. You use the AWS Lambda console to manually invoke the function before you create a DynamoDB stream. You verify return values and logs in the console UI.

Next Step

[Step 1: Prepare](#) (p. 153)

Step 1: Prepare

Make sure you have completed the following steps:

- Signed up for an AWS account and created an administrator user in the account.
- Installed and set up the AWS CLI.

For instructions, see [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#).

Next Step

[Step 2: Create a Lambda Function and Invoke It Manually \(Using Sample Event Data\) \(p. 153\)](#)

Step 2: Create a Lambda Function and Invoke It Manually (Using Sample Event Data)

In this section, you do the following:

- Create a Lambda function deployment package using the sample code provided. The sample Lambda function code that you'll use to process DynamoDB events is provided in various languages. Select one of the languages and follow the corresponding instructions to create a deployment package.

Note

To see more examples of using other AWS services within your function, including calling other Lambda functions, see [AWS SDK for JavaScript](#)

- Create an IAM role (execution role). At the time you upload the deployment package, you need to specify an IAM role (execution role) that Lambda can assume to execute the function on your behalf. For example, AWS Lambda needs permissions for DynamoDB actions so it can poll the stream and read records from the stream. In the *pull* model you must also grant AWS Lambda permissions to invoke your Lambda function. The example Lambda function writes some of the event data to CloudWatch, so it needs permissions for necessary CloudWatch actions.
- Create the Lambda function by uploading the deployment package, and then test it by invoking it manually using sample DynamoDB event data. You provide both the deployment package and the IAM role at the time of creating a Lambda function. You can also specify other configuration information, such as the function name, memory size, runtime environment to use, and the handler. For more information about these parameters, see [CreateFunction \(p. 282\)](#). After creating the Lambda function, you invoke it using sample Amazon DynamoDB event data.

Topics

- [Step 2.1: Create a Lambda Function Deployment Package \(p. 153\)](#)
- [Step 2.2: Create the Execution Role \(IAM Role\) \(p. 155\)](#)
- [Step 2.3: Create the Lambda Function and Test It Manually \(p. 156\)](#)

Step 2.1: Create a Lambda Function Deployment Package

From the **Filter View** list, choose the language you want to use for your Lambda function. The appropriate section appears with code and specific instructions for creating a deployment package.

Node.js

1. Open a text editor, and then copy the following code.

```
console.log('Loading function');

exports.handler = function(event, context, callback) {
    console.log(JSON.stringify(event, null, 2));
    event.Records.forEach(function(record) {
        console.log(record.eventID);
        console.log(record.eventName);
        console.log('DynamoDB Record: %j', record.dynamodb);
    });
    callback(null, "message");
};
```

Note

The code sample is compliant with the Node.js runtime v4.3. For more information, see [Programming Model \(Node.js\) \(p. 51\)](#)

2. Save the file as `ProcessDynamoDBStream.js`.
3. Zip the `ProcessDynamoDBStream.js` file as `ProcessDynamoDBStream.zip`.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 155\)](#)

Java

In the following code, `handleRequest` is the handler that AWS Lambda invokes and provides event data. The handler uses the predefined `DynamodbEvent` class, which is defined in the `aws-lambda-java-events` library.

```
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent.DynamodbStreamRecord;

public class DDBEventProcessor implements
    RequestHandler<DynamodbEvent, String> {

    public String handleRequest(DynamodbEvent ddbEvent, Context context) {

        for (DynamodbStreamRecord record : ddbEvent.getRecords()){
            System.out.println(record.getEventID());
            System.out.println(record.getEventName());
            System.out.println(record.getDynamodb().toString());
        }
        return "Successfully processed " + ddbEvent.getRecords().size() + "
records.";
    }
}
```

If the handler returns normally without exceptions, Lambda considers the input batch of records as processed successfully and begins reading new records in the stream. If the handler throws an exception,

Lambda considers the input batch of records as not processed and invokes the function with the same batch of records again.

Using the preceding code (in a file named `DDBEventProcessor.java`), create a deployment package. Make sure that you add the following dependencies:

- `aws-lambda-java-core`
- `aws-lambda-java-events`

For more information, see [Programming Model for Authoring Lambda Functions in Java](#) (p. 63).

Your deployment package can be a .zip file or a standalone .jar. You can use any build and packaging tool you are familiar with to create a deployment package. For examples of how to use the Maven build tool to create a standalone .jar, see [Creating a .jar Deployment Package Using Maven without any IDE \(Java\)](#) (p. 91) and [Creating a .jar Deployment Package Using Maven and Eclipse IDE \(Java\)](#) (p. 93). For an example of how to use the Gradle build tool to create a .zip file, see [Creating a .zip Deployment Package \(Java\)](#) (p. 96).

After you verify that your deployment package is created, go to the next step to create an IAM role (execution role). You specify this role at the time you create your Lambda function.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 155)

Python

1. Open a text editor, and then copy the following code.

```
from __future__ import print_function

def lambda_handler(event, context):
    for record in event['Records']:
        print(record['eventID'])
        print(record['eventName'])
    print('Successfully processed %s records.' % str(len(event['Records'])))
```

2. Save the file as `ProcessDynamoDBStream.py`.
3. Zip the `ProcessDynamoDBStream.py` file as `ProcessDynamoDBStream.zip`.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 155)

Step 2.2: Create the Execution Role (IAM Role)

In this section, you create an IAM role using the following predefined role type and access policy:

- AWS service role of the type **AWS Lambda** – This role grants AWS Lambda permissions to assume the role.
- **AWSLambdaDynamoDBExecutionRole** – This is the access permissions policy that you attach to the role.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. Use the following procedure to create the IAM role.

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-dynamodb-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**. This grants the AWS Lambda service permissions to assume the role.
 - In **Attach Policy**, choose **AWSLambdaDynamoDBExecutionRole**. The permissions in this policy are sufficient for the Lambda function in this tutorial.
3. Write down the role ARN. You will need it in the next step when you create your Lambda function.

Next Step

[Step 2.3: Create the Lambda Function and Test It Manually \(p. 156\)](#)

Step 2.3: Create the Lambda Function and Test It Manually

In this section, you do the following:

- Create a Lambda function by uploading the deployment package.
- Test the Lambda function by invoking it manually. Instead of creating an event source, you use sample DynamoDB event data.

In the next section, you create an DynamoDB stream and test the end-to-end experience.

Step 2.3.1: Create a Lambda Function (Upload the Deployment Package)

In this step, you upload the deployment package using the AWS CLI.

At the command prompt, run the following Lambda CLI `create-function` command using the **adminuser** profile.

You need to update the command by providing the .zip file path and the execution role ARN. The `--runtime` parameter value can be `python2.7`, `nodejs4.3`, or `java8`, depending on the language you used to author your code.

```
$ aws lambda create-function \
--region us-east-1 \
--function-name ProcessDynamoDBStream \
--zip-file fileb://file-path/ProcessDynamoDBStream.zip \
--role role-arn \
--handler ProcessDynamoDBStream.lambda_handler \
--runtime runtime-value \
--profile adminuser
```

Note

If you choose `Java 8` as the runtime, the handler value must be `packageName::methodName`.

For more information, see [CreateFunction \(p. 282\)](#). AWS Lambda creates the function and returns function configuration information.

Optionally, you can upload the `.zip` file to an Amazon S3 bucket in the same AWS region, and then specify the bucket and object name in the preceding command. You need to replace the `--zip-file` parameter by the `--code` parameter, as shown following:

```
--code S3Bucket=bucket-name,S3Key=zip-file-object-key
```

Step 2.3.2: Test the Lambda Function (Invoke Manually)

In this step, you invoke your Lambda function manually using the `invoke` AWS Lambda CLI command and the following sample DynamoDB event.

1. Copy the following JSON into a file and save it as `input.txt`.

```
{
  "Records": [
    {
      "eventID": "1",
      "eventName": "INSERT",
      "eventVersion": "1.0",
      "eventSource": "aws:dynamodb",
      "awsRegion": "us-east-1",
      "dynamodb": {
        "Keys": {
          "Id": {
            "N": "101"
          }
        },
        "NewImage": {
          "Message": {
            "S": "New item!"
          },
          "Id": {
            "N": "101"
          }
        },
        "SequenceNumber": "111",
        "SizeBytes": 26,
        "StreamViewType": "NEW_AND_OLD_IMAGES"
      },
      "eventSourceARN": "stream-ARN"
    },
    {
      "eventID": "2",
      "eventName": "MODIFY",
      "eventVersion": "1.0",
      "eventSource": "aws:dynamodb",
      "awsRegion": "us-east-1",
      "dynamodb": {
        "Keys": {
          "Id": {
            "N": "101"
          }
        }
      }
    }
  ]
}
```

```
        },
      },
      "NewImage": {
        "Message": {
          "S": "This item has changed"
        },
        "Id": {
          "N": "101"
        }
      },
      "OldImage": {
        "Message": {
          "S": "New item!"
        },
        "Id": {
          "N": "101"
        }
      },
      "SequenceNumber": "222",
      "SizeBytes": 59,
      "StreamViewType": "NEW_AND_OLD_IMAGES"
    },
    "eventSourceARN": "stream-ARN"
  },
  {
    "eventID": "3",
    "eventName": "REMOVE",
    "eventVersion": "1.0",
    "eventSource": "aws:dynamodb",
    "awsRegion": "us-east-1",
    "dynamodb": {
      "Keys": {
        "Id": {
          "N": "101"
        }
      },
      "OldImage": {
        "Message": {
          "S": "This item has changed"
        },
        "Id": {
          "N": "101"
        }
      },
      "SequenceNumber": "333",
      "SizeBytes": 38,
      "StreamViewType": "NEW_AND_OLD_IMAGES"
    },
    "eventSourceARN": "stream-ARN"
  }
]
}
```

2. Execute the following `invoke` command.

```
$ aws lambda invoke \  
--invocation-type RequestResponse \  
--function-name ProcessDynamoDBStream \  
--region us-east-1 \  
--payload file://file-path/input.txt \  
--profile adminuser \  
outputfile.txt
```

Note that the `invoke` command specifies the `RequestResponse` as the invocation type, which requests synchronous execution. For more information, see [Invoke \(p. 303\)](#). The function returns the string message (message in the `context.succeed()` in the code) in the response body.

3. Verify the output in the `outputfile.txt` file.

You can monitor the activity of your Lambda function in the AWS Lambda console.

- The AWS Lambda console shows a graphical representation of some of the CloudWatch metrics in the **Cloudwatch Metrics at a glance** section for your function. Sign in to the AWS Management Console at <https://console.aws.amazon.com/>.
- For each graph you can also click the **logs** link to view the CloudWatch logs directly.

Next Step

[Step 3: Add an Event Source \(Create a DynamoDB Stream and Associate It with Your Lambda Function\) \(p. 159\)](#)

Step 3: Add an Event Source (Create a DynamoDB Stream and Associate It with Your Lambda Function)

In this section, you do the following:

- Create an Amazon DynamoDB table with a stream enabled.
- Create an event source mapping in AWS Lambda. This event source mapping associates the DynamoDB stream with your Lambda function. After you create this event source mapping, AWS Lambda starts polling the stream.
- Test the end-to-end experience. As you perform table updates, DynamoDB writes event records to the stream. As AWS Lambda polls the stream, it detects new records in the stream and executes your Lambda function on your behalf by passing events to the function.

Step 3.1: Create a DynamoDB Table with a Stream Enabled

Follow the procedure to create a table with a stream:

1. Sign in to the AWS Management Console and open the DynamoDB console at <https://console.aws.amazon.com/dynamodb/>.
2. In the DynamoDB console, create a table with streams enabled. Make sure you have the US East (N. Virginia) region selected before you create the table.

Important

You must create a DynamoDB table in the same region where you created the Lambda function. This tutorial assumes the US East (N. Virginia) region. In addition, both the table and the Lambda functions must belong to the same AWS account.

3. Write down the stream ARN. You need this in the next step when you associate the stream with your Lambda function.

Step 3.2: Add an Event Source in AWS Lambda

Run the following AWS CLI `create-event-source-mapping` command. After the command executes, note down the UUID. You'll need this UUID to refer to the event source mapping in any commands, for example, when deleting the event source mapping.

```
$ aws lambda create-event-source-mapping \
--region us-east-1 \
--function-name ProcessDynamoDBStream \
--event-source DynamoDB-stream-arn \
--batch-size 100 \
--starting-position TRIM_HORIZON \
--profile adminuser
```

Note

This creates a mapping between the specified DynamoDB stream and the Lambda function. You can associate a DynamoDB stream with multiple Lambda functions, and associate the same Lambda function with multiple streams. However, the Lambda functions will share the read throughput for the stream they share.

You can get the list of event source mappings by running the following command.

```
$ aws lambda list-event-source-mappings \
--region us-east-1 \
--function-name ProcessDynamoDBStream \
--event-source DynamoDB-stream-arn \
--profile adminuser
```

The list returns all of the event source mappings you created, and for each mapping it shows the `LastProcessingResult`, among other things. This field is used to provide an informative message if there are any problems. Values such as `No records processed` (indicates that AWS Lambda has not started polling or that there are no records in the stream) and `OK` (indicates AWS Lambda successfully read records from the stream and invoked your Lambda function) indicate that there are no issues. If there are issues, you receive an error message.

Step 3.3: Test the Setup

You're all done! Now **adminuser** can test the setup as follows:

1. In the DynamoDB console, add, update, delete items to the table. DynamoDB writes records of these actions to the stream.
2. AWS Lambda polls the stream and when it detects updates to the stream, it invokes your Lambda function by passing in the event data it finds in the stream.
3. Your function executes and creates logs in Amazon CloudWatch. The **adminuser** can also verify the logs reported in the Amazon CloudWatch console.

Using AWS Lambda with AWS CloudTrail

You can enable CloudTrail in your AWS account to get logs of API calls and related events history in your account. CloudTrail records all of the API access events as objects in your Amazon S3 bucket that you specify at the time you enable CloudTrail.

You can take advantage of Amazon S3's bucket notification feature and direct Amazon S3 to publish object-created events to AWS Lambda. Whenever CloudTrail writes logs to your S3 bucket, Amazon S3 can then invoke your Lambda function by passing the Amazon S3 object-created event as a parameter. The S3 event provides information, including the bucket name and key name of the log object that CloudTrail created. Your Lambda function code can read the log object and process the access records logged by CloudTrail. For example, you might write Lambda function code to notify you if specific API call was made in your account.


In this scenario, you enable CloudTrail so it can write access logs to your S3 bucket. As for AWS Lambda, Amazon S3 is the event source so Amazon S3 publishes events to AWS Lambda and invokes your Lambda function.

Note

Amazon S3 can only support one event destination.

For detailed information about how to configure Amazon S3 as the event source, see [Using AWS Lambda with Amazon S3 \(p. 125\)](#).

The following diagram summarizes the flow:

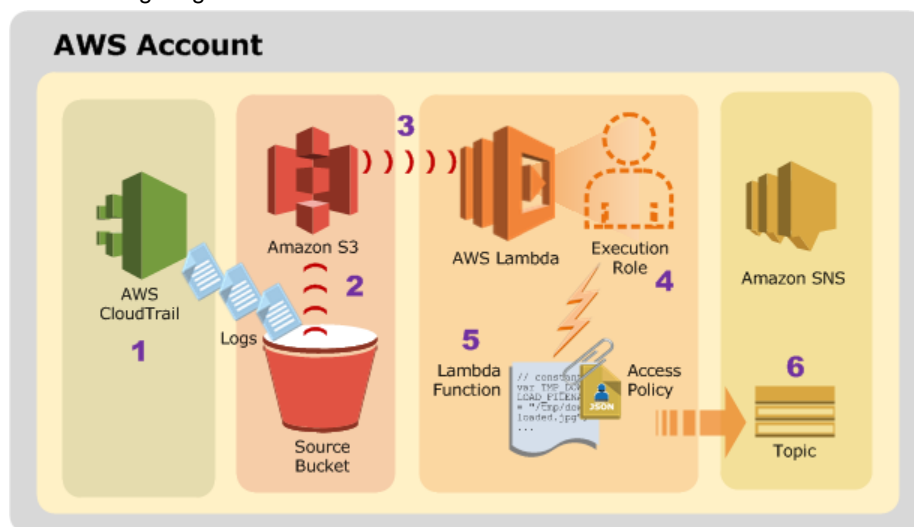

1. AWS CloudTrail saves logs to an S3 bucket (object-created event).
2. Amazon S3 detects the object-created event.
3. Amazon S3 publishes the `s3:ObjectCreated:*` event to AWS Lambda by invoking the Lambda function, as specified in the bucket notification configuration. Because the Lambda function's access permissions policy includes permissions for Amazon S3 to invoke the function, Amazon S3 can invoke the function.
4. AWS Lambda executes the Lambda function by assuming the execution role that you specified at the time you created the Lambda function.
5. The Lambda function reads the Amazon S3 event it receives as a parameter, determines where the CloudTrail object is, reads the CloudTrail object, and then it processes the log records in the CloudTrail object.

6. If the log includes a record with specific `eventType` and `eventSource` values, it publishes the event to your Amazon SNS topic. In [Tutorial: Using AWS Lambda with AWS CloudTrail \(p. 162\)](#), you subscribe to the SNS topic using the email protocol, so you get email notifications.

For a tutorial that walks you through an example scenario, see [Tutorial: Using AWS Lambda with AWS CloudTrail \(p. 162\)](#).

Tutorial: Using AWS Lambda with AWS CloudTrail

Suppose you have turned on AWS CloudTrail for your AWS account to maintain records (logs) of AWS API calls made on your account and you want to be notified anytime an API call is made to create an SNS topic. As API calls are made in your account, CloudTrail writes logs to an Amazon S3 bucket that you configured. In this scenario, you want Amazon S3 to publish the object-created events to AWS Lambda and invoke your Lambda function as CloudTrail creates log objects.

When Amazon S3 invokes your Lambda function, it passes an S3 event identifying, among other things, the bucket name and key name of the object that CloudTrail created. Your Lambda function can read the log object, and it knows the API calls that were reported in the log.

Each object CloudTrail creates in your S3 bucket is a JSON object, with one or more event records. Each record, among other things, provides `eventSource` and `eventName`.

```
{
  "Records": [
    {
      "eventVersion": "1.02",
      "userIdentity": {
        ...
      },
      "eventTime": "2014-12-16T19:17:43Z",
      "eventSource": "sns.amazonaws.com",
      "eventName": "CreateTopic",
      "awsRegion": "us-west-2",
      "sourceIPAddress": "72.21.198.64",
      ...
    },
    {
      ...
    },
    ...
  ]
}
```

For illustration, the Lambda function notifies you by email if an API call to create an Amazon SNS topic is reported in the log. That is, when your Lambda function parses the log, it looks for records with the following:

- `eventSource = "sns.amazonaws.com"`
- `eventName = "CreateTopic"`

If found, it publishes the event to your Amazon SNS topic (you configure this topic to notify you by email).

Implementation Summary

Upon completing this tutorial, you will have Amazon S3, AWS Lambda, Amazon SNS, and AWS Identity and Access Management (IAM) resources in your account:

Note

This tutorial assumes that you create these resources in the `us-west-2` region.

In Lambda:

- A Lambda function.
- An access policy associated with your Lambda function – You grant Amazon S3 permissions to invoke the Lambda function using this permissions policy. You will also restrict the permissions so that Amazon S3 can invoke the Lambda function only for object-created events from a specific bucket that is owned by a specific AWS account.

Note

It is possible for an AWS account to delete a bucket and some other AWS account to later create a bucket with same name. The additional conditions ensure that Amazon S3 can invoke the Lambda function only if Amazon S3 detects object-created events from a specific bucket owned by a specific AWS account.

For more information, see [How It Works \(p. 3\)](#).

In IAM:

- An IAM role (execution role) – You grant permissions that your Lambda function needs through the permissions policy associated with this role.

In Amazon S3:

- A bucket – In this tutorial, the bucket name is `examplebucket`. When you turn the trail on in the CloudTrail console, you specify this bucket for CloudTrail to save the logs.
- Notification configuration on the `examplebucket` – In the configuration, you direct Amazon S3 to publish object-created events to Lambda, by invoking your Lambda function. For more information about the Amazon S3 notification feature, see [Setting Up Notification of Bucket Events](#) in *Amazon Simple Storage Service Developer Guide*.
- Sample CloudTrail log object (`ExampleCloudTrailLog.json`) in `examplebucket` bucket – In the first half of this exercise, you create and test your Lambda function by manually invoking it using a sample S3 event. This sample event identifies `examplebucket` as the bucket name and this sample object key name. Your Lambda function then reads the object and sends you email notifications using an SNS topic.

In Amazon SNS

- An SNS topic – You subscribe to this topic by specifying email as the protocol.

Now you are ready to start the tutorial.

Next Step

[Step 1: Prepare \(p. 164\)](#)

Step 1: Prepare

In this section you do the following:

- Sign up for an AWS account and set up the AWS CLI.
- Turn on CloudTrail in your account.
- Create an SNS topic and subscribe to it.

Follow the steps in the following sections to walk through the setup process.

Note

In this tutorial, we assume that you are setting the resources in the `us-west-2` region.

Step 1.1: Sign Up for AWS and Set Up the AWS CLI

Make sure you have completed the following steps:

- Signed up for an AWS account and created an administrator user in the account (called **adminuser**).
- Installed and set up the AWS CLI.

For instructions, see [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#).

Step 1.2: Turn on CloudTrail

In the AWS CloudTrail console, turn on the trail in your account by specifying `examplebucket` in the `us-west-2` region for CloudTrail to save logs. When configuring the trail, do not enable SNS notification.

For instructions, see [Creating and Updating Your Trail](#) in the *AWS CloudTrail User Guide*.

Note

Although you turn CloudTrail on now, you do not perform any additional configuration for your Lambda function to process the real CloudTrail logs in the first half of this exercise. Instead, you will use sample CloudTrail log objects (that you will upload) and sample S3 events to manually invoke and test your Lambda function. In the second half of this tutorial, you perform additional configuration steps that enable your Lambda function to process the CloudTrail logs.

Step 1.3: Create an SNS Topic and Subscribe to the Topic

Follow the procedure to create an SNS topic in the `us-west-2` region and subscribe to it by providing an email address as the endpoint.

To create and subscribe to a topic

1. Create an SNS topic.

For instructions, see [Create a Topic](#) in the *Amazon Simple Notification Service Developer Guide*.

2. Subscribe to the topic by providing an email address as the endpoint.

For instructions, see [Subscribe to a Topic](#) in the *Amazon Simple Notification Service Developer Guide*.

3. Note down the topic ARN. You will need the value in the following sections.

Next Step

[Step 2: Create a Lambda Function and Invoke It Manually \(Using Sample Event Data\) \(p. 165\)](#)

Step 2: Create a Lambda Function and Invoke It Manually (Using Sample Event Data)

In this section, you do the following:

- Create a Lambda function deployment package using the sample code provided. The sample Lambda function code that you'll use to process Amazon S3 events is provided in various languages. Select one of the languages and follow the corresponding instructions to create a deployment package.

Note

Your Lambda function uses an S3 event that provides the bucket name and key name of the object CloudTrail created. Your Lambda function then reads that object to process CloudTrail records.

- Create an IAM role (execution role). At the time you upload the deployment package, you need to specify an IAM role (execution role) that Lambda can assume to execute the function on your behalf.
- Create the Lambda function by uploading the deployment package, and then test it by invoking it manually using sample CloudTrail event data.

Topics

- [Step 2.1: Create a Deployment Package](#) (p. 165)
- [Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 167)
- [Step 2.3: Create the Lambda Function and Test It Manually](#) (p. 168)

Step 2.1: Create a Deployment Package

The deployment package is a .zip file containing your Lambda function code.

Node.js

1. Open a text editor, and then copy the following code.

```
var aws = require('aws-sdk');
var zlib = require('zlib');
var async = require('async');

var EVENT_SOURCE_TO_TRACK = /sns.amazonaws.com/;
var EVENT_NAME_TO_TRACK = /CreateTopic/;
var DEFAULT_SNS_REGION = 'us-west-2';
var SNS_TOPIC_ARN = 'SNS Topic ARN';

var s3 = new aws.S3();
var sns = new aws.SNS({
  apiVersion: '2010-03-31',
  region: DEFAULT_SNS_REGION
});

exports.handler = function(event, context, callback) {
  var srcBucket = event.Records[0].s3.bucket.name;
  var srcKey = event.Records[0].s3.object.key;

  async.waterfall([
    function fetchLogFromS3(next) {
      console.log('Fetching compressed log from S3...');
      s3.getObject({
```

```
        Bucket: srcBucket,
        Key: srcKey
    },
    next);
},
function uncompressLog(response, next){
    console.log("Uncompressing log...");
    zlib.gunzip(response.Body, next);
},
function publishNotifications(jsonBuffer, next) {
    console.log('Filtering log...');
    var json = jsonBuffer.toString();
    console.log('CloudTrail JSON from S3:', json);
    var records;
    try {
        records = JSON.parse(json);
    } catch (err) {
        next('Unable to parse CloudTrail JSON: ' + err);
        return;
    }
    var matchingRecords = records
        .Records
        .filter(function(record) {
            return record.eventSource.match(EVENT_SOURCE_TO_TRACK)
                && record.eventName.match(EVENT_NAME_TO_TRACK);
        });

    console.log('Publishing ' + matchingRecords.length + ' notification(s) in parallel...');
    async.each(
        matchingRecords,
        function(record, publishComplete) {
            console.log('Publishing notification: ', record);
            sns.publish({
                Message:
                    'Alert... SNS topic created: \n TopicARN=' +
                    record.responseElements.topicArn + '\n\n' +
                    JSON.stringify(record),
                TopicArn: SNS_TOPIC_ARN
            }, publishComplete);
        },
        next
    );
},
function (err) {
    if (err) {
        console.error('Failed to publish notifications: ', err);
    } else {
        console.log('Successfully published all notifications.');
```

Note

The code sample is compliant with the Node.js runtime v4.3. For more information, see [Programming Model \(Node.js\)](#) (p. 51)

2. Save the file as `CloudTrailEventProcessing.js`.
3. Zip the `CloudTrailEventProcessing.js` file as `CloudTrailEventProcessing.zip`.

Note

We're using Node.js in this tutorial example, but you can author your Lambda functions in Java or Python too.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 167\)](#)

Step 2.2: Create the Execution Role (IAM Role)

Now you create an IAM role (execution role) that you specify when creating your Lambda function. This role has a permissions policy that grant the necessary permissions that your Lambda function needs, such as permissions to write CloudWatch logs, permissions to read CloudTrail log objects from an S3 bucket, and permissions to publish events to your SNS topic when your Lambda function finds specific API calls in the CloudTrail records.

For more information about the execution role, see [Manage Permissions: Using an IAM Role \(Execution Role\) \(p. 31\)](#).

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. Create a managed policy and attach it to the IAM role. In this step, you modify an existing AWS Managed Policy, save it using a different name, and then attach the permissions policy to an IAM role that you create.
 - a. In the navigation pane of the IAM console, choose **Policies**, and then choose **Create Policy**.
 - b. Next to **Copy an AWS Managed Policy**, choose **Select**.
 - c. Next to **AWSLambdaExecute**, choose **Select**.
 - d. Copy the following policy into the **Policy Document**, replacing the existing policy, and then update the policy with the ARN of the Amazon SNS topic that you created.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "logs:*"
      ],
      "Resource": "arn:aws:logs:*:*:*"
    },
    {
      "Effect": "Allow",
      "Action": [
        "s3:GetObject"
      ],
      "Resource": "arn:aws:s3:::examplebucket/*"
    },
    {
      "Effect": "Allow",
      "Action": [
```

```
        "sns:Publish"
      ],
      "Resource": "your sns topic ARN"
    }
  ]
}
```

3. Note the permissions policy name because you will use it in the next step.
4. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role and then attach the permissions policy you just created to the role. As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-cloudtrail-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**.
 - In **Attach Policy**, choose the policy you created in the previous step.

Next Step

[Step 2.3: Create the Lambda Function and Test It Manually \(p. 168\)](#)

Step 2.3: Create the Lambda Function and Test It Manually

In this section, you do the following:

- Create a Lambda function by uploading the deployment package.
- Test the Lambda function by invoking it manually.

In this step, you use a sample S3 event that identifies your bucket name and the sample object (that is, an example CloudTrail log). In the next section you configure your S3 bucket notification to publish object-created events and test the end-to-end experience.

Step 2.3.1: Create the Lambda Function (Upload the Deployment Package)

In this step, you upload the deployment package using the AWS CLI and provide configuration information when you create the Lambda function. At the command prompt, run the following Lambda CLI `create-function` command using the `adminuser` profile.

Note

You need to update the command by providing the `.zip` file path (`//file-path/CloudTrailEventProcessing.zip \`) and the execution role ARN (`execution-role-arn`). If you used the sample code provided earlier in this tutorial, set the `--runtime` parameter value to `node.js`.

You can author your Lambda functions in Java or Python too. If you use another language, change the `--runtime` parameter value to `java8` or `python2.7` as needed.

```
$ aws lambda create-function \
--region us-west-2 \
--function-name CloudTrailEventProcessing \
--zip-file fileb://file-path/CloudTrailEventProcessing.zip \
--role execution-role-arn \
```

```
--handler CloudTrailEventProcessing.handler \  
--runtime nodejs4.3 \  
--profile adminuser \  
--timeout 10 \  
--memory-size 1024
```

Optionally, you can upload the .zip file to an Amazon S3 bucket in the same AWS region, and then specify the bucket and object name in the preceding command. You need to replace the `--zip-file` parameter by the `--code` parameter as shown:

```
--code S3Bucket=bucket-name,S3Key=zip-file-object-key
```

Note

You can create the Lambda function using the AWS Lambda console, in which case note the value of the `create-function` AWS CLI command parameters. You provide the same values in the console.

Step 2.3.2: Test the Lambda Function (Invoke Manually)

In this section, you invoke the Lambda function manually using sample Amazon S3 event data. When the Lambda function executes, it reads the S3 object (a sample CloudTrail log) from the bucket identified in the S3 event data, and then it publishes an event to your SNS topic if the sample CloudTrail log reports use a specific API. For this tutorial, the API is the SNS API used to create a topic. That is, the CloudTrail log reports a record identifying `sns.amazonaws.com` as the `eventSource`, and `CreateTopic` as the `eventName`.

1. Save the following sample CloudTrail log to a file (`ExampleCloudTrailLog.json`).

Note

Note that one of events in this log has `sns.amazonaws.com` as the `eventSource` and `CreateTopic` as the `eventName`. Your Lambda function reads the logs and if it finds an event of this type, it publishes the event to the Amazon SNS topic that you created and then you receive one email when you invoke the Lambda function manually.

```
{  
  "Records": [  
    {  
      "eventVersion": "1.02",  
      "userIdentity": {  
        "type": "Root",  
        "principalId": "account-id",  
        "arn": "arn:aws:iam::account-id:root",  
        "accountId": "account-id",  
        "accessKeyId": "access-key-id",  
        "sessionContext": {  
          "attributes": {  
            "mfaAuthenticated": "false",  
            "creationDate": "2015-01-24T22:41:54Z"  
          }  
        }  
      },  
      "eventTime": "2015-01-24T23:26:50Z",  
      "eventSource": "sns.amazonaws.com",  
      "eventName": "CreateTopic",  
      "awsRegion": "us-west-2",  
      "sourceIPAddress": "205.251.233.176",  
    }  
  ]  
}
```

```
    "userAgent": "console.amazonaws.com",
    "requestParameters": {
      "name": "dropmeplease"
    },
    "responseElements": {
      "topicArn": "arn:aws:sns:us-west-2:account-id:exampletopic"
    },
    "requestID": "3fdb7834-9079-557e-8ef2-350abc03536b",
    "eventID": "17b46459-dada-4278-b8e2-5a4ca9ff1a9c",
    "eventType": "AwsApiCall",
    "recipientAccountId": "account-id"
  },
  {
    "eventVersion": "1.02",
    "userIdentity": {
      "type": "Root",
      "principalId": "account-id",
      "arn": "arn:aws:iam::account-id:root",
      "accountId": "account-id",
      "accessKeyId": "access-key-id",
      "sessionContext": {
        "attributes": {
          "mfaAuthenticated": "false",
          "creationDate": "2015-01-24T22:41:54Z"
        }
      }
    },
    "eventTime": "2015-01-24T23:27:02Z",
    "eventSource": "sns.amazonaws.com",
    "eventName": "GetTopicAttributes",
    "awsRegion": "us-west-2",
    "sourceIPAddress": "205.251.233.176",
    "userAgent": "console.amazonaws.com",
    "requestParameters": {
      "topicArn": "arn:aws:sns:us-west-2:account-id:exampletopic"
    },
    "responseElements": null,
    "requestID": "4a0388f7-a0af-5df9-9587-c5c98c29cbec",
    "eventID": "ec5bb073-8fa1-4d45-b03c-f07b9fc9ea18",
    "eventType": "AwsApiCall",
    "recipientAccountId": "account-id"
  }
]
```

2. Run the `gzip` command to create a `.gz` file from the preceding source file.

```
$ gzip ExampleCloudTrailLog.json
```

This creates `ExampleCloudTrailLog.json.gz` file.

3. Upload the `ExampleCloudTrailLog.json.gz` file to the *examplebucket* that you specified in the CloudTrail configuration.

This object is specified in the sample Amazon S3 event data that we use to manually invoke the Lambda function.

4. Save the following JSON (an example S3 event) in a file, `input.txt`. Note the bucket name and the object key name values.

You provide this sample event when you invoke your Lambda function. For more information about the S3 event structure, see [Event Message Structure](#) in the *Amazon Simple Storage Service Developer Guide*.

```
{
  "Records": [
    {
      "eventVersion": "2.0",
      "eventSource": "aws:s3",
      "awsRegion": "us-west-2",
      "eventTime": "1970-01-01T00:00:00.000Z",
      "eventName": "ObjectCreated:Put",
      "userIdentity": {
        "principalId": "AIDAJDPLRKL7UEXAMPLE"
      },
      "requestParameters": {
        "sourceIPAddress": "127.0.0.1"
      },
      "responseElements": {
        "x-amz-request-id": "C3D13FE58DE4C810",
        "x-amz-id-2": "FMjUVURIY8/IgAtTv8xRjskZQpcIZ9KG4V5Wp6S7S/JR
WeUWerMUE5JgHvANOjpD"
      },
      "s3": {
        "s3SchemaVersion": "1.0",
        "configurationId": "testConfigRule",
        "bucket": {
          "name": "your bucket name",
          "ownerIdentity": {
            "principalId": "A3NL1KOZZKExample"
          },
          "arn": "arn:aws:s3:::mybucket"
        },
        "object": {
          "key": "ExampleCloudTrailLog.json.gz",
          "size": 1024,
          "eTag": "d41d8cd98f00b204e9800998ecf8427e",
          "versionId": "096fKKXTRTtl3on89fVO.nfljtsv6qko"
        }
      }
    }
  ]
}
```

5. In the AWS Management Console, invoke the function manually using sample Amazon S3 event data. For instructions, see the Getting Started exercise [Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics \(p. 42\)](#). In the console, use the following sample Amazon S3 event data.

Note

We recommend that you invoke the function using the console because the console UI provides a user-friendly interface for reviewing the execution results, including the execution summary, logs written by your code, and the results returned by the function (because the console always performs synchronous execution—invokes the Lambda function using the `RequestResponse` invocation type).

```
{
  "Records": [
    {
      "eventVersion": "2.0",
      "eventSource": "aws:s3",
      "awsRegion": "us-west-2",
      "eventTime": "1970-01-01T00:00:00.000Z",
      "eventName": "ObjectCreated:Put",
      "userIdentity": {
        "principalId": "AIDAJDPLRKL7UEEXAMPLE"
      },
      "requestParameters": {
        "sourceIPAddress": "127.0.0.1"
      },
      "responseElements": {
        "x-amz-request-id": "C3D13FE58DE4C810",
        "x-amz-id-2": "FMMyUVURIY8/IgAtTv8xRjskZQpcIZ9KG4V5Wp6S7S/JR
WeUWerMUE5JgHvANOjpD"
      },
      "s3": {
        "s3SchemaVersion": "1.0",
        "configurationId": "testConfigRule",
        "bucket": {
          "name": "your bucket name",
          "ownerIdentity": {
            "principalId": "A3NL1KOZZKExample"
          },
          "arn": "arn:aws:s3:::mybucket"
        },
        "object": {
          "key": "ExampleCloudTrailLog.json.gz",
          "size": 1024,
          "eTag": "d41d8cd98f00b204e9800998ecf8427e",
          "versionId": "096fKKXTRTtl3on89fVO.nfljtsv6qko"
        }
      }
    }
  ]
}
```

6. Execute the following AWS CLI command to invoke the function manually using the adminuser profile.

```
$ aws lambda invoke-async \
  --function-name CloudTrailEventProcessing \
  --region us-west-2 \
  --invoke-args /filepath/input.txt \
  --debug \
  --profile adminuser
```

Because your example log object has an event record showing the SNS API to call to create a topic, the Lambda function posts that event to your SNS topic, and you should get an email notification.

You can monitor the activity of your Lambda function by using CloudWatch metrics and logs. For more information about CloudWatch monitoring, see [Troubleshooting and Monitoring AWS Lambda Functions with Amazon CloudWatch](#) (p. 118).

7. (Optional) Manually invoke the Lambda function using AWS CLI as follows:
 - a. Save the JSON from Step 2 earlier in this procedure to a file called `input.txt`.
 - b. Execute the following invoke command:

```
$ aws lambda invoke \
--invocation-type Event \
--function-name CloudTrailEventProcessing \
--region us-west-2 \
--payload file://file-path/input.txt \
--profile adminuser
outputfile.txt
```

Note

In this tutorial example, the message is saved in the `outputfile.txt` file. If you request synchronous execution (`RequestResponse` as the invocation type), the function returns the string message in the response body.

For Node.js, it could be one of the following (whatever one you specify in the code):

```
context.succeed("message")
context.fail("message")
context.done(null, "message")
```

For Python or Java, it is the message in the return statement:

```
return "message"
```

Next Step

[Step 3: Add Event Source \(Configure Amazon S3 to Publish Events\) \(p. 173\)](#)

Step 3: Add Event Source (Configure Amazon S3 to Publish Events)

In this section, you add the remaining configuration so Amazon S3 can publish object-created events to AWS Lambda and invoke your Lambda function. You will do the following:

- Add permissions to the Lambda function's access policy to allow Amazon S3 to invoke the function.
- Add notification configuration to your source bucket. In the notification configuration, you provide the following:
 - Event type for which you want Amazon S3 to publish events. For this tutorial, you specify the `s3:ObjectCreated:*` event type.
 - Lambda function to invoke.

Step 3.1: Add Permissions to the Lambda Function's Access Permissions Policy

1. Run the following Lambda CLI `add-permission` command to grant Amazon S3 service principal (`s3.amazonaws.com`) permissions to perform the `lambda:InvokeFunction` action. Note that permission is granted to Amazon S3 to invoke the function only if the following conditions are met:
 - An object-created event is detected on a specific bucket.

- The bucket is owned by a specific AWS account. If a bucket owner deletes a bucket, some other AWS account can create a bucket with the same name. This condition ensures that only a specific AWS account can invoke your Lambda function.

```
$ aws lambda add-permission \  
--function-name CloudTrailEventProcessing \  
--region us-west-2 \  
--statement-id Id-1 \  
--action "lambda:InvokeFunction" \  
--principal s3.amazonaws.com \  
--source-arn arn:aws:s3:::examplebucket \  
--source-account examplebucket-owner-account-id \  
--profile adminuser
```

2. Verify the function's access policy by running the AWS CLI `get-policy` command.

```
$ aws lambda get-policy \  
--function-name function-name \  
--profile adminuser
```

Step 3.2: Configure Notification on the Bucket

Add notification configuration on the *examplebucket* to request Amazon S3 to publish object-created events to Lambda. In the configuration, you specify the following:

- Event type – For this tutorial, these can be any event types that create objects.
- Lambda function ARN – This is your Lambda function that you want Amazon S3 to invoke. The ARN is of the following form:

```
arn:aws:lambda:aws-region:account-id:function:function-name
```

For example, the function `CloudTrailEventProcessing` created in `us-west-2` region has the following ARN:

```
arn:aws:lambda:us-west-2:account-id:function:CloudTrailEventProcessing
```

For instructions on adding notification configuration to a bucket, see [Enabling Event Notifications](#) in the *Amazon Simple Storage Service Console User Guide*.


Step 3.3: Test the Setup

You're all done! Now you can test the setup as follows:

1. Perform some action in your AWS account. For example, add another topic in the Amazon SNS console.
2. You receive an email notification about this event.
3. AWS CloudTrail creates a log object in your bucket.
4. If you open the log object (.gz file), the log shows the `CreateTopic` SNS event.
5. For each object AWS CloudTrail creates, Amazon S3 invokes your Lambda function by passing in the log object as event data.

- Lambda executes your function. The function parses the log, finds a `CreateTopic` SNS event, and then you receive an email notification.

You can monitor the activity of your Lambda function by using CloudWatch metrics and logs. For more information about CloudWatch monitoring, see [Troubleshooting and Monitoring AWS Lambda Functions with Amazon CloudWatch](#) (p. 118).

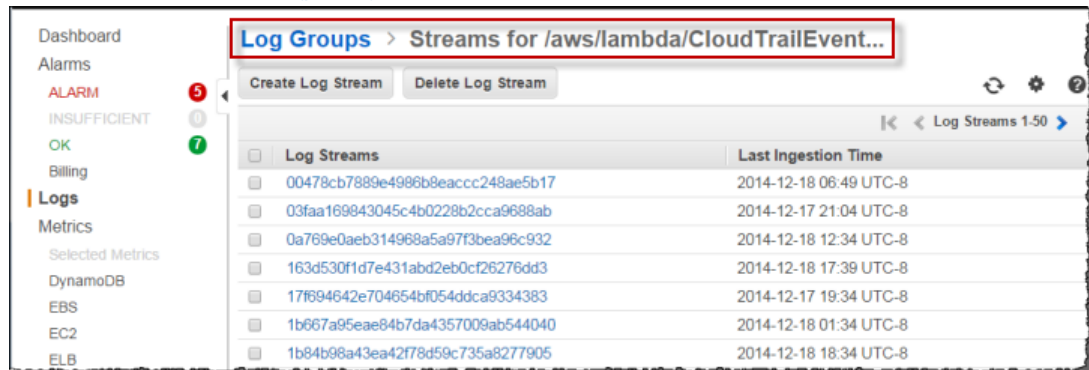

Using AWS Lambda with Amazon SNS from Different Accounts

In order to perform cross account Amazon SNS deliveries to Lambda, you need to authorize your Lambda function to be invoked from Amazon SNS. In turn, Amazon SNS needs to allow the Lambda account to subscribe to the Amazon SNS topic. For example, if the Amazon SNS topic is in account A and the Lambda function is in account B, both accounts must grant permissions to the other to access their respective resources. Since not all the options for setting up cross-account permissions are available from the AWS console, you use the AWS CLI to set up the entire process.

For a tutorial that walks you through an example setup, see [Tutorial: Using AWS Lambda with Amazon SNS](#) (p. 175).

Tutorial: Using AWS Lambda with Amazon SNS

In this tutorial, you create a Lambda function in one AWS account to subscribe to an Amazon SNS topic in a separate AWS account.

The tutorial is divided into three main sections:

- First, you perform the necessary setup to create a Lambda function.
- Second, you create an Amazon SNS topic in a separate AWS account.
- Third, you grant permissions from each account in order for the Lambda function to subscribe to the Amazon SNS topic. Then, you test the end-to-end setup.

Important

This tutorial assumes that you create these resources in the `us-east-1` region.

In this tutorial, you use the AWS Command Line Interface to perform AWS Lambda operations such as creating a Lambda function, creating an Amazon SNS topic and granting permissions to allow these two resources to access each other.

Next Step

[Step 1: Prepare \(p. 176\)](#)

Step 1: Prepare

- Sign up for an AWS account and create an administrator user in the account (called **adminuser**).
- Install and set up the AWS CLI.

For instructions, see [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#).

Next Step

[Step 2: Create a Lambda Function \(p. 176\)](#)

Step 2: Create a Lambda Function

In this section, you do the following:

- Create a Lambda function deployment package using the sample code provided. The sample Lambda function code that you'll use to subscribe to an Amazon SNS topic is provided in various languages. Select one of the languages and follow the corresponding instructions to create a deployment package.
- Create an IAM role (execution role). At the time you upload the deployment package, you need to specify an IAM role (execution role) that Lambda can assume to execute the function on your behalf.

Topics

- [Step 2.1: Create a Lambda Function Deployment Package \(p. 176\)](#)
- [Step 2.2: Create the Execution Role \(IAM Role\) \(p. 178\)](#)

Step 2.1: Create a Lambda Function Deployment Package

From the **Filter View** list, choose the language you want to use for your Lambda function. The appropriate section appears with code and specific instructions for creating a deployment package.

Node.js

1. Open a text editor, and then copy the following code.

```
console.log('Loading function');

exports.handler = function(event, context, callback) {
  // console.log('Received event:', JSON.stringify(event, null, 4));

  var message = event.Records[0].Sns.Message;
  console.log('Message received from SNS:', message);
  callback(null, "Success");
};
```

Note

The code sample is compliant with the Node.js runtime v4.3. For more information, see [Programming Model \(Node.js\) \(p. 51\)](#)

2. Save the file as `index.js`.

3. Zip the `index.js` file as `LambdaWithSNS.zip`.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 178\)](#)

Java

Open a text editor, and then copy the following code.

```
package example;

import java.text.SimpleDateFormat;
import java.util.Calendar;

import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.events.SNSEvent;

public class LogEvent implements RequestHandler<SNSEvent, Object> {
    public Object handleRequest(SNSEvent request, Context context){
        String timeStamp = new SimpleDateFormat("yyyy-MM-dd_HH:mm:ss").format(Calendar.getInstance().getTime());
        context.getLogger().log("Invocation started: " + timeStamp);

        context.getLogger().log(request.getRecords().get(0).getSNS().getMessage());

        timeStamp = new SimpleDateFormat("yyyy-MM-dd_HH:mm:ss").format(Calendar.getInstance().getTime());
        context.getLogger().log("Invocation completed: " + timeStamp);
        return null;
    }
}
```

Using the preceding code (in a file named `LambdaWithSNS.java`), create a deployment package. Make sure that you add the following dependencies:

- `aws-lambda-java-core`
- `aws-lambda-java-events`

For more information, see [Programming Model for Authoring Lambda Functions in Java \(p. 63\)](#).

Your deployment package can be a `.zip` file or a standalone `.jar`. You can use any build and packaging tool you are familiar with to create a deployment package. For examples of how to use the Maven build tool to create a standalone `.jar`, see [Creating a .jar Deployment Package Using Maven without any IDE \(Java\) \(p. 91\)](#) and [Creating a .jar Deployment Package Using Maven and Eclipse IDE \(Java\) \(p. 93\)](#). For an example of how to use the Gradle build tool to create a `.zip` file, see [Creating a .zip Deployment Package \(Java\) \(p. 96\)](#).

After you verify that your deployment package is created, go to the next step to create an IAM role (execution role). You specify this role at the time you create your Lambda function.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 178\)](#)

Python

1. Open a text editor, and then copy the following code.

```
from __future__ import print_function
import json
print('Loading function')

def lambda_handler(event, context):
    #print("Received event: " + json.dumps(event, indent=2))
    message = event['Records'][0]['Sns']['Message']
    print("From SNS: " + message)
    return message
```

2. Save the file as `lambda_handler.py`.
3. Zip the `lambda_handler.py` file as `LambdaWithSNS.zip`.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 178\)](#)

Step 2.2: Create the Execution Role (IAM Role)

In this section, you create an IAM role using the following predefined role type and access policy:

- AWS service role of the type **AWS Lambda** – This role grants AWS Lambda permissions to assume the role.
- **AWSLambdaBasicExecutionRole** – This is the access permissions policy that you attach to the role.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. Use the following procedure to create the IAM role.

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-sns-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**. This grants the AWS Lambda service permissions to assume the role.
 - In **Attach Policy**, choose **AWSLambdaBasicExecutionRole**. The permissions in this policy are sufficient for the Lambda function in this tutorial.
3. Write down the role ARN. You will need it in the next step when you create your Lambda function.

Step 3: Set Up Cross-Account Permissions

In this section, you use CLI commands to set permissions across the Lambda function account and the Amazon SNS topic account and then test the subscription.

1. From account A, create the Amazon SNS topic:

```
aws sns create-topic \  
  --name lambda-x-account
```

Note the topic arn that is returned by the command. You will need it when you add permissions to the Lambda function to subscribe to the topic.

2. From account B, create the Lambda function. For the runtime parameter, select either `nodejs4.3`, `python2.7` or `java8`, depending on the code sample you selected when you created your deployment package.

```
aws lambda create-function \  
  --function-name SNS-X-Account \  
  --runtime runtime language \  
  --role role arn \  
  --handler index.handler \  
  --description "SNS X Account Test Function" \  
  --timeout 60 \  
  --memory-size 128 \  
  --zip-file fileb://path/LambdaWithSNS.zip
```

Note the function arn that is returned by the command. You will need it when you add permissions to allow Amazon SNS to invoke your function.

3. From account A add permission to account B to subscribe to the topic:

```
aws sns add-permission \  
  --region us-east-1 \  
  --topic-arn Amazon SNS topic arn \  
  --label lambda-access \  
  --aws-account-id B \  
  --action-name Subscribe ListSubscriptionsByTopic Receive
```

4. From account B add the Lambda permission to allow invocation from Amazon SNS:

```
aws lambda add-permission \  
  --function-name SNS-X-Account \  
  --statement-id sns-x-account \  
  --action "lambda:InvokeFunction" \  
  --principal sns.amazonaws.com \  
  --source-arn Amazon SNS topic arn
```

In response, Lambda returns the following JSON code. The Statement value is a JSON string version of the statement added to the Lambda function policy:

```
{  
  "Statement": "{ \"Condition\": { \"Arn  
Like\": { \"AWS:SourceArn\": \"arn:aws:lambda:us-east-1:B:function:SNS-X-Ac  
count\" } }, \"Action\": [ \"lambda:InvokeFunction\" ], \"Re  
source\": \"arn:aws:lambda:us-east-1:A:function:SNS-X-Account\", \"Effect\": \"Al  
low\", \"Principal\": { \"Service\": \"sns.amazonaws.com\" }, \"Sid\": \"sns-x-ac  
count1\" } }"  
}
```

Note

Do not use the `--source-account` parameter to add a source account to the Lambda policy when adding the policy. Source account is not supported for Amazon SNS event sources and will result in access being denied. This has no security impact as the source account is included in the source ARN.

5. From account B subscribe the Lambda function to the topic:

```
aws sns subscribe \  
  --topic-arn Amazon SNS topic arn \  
  --protocol lambda \  
  --notification-endpoint arn:aws:lambda:us-east-1:B:function:SNS-X-Account
```

You should see JSON output similar to the following:

```
{  
  "SubscriptionArn": "arn:aws:sns:us-east-1:A:lambda-x-account:5d906xxxx-  
7c8x-45dx-a9dx-0484e31c98xx"  
}
```

6. From account A you can now test the subscription. Type "Hello World" into a text file and save it as `message.txt`. Then run the following command:

```
aws sns publish \  
  --topic-arn arn:aws:sns:us-east-1:A:lambda-x-account \  
  --message file://message.txt \  
  --subject Test
```

This will return a message id with a unique identifier, indicating the message has been accepted by the Amazon SNS service. Amazon SNS will then attempt to deliver it to the topic's subscribers.

Note

Alternatively, you could supply a JSON string directly to the `message` parameter, but using a text file allows for line breaks in the message.

For more information on Amazon SNS, see [What is Amazon Simple Notification Service?](#)

Using AWS Lambda with Amazon API Gateway (On-Demand Over HTTPS)

You can invoke AWS Lambda functions over HTTPS. You can do this by defining a custom REST API and endpoint using Amazon API Gateway (see <http://aws.amazon.com/api-gateway/>), and then mapping individual methods, such as `GET` and `PUT`, to specific Lambda functions. When you send an HTTPS request to the API endpoint, the Amazon API Gateway service invokes the corresponding Lambda function.

Amazon API Gateway also adds a layer between your application users and your app logic that enables the following:

- Ability to throttle individual users or requests.
- Protect against Distributed Denial of Service attacks.
- Provide a caching layer to cache response from your Lambda function.

Note the following about how the Amazon API Gateway and AWS Lambda integration works:

- **Push-event model** – This is a model (see [Event Source Mapping \(p. 10\)](#)), where Amazon API Gateway invokes the Lambda function by passing data in the request body as parameter to the Lambda function.
- **Synchronous invocation** – The Amazon API Gateway can invoke the Lambda function and get a response back in real time by specifying `RequestResponse` as the invocation type. For information about invocation types, see [Invocation Types \(p. 9\)](#).
- **Event structure** – The event your Lambda function receives is the body from the HTTPS request that Amazon API Gateway receives and your Lambda function is the custom code written to process the specific event type.

Note that there are two types of permissions policies that you work with when you set up the end-to-end experience:

- **Permissions for your Lambda function** – Regardless of what invokes a Lambda function, AWS Lambda executes the function by assuming the IAM role (execution role) that you specify at the time you create the Lambda function. Using the permissions policy associated with this role, you grant your Lambda function the permissions that it needs. For example, if your Lambda function needs to read an object, you grant permissions for the relevant Amazon S3 actions in the permissions policy. For more information, see [Manage Permissions: Using an IAM Role \(Execution Role\) \(p. 31\)](#).
- **Permission for Amazon API Gateway to invoke your Lambda function** – Amazon API Gateway cannot invoke your Lambda function without your permission. You grant this permission via the permission policy associated with the Lambda function.

For a tutorial that walks you through an example setup, see [Tutorial: Using AWS Lambda with Amazon API Gateway \(On-Demand Over HTTPS\) \(p. 181\)](#).

Tutorial: Using AWS Lambda with Amazon API Gateway (On-Demand Over HTTPS)

In this example you create a simple API (`DynamoDBOperations`) using Amazon API Gateway. An Amazon API Gateway is a collection of resources and methods. For this tutorial, you create one resource (`DynamoDBManager`) and define one method (`POST`) on it. The method is backed by a Lambda function (`LambdaFunctionForAPIGateway`). That is, when you invoke the method through an HTTPS endpoint, Amazon API Gateway invokes the Lambda function.

The `POST` method on the `DynamoDBManager` resource supports the following DynamoDB operations:

- Create, update, and delete an item.
- Read an item.
- Scan an item.
- Other operations (echo, ping), not related to DynamoDB, that you can use for testing.

The request payload you send in the `POST` request identifies the DynamoDB operation and provides necessary data. For example:

- The following is a sample request payload for a DynamoDB put item operation:

```
{
  "operation": "create",
  "tableName": "LambdaTable",
  "payload": {
```

```
        "Item": {
            "Id": "1",
            "name": "Bob"
        }
    }
}
```

- The following is a sample request payload for a DynamoDB read item operation:

```
{
  "operation": "read",
  "tableName": "LambdaTable",
  "payload": {
    "Key": {
      "Id": "1"
    }
  }
}
```

- The following is a sample request payload for a the `echo` operation. You will then send HTTPS PUT request to the endpoint, using the following data in the request body.

```
{
  "operation": "echo",
  "payload": {
    "somekey1": "somevalue1",
    "somekey2": "somevalue2"
  }
}
```

You can also create and manage API endpoints from the AWS Lambda console. For example, search for the **microservice** in the blueprints. This tutorial does not use the console, instead it uses AWS CLI to provide you with more details of how the API works.

Next Step

[Step 1: Prepare \(p. 182\)](#)

Step 1: Prepare

Make sure you have completed the following steps:

- Signed up for an AWS account and created an administrator user in the account.
- Installed and set up the AWS CLI.

For instructions, see [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#).

Important

This example uses the `us-east-1` region to create an API using Amazon API Gateway and a Lambda function.

Next Step

[Step 2: Create a Lambda Function and Test It Manually \(p. 183\)](#)

Step 2: Create a Lambda Function and Test It Manually

In this section, you do the following:

- Create a Lambda function deployment package using the sample code provided.
- Create an IAM role (execution role). At the time you upload the deployment package, you need to specify an IAM role (execution role) that Lambda can assume to execute the function on your behalf.
- Create the Lambda function and then test it manually.

Topics

- [Step 2.1: Create a Deployment Package \(p. 183\)](#)
- [Step 2.2: Create the Execution Role \(IAM Role\) \(p. 185\)](#)
- [Step 2.3: Create the Lambda Function and Test It Manually \(p. 186\)](#)

Step 2.1: Create a Deployment Package

From the **Filter View** list, choose the language you want to use for your Lambda function. The appropriate section appears with code and specific instructions for creating a deployment package.

Node.js

Follow the instructions to create a AWS Lambda function deployment package.

1. Open a text editor, and then copy the following code.

```
console.log('Loading function');

var doc = require('dynamodb-doc');
var dynamo = new doc.DynamoDB();

/**
 * Provide an event that contains the following keys:
 *
 * - operation: one of the operations in the switch statement below
 * - tableName: required for operations that interact with DynamoDB
 * - payload: a parameter to pass to the operation being performed
 */
exports.handler = function(event, context, callback) {
    //console.log('Received event:', JSON.stringify(event, null, 2));

    var operation = event.operation;

    if (event.tableName) {
        event.payload.TableName = event.tableName;
    }

    switch (operation) {
        case 'create':
            dynamo.putItem(event.payload, callback);
            break;
        case 'read':
```

```
        dynamo.getItem(event.payload, callback);
        break;
    case 'update':
        dynamo.updateItem(event.payload, callback);
        break;
    case 'delete':
        dynamo.deleteItem(event.payload, callback);
        break;
    case 'list':
        dynamo.scan(event.payload, callback);
        break;
    case 'echo':
        callback(null, "Success");
        break;
    case 'ping':
        callback(null, "pong");
        break;
    default:
        callback('Unknown operation: ${operation}');
    }
};
```

Note

The code sample is compliant with the Node.js runtime v4.3. For more information, see [Programming Model \(Node.js\) \(p. 51\)](#)

2. Save the file as `LambdaFunctionOverHttps.js`.
3. Zip the `LambdaFunctionOverHttps.js` file as `LambdaFunctionOverHttps.zip`.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 185\)](#)

Python

Follow the instructions to create AWS Lambda function deployment package.

1. Open a text editor, and then copy the following code.

```
from __future__ import print_function

import boto3
import json

print('Loading function')

def handler(event, context):
    '''Provide an event that contains the following keys:

    - operation: one of the operations in the operations dict below
    - tableName: required for operations that interact with DynamoDB
    - payload: a parameter to pass to the operation being performed
    '''
    #print("Received event: " + json.dumps(event, indent=2))
```

```
operation = event['operation']

if 'tableName' in event:
    dynamo = boto3.resource('dynamodb').Table(event['tableName'])

operations = {
    'create': lambda x: dynamo.put_item(**x),
    'read': lambda x: dynamo.get_item(**x),
    'update': lambda x: dynamo.update_item(**x),
    'delete': lambda x: dynamo.delete_item(**x),
    'list': lambda x: dynamo.scan(**x),
    'echo': lambda x: x,
    'ping': lambda x: 'pong'
}

if operation in operations:
    return operations[operation](event.get('payload'))
else:
    raise ValueError('Unrecognized operation {}'.format(operation))
```

2. Save the file as `LambdaFunctionOverHttps.py`.
3. Zip the `LambdaFunctionOverHttps.py` file as `LambdaFunctionOverHttps.zip`.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 185)

Step 2.2: Create the Execution Role (IAM Role)

In this section, you create an IAM role using the following predefined role type:

- AWS service role of the type **AWS Lambda** – This role grants AWS Lambda permissions to assume the role.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. Use the following procedure to create the IAM role.

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-gateway-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**. This grants the AWS Lambda service permissions to assume the role.
 - You create an IAM role without attaching a permissions policy in the console. After you create the role, you update the role, and then attach the following permissions policy to the role.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "Stmt1428341300017",
      "Action": [
        "dynamodb:DeleteItem",
        "dynamodb:GetItem",
        "dynamodb:PutItem",
        "dynamodb:Query",
        "dynamodb:Scan",
        "dynamodb:UpdateItem"
      ],
      "Effect": "Allow",
      "Resource": "*"
    },
    {
      "Sid": "",
      "Resource": "*",
      "Action": [
        "logs:CreateLogGroup",
        "logs:CreateLogStream",
        "logs:PutLogEvents"
      ],
      "Effect": "Allow"
    }
  ]
}
```

3. Write down the role ARN (Amazon Resource Name). You need it in the next step when you create your Lambda function.

Next Step

[Step 2.3: Create the Lambda Function and Test It Manually \(p. 186\)](#)

Step 2.3: Create the Lambda Function and Test It Manually

In this section, you do the following:

- Create a Lambda function by uploading the deployment package.
- Test the Lambda function by invoking it manually and passing sample event data.

Step 2.3.1: Create a Lambda Function (Upload the Deployment Package)

In this step, you upload the deployment package using the AWS CLI.

At the command prompt, run the following Lambda CLI `create-function` command using the **adminuser** profile.

You need to update the command by providing the .zip file path and the execution role ARN. The `--runtime` parameter value can be `python2.7`, `nodejs4.3`, or `java8`, depending on the language you used to author your code.


```
$ aws lambda create-function \
--region us-east-1 \
--function-name LambdaFunctionOverHttps \
--zip-file fileb://file-path/LambdaFunctionOverHttps.zip \
--role execution-role-arn \
--handler LambdaFunctionOverHttps.handler \
--runtime runtime-value \
--profile adminuser
```

Optionally, you can upload the .zip file to an Amazon S3 bucket in the same AWS region, and then specify the bucket and object name in the preceding command. You need to replace the `--zip-file` parameter by the `--code` parameter, as shown following:

```
--code S3Bucket=bucket-name,S3Key=zip-file-object-key
```

Note

You can create the Lambda function using the AWS Lambda console, in which case note the value of the `create-function` AWS CLI command parameters. You provide the same values in the console UI.

Step 2.3.2: Test the Lambda Function (Invoke Manually)

Invoke the function manually using the sample event data. We recommend that you invoke the function using the console because the console UI provides a user-friendly interface for reviewing the execution results, including the execution summary, logs written by your code, and the results returned by the function (because the console always performs synchronous execution—invokes the Lambda function using the `RequestResponse` invocation type).

To test the Lambda function (AWS Management Console)

1. Follow the steps in the Getting Started exercise to create and invoke the Lambda function at [Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics \(p. 42\)](#). For the sample event for testing, choose **Hello World** in **Sample event template**, and then replace the data using the following:

```
{
  "operation": "echo",
  "payload": {
    "somekey1": "somevalue1",
    "somekey2": "somevalue2"
  }
}
```

2. Verify the results in the console.

To test the Lambda function (AWS CLI)

1. Copy the following JSON into a file and save it as `input.txt`.

```
{
  "operation": "echo",
  "somekey1": "somevalue1",
  "somekey2": "somevalue2"
}
```

2. Execute the following `invoke` command:

```
$ aws lambda invoke \  
--invocation-type Event \  
--function-name LambdaFunctionOverHttps \  
--region us-west-2 \  
--payload file://file-path/input.txt \  
--profile adminuser \  
outputfile.txt
```

Note

In this tutorial example, the message is saved in the `outputfile.txt` file if you request synchronous execution (`RequestResponse` as the invocation type). The function returns the string message in the response body. If you use the `Event` invocation type, no message is returned to the output file. In either case, the `outputfile.txt` parameter is required.

For Node.js, it could be one of the following (whatever one you specify in the code):

```
context.succeed("message")  
context.fail("message")  
context.done(null, "message")
```

For Python or Java, it is the message in the return statement:

```
return "message"
```

Next Step

[Step 3: Create an API Using Amazon API Gateway and Test It \(p. 188\)](#)

Step 3: Create an API Using Amazon API Gateway and Test It

In this step, you associate your Lambda function with a method in the API that you created using Amazon API Gateway and test the end-to-end experience. That is, when an HTTPS request is sent to an API method, Amazon API Gateway invokes your Lambda function.

First, you create an API (`DynamoDBOperations`) using Amazon API Gateway with one resource (`DynamoDBManager`) and one method (`POST`). You associate the `POST` method with your Lambda function. Then, you test the end-to-end experience.

Step 3.1: Create the API

Run the following `create-rest-api` command to create the `DynamoDBOperations` API for this tutorial.

```
$ aws apigateway create-rest-api \  
--name DynamoDBOperations
```

The following is an example response:

```
{  
  "name": "DynamoDBOperations",  
  "id": "api-id",  
  "createdDate": 1447724091  
}
```

Note the API ID.

You also need the ID of the API root resource. To get the ID, run the `get-resources` command.

```
$ aws apigateway get-resources \  
--rest-api-id api-id
```

The following is example response (at this time you only have the root resource, but you add more resources in the next step):

```
{  
  "items": [  
    {  
      "path": "/",  
      "id": "root-id"  
    }  
  ]  
}
```

Step 3.2: Create a Resource (DynamoDBManager) in the API

Run the following `create-resource` command to create a resource (DynamoDBManager) in the API that you created in the preceding section.

```
$ aws apigateway create-resource \  
--rest-api-id api-id \  
--parent-id root-id \  
--path-part DynamoDBManager
```

The following is an example response:

```
{  
  "path": "/DynamoDBManager",  
  "pathPart": "DynamoDBManager",  
  "id": "resource-id",  
  "parentId": "root-id"  
}
```

Note the ID in the response. This is the ID of the resource (DynamoDBManager) that you created.

Step 3.3: Create Method (POST) on the Resource

Run the following `put-method` command to create a method (POST) on the resource (DynamoDBManager) in your API (DynamoDBOperations).

```
$ aws apigateway put-method \  
--rest-api-id api-id \  
--resource-id resource-id \  
--http-method POST \  
--authorization-type NONE
```

We specify `NONE` for the `--authorization-type` parameter, which means that unauthenticated requests for this method are supported. This is fine for testing but in production you should use either the key-based or role-based authentication.

The following is an example response:

```
{
  "apiKeyRequired": false,
  "httpMethod": "POST",
  "authorizationType": "NONE"
}
```

Step 3.4: Set the Lambda Function as the Destination for the POST Method

Run the following command to set the Lambda function as the integration point for the `POST` method (this is the method Amazon API Gateway invokes when you make an HTTPS request for the `POST` method endpoint).

```
$ aws apigateway put-integration \
--rest-api-id api-id \
--resource-id resource-id \
--http-method POST \
--type AWS \
--integration-http-method POST \
--uri arn:aws:apigateway:aws-region:lambda:path/2015-03-31/functions/arn:aws:lambda:aws-region:aws-acct-id:function:your-lambda-function-name/invocations
```

Note

- `--rest-api-id` is the ID of the API (DynamoDBOperations) that you created in Amazon API Gateway.
- `--resource-id` is the resource ID of the resource (DynamoDBManager) you created in the API
- `--http-method` is the API Gateway method and `--integration-http-method` is the method that API Gateway uses to communicate with AWS Lambda.
- `--uri` is unique identifier for the endpoint to which Amazon API Gateway can send request.

The following is an example response:

```
{
  "httpMethod": "POST",
  "type": "AWS",
  "uri": "arn:aws:apigateway:us-east-1:lambda:path/2015-03-31/functions/arn:aws:lambda:us-east-1:aws-acct-id:function:LambdaFunctionForAPIGateway/invocations",
  "cacheNamespace": "resource-id"
}
```

Set `content-type` of the `POST` method response and integration response to JSON as follows:

- Run the following command to set the `POST` method response to JSON. This is the response type that your API method returns.

```
$ aws apigateway put-method-response \
--rest-api-id api-id \
--resource-id resource-id \
--http-method POST \
```

```
--status-code 200 \  
--response-models "{\"application/json\": \"Empty\"}"
```

- Run the following command to set the POST method integration response to JSON. This is the response type that Lambda function returns.

```
$ aws apigateway put-integration-response \  
--rest-api-id api-id \  
--resource-id resource-id \  
--http-method POST \  
--status-code 200 \  
--response-templates "{\"application/json\": \"\"}"
```

Step 3.5: Deploy the API

In this step, you deploy the API that you created to a stage called `prod`.

```
$ aws apigateway create-deployment \  
--rest-api-id api-id \  
--stage-name prod
```

The following is an example response:

```
{  
  "id": "deployment-id",  
  "createdDate": 1447726017  
}
```

Step 3.6: Grant Permissions that Allows Amazon API Gateway to Invoke the Lambda Function

Now that you have an API created using Amazon API Gateway and you've deployed it, you can test. First, you need to add permissions so that Amazon API Gateway can invoke your Lambda function when you send HTTPS request to the POST method.

To do this, you need to add a permissions to the permissions policy associated with your Lambda function. Run the following `add-permission` AWS Lambda command to grant the Amazon API Gateway service principal (`apigateway.amazonaws.com`) permissions to invoke your Lambda function (`LambdaFunctionForAPIGateway`).

```
$ aws lambda add-permission \  
--function-name LambdaFunctionOverHttps \  
--statement-id apigateway-test-2 \  
--action lambda:InvokeFunction \  
--principal apigateway.amazonaws.com \  
--source-arn "arn:aws:execute-api:us-east-1:aws-acct-id:api-id/*/POST/DynamoDB  
Manager"
```

You must grant this permission to enable testing (if you go to the Amazon API Gateway and choose **Test** to test the API method, you need this permission). Note the `--source-arn` specifies a wildcard character (*) as the stage value (indicates testing only). This allows you to test without deploying the API.

Now, run the same command again, but this time you grant to your deployed API permissions to invoke the Lambda function.

```
$ aws lambda add-permission \  
--function-name LambdaFunctionOverHttps \  
--statement-id apigateway-prod-2 \  
--action lambda:InvokeFunction \  
--principal apigateway.amazonaws.com \  
--source-arn "arn:aws:execute-api:us-east-1:aws-acct-id:api-id/prod/POST/DynamoDBManager"
```

You grant this permission so that your deployed API has permissions to invoke the Lambda function. Note that the `--source-arn` specifies a `prod` which is the stage name we used when deploying the API.

Step 3.7: Test Sending an HTTPS Request

In this step, you are ready to send an HTTPS request to the `POST` method endpoint. You can use either Curl or a method (`test-invoke-method`) provided by Amazon API Gateway.

If you want to test operations that your Lambda function supports on a DynamoDB table, first you need to create a table in Amazon DynamoDB `LambdaTable (Id)`, where `Id` is the hash key of string type.

If you are testing the `echo` and `ping` operations that your Lambda function supports, you don't need to create the DynamoDB table.

You can use Amazon API Gateway CLI commands to send an HTTPS `POST` request to the resource (`DynamoDBManager`) endpoint. Because you deployed your Amazon API Gateway, you can use Curl to invoke the methods for the same operation.

The Lambda function supports using the `create` operation to create an item in your DynamoDB table. To request this operation, use the following JSON:

```
{  
  "operation": "create",  
  "tableName": "LambdaTable",  
  "payload": {  
    "Item": {  
      "Id": "foo",  
      "number": 5  
    }  
  }  
}
```

Run the `test-invoke-method` Amazon API Gateway command to send an HTTPS `POST` method request to the resource (`DynamoDBManager`) endpoint with the preceding JSON in the request body.

```
$ aws apigateway test-invoke-method \  
--rest-api-id api-id \  
--resource-id resource-id \  
--http-method POST \  
--path-with-query-string "" \  
--body "{\"operation\":\"create\",\"tableName\":\"LambdaTable\",\"payload\":{\"Item\":{\"Id\":\"1\",\"name\":\"Bob\"}}}"
```

Or, you can use the following Curl command:

```
curl -X POST -d '{"operation\":"create\","tableName\":"LambdaTable\","payload\":"{\\"Item\":"{\\"Id\":"1\\",\\"name\":"Bob\\"}}"}' https://api-id.execute-api.aws-region.amazonaws.com/prod/DynamoDBManager
```

To send request for the `echo` operation that your Lambda function supports, you can use the following request payload:

```
{
  "operation": "echo",
  "payload": {
    "somekey1": "somevalue1",
    "somekey2": "somevalue2"
  }
}
```

Run the `test-invoke-method` Amazon API Gateway CLI command to send an HTTPS `POST` method request to the resource (`DynamoDBManager`) endpoint using the preceding JSON in the request body.

```
$ aws apigateway test-invoke-method \
--rest-api-id api-id \
--resource-id resource-id \
--http-method POST \
--path-with-query-string "" \
--body '{"operation\":"echo\","payload\":"{\\"somekey1\":"somevalue1\\",\\"somekey2\":"somevalue2\\"}}'
```

Or, you can use the following Curl command:

```
curl -X POST -d '{"operation\":"echo\","payload\":"{\\"somekey1\":"somevalue1\\",\\"somekey2\":"somevalue2\\"}}' https://api-id.execute-api.region.amazonaws.com/prod/DynamoDBManager
```

Using AWS Lambda as Mobile Application Backend (Custom Event Source: Android)

You can use AWS Lambda to host backend logic for mobile applications. That is, some of your mobile app code can be run as Lambda functions. This allows you to put minimal logic in the mobile application itself making it easy to scale and update (for example, you only apply code updates to the Lambda function, instead of having to deploy code updates in your app clients).

After you create the Lambda function, you can invoke it from your mobile app using AWS Mobile SDKs, such as the AWS SDK for Android. For more information, see [Tools for Amazon Web Services](#).

Note

You can also invoke your Lambda function over HTTP using Amazon API Gateway (instead of using any of the AWS SDKs). Amazon API Gateway adds an additional layer between your mobile users and your app logic that enable the following:

- Ability to throttle individual users or requests.
- Protect against Distributed Denial of Service attacks.

- Provide a caching layer to cache response from your Lambda function.


Note the following about how the mobile application and AWS Lambda integration works:

- **Push-event model** – This is a model (see [Event Source Mapping \(p. 10\)](#)), where the app invokes the Lambda function by passing the event data as parameter.
- **Synchronous or asynchronous invocation** – The app can invoke the Lambda function and get a response back in real time by specifying `RequestResponse` as the invocation type (or use the `Event` invocation type for asynchronous invocation). For information about invocation types, see [Manage Permissions: Using a Lambda Function Policy \(p. 32\)](#).
- **Event structure** – The event your Lambda function receives is defined by your application, and your Lambda function is the custom code written to process the specific event type.

Note that there are two types of permissions policies that you work with in setting the end-to-end experience:

- **Permissions for your Lambda function** – Regardless of what invokes a Lambda function, AWS Lambda executes the function by assuming the IAM role (execution role) that you specify at the time you create the Lambda function. Using the permissions policy associated with this role, you grant your Lambda function the permissions that it needs. For example, if your Lambda function needs to read an object, you grant permissions for the relevant Amazon S3 actions in the permissions policy. For more information, see [Manage Permissions: Using an IAM Role \(Execution Role\) \(p. 31\)](#).
- **Permissions for the mobile app to invoke your Lambda function** – The application must have valid security credentials and permissions to invoke a Lambda function. For mobile applications, you can use the Amazon Cognito service to manage user identities, authentication, and permissions.

The following diagram illustrates the application flow (the illustration assumes a mobile app using AWS Mobile SDK for Android to make the API calls):

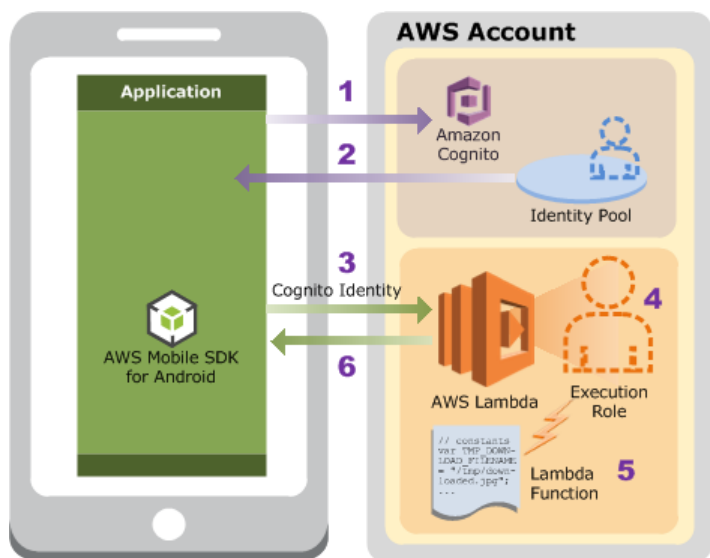

1. The mobile application sends a request to Amazon Cognito with an identity pool ID in the request (you create the identity pool as part the setup).
2. Amazon Cognito returns temporary security credentials back to the application.

Amazon Cognito assumes the role associated with the identity pool to generate temporary credentials. What the application can do using the credentials is limited to the permissions defined in the permissions policy associated with the role Amazon Cognito used in obtaining the temporary credential.

Note

The AWS SDK can cache the temporary credentials so that the application does not send a request to Amazon Cognito each time it needs to invoke a Lambda function.

3. The mobile application invokes the Lambda function using temporary credentials (Cognito Identity).
4. AWS Lambda assumes the execution role to execute your Lambda function on your behalf.
5. The Lambda function executes.
6. AWS Lambda returns results to the mobile application, assuming the app invoked the Lambda function using the `RequestResponse` invocation type (synchronous invocation).

For a tutorial that walks you through an example setup, see [Tutorial: Using AWS Lambda as Mobile Application Backend](#) (p. 195).

Tutorial: Using AWS Lambda as Mobile Application Backend

In this tutorial, you create a simple Android mobile application. The primary purpose of this tutorial is to show you how to hook up various components to enable an Android mobile application to invoke a Lambda function and process response. The app itself is simple, we will assume following:

- The sample mobile application will generate event data consisting of a name (first name and last name) in this format:

```
{ firstName: 'value1', lastName: 'value2' }
```

- You use Lambda function to process the event. That is, the app (using the AWS Mobile SDK for Android) invokes a Lambda function (`ExampleAndroidEventProcessor`) by passing the event data to it. The Lambda function in this tutorial does the following:
 - Logs incoming event data to Amazon CloudWatch Logs.
 - Upon successful execution, returns a simple string in the response body. Your mobile app displays the message using the Android `Toast` class.

Note

The way that the mobile application invokes a Lambda function as shown in this tutorial is an example of the AWS Lambda request-response model in which an application invokes a Lambda function and then receives a response in real time. For more information, see [Programming Model](#) (p. 51).

Implementation Summary

The tutorial is divided into two main sections:


- First, you perform the necessary setup to create a Lambda function and test it by invoking it manually using sample event data (you don't need mobile app to test your Lambda function).
- Second, you create an Amazon Cognito identity pool to manage authentication and permissions, and create the example Android application. Then, you run the application and it invokes the Lambda function. You can then verify the end-to-end experience. In this tutorial example:

- You use the Amazon Cognito service to manage user identities, authentication, and permissions. The mobile application must have valid security credentials and permissions to invoke a Lambda function. As part of the application setup, you create an Amazon Cognito identity pool to store user identities and define permissions. For more information, see [Amazon Cognito](#)
- This mobile application does not require its users to log in. A mobile application can require its users to log in using public identity providers such as Amazon and Facebook. The scope of this tutorial is limited and assumes that the mobile application users are unauthenticated. Therefore, when you configure Amazon Cognito identity pool you will do the following:
 - Enable access for unauthenticated identities.

Amazon Cognito provides a unique identifier and temporary AWS credentials for these users to invoke the Lambda function.

- In the access permissions policy associated with the IAM role for unauthenticated users, add permissions to invoke the Lambda function. An identity pool has two associated IAM roles, one for authenticated and one for unauthenticated application users. In this example, Amazon Cognito assumes the role for unauthenticated users to obtain temporary credentials. When the app uses these temporary credentials to invoke your Lambda function, it can do so only if it has necessary permissions (that is, credentials may be valid, but you also need permissions). You do this by updating the permissions policy that Amazon Cognito uses to obtain the temporary credentials.

The following diagram illustrates the application flow:

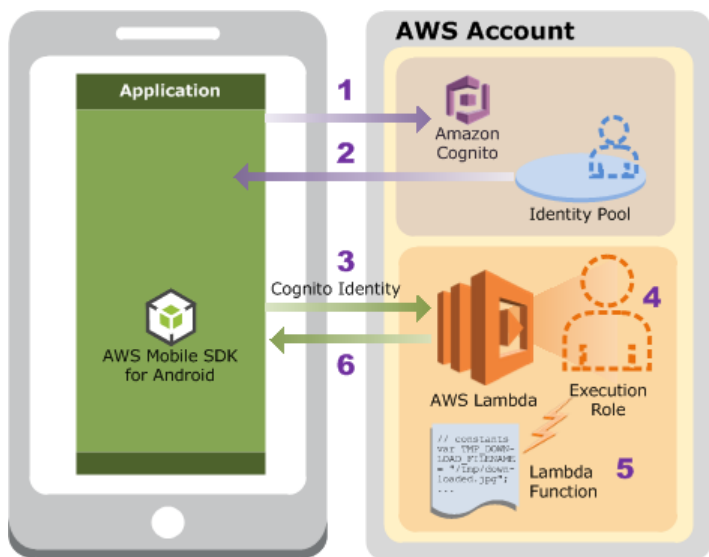

Now you are ready to start the tutorial.

Next Step

[Step 1: Prepare \(p. 196\)](#)

Step 1: Prepare

Make sure you have completed the following steps:

- Signed up for an AWS account and created an administrator user in the account.
- Installed and set up the AWS CLI.

For instructions, see [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#).

Note

The tutorial creates a Lambda function and an Amazon Cognito identity pool in the `us-east-1` region. If you want to use a different AWS region, you must create these resources in the same region. You also need to update the example mobile application code by providing the specific region that you want to use.

Next Step

[Step 2: Create the Lambda Function and Invoke It Manually \(Using Sample Event Data\) \(p. 197\)](#)

Step 2: Create the Lambda Function and Invoke It Manually (Using Sample Event Data)

In this section, you do the following:

- Create a Lambda function deployment package using the sample code provided. The sample Lambda function code to process your mobile application events is provided in various languages. Select one of the languages and follow the corresponding instructions to create a deployment package.

Note

To see more examples of using other AWS services within your function, including calling other Lambda functions, see [AWS SDK for JavaScript](#)

- Create an IAM role (execution role). At the time you upload the deployment package, you need to specify an IAM role (execution role). This is the role that AWS Lambda assumes to invoke your Lambda function on your behalf.
- Create the Lambda function by uploading the deployment package, and then test it by invoking it manually using sample event data.

Topics

- [Step 2.1: Create a Deployment Package \(p. 197\)](#)
- [Step 2.2: Create the Execution Role \(IAM Role\) \(p. 199\)](#)
- [Step 2.3: Create the Lambda Function and Invoke It Manually \(Using Sample Event Data\) \(p. 200\)](#)

Step 2.1: Create a Deployment Package

From the **Filter View** list, choose the language you want to use for your Lambda function. The appropriate section appears with code and specific instructions for creating a deployment package.

Node.js

Follow the instructions to create a AWS Lambda function deployment package.

1. Open a text editor, and then copy the following code.

```
exports.handler = function(event, context, callback) {  
    console.log("Received event: ", event);  
    callback(null, "message");  
}
```

Note

The code sample is compliant with the Node.js runtime v4.3. For more information, see [Programming Model \(Node.js\) \(p. 51\)](#)

2. Save the file as `AndroidBackendLambdaFunction.js`.
3. Zip the `AndroidBackendLambdaFunction.js` file as `AndroidBackendLambdaFunction.zip`.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 199\)](#)

Java

Use the following Java code to create your Lambda function (`AndroidBackendLambdaFunction`). The code receives Android app event data as the first parameter to the handler. Then, the code processes event data (for illustration this code writes some of the event data to CloudWatch Logs and returns a string in response).

In the code, the handler (`myHandler`) uses the `RequestClass` and `ResponseClass` types for the input and output. The code provides implementation for these types.

Important

You use the same classes (POJOs) to handle the input and output data when you create the sample mobile application in the next section.

```
package example;

import com.amazonaws.services.lambda.runtime.Context;

public class HelloPojo {

    // Define two classes/POJOs for use with Lambda function.
    public static class RequestClass {
        String firstName;
        String lastName;

        public String getFirstName() {
            return firstName;
        }

        public void setFirstName(String firstName) {
            this.firstName = firstName;
        }

        public String getLastName() {
            return lastName;
        }

        public void setLastName(String lastName) {
            this.lastName = lastName;
        }

        public RequestClass(String firstName, String lastName) {
            this.firstName = firstName;
            this.lastName = lastName;
        }

        public RequestClass() {
        }
    }
}
```

```
public static class ResponseClass {
    String greetings;

    public String getGreetings() {
        return greetings;
    }

    public void setGreetings(String greetings) {
        this.greetings = greetings;
    }

    public ResponseClass(String greetings) {
        this.greetings = greetings;
    }

    public ResponseClass() {
    }

}

public static ResponseClass myHandler(RequestClass request, Context context){

    String greetingString = String.format("Hello %s, %s.", request.firstName,
request.lastName);
    context.getLogger().log(greetingString);
    return new ResponseClass(greetingString);
}
```

Save the preceding code in a file (`HelloPojo.java`). You can now create a deployment package. You need to include the following dependency:

- `aws-lambda-java-core`

Your deployment package can be a .zip file or a standalone .jar. You can use any build and packaging tool you are familiar with to create a deployment package. For examples of how to use the Maven build tool to create a standalone .jar, see [Creating a .jar Deployment Package Using Maven without any IDE \(Java\) \(p. 91\)](#) and [Creating a .jar Deployment Package Using Maven and Eclipse IDE \(Java\) \(p. 93\)](#). For an example of how to use the Gradle build tool to create a .zip file, see [Creating a .zip Deployment Package \(Java\) \(p. 96\)](#).

After you verify that your deployment package (`lambda-java-example-1.0-SNAPSHOT.jar`) is created, go to the next section to create an IAM role (execution role). You specify the role when you create your Lambda function.

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\) \(p. 199\)](#)

Step 2.2: Create the Execution Role (IAM Role)

In this section, you create an IAM role using the following predefined role type and access policy:

- AWS service role of the type **AWS Lambda** – This role grants AWS Lambda permissions to assume the role.

- **AWSLambdaBasicExecute** – This is the access permissions policy that you attach to the role. This Lambda function only writes logs to CloudWatch Logs. So it only needs permission for specific CloudWatch actions. This policy provides these permissions.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. Use the following procedure to create the IAM role.

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-android-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**. This grants the AWS Lambda service permissions to assume the role.
 - In **Attach Policy**, choose **AWSLambdaBasicExecute**. The permissions in this policy are sufficient for the Lambda function in this tutorial.
3. Write down the role ARN. You will need it in the next step when you create your Lambda function.

Next Step

[Step 2.3: Create the Lambda Function and Invoke It Manually \(Using Sample Event Data\)](#) (p. 200)

Step 2.3: Create the Lambda Function and Invoke It Manually (Using Sample Event Data)

In this section, you do the following:

- Create a Lambda function, by uploading the deployment package.
- Test the Lambda function by invoking it manually. Instead of creating an event source, you use sample event data. In the next section, you create an Android mobile app and test the end-to-end experience.

Step 2.3.1: Create a Lambda Function (Upload the Deployment Package)

In this step, you upload the deployment package using the AWS CLI.

At the command prompt, run the following Lambda CLI `create-function` command using the *adminuser* profile.

You need to update the command by providing the .zip file path and the execution role ARN. The `--runtime` parameter value can be `nodejs4.3`, or `java8`, depending on the language you chose to author your code.

```
$ aws lambda create-function \
--region us-east-1 \
--function-name AndroidBackendLambdaFunction \
--zip-file fileb://file-path-to-jar-or-zip-deployment-package \
--role execution-role-arn \
```

```
--handler handler-name \  
--runtime runtime-value \  
--profile adminuser
```

Optionally, you can upload the .zip file to an Amazon S3 bucket in the same AWS region, and then specify the bucket and object name in the preceding command. You need to replace the `--zip-file` parameter by the `--code` parameter, as shown following:

```
--code S3Bucket=bucket-name,S3Key=zip-file-object-key
```

Note

You can create the Lambda function using the AWS Lambda console, in which case note the value of the `create-function` AWS CLI command parameters. You provide the same values in the console UI.

Step 2.3.2: Test the Lambda Function (Invoke Manually)

Invoke the function manually using the sample event data. We recommend that you invoke the function using the console because the console UI provides a user-friendly interface for reviewing the execution results, including the execution summary, logs written by your code, and the results returned by the function (because the console always performs synchronous execution—invokes the Lambda function using the `RequestResponse` invocation type).

To test the Lambda function (AWS Management Console)

1. Follow the steps in the Getting Started exercise to create and invoke the Lambda function at [Step 2.2: Invoke the Lambda Function Manually and Verify Results, Logs, and Metrics \(p. 42\)](#). After you choose the Lambda function, choose **Configure test event** from the **Actions** menu to specify the following sample event data:

```
{  "firstName": "first-name",    "lastName": "last-name" }
```

2. Verify the results in the console.

- **Execution result** should be `Succeeded` with the following return value:

```
{  
  "greetings": "Hello first-name, last-name."  
}
```

- Review the **Summary** and the **Log output** sections.

To test the Lambda function (AWS CLI)

1. Save the following sample event JSON in a file, `input.txt`.

```
{  "firstName": "first-name",    "lastName": "last-name" }
```

2. Execute the following `invoke` command:

```
$ aws lambda invoke \  
--invocation-type Event \  
--function-name AndroidBackendLambdaFunction \  
--region us-east-1 \  
--payload file://file-path/input.txt \  
--profile adminuser  
outputfile.txt
```

Note

In this tutorial example, the message is saved in the `outputfile.txt` file. If you request synchronous execution (`RequestResponse` as the invocation type), the function returns the string message in the response body.

For Node.js, it could be one of the following (whatever one you specify in the code):

```
context.succeed("message")  
context.fail("message")  
context.done(null, "message")
```

For Java, it is the message in the return statement:

```
return "message"
```

Next Step

[Step 3: Create an Amazon Cognito Identity Pool \(p. 202\)](#)

Step 3: Create an Amazon Cognito Identity Pool

In this section, you create an Amazon Cognito identity pool. The identity pool has two IAM roles. You update the IAM role for unauthenticated users and grant permissions to execute the `AndroidBackendLambdaFunction` Lambda function.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. For more information about Amazon Cognito services, see the [Amazon Cognito](#) product detail page.

To create an identity pool

1. Using the IAM User Sign-In URL, sign in to the Amazon Cognito console as **adminuser**.
2. Create a new identity pool called `JavaFunctionAndroidEventHandlerPool`. Before you follow the procedure to create an identity pool, note the following:
 - The identity pool you are creating must allow access to unauthenticated identities because our example mobile application does not require a user log in (the application users are unauthenticated). Therefore, make sure to select the **Enable access to unauthenticated identities** option.
 - The unauthenticated application users need permission to invoke the Lambda function. To enable this, you will add the following statement to the permission policy associated with the unauthenticated identities (it allows permission for the `lambda:InvokeFunction` action on the specific Lambda function (you must update the resource ARN by providing your account ID).

```
{  
    "Effect": "Allow",  
    "Action": [  
        "lambda:InvokeFunction"  
    ],  
    "Resource": [  
        "arn:aws:lambda:us-east-1:account-id:function:AndroidBackend  
LambdaFunction"    ]  
}
```



```
    ]  
  }  
}
```

The resulting policy will be as follows:

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": [  
        "mobileanalytics:PutEvents",  
        "cognito-sync:*"  
      ],  
      "Resource": [  
        "*"   
      ]  
    },  
    {  
      "Effect": "Allow",  
      "Action": [  
        "lambda:invokefunction"  
      ],  
      "Resource": [  
        "arn:aws:lambda:us-east-1:account-id:function:AndroidBackend  
LambdaFunction"  
      ]  
    }  
  ]  
}
```

Note

You can update policy at the time of creating the identity pool. You can also update the policy after you create the identity pool, in which case make sure you write down the IAM role name for the unauthenticated users from the Amazon Cognito console. Then, go to the IAM console and search for the specific role and edit the access permissions policy.

For instructions about how to create an identity pool, log in to the [Amazon Cognito console](#) and follow the **New Identity Pool** wizard.

3. Note down the identity pool ID. You specify this ID in your mobile application you create in the next section. The app uses this ID when it sends request to Amazon Cognito to request for temporary security credentials.

Next Step

[Step 4: Create a Mobile Application for Android \(p. 203\)](#)

Step 4: Create a Mobile Application for Android

Now you can create a simple Android mobile application that generates events and invokes Lambda functions by passing the event data as parameters.

The following instructions have been verified using Android studio.

1. Create a new Android project called `AndroidEventGenerator` using the following configuration:
 - Select the **Phone and Tablet** platform.
 - Choose **Blank Activity**.

2. In the `build.gradle (Module:app)` file, add the following in the dependencies section:

```
compile 'com.amazonaws:aws-android-sdk-core:2.2.+'
compile 'com.amazonaws:aws-android-sdk-lambda:2.2.+'
```

3. Build the project so that the required dependencies are downloaded, as needed.
4. In the Android application manifest (`AndroidManifest.xml`), add the following permissions so that your application can connect to the Internet. You can add them just before the `</manifest>` end tag.

```
<uses-permission android:name="android.permission.INTERNET" />
<uses-permission android:name="android.permission.ACCESS_NETWORK_STATE" />
```

5. In `MainActivity`, add the following imports:

```
import com.amazonaws.mobileconnectors.lambdainvoker.*;
import com.amazonaws.auth.CognitoCachingCredentialsProvider;
import com.amazonaws.regions.Regions;
```

6. In the package section, add the following two classes (`RequestClass` and `ResponseClass`). Note that the POJO is same as the POJO you created in your Lambda function in the preceding section.
 - `RequestClass`. The instances of this class act as the POJO (Plain Old Java Object) for event data which consists of first and last name. If you are using Java example for your Lambda function you created in the preceding section, this POJO is same as the POJO you created in your Lambda function code.

```
package com.example....lambdaeventgenerator;
public class RequestClass {
    String firstName;
    String lastName;

    public String getFirstName() {
        return firstName;
    }

    public void setFirstName(String firstName) {
        this.firstName = firstName;
    }

    public String getLastName() {
        return lastName;
    }

    public void setLastName(String lastName) {
        this.lastName = lastName;
    }
}
```

```
public RequestClass(String firstName, String lastName) {
    this.firstName = firstName;
    this.lastName = lastName;
}

public RequestClass() {
}
}
```

- ResponseClass

```
package com.example....lambdaeventgenerator;
public class ResponseClass {
    String greetings;

    public String getGreetings() {
        return greetings;
    }

    public void setGreetings(String greetings) {
        this.greetings = greetings;
    }

    public ResponseClass(String greetings) {
        this.greetings = greetings;
    }

    public ResponseClass() {
    }
}
```

7. In the same package, create interface called `MyInterface` for invoking the `AndroidBackendLambdaFunction` Lambda function.

Note

The `@LambdaFunction` annotation in the code maps the specific client method to the same-name Lambda function. For more information about this annotation, see [AWS Lambda](#) in the *AWS Mobile SDK for Android Developer Guide*.

```
package com.example....lambdaeventgenerator;
import com.amazonaws.mobileconnectors.lambdainvoker.LambdaFunction;
public interface MyInterface {

    /**
     * Invoke the Lambda function "AndroidBackendLambdaFunction".
     * The function name is the method name.
     */
    @LambdaFunction
    ResponseClass AndroidBackendLambdaFunction(RequestClass request);
}
```

8. To keep the application simple, we are going to add code to invoke the Lambda function in the `onCreate()` event handler. In `MainActivity`, add the following code toward the end of the `onCreate()` code.

```
// Create an instance of CognitoCachingCredentialsProvider
CognitoCachingCredentialsProvider cognitoProvider = new CognitoCachingCre
dentialsProvider(
    this.getApplicationContext(), "identity-pool-id", Regions.US_WEST_2);

// Create LambdaInvokerFactory, to be used to instantiate the Lambda proxy.
LambdaInvokerFactory factory = new LambdaInvokerFactory(this.getApplication
Context(),
    Regions.US_WEST_2, cognitoProvider);

// Create the Lambda proxy object with a default Json data binder.
// You can provide your own data binder by implementing
// LambdaDataBinder.
final MyInterface myInterface = factory.build(MyInterface.class);

RequestClass request = new RequestClass("John", "Doe");
// The Lambda function invocation results in a network call.
// Make sure it is not called from the main thread.
new AsyncTask<RequestClass, Void, ResponseClass>() {
    @Override
    protected ResponseClass doInBackground(RequestClass... params) {
        // invoke "echo" method. In case it fails, it will throw a
        // LambdaFunctionException.
        try {
            return myInterface.AndroidBackendLambdaFunction(params[0]);
        } catch (LambdaFunctionException lfe) {
            Log.e("Tag", "Failed to invoke echo", lfe);
            return null;
        }
    }

    @Override
    protected void onPostExecute(ResponseClass result) {
        if (result == null) {
            return;
        }

        // Do a toast
        Toast.makeText(MainActivity.this, result.getGreetings(),
Toast.LENGTH_LONG).show();
    }
}.execute(request);
```

9. Run the code and verify it as follows:

- The `Toast.makeText()` displays the response returned.
- Verify that CloudWatch Logs shows the log created by the Lambda function. It should show the event data (first name and last name). You can also verify this in the AWS Lambda console.

Using AWS Lambda with Scheduled Events

You can create a Lambda function and direct AWS Lambda to execute it on a regular schedule. You can specify a fixed rate (for example, execute a Lambda function every hour or 15 minutes), or you can specify a Cron expression. For more information on expressions schedules, see [Schedule Expressions Using Rate or Cron \(p. 210\)](#).

This functionality is available when you create a Lambda function using the AWS Lambda console or the AWS CLI. To configure it using the AWS CLI, see [Run an AWS Lambda Function on a Schedule Using the AWS CLI](#). The console provides the **CloudWatch Events - Schedule** as an event source. At the time of creating a Lambda function, you choose this event source and specify a time interval.

If you have made any manual changes to the permissions on your function, you may need to reapply the scheduled event access to your function. You can do that by using the following CLI command.

```
aws lambda add-permission \  
  --statement-id 'statement id' \  
  --action 'lambda:InvokeFunction' \  
  --principal account-id \  
  --source-arn arn:aws:events:region:account-id:rule/rule_name \  
  --function-name function:MyFunction
```

Note

Each AWS account can have up to 50 unique event sources of the **CloudWatch Events - Schedule** source type. Each of these can be the event source for up to five Lambda functions. That is, you can have up to 250 Lambda functions that can be executing on a schedule in your AWS account.

The console also provides a blueprint (**lambda-canary**) that uses the **CloudWatch Events - Schedule** source type. Using this blueprint, you can create a sample Lambda function and test this feature. The example code that the blueprint provides checks for the presence of a specific webpage and specific text string on the webpage. If either the webpage or the text string is not found, the Lambda function throws an error.

For a tutorial that walks you through an example setup, see [Tutorial: Using AWS Lambda with Scheduled Events \(p. 207\)](#).

Tutorial: Using AWS Lambda with Scheduled Events

In this tutorial, you do the following:

- Create a Lambda function using the **lambda-canary** blueprint. You configure the Lambda function to run every minute. Note that if the function returns an error, AWS Lambda logs error metrics to CloudWatch.
- Configure a CloudWatch alarm on the `Errors` metric of your Lambda function to post a message to your Amazon SNS topic when AWS Lambda emits error metrics to CloudWatch. You subscribe to the Amazon SNS topics to get email notification. In this tutorial, you do the following to set this up:
 - Create an Amazon SNS topic.
 - Subscribe to the topic so you can get email notifications when a new message is posted to the topic.
 - In Amazon CloudWatch, set an alarm on the `Errors` metric of your Lambda function to publish a message to your SNS topic when errors occur.

Next Step

[Step 1: Create a Lambda Function \(p. 208\)](#)

Step 1: Create a Lambda Function

1. Sign in to the AWS Management Console and open the AWS Lambda console at <https://console.aws.amazon.com/lambda/>.
2. Choose **Create a Lambda function**.
3. In **Select blueprint**, choose the **lambda-canary** blueprint.
4. In **Configure triggers**:
 - Choose **CloudWatch Events - Schedule**.
 - In **Rule name**, type a name (for example, `CheckWebsiteScheduledEvent`).
 - In **Rule description**, type a description (for example, `CheckWebsiteScheduledEvent trigger`).
 - In **Schedule expression**, specify `rate(1 minute)`. Note that you can specify the value as a `rate` or in the `cron` expression format. All schedules use the UTC time zone, and the minimum precision for schedules is one minute.

Note

When setting a rate expression, the first execution is immediate and subsequent executions occur based on the rate schedule. In the preceding example, the subsequent execution rate would be every minute.

For more information on expressions schedules, see [Schedule Expressions Using Rate or Cron \(p. 210\)](#).

- In **Enable trigger**, we recommend that you leave the trigger in a disabled state until you have tested it.
5. In **Configure function**, do the following:
 - Specify your Lambda function name (for example, `CheckWebsitePeriodically`).
 - In **Runtime**, specify **Python 2.7** or **Node.js4.3**, depending on your preferred language.
 - Review the code provided by the template. Later in this tutorial, you will update the function code so that the function will return an error. You can either specify a non-existing URL or replace search text to a string that is not on the page.
 - In **Role***, choose **Create new role from template(s)**.
 - In **Role name**, type a name for the role.
 - In **Role templates**, Lambda provides a list of optional, additional templates that extend the basic Lambda permissions. For the purpose of this tutorial, you can leave this field blank because your Lambda function already has the basic execution permission it needs.
 - In **Advanced settings**, leave the default configurations and choose **Next**.
 6. In **Review**, review the configuration and then choose **Create Function**.

Next Step

[Step 2: Test the Lambda Function \(Using a Sample Test Event\) \(p. 209\)](#)

Step 2: Test the Lambda Function (Using a Sample Test Event)

1. Choose the function you created in the previous step and then choose **Test**.
2. On the **Input sample event** page, choose **Scheduled Event** in the **Sample event** list.

Note the event time in the sample event. This value will be different when AWS Lambda invokes the function at scheduled intervals. The sample Lambda function code logs this time to CloudWatch Logs.

3. Choose **Submit** and verify that the **Execution result** section shows success.

Next Step

[Step 3: Create an Amazon SNS Topic and Subscribe to It \(p. 209\)](#)

Step 3: Create an Amazon SNS Topic and Subscribe to It

1. Create an SNS topic using the Amazon SNS console. For instructions, see [Create a Topic](#) in the *Amazon Simple Notification Service Developer Guide*.
2. Subscribe to the topic. For this exercise, use email as the communication protocol. For instructions, see [Subscribe to a Topic](#) in the *Amazon Simple Notification Service Developer Guide*.

You use this Amazon SNS topic in the next step when you configure a CloudWatch alarm so that when AWS Lambda emits an error the alarm will publish a notification to this topic.

Next Step

[Step 4: Configure a CloudWatch Alarm \(p. 209\)](#)

Step 4: Configure a CloudWatch Alarm

To configure a CloudWatch alarm, follow the instructions at [Create Alarm](#) in the *Amazon CloudWatch Developer Guide*. As you follow the steps, note the following:

- In **Create Alarm (1. Select Metric step)**, choose **Lambda Metrics**, and then choose the **Errors (Metric Name is Errors)** for the Lambda function you created. Also, on the statistics drop-down, change the settings from **Average** to **Sum** statistics.
- In **Create Alarm (2. Define Metric step)**, set the alarm threshold to **Whenever: Errors is >= 1** and select your Amazon SNS topic from the **Send notification to:** list.

Next Step

[Step 5: Test the Lambda Function Again \(p. 209\)](#)

Step 5: Test the Lambda Function Again

Now test the Lambda function again. This time, update the code by specifying either a non-existing webpage URL or a text string. This causes the function to return an error that AWS Lambda sends to CloudWatch error metrics. CloudWatch posts this message to the Amazon SNS topic and you get an email notification.

Schedule Expressions Using Rate or Cron

Rate expression

```
rate(Value Unit)
```

Where:

Value can be a positive integer.

Unit can be minute(s), hour(s), or day(s).

For example:

Example	Cron expression
Invoke Lambda function every 5 minutes	rate(5 minutes)
Invoke Lambda function every hour	rate(1 hour)
Invoke Lambda function every seven days	rate(7 days)

Note the following:

- Rate frequencies of less than one minute are not supported.
- For a singular value the unit must be singular (for example, `rate(1 day)`), otherwise plural (for example, `rate(5 days)`).

Cron expression

```
cron(Minutes Hours Day-of-month Month Day-of-week Year)
```

All fields are required and time zone is UTC only. The following table describes these fields.

Field	Values	Wildcards
Minutes	0-59	, - * /
Hours	0-23	, - * /
Day-of-month	1-31	, - * ? / L W
Month	1-12 or JAN-DEC	, - * /
Day-of-week	1-7 or SUN-SAT	, - * ? / L #
Year	1970-2199	, - * /

The following table describes the wildcard characters.

Character	Definition	Example
/	Specifies increments	0/15 in the minutes field directs execution to occur every 15 minutes.
L	Specifies "Last"	If used in Day-of-month field, specifies last day of the month. If used in Day-of-week field, specifies last day of the week (Saturday).
W	Specifies <i>Weekday</i>	When used with a date, such as 5/W, specifies the closest weekday to 5th day of the month. If the 5th falls on a Saturday, execution occurs on Friday. If the 5th falls on a Sunday, execution occurs on Monday.
#	Specifies the <i>nd</i> or <i>nth</i> day of the month	Specifying 3#2 means the second Tuesday of the month (Tuesday is the third day of the 7-day week).
*	Specifies <i>All values</i>	If used in the Day-of-month field, it means all days in the month.
?	No specified value	Used in conjunction with another specified value. For example, if a specific date is specified, but you don't care what day of the week it falls on.
-	Specifies ranges	10-12 would mean 10, 11 and 12
,	Specifies additional values	SUN, MON, TUE means Sunday, Monday and Tuesday
/	Specifies increments	5/10 means 5, 15, 25, 35, etc.

The following table lists common examples of cron expressions.

Example	Cron expression
Invoke Lambda function at 10:00am (UTC) everyday	<code>cron(0 10 * * ? *)</code>
Invoke a Lambda function 12:15pm (UTC) everyday	<code>cron(15 12 * * ? *)</code>
Invoke Lambda function at 06:00pm (UTC) every Mon-Fri	<code>cron(0 18 ? * MON-FRI *)</code>
Invoke Lambda function at 8:00am (UTC) every first day of the month	<code>cron(0 8 1 * ? *)</code>
Invoke Lambda function every 10 min Mon-Fri	<code>cron(0/10 * ? * MON-FRI *)</code>

Example	Cron expression
Invoke Lambda function every 5 minutes Mon-Fri between 8:00am and 5:55pm (UTC)	<code>cron(0/5 8-17 ? * MON-FRI *)</code>

Note the following:

- Cron expressions that lead to rates faster than one minute are not supported.
- One of the day-of-month or day-of-week values must be a question mark (?).

Using AWS Lambda with Custom User Applications

One of the use cases for using AWS Lambda is to process events generated by a user application. For demonstration purposes, you don't need to write a user application that invokes your Lambda function. Instead, the tutorial provided in this section provides sample event data that you can use and then you invoke your Lambda function manually.

When a user application invokes a Lambda function, it's an example of the AWS Lambda *request-response* model in which an application invokes a Lambda function and receives a response in real time. For more information, see [How It Works \(p. 3\)](#).

For a tutorial that walks you through an example setup, see [Tutorial: Using AWS Lambda with Custom User Applications \(p. 212\)](#).

Tutorial: Using AWS Lambda with Custom User Applications

In this tutorial, you use the AWS CLI to create and invoke a Lambda function and explore other AWS Lambda APIs.

You'll do the following:

- Create a Lambda function to process an event it receives as a parameter. You use the following example Node.js code to create your Lambda function.

```
console.log('Loading function');

exports.handler = function(event, context, callback) {
    console.log('value1 =', event.key1);
    console.log('value2 =', event.key2);
    console.log('value3 =', event.key3);
    callback(null, "Success");
};
```

Note

The code sample is compliant with the Node.js runtime v4.3. For more information, see [Programming Model \(Node.js\) \(p. 51\)](#)

The function is simple. It processes incoming event data by logging it (these logs are available in Amazon CloudWatch), and in the request-response model, you can request the log data be returned in the response.

- Simulate a user application that sends an event to your Lambda function by invoking your Lambda function manually using the following sample event data.

```
{
  "key1": "value1",
  "key2": "value2",
  "key3": "value3"
}
```

Note

This example is similar to the Getting Started exercise (see [Getting Started \(p. 35\)](#)). The difference is that the Getting Started exercise provides a console-based experience. The console does many things for you, which simplifies the experience. When using the AWS CLI, you get the experience of making the API calls, which can help you develop a better understanding of the AWS Lambda operations. In addition to creating and invoking a Lambda function, you can explore other Lambda APIs.

Next Step

[Step 1: Prepare \(p. 213\)](#)

Step 1: Prepare

Make sure you have completed the following steps:

- Signed up for an AWS account and created an administrator user in the account.
- Installed and set up the AWS CLI.

For instructions, see [Step 1: Set Up an AWS Account and the AWS CLI \(p. 35\)](#).

Next Step

[Step 2: Create a Lambda Function and Invoke It Manually \(p. 213\)](#)

Step 2: Create a Lambda Function and Invoke It Manually

In this section, you do the following:

- Create a deployment package. A deployment package is a .zip file that contains your code and any dependencies. For this tutorial there are no dependencies, you only have a simple example code.
- Create an IAM role (execution role). At the time you upload the deployment package, you need to specify an IAM role (execution role) that Lambda can assume to execute the function on your behalf.

You also grant this role the permissions that your Lambda function needs. The code in this tutorial writes logs to Amazon CloudWatch Logs. So you need to grant permissions for CloudWatch actions. For more information, see [AWS Lambda Watch Logs](#).

- Create a Lambda function (HelloWorld) using the `create-function` CLI command. For more information about the underlying API and related parameters, see [CreateFunction \(p. 282\)](#).

Topics

- [Step 2.1: Create a Lambda Function Deployment Package \(p. 214\)](#)
- [Step 2.2: Create the Execution Role \(IAM Role\) \(p. 214\)](#)
- [Step 2.3: Create a Lambda Function \(p. 215\)](#)
- [Next Step \(p. 216\)](#)

Step 2.1: Create a Lambda Function Deployment Package

Follow the instructions to create an AWS Lambda function deployment package.

1. Open a text editor, and then copy the following code.

```
console.log('Loading function');

exports.handler = function(event, context, callback) {
    console.log('value1 =', event.key1);
    console.log('value2 =', event.key2);
    console.log('value3 =', event.key3);
    callback(null, "Success");
};
```

Note

The code sample is compliant with the Node.js runtime v4.3. For more information, see [Programming Model \(Node.js\) \(p. 51\)](#)

2. Save the file as `helloworld.js`.
3. Zip the `helloworld.js` file as `helloworld.zip`.

Note

To see more examples of using other AWS services within your function, including calling other Lambda functions, see [AWS SDK for JavaScript](#)

Step 2.2: Create the Execution Role (IAM Role)

When the Lambda function in this tutorial executes, it needs permissions to write logs to Amazon CloudWatch. You grant these permissions by creating an IAM role (execution role). AWS Lambda assumes this role when executing your Lambda function on your behalf. In this section, you create an IAM role using the following predefined role type and access policy:

- AWS service role of the "AWS Lambda" type. This role grants AWS Lambda permission to assume the role.
- "AWSLambdaBasicExecutionRole" access policy that you attach to the role. This existing policy grants permissions that include permissions for Amazon CloudWatch actions that your Lambda function needs.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*.

In this section, you create an IAM role using the following predefined role type and access permissions policy:

- AWS service role of the type **AWS Lambda** – This role grants AWS Lambda permissions to assume the role.
- **AWSLambdaBasicExecutionRole** access permissions policy that you attach to the role.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. Use the following procedure to create the IAM role.

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-custom-app-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**. This grants the AWS Lambda service permissions to assume the role.
 - In **Attach Policy**, choose **AWSLambdaBasicExecutionRole**.
3. Write down the role ARN. You will need it in the next step when you create your Lambda function.

Step 2.3: Create a Lambda Function

Execute the following Lambda CLI `create-function` command to create a Lambda function. You provide the deployment package and IAM role ARN as parameters.

```
$ aws lambda create-function \
--region us-west-2 \
--function-name helloworld \
--zip-file fileb://file-path/helloworld.zip \
--role role-arn \
--handler helloworld.handler \
--runtime nodejs4.3 \
--profile adminuser
```

Optionally, you can upload the .zip file to an Amazon S3 bucket in the same AWS region, and then specify the bucket and object name in the preceding command. You need to replace the `--zip-file` parameter by the `--code` parameter, as shown following:

```
--code S3Bucket=bucket-name,S3Key=zip-file-object-key
```

For more information, see [CreateFunction \(p. 282\)](#). AWS Lambda creates the function and returns function configuration information as shown in the following example:

```
{
  "FunctionName": "helloworld",
  "CodeSize": 351,
  "MemorySize": 128,
  "FunctionArn": "function-arn",
  "Handler": "helloworld.handler",
  "Role": "arn:aws:iam::account-id:role/LambdaExecRole",
  "Timeout": 3,
  "LastModified": "2015-04-07T22:02:58.854+0000",
  "Runtime": "nodejs4.3",
```

```
"Description": ""  
}
```

Next Step

[Step 3: Invoke the Lambda Function \(AWS CLI\) \(p. 216\)](#)

Step 3: Invoke the Lambda Function (AWS CLI)

In this section, you invoke your Lambda function manually using the `invoke` AWS CLI command.

```
$ aws lambda invoke \  
--invocation-type RequestResponse \  
--function-name helloworld \  
--region us-west-2 \  
--log-type Tail \  
--payload '{"key1":"value1", "key2":"value2", "key3":"value3"}' \  
--profile adminuser \  
outputfile.txt
```

If you want you can save the payload to a file (for example, `input.txt`) and provide the file name as a parameter.

```
--payload file://input.txt \  

```

The preceding `invoke` command specifies `RequestResponse` as the invocation type, which returns a response immediately in response to the function execution. Alternatively, you can specify `Event` as the invocation type to invoke the function asynchronously.

By specifying the `--log-type` parameter, the command also requests the tail end of the log produced by the function. The log data in the response is base64-encoded as shown in the following example response:

```
{  
  "LogResult": "base64-encoded-log",  
  "StatusCode": 200  
}
```

On Linux and Mac, you can use the `base64` command to decode the log.

```
$ echo base64-encoded-log | base64 --decode
```

The following is a decoded version of an example log.

```
START RequestId: 16d25499-d89f-11e4-9e64-5d70fce44801  
2015-04-01T18:44:12.323Z    16d25499-d89f-11e4-9e64-5d70fce44801    value1 =  
value1  
2015-04-01T18:44:12.323Z    16d25499-d89f-11e4-9e64-5d70fce44801    value2 =  
value2  
2015-04-01T18:44:12.323Z    16d25499-d89f-11e4-9e64-5d70fce44801    value3 =  
value3  
2015-04-01T18:44:12.323Z    16d25499-d89f-11e4-9e64-5d70fce44801    result:
```

```
"value1"
END RequestId: 16d25499-d89f-11e4-9e64-5d70fce44801
REPORT RequestId: 16d25499-d89f-11e4-9e64-5d70fce44801
Duration: 13.35 ms      Billed Duration: 100 ms    Memory Size: 128 MB
Max Memory Used: 9 MB
```

For more information, see [Invoke \(p. 303\)](#).

Because you invoked the function using the `RequestResponse` invocation type, the function executes and returns the object you passed to the `context.succeed()` in real time when it is called. In this tutorial, you see the following text written to the `outputfile.txt` you specified in the CLI command:

```
"value1"
```

Note

You are able to execute this function because you are using the same AWS account to create and invoke the Lambda function. However, if you want to grant cross-account permissions to another AWS account or grant permissions to another an AWS service to execute the function, you must add a permissions to the access permissions policy associated with the function. The Amazon S3 tutorial, which uses Amazon S3 as the event source (see [Tutorial: Using AWS Lambda with Amazon S3 \(p. 127\)](#)), grants such permissions to Amazon S3 to invoke the function.

You can monitor the activity of your Lambda function in the AWS Lambda console.

- Sign in to the AWS Management Console and open the AWS Lambda console at <https://console.aws.amazon.com/lambda/>.

The AWS Lambda console shows a graphical representation of some of the CloudWatch metrics in the **Cloudwatch Metrics at a glance** section for your function.

- For each graph, you can also choose the **logs** link to view the CloudWatch logs directly.

Next Step

[Step 4: Try More CLI Commands \(AWS CLI\) \(p. 217\)](#)

Step 4: Try More CLI Commands (AWS CLI)

Step 4.1: List the Lambda Functions in Your Account

In this section, you try AWS Lambda list function operations. Execute the following AWS CLI `list-functions` command to retrieve a list of functions that you uploaded.

```
$ aws lambda list-functions \
--max-items 10 \
--profile adminuser
```

To illustrate the use of pagination, the command specifies the optional `--max-items` parameter to limit the number of functions returned in the response. For more information, see [ListFunctions \(p. 313\)](#). The following is an example response.

```
{
  "Functions": [
    {
```

```
    "FunctionName": "helloworld",
    "MemorySize": 128,
    "CodeSize": 412,
    "FunctionArn": "arn:aws:lambda:us-east-1:account-id:function:ProcessKinesisRecords",
    "Handler": "ProcessKinesisRecords.handler",
    "Role": "arn:aws:iam::account-id:role/LambdaExecRole",
    "Timeout": 3,
    "LastModified": "2015-02-22T21:03:01.172+0000",
    "Runtime": "nodejs4.3",
    "Description": ""
  },
  {
    "FunctionName": "ProcessKinesisRecords",
    "MemorySize": 128,
    "CodeSize": 412,
    "FunctionArn": "arn:aws:lambda:us-east-1:account-id:function:ProcessKinesisRecords",
    "Handler": "ProcessKinesisRecords.handler",
    "Role": "arn:aws:iam::account-id:role/lambda-execute-test-kinesis",
    "Timeout": 3,
    "LastModified": "2015-02-22T21:03:01.172+0000",
    "Runtime": "nodejs4.3",
    "Description": ""
  },
  ...
],
"NextMarker": null
}
```

In response, Lambda returns a list of up to 10 functions. If there are more functions you can retrieve, `NextMarker` provides a marker you can use in the next `list-functions` request; otherwise, the value is null. The following `list-functions` AWS CLI command is an example that shows the `--next-marker` parameter.

```
$ aws lambda list-functions \
--max-items 10 \
--marker value-of-NextMarker-from-previous-response \
--profile adminuser
```

Step 4.2: Get Metadata and a URL to Download Previously Uploaded Lambda Function Deployment Packages

The Lambda CLI `get-function` command returns Lambda function metadata and a presigned URL that you can use to download the function's .zip file (deployment package) that you uploaded to create the function. For more information, see [GetFunction](#) (p. 296).

```
$ aws lambda get-function \
--function-name helloworld \
--region us-west-2 \
--profile adminuser
```

The following is an example response.


```
{
  "Code": {
    "RepositoryType": "S3",
    "Location": "pre-signed-url"
  },
  "Configuration": {
    "FunctionName": "helloworld",
    "MemorySize": 128,
    "CodeSize": 287,
    "FunctionArn": "arn:aws:lambda:us-west-2:account-id:function:helloworld",

    "Handler": "helloworld.handler",
    "Role": "arn:aws:iam::account-id:role/LambdaExecRole",
    "Timeout": 3,
    "LastModified": "2015-04-07T22:02:58.854+0000",
    "Runtime": "nodejs4.3",
    "Description": ""
  }
}
```

If you want the function configuration information only (not the presigned URL), you can use the Lambda CLI `get-function-configuration` command.

```
$ aws lambda get-function-configuration \
  --function-name helloworld \
  --region us-west-2 \
  --profile adminuser
```

Next Step

[Step 5: Delete the Lambda Function and IAM Role \(AWS CLI\)](#) (p. 219)

Step 5: Delete the Lambda Function and IAM Role (AWS CLI)

Execute the following `delete-function` command to delete the `helloworld` function.

```
$ aws lambda delete-function \
  --function-name helloworld \
  --region us-west-2 \
  --profile adminuser
```

Delete the IAM Role

After you delete the Lambda function you can also delete the IAM role you created in the IAM console. For information about deleting a role, see [Deleting Roles or Instance Profiles](#) in the *IAM User Guide*.

Configuring a Lambda Function to Access Resources in an Amazon VPC

Typically, you create resources inside Amazon Virtual Private Cloud (Amazon VPC) so that they cannot be accessed over the public Internet. These resources could be AWS service resources, such as Amazon Redshift data warehouses, Amazon ElastiCache clusters, or Amazon RDS instances. They could also be your own services running on your own EC2 instances. By default, resources within a VPC are not accessible from within a Lambda function.

AWS Lambda runs your function code securely within a VPC by default. However, to enable your Lambda function to access resources inside your private VPC, you must provide additional VPC-specific configuration information that includes VPC subnet IDs and security group IDs. AWS Lambda uses this information to set up elastic network interfaces (ENIs) that enable your function to connect securely to other resources within your private VPC.

Important

AWS Lambda does not support connecting to resources within Dedicated Tenancy VPCs. For more information, see [Dedicated VPCs](#).

Configuring a Lambda Function for Amazon VPC Access

You add VPC information to your Lambda function configuration using the `VpcConfig` parameter, either at the time you create a Lambda function (see [CreateFunction](#) (p. 282)), or you can add it to the existing Lambda function configuration (see [UpdateFunctionConfiguration](#) (p. 332)). Following are AWS CLI examples:

- The `create-function` CLI command specifies the `--vpc-config` parameter to provide VPC information at the time you create a Lambda function.

```
$ aws lambda create-function \  
--function-name ExampleFunction \  

```

```
--runtime python2.7 \  
--role execution-role-arn \  
--zip-file fileb://path/app.zip \  
--handler app.handler \  
--vpc-config SubnetIds=comma-separated-vpc-subnet-ids,SecurityGroupIds=comma-separated-security-group-ids \  
--memory-size 1024 \  
--profile adminuser
```

Note

The Lambda function execution role must have permissions to create ENIs. AWS Lambda provides a permissions policy, `AWSLambdaVPCLambdaAccessExecutionRole`, with permissions for the necessary EC2 actions (`ec2:CreateNetworkInterface`, `ec2:DescribeNetworkInterfaces`, and `ec2>DeleteNetworkInterface`) that you can use when creating a role. You can review the policy in the IAM console.

- The `update-function-configuration` CLI command specifies the `--vpc-config` parameter to add VPC information to an existing Lambda function configuration.

```
$ aws lambda update-function-configuration \  
--function-name ExampleFunction \  
--vpc-config SubnetIds=comma-separated-vpc-subnet-ids,SecurityGroupIds=security-group-ids
```

To remove VPC-related information from your Lambda function configuration, use the `UpdateFunctionConfiguration` API by providing an empty list of subnet IDs and security group IDs as shown in the following example CLI command.

```
$ aws lambda update-function-configuration \  
--function-name ExampleFunction \  
--vpc-config SubnetIds=[],SecurityGroupIds=[]
```

Note the following additional considerations:

- We recommend that you avoid DNS resolution of public host names for your VPC. This can take several seconds to resolve, which adds several seconds of billable time on your request. For example, if your Lambda function accesses an Amazon RDS instance in your VPC, launch the instance with the `no-publicly-accessible` option.
- When you add VPC configuration to a Lambda function, it can only access resources in that VPC. If a Lambda function needs to access both VPC resources and the public Internet, the VPC needs to have a Network Address Translation (NAT) instance inside the VPC.

Internet Access for Lambda Functions

AWS Lambda uses the VPC information you provide to set up [ENIs](#) that allow your Lambda function to access VPC resources. Each ENI is assigned a private IP address from the IP address range within the Subnets you specify, but is not assigned any public IP addresses. *Therefore, if your Lambda function requires Internet access (for example, to access AWS services that don't have VPC endpoints, such as*

*Amazon Kinesis), you can configure a NAT instance inside your VPC or you can use the Amazon VPC NAT gateway. For more information, see [NAT Gateways](#) in the *Amazon VPC User Guide*. You cannot use an Internet gateway attached to your VPC, since that requires the ENI to have public IP addresses.*

Important

If your Lambda function needs Internet access, do not attach it to a public subnet or to a private subnet without Internet access. Instead, attach it only to private subnets with Internet access through a NAT instance or an Amazon VPC NAT gateway.

Guidelines for Setting Up VPC-Enabled Lambda Functions

Your Lambda function automatically scales based on the number of events it processes. The following are general guidelines for setting up VPC-enabled Lambda functions to support the scaling behavior.

- If your Lambda function accesses a VPC, you must make sure that your VPC has sufficient ENI capacity to support the scale requirements of your Lambda function. You can use the following formula to approximately determine the ENI capacity.

$$\text{Projected peak concurrent executions} * (\text{Memory in GB} / 1.5\text{GB})$$

Where:

- **Projected peak concurrent execution** – Use the information in [Lambda Function Concurrent Executions \(p. 28\)](#) to determine this value.
 - **Memory** – The amount of memory you configured for your Lambda function.
- The subnets you specify should have sufficient available IP addresses to match the number of ENIs.

We also recommend that you specify at least one subnet in each Availability Zone in your Lambda function configuration. By specifying subnets in each of the Availability Zones, your Lambda function can run in another Availability Zone if one goes down or runs out of IP addresses.

Caution

If your VPC does not have sufficient ENIs or subnet IPs, your Lambda function will not scale as requests increase, and you will see an increase in function failures. AWS Lambda currently does not log errors to CloudWatch Logs that are caused by insufficient ENIs or IP addresses. If you see an increase in errors without corresponding CloudWatch Logs, you can invoke the Lambda function synchronously to get the error responses (for example, test your Lambda function in the AWS Lambda console because the console invokes your Lambda function synchronously and displays errors).

Topics

- [Tutorials: Accessing Resources in an Amazon VPC \(p. 223\)](#)

Tutorials: Configuring a Lambda Function to Access Resources in an Amazon VPC

This section provides end-to-end example tutorials where you create and configure a Lambda function to access resources in an Amazon VPC, such as an Amazon ElastiCache cluster or an Amazon RDS database instance.

Topics

- [Tutorial: Configuring a Lambda Function to Access Amazon ElastiCache in an Amazon VPC \(p. 223\)](#)
- [Tutorial: Configuring a Lambda Function to Access Amazon RDS in an Amazon VPC \(p. 227\)](#)

Tutorial: Configuring a Lambda Function to Access Amazon ElastiCache in an Amazon VPC

In this tutorial, you do the following:

- Create an Amazon ElastiCache cluster in your default Amazon Virtual Private Cloud (Amazon VPC) in the us-east-1 region. For more information about Amazon ElastiCache, see [Amazon ElastiCache](#).
- Create a Lambda function to access the ElastiCache cluster. When you create the Lambda function, you provide subnet IDs in your Amazon VPC and a VPC security group to allow the Lambda function to access resources in your VPC. For illustration in this tutorial, the Lambda function generates a UUID, writes it to the cache, and retrieves it from the cache.
- Invoke the Lambda function manually and verify that it accessed the ElastiCache cluster in your VPC.

Important

This tutorial uses the default Amazon VPC in the us-east-1 region in your account. For more information about Amazon VPC, see [How to Get Started with Amazon VPC](#) in the *Amazon VPC User Guide*.

Next Step

[Step 1: Create an ElastiCache Cluster \(p. 223\)](#)

Step 1: Create an ElastiCache Cluster

In this step, you create an ElastiCache cluster in the default Amazon VPC in us-east-1 region in your account.

1. Run the following AWS CLI command to create a Memcached cluster in the default VPC in the us-east-1 region in your account.

```
aws elasticache create-cache-cluster \  
  --cache-cluster-id ClusterForLambdaTest \  
  --cache-node-type cache.m3.medium \  
  --engine memcached \  
  --security-group-ids your-default-vpc-security-group \  
  --num-cache-nodes 1
```

You can look up the default VPC security group in the VPC console under **Security Groups**. Your example Lambda function will add and retrieve an item from this cluster.

You can also launch a cache cluster using the Amazon ElastiCache console. For instructions, see [Getting Started with Amazon ElastiCache](#) in the *Amazon ElastiCache User Guide*.

2. Write down the configuration endpoint for the cache cluster that you launched. You can get this from the Amazon ElastiCache console. You will specify this value in your Lambda function code in the next section.

Next Step

[Step 2: Create a Lambda Function](#) (p. 224)

Step 2: Create a Lambda Function

In this step, you do the following:

- Create a Lambda function deployment package using the sample code provided.
- Create an IAM role (execution role). At the time you upload the deployment package, you need to specify this role so that Lambda can assume the role and then execute the function on your behalf.

The permissions policy grants AWS Lambda permissions to set up elastic network interfaces (ENIs) to enable your Lambda function to access resources in the VPC. In this example, your Lambda function accesses an ElastiCache cluster in the VPC.

- Create the Lambda function by uploading the deployment package.

Topics

- [Step 2.1: Create a Deployment Package](#) (p. 224)
- [Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 225)
- [Step 2.3: Create the Lambda Function \(Upload the Deployment Package\)](#) (p. 226)

Step 2.1: Create a Deployment Package

Note

At this time, example code for the Lambda function is provided only in Python.

Python

The following example Python code reads and writes an item to your ElastiCache cluster.

1. Open a text editor, and then copy the following code.

```
from __future__ import print_function
import time
import uuid
import sys
import socket
import elasticache_auto_discovery
from pymemcache.client.hash import HashClient

#elasticache settings
elasticache_config_endpoint = "your-elasticache-cluster-endpoint:port"
nodes = elasticache_auto_discovery.discover(elasticache_config_endpoint)
nodes = map(lambda x: (x[1], int(x[2])), nodes)
memcache_client = HashClient(nodes)

def handler(event, context):
```

```
"""
This function puts into memcache and get from it.
Memcache is hosted using elasticache
"""

#Create a random UUID... this will be the sample element we add to the
cache.
uuid_inserted = uuid.uuid4().hex
#Put the UUID to the cache.
memcache_client.set('uuid', uuid_inserted)
#Get item (UUID) from the cache.
uuid_obtained = memcache_client.get('uuid')
if uuid_obtained == uuid_inserted:
    # this print should go to the CloudWatch Logs and Lambda console.
    print ("Success: Fetched value %s from memcache" %(uuid_inserted))
else:
    raise Exception("Value is not the same as we put :(. Expected %s
got %s" %(uuid_inserted, uuid_obtained))

return "Fetched value from memcache: " + uuid_obtained
```

2. Save the file as `app.py`.
3. Install the following library dependencies using **pip**:
 - `pymemcache` – The Lambda function code uses this library to create a `HashClient` object to set and get items from memcache (see [pymemcache](#)).
 - `elasticache-auto-discovery` – The Lambda function uses this library to get the nodes in your Amazon ElastiCache cluster (see [elasticache-auto-discovery](#)).
4. Zip all of these files into a file named `app.zip` to create your deployment package. For step-by-step instructions, see [Creating a Deployment Package \(Python\)](#) (p. 98).

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 225)

Step 2.2: Create the Execution Role (IAM Role)

In this step, you create an AWS Identity and Access Management (IAM) role using the following predefined role type and access permissions policy:

- **AWS Lambda** (AWS service role) – This role grants AWS Lambda permissions to assume the role.
- **AWSLambdaVPCAccessExecutionRole** (access permissions policy) – This is the policy that you attach to the role. The policy grants permissions for the EC2 actions that AWS Lambda needs to manage ENIs. You can view this AWS managed policy in IAM console.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. Use the following procedure to create the IAM role.

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.

2. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-vpc-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**. This grants the AWS Lambda service permissions to assume the role.
 - In **Attach Policy**, choose **AWSLambdaVPCAccessExecutionRole**. The permissions in this policy are sufficient for the Lambda function in this tutorial.
3. Write down the role ARN. You will need it in the next step when you create your Lambda function.

Next Step

[Step 2.3: Create the Lambda Function \(Upload the Deployment Package\) \(p. 226\)](#)

Step 2.3: Create the Lambda Function (Upload the Deployment Package)

In this step, you create the Lambda function (AccessMemCache) using the `create-function` AWS CLI command.

At the command prompt, run the following Lambda CLI `create-function` command using the **adminuser** profile.

You need to update the following `create-function` command by providing the .zip file path and the execution role ARN. The `--runtime` parameter value can be `python2.7`, `nodejs` and `java8`, depending on the language you used to author your code.

Note

At this time, example code for the Lambda function is provided only in Python.

```
$ aws lambda create-function \
--function-name AccessMemCache \
--region us-east-1 \
--zip-file fileb://path-to/app.zip \
--role execution-role-arn \
--handler app.handler \
--runtime python2.7 \
--timeout 30 \
--vpc-config SubnetIds=comma-separated-vpc-subnet-ids,SecurityGroupIds=default-security-group-id \
--memory-size 1024 \
--profile adminuser
```

You can find the subnet IDs and the default security group ID of your VPC from the VPC console.

Optionally, you can upload the .zip file to an Amazon S3 bucket in the same AWS region, and then specify the bucket and object name in the preceding command. You need to replace the `--zip-file` parameter by the `--code` parameter, as shown following:

```
--code S3Bucket=bucket-name,S3Key=zip-file-object-key
```


Note

You can also create the Lambda function using the AWS Lambda console. When creating the function, choose a VPC for the Lambda and then select the subnets and security groups from the provided fields.

Next Step

[Step 3: Test the Lambda Function \(Invoke Manually\)](#) (p. 227)

Step 3: Test the Lambda Function (Invoke Manually)

In this step, you invoke the Lambda function manually using the `invoke` command. When the Lambda function executes, it generates a UUID and writes it to the ElastiCache cluster that you specified in your Lambda code. The Lambda function then retrieves the item from the cache.

1. Invoke the Lambda function (`AccessMemCache`) using the AWS Lambda `invoke` command.

```
$ aws lambda invoke \
--function-name AccessMemCache \
--region us-east-1 \
--profile adminuser \
output.txt
```

2. Verify that the Lambda function executed successfully as follows:

- Review the `output.txt` file.
- Review the results in the AWS Lambda console.
- Verify the results in CloudWatch Logs.

What Next?

Now that you have created a Lambda function that accesses an ElastiCache cluster in your VPC, you can have the function invoked in response to events. For information about configuring event sources and examples, see [Use Cases](#) (p. 125).

Tutorial: Configuring a Lambda Function to Access Amazon RDS in an Amazon VPC

In this tutorial, you do the following:

- Launch an Amazon RDS MySQL database engine instance in your default Amazon VPC. In the MySQL instance, you create a database (ExampleDB) with a sample table (Employee) in it. For more information about Amazon RDS, see [Amazon RDS](#).
- Create a Lambda function to access the ExampleDB database, create a table (Employee), add a few records, and retrieve the records from the table.
- Invoke the Lambda function manually and verify the query results. This is how you verify that your Lambda function was able to access the RDS MySQL instance in the VPC.

Important

This tutorial uses the default Amazon VPC in the us-east-1 region in your account. For more information about Amazon VPC, see [How to Get Started with Amazon VPC](#) in the *Amazon VPC User Guide*.

Next Step

[Step 1: Create an Amazon RDS MySQL Instance and ExampleDB Database \(p. 228\)](#)

Step 1: Create an Amazon RDS MySQL Instance and ExampleDB Database

In this tutorial, the example Lambda function creates a table (Employee), inserts a few records, and then retrieves the records. The table that the Lambda function creates has the following schema:

```
Employee(EmpID, Name)
```

Where `EmpID` is the primary key. Now, you need to add a few records to this table.

First, you launch an RDS MySQL instance in your default VPC with ExampleDB database. If you already have an RDS MySQL instance running in your default VPC, skip this step.

Important

This tutorial uses the RDS MySQL DB engine launched in the default VPC in the us-east-1 region.

You can launch an RDS MySQL instance using one of the following methods:

- Follow the instructions at [Creating a MySQL DB Instance and Connecting to a Database on a MySQL DB Instance](#) in the *Amazon Relational Database Service User Guide*.
- Use the following AWS CLI command:

```
$ aws rds create-db-instance \  
  --db-instance-identifier MySQLForLambdaTest \  
  --db-instance-class db.t2.micro \  
  --engine MySQL \  
  --allocated-storage 5 \  
  --no-publicly-accessible \  
  --db-name ExampleDB \  
  --master-username username \  
  --master-user-password password \  
  --backup-retention-period 3 \  
  --profile adminuser
```

Write down the database name, user name, and password. You also need the host address (endpoint) of the DB instance, which you can get from the RDS console (you might need to wait until the instance status is available and the Endpoint value appears in the console).

Next Step

[Step 2: Create a Lambda Function \(p. 228\)](#)

Step 2: Create a Lambda Function

In this step, you do the following:

- Create a Lambda function deployment package using the sample code provided.
- Create an IAM role (execution role) that you specify at the time of creating your Lambda function. This is the role AWS Lambda assumes when executing the Lambda function.

The permissions policy associated with this role grants AWS Lambda permissions to set up elastic network interfaces (ENIs) to enable your Lambda function to access resources in the VPC.

- Create the Lambda function by uploading the deployment package.

Topics

- [Step 2.1: Create a Deployment Package \(p. 229\)](#)
- [Step 2.2: Create the Execution Role \(IAM Role\) \(p. 230\)](#)
- [Step 2.3: Create the Lambda Function \(Upload the Deployment Package\) \(p. 231\)](#)

Step 2.1: Create a Deployment Package

Note

At this time, example code for the Lambda function is provided only in Python.

Python

The following example Python code runs a SELECT query against the Employee table in the MySQL RDS instance that you created in the VPC. The code creates a table in the ExampleDB database, adds sample records, and retrieves those records.

1. Open a text editor, and then copy the following code.

```
import sys
import logging
import rds_config
import pymysql
#rds settings
rds_host = "rds-instance-endpoint"
name = rds_config.db_username
password = rds_config.db_password
db_name = rds_config.db_name
port = 3306

logger = logging.getLogger()
logger.setLevel(logging.INFO)

server_address = (rds_host, port)
try:
    conn = pymysql.connect(rds_host, user=name, passwd=password, db=db_name,
        connect_timeout=5)
except:
    logger.error("ERROR: Unexpected error: Could not connect to MySql in
        stance.")
    sys.exit()

logger.info("SUCCESS: Connection to RDS mysql instance succeeded")
def handler(event, context):
    """
    This function fetches content from mysql RDS instance
    """

    item_count = 0

    with conn.cursor() as cur:
        cur.execute("create table Employee3 ( EmpID int NOT NULL, Name
            varchar(255) NOT NULL, PRIMARY KEY (EmpID))")
```

```
cur.execute('insert into Employee3 (EmpID, Name) values(1, "Joe")')

cur.execute('insert into Employee3 (EmpID, Name) values(2, "Bob")')

cur.execute('insert into Employee3 (EmpID, Name) values(3, "Mary")')

conn.commit()
cur.execute("select * from Employee3")
for row in cur:
    item_count += 1
    logger.info(row)
    #print(row)

return "Added %d items from RDS MySQL table" %(item_count)
```

Note

We recommend that `pymysql.connect()` is executed outside the handler, as shown, for better performance.

2. Save the file as `app.py`.
3. Install the following library dependencies using **pip**:
 - `pymysql` – The Lambda function code uses this library to access your MySQL instance (see [PyMySQL](#)).
4. Create a config file that contains the following information and save it as `rds_config.py`:

```
#config file containing credentials for rds mysql instance
db_username = "username"
db_password = "password"
db_name = "databasename"
```

5. Zip all of these files into a file named `app.zip` to create your deployment package. For step-by-step instructions, see [Creating a Deployment Package \(Python\)](#) (p. 98).

Next Step

[Step 2.2: Create the Execution Role \(IAM Role\)](#) (p. 230)

Step 2.2: Create the Execution Role (IAM Role)

In this step, you create an execution role (IAM role) for your Lambda function using the following predefined role type and access permissions policy:

- **AWS Lambda** (AWS service role) – This role grants AWS Lambda permissions to assume the role.
- **AWSLambdaVPCLambdaAccessExecutionRole** (access permissions policy) – This role grants AWS Lambda permissions for EC2 actions to create ENIs and your Lambda function can access VPC resources and CloudWatch Logs actions to write logs.

For more information about IAM roles, see [IAM Roles](#) in the *IAM User Guide*. Use the following procedure to create the IAM role.

To create an IAM role (execution role)

1. Sign in to the Identity and Access Management (IAM) console at <https://console.aws.amazon.com/iam/>.
2. Follow the steps in [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide* to create an IAM role (execution role). As you follow the steps to create a role, note the following:
 - In **Role Name**, use a name that is unique within your AWS account (for example, **lambda-vpc-execution-role**).
 - In **Select Role Type**, choose **AWS Service Roles**, and then choose **AWS Lambda**. This grants the AWS Lambda service permissions to assume the role.
 - In **Attach Policy**, choose **AWSLambdaVPCAccessExecutionRole**. The permissions in this policy are sufficient for the Lambda function in this tutorial.
3. Write down the role ARN. You will need it in the next step when you create your Lambda function.

Next Step

[Step 2.3: Create the Lambda Function \(Upload the Deployment Package\) \(p. 231\)](#)

Step 2.3: Create the Lambda Function (Upload the Deployment Package)

In this step, you create the Lambda function (ReadMySQLTable) using the `create-function` AWS CLI command.

At the command prompt, run the following Lambda CLI `create-function` command using the **adminuser** profile.

You need to update the following `create-function` command by providing the .zip file path and the execution role ARN. The `--runtime` parameter value can be `python2.7`, `nodejs`, or `java8`, depending on the language you used to author your code.

Note

At this time, example code for the Lambda function is provided only in Python.

```
$ aws lambda create-function \
--region us-east-1 \
--function-name CreateTableAddRecordsAndRead \
--zip-file fileb://file-path/app.zip \
--role execution-role-arn \
--handler app.handler \
--runtime python2.7 \
--vpc-config SubnetIds=comma-separated-subnet-ids,SecurityGroupIds=default-vpc-security-group-id \
--profile adminuser
```

Optionally, you can upload the .zip file to an Amazon S3 bucket in the same AWS region, and then specify the bucket and object name in the preceding command. You need to replace the `--zip-file` parameter by the `--code` parameter, as shown following:

```
--code S3Bucket=bucket-name,S3Key=zip-file-object-key
```

Note

You can also create the Lambda function using the AWS Lambda console (use the parameter values shown in the preceding CLI command).

Next Step

[Step 3: Test the Lambda Function \(Invoke Manually\) \(p. 232\)](#)

Step 3: Test the Lambda Function (Invoke Manually)

In this step, you invoke the Lambda function manually using the `invoke` command. When the Lambda function executes, it runs the `SELECT` query against the `Employee` table in the RDS MySQL instance and prints the results (these results also go to the CloudWatch Logs).

1. Invoke the Lambda function (`ReadMySQLTable`) using the AWS Lambda `invoke` command.

```
$ aws lambda invoke \  
--function-name CreateTableAddRecordsAndRead \  
--region us-east-1 \  
--profile adminuser \  
output.txt
```

2. Verify that the Lambda function executed successfully as follows:
 - Review the `output.txt` file.
 - Review the results in the AWS Lambda console.
 - Verify the results in CloudWatch Logs.

Logging AWS Lambda API Calls By Using AWS CloudTrail

AWS Lambda is integrated with AWS CloudTrail, a service that captures API calls made by or on behalf of AWS Lambda in your AWS account and delivers the log files to an Amazon S3 bucket that you specify. CloudTrail captures API calls made from the AWS Lambda console or from the AWS Lambda API. Using the information collected by CloudTrail, you can determine what request was made to AWS Lambda, the source IP address from which the request was made, who made the request, when it was made, and so on. To learn more about CloudTrail, including how to configure and enable it, see the [AWS CloudTrail User Guide](#).

AWS Lambda Information in CloudTrail

When CloudTrail logging is enabled in your AWS account, API calls made to AWS Lambda actions are tracked in log files. AWS Lambda records are written together with other AWS service records in a log file. CloudTrail determines when to create and write to a new file based on a time period and file size.

The following actions are supported:

- [AddPermission](#) (p. 272)
- [CreateEventSourceMapping](#) (p. 278)
- [CreateFunction](#) (p. 282)

(The `zipFile` parameter is omitted from the CloudTrail logs for `CreateFunction`.)

- [DeleteEventSourceMapping](#) (p. 288)
- [DeleteFunction](#) (p. 290)
- [GetEventSourceMapping](#) (p. 294)
- [GetFunction](#) (p. 296)
- [GetFunctionConfiguration](#) (p. 298)
- [GetPolicy](#) (p. 301)
- [ListEventSourceMappings](#) (p. 311)
- [ListFunctions](#) (p. 313)
- [RemovePermission](#) (p. 321)
- [UpdateEventSourceMapping](#) (p. 325)

- [UpdateFunctionCode](#) (p. 328)

(The `ZipFile` parameter is omitted from the CloudTrail logs for `UpdateFunctionCode`.)

- [UpdateFunctionConfiguration](#) (p. 332)

Every log entry contains information about who generated the request. The user identity information in the log helps you determine whether the request was made with root or IAM user credentials, with temporary security credentials for a role or federated user, or by another AWS service. For more information, see the **userIdentity** field in the [CloudTrail Event Reference](#).

You can store your log files in your bucket for as long as you want, but you can also define Amazon S3 lifecycle rules to archive or delete log files automatically. By default, your log files are encrypted by using Amazon S3 server-side encryption (SSE).

You can choose to have CloudTrail publish Amazon SNS notifications when new log files are delivered if you want to take quick action upon log file delivery. For more information, see [Configuring Amazon SNS Notifications for CloudTrail](#).

You can also aggregate AWS Lambda log files from multiple AWS regions and multiple AWS accounts into a single S3 bucket. For more information, see [Working with CloudTrail Log Files](#).

Understanding AWS Lambda Log File Entries

CloudTrail log files contain one or more log entries where each entry is made up of multiple JSON-formatted events. A log entry represents a single request from any source and includes information about the requested action, any parameters, the date and time of the action, and so on. The log entries are not guaranteed to be in any particular order. That is, they are not an ordered stack trace of the public API calls.

The following example shows CloudTrail log entries for the `GetFunction` and `DeleteFunction` actions.

```
{
  "Records": [
    {
      "eventVersion": "1.03",
      "userIdentity": {
        "type": "IAMUser",
        "principalId": "A1B2C3D4E5F6G7EXAMPLE",
        "arn": "arn:aws:iam::999999999999:user/myUserName",
        "accountId": "999999999999",
        "accessKeyId": "AKIAIOSFODNN7EXAMPLE",
        "userName": "myUserName"
      },
      "eventTime": "2015-03-18T19:03:36Z",
      "eventSource": "lambda.amazonaws.com",
      "eventName": "GetFunction",
      "awsRegion": "us-east-1",
      "sourceIPAddress": "127.0.0.1",
      "userAgent": "Python-httpplib2/0.8 (gzip)",
      "errorCode": "AccessDenied",
      "errorMessage": "User: arn:aws:iam::999999999999:user/myUserName is not
authorized to perform: lambda:GetFunction on resource: arn:aws:lambda:us-west-
2:999999999999:function:other-acct-function",
      "requestParameters": null,
      "responseElements": null,
    }
  ]
}
```



```
    "requestID": "7aebcd0f-cda1-11e4-aaa2-e356da31e4ff",
    "eventID": "e92a3e85-8ecd-4d23-8074-843aabfe89bf",
    "eventType": "AwsApiCall",
    "recipientAccountId": "999999999999"
  },
  {
    "eventVersion": "1.03",
    "userIdentity": {
      "type": "IAMUser",
      "principalId": "A1B2C3D4E5F6G7EXAMPLE",
      "arn": "arn:aws:iam::999999999999:user/myUserName",
      "accountId": "999999999999",
      "accessKeyId": "AKIAIOSFODNN7EXAMPLE",
      "userName": "myUserName"
    },
    "eventTime": "2015-03-18T19:04:42Z",
    "eventSource": "lambda.amazonaws.com",
    "eventName": "DeleteFunction",
    "awsRegion": "us-east-1",
    "sourceIPAddress": "127.0.0.1",
    "userAgent": "Python-httpplib2/0.8 (gzip)",
    "requestParameters": {
      "functionName": "basic-node-task"
    },
    "responseElements": null,
    "requestID": "a2198ecc-cda1-11e4-aaa2-e356da31e4ff",
    "eventID": "20b84ce5-730f-482e-b2b2-e8fcc87ceb22",
    "eventType": "AwsApiCall",
    "recipientAccountId": "999999999999"
  }
]
```

Note

The `eventName` may include date and version information, such as `"GetFunction20150331"`, but it is still referring to the same public API.

Best Practices for Working with AWS Lambda Functions

The following are recommended best practices for using AWS Lambda:

- Write your Lambda function code in a stateless style, and ensure there is no affinity between your code and the underlying compute infrastructure.
- Avoid declaring any function variables outside the scope of the handler. Lambda does not guarantee those variables will be refreshed between function invocations.
- Make sure you have set `rx` permissions on your files in the uploaded ZIP to ensure Lambda can execute code on your behalf.
- Lower costs and improve performance by minimizing the use of startup code not directly related to processing the current event.
- Use the built-in CloudWatch monitoring of your Lambda functions to view and optimize request latencies.
- Delete old Lambda functions that you are no longer using.

AWS Lambda Limits

This section discusses AWS Lambda limits.

Topics

- [List of AWS Lambda Limits \(p. 237\)](#)
- [AWS Lambda Limit Errors \(p. 238\)](#)

List of AWS Lambda Limits

Every Lambda function is allocated with a fixed amount of specific resources regardless of the memory allocation, and each function is allocated with a fixed amount of code storage per function and per account.

The following table lists the runtime resource limits for a Lambda function per invocation.

AWS Lambda Resource Limits

Resource	Default Limit
Ephemeral disk capacity ("/tmp" space)	512 MB
Number of file descriptors	1,024
Number of processes and threads (combined total)	1,024
Maximum execution duration per request	300 seconds
Invoke (p. 303) request body payload size (RequestResponse)	6 MB
Invoke (p. 303) request body payload size (Event)	128 K
Invoke (p. 303) response body payload size (RequestResponse)	6 MB

The following table lists the Lambda account limits per region.

AWS Lambda Account Limits Per Region

Resource	Default Limit
Concurrent executions (see Lambda Function Concurrent Executions (p. 28))	100

To request a limit increase for concurrent execution

1. Open the [AWS Support Center](#) page, sign in, if necessary, and then click **Create case**.
2. Under **Regarding**, select **Service Limit Increase**.
3. Under **Limit Type**, select **Lambda**, fill in the necessary fields in the form, and then click the button at the bottom of the page for your preferred method of contact.

Note

AWS may automatically raise the concurrent execution limit on your behalf to enable your function to match the incoming event rate, as in the case of triggering the function from an Amazon S3 bucket.

The following table lists service limits for deploying a Lambda function.

AWS Lambda Deployment Limits

Item	Default Limit
Lambda function deployment package size (.zip/.jar file)	50 MB
Total size of all the deployment packages that can be uploaded per region	75 GB
Size of code/dependencies that you can zip into a deployment package (uncompressed zip/jar size)	250 MB

AWS Lambda Limit Errors

Functions that exceed any of the limits listed in the previous limits tables will fail with an `exceeded limits` exception. These limits are fixed and cannot be changed at this time. For example, if you receive the exception `CodeStorageExceededException` or an error message similar to "Code storage limit exceeded" from AWS Lambda, you need to reduce the size of your code storage.

To reduce the size of your code storage

1. Remove the functions that you no longer use.
2. Reduce the code size of the functions that you do not want to remove. You can find the code size of a Lambda function by using the AWS Lambda console, the AWS Command Line Interface, or AWS SDKs.

Authentication and Access Control for AWS Lambda

Access to AWS Lambda requires credentials that AWS can use to authenticate your requests. Those credentials must have permissions to access AWS resources, such as an AWS Lambda function or an Amazon S3 bucket. The following sections provide details on how you can use [AWS Identity and Access Management \(IAM\)](#) and Lambda to help secure your resources by controlling who can access them:

- [Authentication](#) (p. 239)
- [Access Control](#) (p. 240)

Authentication

You can access AWS as any of the following types of identities:

- **AWS account root user** – When you sign up for AWS, you provide an email address and password that is associated with your AWS account. These are your *root credentials* and they provide complete access to all of your AWS resources.

Important

For security reasons, we recommend that you use the root credentials only to create an *administrator user*, which is an *IAM user* with full permissions to your AWS account. Then, you can use this administrator user to create other IAM users and roles with limited permissions. For more information, see [IAM Best Practices](#) and [Creating an Admin User and Group](#) in the *IAM User Guide*.

- **IAM user** – An [IAM user](#) is simply an identity within your AWS account that has specific custom permissions (for example, permissions to create a function in Lambda). You can use an IAM user name and password to sign in to secure AWS webpages like the [AWS Management Console](#), [AWS Discussion Forums](#), or the [AWS Support Center](#).

In addition to a user name and password, you can also generate [access keys](#) for each user. You can use these keys when you access AWS services programmatically, either through [one of the several SDKs](#) or by using the [AWS Command Line Interface \(CLI\)](#). The SDK and CLI tools use the access keys to cryptographically sign your request. If you don't use the AWS tools, you must sign the request yourself. Lambda supports *Signature Version 4*, a protocol for authenticating inbound API requests.

For more information about authenticating requests, see [Signature Version 4 Signing Process](#) in the *AWS General Reference*.

- **IAM role** – An [IAM role](#) is another IAM identity you can create in your account that has specific permissions. It is similar to an *IAM user*, but it is not associated with a specific person. An IAM role enables you to obtain temporary access keys that can be used to access AWS services and resources. IAM roles with temporary credentials are useful in the following situations:
 - **Federated user access** – Instead of creating an IAM user, you can use preexisting user identities from AWS Directory Service, your enterprise user directory, or a web identity provider. These are known as *federated users*. AWS assigns a role to a federated user when access is requested through an [identity provider](#). For more information about federated users, see [Federated Users and Roles](#) in the *IAM User Guide*.
 - **Cross-account access** – You can use an IAM role in your account to grant another AWS account permissions to access your account's resources. For an example, see [Tutorial: Delegate Access Across AWS Accounts Using IAM Roles](#) in the *IAM User Guide*.
 - **AWS service access** – You can use an IAM role in your account to grant an AWS service permissions to access your account's resources. For example, you can create a role that allows Amazon Redshift to access an S3 bucket on your behalf and then load data stored in the S3 bucket into an Amazon Redshift cluster. For more information, see [Creating a Role to Delegate Permissions to an AWS Service](#) in the *IAM User Guide*.
 - **Applications running on EC2** – Instead of storing access keys within the EC2 instance for use by applications running on the instance and making AWS API requests, you can use an IAM role to manage temporary credentials for these applications. To assign an AWS role to an EC2 instance and make it available to all of its applications, you can create an instance profile that is attached to the instance. An instance profile contains the role and enables programs running on the EC2 instance to get temporary credentials. For more information, see [Using Roles for Applications on Amazon EC2](#) in the *IAM User Guide*.

Access Control

You can have valid credentials to authenticate your requests, but unless you have permissions you cannot create or access AWS Lambda resources. For example, you must have permissions to create a Lambda function, add an event source, and publish a version of your Lambda function.

The following sections describe how to manage permissions for AWS Lambda. We recommend that you read the overview first.

- [Overview of Managing Access Permissions to Your AWS Lambda Resources](#) (p. 241)
- [Using Identity-Based Policies \(IAM Policies\) for AWS Lambda](#) (p. 245)
- [Using Resource-Based Policies for AWS Lambda \(Lambda Function Policies\)](#) (p. 258)

Overview of Managing Access Permissions to Your AWS Lambda Resources

Every AWS resource is owned by an AWS account, and permissions to create or access a resource are governed by permissions policies. An account administrator can attach permissions policies to IAM identities (that is, users, groups, and roles), and some services (such as AWS Lambda) also support attaching permissions policies to resources.

Note

An *account administrator* (or administrator user) is a user with administrator privileges. For more information, see [IAM Best Practices](#) in the *IAM User Guide*.

When granting permissions, you decide who is getting the permissions, the resources they get permissions for, and the specific actions that you want to allow on those resources.

Topics

- [AWS Lambda Resources and Operations](#) (p. 241)
- [Understanding Resource Ownership](#) (p. 242)
- [Managing Access to Resources](#) (p. 242)
- [Specifying Policy Elements: Actions, Effects, Resources, and Principals](#) (p. 244)
- [Specifying Conditions in a Policy](#) (p. 245)

AWS Lambda Resources and Operations

In AWS Lambda, the primary resources are a Lambda *function* and an *event source mapping*. You create an event source mapping in the AWS Lambda pull model to associate a Lambda function with an event source. For more information, see [Event Source Mapping](#) (p. 10).

AWS Lambda also supports additional resource types, *alias* and *version*. However, you can create aliases and versions only in the context of an existing Lambda function. These are referred to as *subresources*.

These resources and subresources have unique Amazon Resource Names (ARNs) associated with them as shown in the following table.

Resource Type	ARN Format
Function	arn:aws:lambda: <i>region</i> : <i>account-id</i> :functions: <i>function-name</i>
Function alias	arn:aws:lambda: <i>region</i> : <i>account-id</i> :functions: <i>function-name</i> : <i>alias-name</i>
Function version	arn:aws:lambda: <i>region</i> : <i>account-id</i> :functions: <i>function-name</i> : <i>version</i>
Event source mapping	arn:aws:lambda: <i>region</i> : <i>account-id</i> :event-source-mappings: <i>event-source-mapping-id</i>

AWS Lambda provides a set of operations to work with the Lambda resources. For a list of available operations, see [Actions](#) (p. 270).

Understanding Resource Ownership

A *resource owner* is the AWS account that created the resource. That is, the resource owner is the AWS account of the *principal entity* (the root account, an IAM user, or an IAM role) that authenticates the request that creates the resource. The following examples illustrate how this works:

- If you use the root account credentials of your AWS account to create a Lambda function, your AWS account is the owner of the resource (in Lambda, the resource is the Lambda function).
- If you create an IAM user in your AWS account and grant permissions to create a Lambda function to that user, the user can create a Lambda function. However, your AWS account, to which the user belongs, owns the Lambda function resource.
- If you create an IAM role in your AWS account with permissions to create a Lambda function, anyone who can assume the role can create a Lambda function. Your AWS account, to which the role belongs, owns the Lambda function resource.

Managing Access to Resources

A *permissions policy* describes who has access to what. The following section explains the available options for creating permissions policies.

Note

This section discusses using IAM in the context of AWS Lambda. It doesn't provide detailed information about the IAM service. For complete IAM documentation, see [What Is IAM?](#) in the *IAM User Guide*. For information about IAM policy syntax and descriptions, see [AWS IAM Policy Reference](#) in the *IAM User Guide*.

Policies attached to an IAM identity are referred to as *identity-based* policies (IAM policies) and policies attached to a resource are referred to as *resource-based* policies. AWS Lambda supports both identity-based (IAM policies) and resource-based policies.

Topics

- [Identity-Based Policies \(IAM Policies\)](#) (p. 242)
- [Resource-Based Policies \(Lambda Function Policies\)](#) (p. 243)

Identity-Based Policies (IAM Policies)

You can attach policies to IAM identities. For example, you can do the following:

- **Attach a permissions policy to a user or a group in your account** – An account administrator can use a permissions policy that is associated with a particular user to grant permissions for that user to create a Lambda function.
- **Attach a permissions policy to a role (grant cross-account permissions)** – You can attach an identity-based permissions policy to an IAM role to grant cross-account permissions. For example, the administrator in Account A can create a role to grant cross-account permissions to another AWS account (for example, Account B) or an AWS service as follows:
 1. Account A administrator creates an IAM role and attaches a permissions policy to the role that grants permissions on resources in Account A.
 2. Account A administrator attaches a trust policy to the role identifying Account B as the principal who can assume the role.
 3. Account B administrator can then delegate permissions to assume the role to any users in Account B. Doing this allows users in Account B to create or access resources in Account A. The principal in the trust policy can also be an AWS service principal if you want to grant an AWS service permissions to assume the role.

For more information about using IAM to delegate permissions, see [Access Management](#) in the *IAM User Guide*.

The following is an example policy that grants permissions for the `lambda:ListFunctions` action on all resources. In the current implementation, Lambda doesn't support identifying specific resources using the resource ARNs (also referred to as resource-level permissions) for some of the API actions, so you must specify a wildcard character (*).

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "ListExistingFunctions",
      "Effect": "Allow",
      "Action": [
        "lambda:ListFunctions"
      ],
      "Resource": "*"
    }
  ]
}
```

For more information about using identity-based policies with Lambda, see [Using Identity-Based Policies \(IAM Policies\) for AWS Lambda \(p. 245\)](#). For more information about users, groups, roles, and permissions, see [Identities \(Users, Groups, and Roles\)](#) in the *IAM User Guide*.

Resource-Based Policies (Lambda Function Policies)

Each Lambda function can have resource-based permissions policies associated with it. For Lambda, a Lambda function is the primary resource and these policies are referred to as *Lambda function policies*. You can use a Lambda function policy to grant cross-account permissions as an alternative to using identity-based policies with IAM roles. For example, you can grant Amazon S3 permissions to invoke your Lambda function by simply adding permissions to the Lambda function policy instead of creating an IAM role.

Important

Lambda function policies are primarily used when you are setting up an event source in AWS Lambda to grant a service or an event source permissions to invoke your Lambda function (see [Invoke \(p. 303\)](#)). An exception to this is when an event source (for example, Amazon DynamoDB or Amazon Kinesis) uses the pull model, where permissions are managed in the Lambda function execution role instead. For more information, see [Event Source Mapping \(p. 10\)](#).

The following is an example Lambda function policy that has one statement. The statement allows the Amazon S3 service principal permission for the `lambda:InvokeFunction` action on a Lambda function called HelloWorld. The condition ensures that the bucket where the event occurred is owned by the same account that owns the Lambda function.

```
{
  "Policy": {
    "Version": "2012-10-17",
    "Statement": [
      {
        "Effect": "Allow",
        "Principal": {
          "Service": "s3.amazonaws.com"
        }
      }
    ]
  }
}
```

```
    },
    "Action": "lambda:InvokeFunction",
    "Resource": "arn:aws:lambda:region:account-id:function:HelloWorld",

    "Sid": "65bafc90-6a1f-42a8-a7ab-8aa9bc877985",
    "Condition": {
      "StringEquals": {
        "AWS:SourceAccount": "account-id"
      },
      "ArnLike": {
        "AWS:SourceArn": "arn:aws:s3:::ExampleBucket"
      }
    }
  }
}
]
```

For more information about using resource-based policies with Lambda, see [Using Resource-Based Policies for AWS Lambda \(Lambda Function Policies\)](#) (p. 258). For additional information about using IAM roles (identity-based policies) as opposed to resource-based policies, see [How IAM Roles Differ from Resource-based Policies](#) in the *IAM User Guide*.

Specifying Policy Elements: Actions, Effects, Resources, and Principals

For each AWS Lambda resource (see [AWS Lambda Resources and Operations](#) (p. 241)), the service defines a set of API operations (see [Actions](#) (p. 270)). To grant permissions for these API operations, Lambda defines a set of actions that you can specify in a policy. Note that, performing an API operation can require permissions for more than one action. When granting permissions for specific actions, you also identify the resource on which the actions are allowed or denied.

The following are the most basic policy elements:

- **Resource** – In a policy, you use an Amazon Resource Name (ARN) to identify the resource to which the policy applies. For more information, see [AWS Lambda Resources and Operations](#) (p. 241).
- **Action** – You use action keywords to identify resource operations that you want to allow or deny. For example, the `lambda:Invoke` permission allows the user permissions to perform the AWS Lambda `Invoke` operation.
- **Effect** – You specify the effect when the user requests the specific action—this can be either allow or deny. If you don't explicitly grant access to (allow) a resource, access is implicitly denied. You can also explicitly deny access to a resource, which you might do to make sure that a user cannot access it, even if a different policy grants access.
- **Principal** – In identity-based policies (IAM policies), the user that the policy is attached to is the implicit principal. For resource-based policies, you specify the user, account, service, or other entity that you want to receive permissions (applies to resource-based policies only).

To learn more about IAM policy syntax and descriptions, see [AWS IAM Policy Reference](#) in the *IAM User Guide*.

For a table showing all of the AWS Lambda API actions and the resources that they apply to, see [Lambda API Permissions: Actions, Resources, and Conditions Reference](#) (p. 262).

Specifying Conditions in a Policy

When you grant permissions, you can use the IAM policy language to specify the conditions when a policy should take effect. For example, you might want a policy to be applied only after a specific date. For more information about specifying conditions in a policy language, see [Condition](#) in the *IAM User Guide*.

To express conditions, you use predefined condition keys. There are no condition keys specific to Lambda. However, there are AWS-wide condition keys that you can use as appropriate. For a complete list of AWS-wide keys, see [Available Keys for Conditions](#) in the *IAM User Guide*.

Using Identity-Based Policies (IAM Policies) for AWS Lambda

This topic provides examples of identity-based policies in which an account administrator can attach permissions policies to IAM identities (that is, users, groups, and roles).

Important

We recommend that you first review the introductory topics that explain the basic concepts and options available for you to manage access to your AWS Lambda resources. For more information, see [Overview of Managing Access Permissions to Your AWS Lambda Resources](#) (p. 241).

The sections in this topic cover the following:

- [Permissions Required to Use the AWS Lambda Console](#) (p. 246)
- [AWS Managed \(Predefined\) Policies for AWS Lambda](#) (p. 246)
- [Customer Managed Policy Examples](#) (p. 247)

The following shows an example of a permissions policy.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "CreateFunctionPermissions",
      "Effect": "Allow",
      "Action": [
        "lambda:CreateFunction"
      ],
      "Resource": "*"
    },
    {
      "Sid": "PermissionToPassAnyRole",
      "Effect": "Allow",
      "Action": [
        "iam:PassRole"
      ],
      "Resource": "arn:aws:iam::account-id:role/*"
    }
  ]
}
```

The policy has two statements:

- The first statement grants permissions for the AWS Lambda action (`lambda:CreateFunction`) on a resource by using the Amazon Resource Name (ARN) for the Lambda function. Currently, AWS Lambda doesn't support permissions for this particular action at the resource-level. Therefore, the policy specifies a wildcard character (*) as the `Resource` value.
- The second statement grants permissions for the IAM action (`iam:PassRole`) on IAM roles. The wildcard character (*) at the end of the `Resource` value means that the statement allows permission for the `iam:PassRole` action on any IAM role. To limit this permission to a specific role, replace the wildcard character (*) in the resource ARN with the specific role name.

The policy doesn't specify the `Principal` element because in an identity-based policy you don't specify the principal who gets the permission. When you attach policy to a user, the user is the implicit principal. When you attach a permission policy to an IAM role, the principal identified in the role's trust policy gets the permissions.

For a table showing all of the AWS Lambda API actions and the resources that they apply to, see [Lambda API Permissions: Actions, Resources, and Conditions Reference](#) (p. 262).

Permissions Required to Use the AWS Lambda Console

The AWS Lambda console provides an integrated environment for you to create and manage Lambda functions. The console provides many features and workflows that often require permissions to create a Lambda function in addition to the API-specific permissions documented in the [Lambda API Permissions: Actions, Resources, and Conditions Reference](#) (p. 262). For more information about these additional console permissions, see [Permissions Required to Use the AWS Lambda Console](#) (p. 250).

AWS Managed (Predefined) Policies for AWS Lambda

AWS addresses many common use cases by providing standalone IAM policies that are created and administered by AWS. Managed policies grant necessary permissions for common use cases so you can avoid having to investigate what permissions are needed. For more information, see [AWS Managed Policies](#) in the *IAM User Guide*.

The following AWS managed policies, which you can attach to users in your account, are specific to AWS Lambda and are grouped by use case scenario:

- **AWSLambdaReadOnlyAccess** – Grants read-only access to AWS Lambda resources. Note that this policy doesn't grant permission for the `lambda:InvokeFunction` action. If you want a user to invoke a Lambda function, you can also attach the `AWSLambdaRole` AWS managed policy.
- **AWSLambdaFullAccess** – Grants full access to AWS Lambda resources.
- **AWSLambdaRole** – Grants permissions to invoke any Lambda function.

Note

You can review these permissions policies by signing in to the IAM console and searching for specific policies there.

In addition, there are other AWS-managed policies that are suitable for use with IAM role (execution role) you specify at the time of creating a Lambda function. For more information, see [AWS Lambda Permissions Model](#) (p. 30).

You can also create your own custom IAM policies to allow permissions for AWS Lambda API actions and resources. You can attach these custom policies to the IAM users or groups that require those permissions or to custom execution roles (IAM roles) that you create for your Lambda functions.

Customer Managed Policy Examples

The examples in this section provide a group of sample policies that you can attach to a user. If you are new to creating policies, we recommend that you first create an IAM user in your account and attach the policies to the user in sequence, as outlined in the steps in this section.

You can use the console to verify the effects of each policy as you attach the policy to the user. Initially, the user doesn't have permissions and the user won't be able to do anything in the console. As you attach policies to the user, you can verify that the user can perform various actions in the console.

We recommend that you use two browser windows: one to create the user and grant permissions, and the other to sign in to the AWS Management Console using the user's credentials and verify permissions as you grant them to the user.

For examples that show how to create an IAM role that you can use as an execution role for your Lambda function, see [Creating IAM Roles](#) in the *IAM User Guide*.

Example Steps

- [Step 1: Create an IAM User](#) (p. 247)
- [Step 2: Allow a User to List Lambda Functions](#) (p. 247)
- [Step 3: Allow a User to View Details of a Lambda Function](#) (p. 248)
- [Step 4: Allow a User to Invoke a Lambda Function](#) (p. 248)
- [Step 5: Allow a User to Monitor a Lambda Function and View CloudWatch Logs](#) (p. 252)
- [Step 6: Allow a User to Create a Lambda Function](#) (p. 249)

Step 1: Create an IAM User

First, you need to create an IAM user, add the user to an IAM group with administrative permissions, and then grant administrative permissions to the IAM user that you created. You can then access AWS using a special URL and that IAM user's credentials.

For instructions, see [Creating Your First IAM User and Administrators Group](#) in the *IAM User Guide*.

Step 2: Allow a User to List Lambda Functions

An IAM user in your account must have permissions for the `lambda:ListFunctions` action before the user can see anything in the console. When you grant these permissions, the console can show the list of Lambda functions in the AWS account created in the specific AWS Region the user belongs to.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "ListExistingFunctions",
      "Effect": "Allow",
      "Action": [
        "lambda:ListFunctions"
      ],
      "Resource": "*"
    }
  ]
}
```

```
]
}
```

Step 3: Allow a User to View Details of a Lambda Function

A user can select a Lambda function and view details of the function (such as aliases, versions, and other configuration information), provided that the user has permissions for the following AWS Lambda actions:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "DisplayFunctionDetailsPermissions",
      "Effect": "Allow",
      "Action": [
        "lambda:ListVersionsByFunction",
        "lambda:ListAliases",
        "lambda:GetFunction",
        "lambda:GetFunctionConfiguration",
        "lambda:ListEventSourceMappings",
        "lambda:GetPolicy"
      ],
      "Resource": "*"
    }
  ]
}
```

Step 4: Allow a User to Invoke a Lambda Function

If you want to allow a user permissions to manually invoke a function, you need to grant permissions for the `lambda:InvokeFunction` action, as shown following:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "InvokePermission",
      "Effect": "Allow",
      "Action": [
        "lambda:InvokeFunction"
      ],
      "Resource": "*"
    }
  ]
}
```

Step 5: Allow a User to Monitor a Lambda Function and View CloudWatch Logs

When a user invokes a Lambda function, AWS Lambda executes it and returns results. The user needs additional permissions to monitor the Lambda function.

To enable the user to see the Lambda function's CloudWatch metrics on the console's **Monitoring** tab, or on the grid view on the console home page, you must grant the following permissions:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "CloudWatchPermission",
      "Effect": "Allow",
      "Action": [
        "cloudwatch:GetMetricStatistics"
      ],
      "Resource": "*"
    }
  ]
}
```

To enable a user to click the links to CloudWatch Logs in the AWS Lambda console and view log output in CloudWatch Logs, you must grant the following permissions:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "CloudWatchLogsPerms",
      "Effect": "Allow",
      "Action": [
        "cloudwatchlog:DescribeLogGroups",
        "cloudwatchlog:DescribeLogStreams",
        "cloudwatchlog:GetLogEvents"
      ],
      "Resource": "arn:aws:logs:region:account-id:log-group:/aws/lambda/*"
    }
  ]
}
```

Step 6: Allow a User to Create a Lambda Function

If you want a user to be able to create a Lambda function, you must grant the following permissions. The permissions for IAM-related actions are required because when a user creates a Lambda function, the user needs to select an IAM execution role, which AWS Lambda assumes to execute the Lambda function.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "ListExistingRolesAndPolicies",
      "Effect": "Allow",
      "Action": [
        "iam:ListRolePolicies",
        "iam:ListRoles"
      ],
      "Resource": "*"
    }
  ]
}
```

```
    },
    {
      "Sid": "CreateFunctionPermissions",
      "Effect": "Allow",
      "Action": [
        "lambda:CreateFunction"
      ],
      "Resource": "*"
    },
    {
      "Sid": "PermissionToPassAnyRole",
      "Effect": "Allow",
      "Action": [
        "iam:PassRole"
      ],
      "Resource": "arn:aws:iam::account-id:role/*"
    }
  ]
}
```

If you want a user to be able to create an IAM role when the user is creating a Lambda function, the user needs permissions to perform the `iam:PutRolePolicy` action, as shown following:

```
{
  "Sid": "CreateARole",
  "Effect": "Allow",
  "Action": [
    "iam:PutRolePolicy"
  ],
  "Resource": "arn:aws:iam::account-id:role/*"
}
```

Important

Each IAM role has a permissions policy attached to it, which grants specific permissions to the role. Regardless of whether the user creates a new role or uses an existing role, the user must have permissions for all of the actions granted in the permissions policy associated with the role. You must grant the user additional permissions accordingly.

Permissions Required to Use the AWS Lambda Console

To take advantage of the integrated experience provided by the AWS Lambda console, a user must often have more permissions than the API-specific permissions described in the references table, depending on what you want the user to be able to do. For more information about Lambda API operations, see [Lambda API Permissions: Actions, Resources, and Conditions Reference](#) (p. 262).

For example, suppose you allow an IAM user in your account permissions to create a Lambda function to process Amazon S3 object-created events. To enable the user to configure Amazon S3 as the event source, the console drop-down list will display a list of your buckets. However, the console can show the bucket list only if the signed-in user has permissions for the relevant Amazon S3 actions.

The following sections describe required additional permissions for different integration points. For information about integration points, see [How It Works](#) (p. 3).

If you are new to managing permissions, we recommend that you start with the example walkthrough where you create an IAM user, grant the user incremental permissions, and verify the permissions work using the AWS Lambda console (see [Customer Managed Policy Examples \(p. 247\)](#)).

Topics

- [Amazon API Gateway \(p. 251\)](#)
- [Amazon CloudWatch Events \(p. 252\)](#)
- [Amazon CloudWatch Logs \(p. 252\)](#)
- [Amazon Cognito \(p. 253\)](#)
- [Amazon DynamoDB \(p. 254\)](#)
- [Amazon Kinesis Streams \(p. 255\)](#)
- [Amazon S3 \(p. 256\)](#)
- [Amazon SNS \(p. 257\)](#)
- [AWS IoT \(p. 257\)](#)

Note

All of these permissions policies grant the specific AWS services permissions to invoke a Lambda function. The user who is configuring this integration must have permissions to invoke the Lambda function. Otherwise, the user can't set the configuration. You can attach the `AWSLambdaRole` AWS managed (predefined) permissions policy to the user to provide these permissions.

Amazon API Gateway

When you configure an API endpoint in the console, the console makes several API Gateway API calls. These calls require permissions for the `apigateway:*` action, as shown following:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "ApiGatewayPermissions",
      "Effect": "Allow",
      "Action": [
        "apigateway:*"
      ],
      "Resource": "*"
    },
    {
      "Sid": "AddPermissionToFunctionPolicy",
      "Effect": "Allow",
      "Action": [
        "lambda:AddPermission",
        "lambda:RemovePermission",
        "lambda:GetPolicy"
      ],
      "Resource": "arn:aws:lambda:region:account-id:function:*"
    },
    {
      "Sid": "ListEventSourcePerm",
      "Effect": "Allow",
      "Action": [
        "lambda:ListEventSourceMappings"
      ],
      "Resource": "*"
    }
  ]
}
```

```
}  
]  
}
```

Amazon CloudWatch Events

You can schedule when to invoke a Lambda function. After you select an existing CloudWatch Events rule (or create a new one), AWS Lambda creates a new target in CloudWatch that invokes your Lambda function. For target creation to work, you need to grant the following additional permissions:

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "EventPerms",  
      "Effect": "Allow",  
      "Action": [  
        "events:PutRule",  
        "events:ListRules",  
        "events:ListRuleNamesByTarget",  
        "events:PutTargets",  
        "events:RemoveTargets",  
        "events:DescribeRule",  
        "events:TestEventPattern",  
        "events:ListTargetsByRule",  
        "events>DeleteRule"  
      ],  
      "Resource": "arn:aws:events:region:account-id:*"  
    },  
    {  
      "Sid": "AddPermissionToFunctionPolicy",  
      "Effect": "Allow",  
      "Action": [  
        "lambda:AddPermission",  
        "lambda:RemovePermission",  
        "lambda:GetPolicy"  
      ],  
      "Resource": "arn:aws:lambda:region:account-id:function:*"  
    }  
  ]  
}
```

Amazon CloudWatch Logs

You can have the Amazon CloudWatch Logs service publish events and invoke your Lambda function. When you configure this service as an event source, the console lists log groups in your account. For this listing to occur, you need to grant the `logs:DescribeLogGroups` permissions, as shown following:

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "CloudWatchLogsPerms",  
      "Effect": "Allow",  
      "Action": [  
        "logs:DescribeLogGroups"  
      ]  
    }  
  ]  
}
```

```
        "Action": [
            "logs:FilterLogEvents",
            "logs:DescribeLogGroups",
            "logs:PutSubscriptionFilter",
            "logs:DescribeSubscriptionFilters",
            "logs:DeleteSubscriptionFilter",
            "logs:TestMetricFilter"
        ],
        "Resource": "arn:aws:logs:region:account-id:*"
    },
    {
        "Sid": "AddPermissionToFunctionPolicy",
        "Effect": "Allow",
        "Action": [
            "lambda:AddPermission",
            "lambda:RemovePermission",
            "lambda:GetPolicy"
        ],
        "Resource": "arn:aws:lambda:region:account-id:function:*"
    },
    {
        "Sid": "ListEventSourceMappingsPerms",
        "Effect": "Allow",
        "Action": [
            "lambda:ListEventSourceMappings"
        ],
        "Resource": "*"
    }
]
```

Note

The additional permissions shown are required for managing subscription filters.

Amazon Cognito

The console lists identity pools in your account. After you select a pool, you can configure the pool to have the **Cognito sync trigger** as the event source type. To do this, you need to grant the following additional permissions:

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "CognitoPerms1",
            "Effect": "Allow",
            "Action": [
                "cognito-identity:ListIdentityPools"
            ],
            "Resource": [
                "arn:aws:cognito-identity:region:account-id:*"
            ]
        },
        {
            "Sid": "CognitoPerms2",
            "Effect": "Allow",
```

```
        "Action": [
            "cognito-sync:GetCognitoEvents",
            "cognito-sync:SetCognitoEvents"
        ],
        "Resource": [
            "arn:aws:cognito-sync:region:account-id:*"
        ]
    },
    {
        "Sid": "AddPermissionToFunctionPolicy",
        "Effect": "Allow",
        "Action": [
            "lambda:AddPermission",
            "lambda:RemovePermission",
            "lambda:GetPolicy"
        ],
        "Resource": "arn:aws:lambda:region:account-id:function:*"
    },
    {
        "Sid": "ListEventSourcePerms",
        "Effect": "Allow",
        "Action": [
            "lambda:ListEventSourceMappings"
        ],
        "Resource": "*"
    }
]
```

Amazon DynamoDB

The console lists all of the tables in your account. After you select a table, the console checks to see if a DynamoDB stream exists for that table. If not, it creates the stream. If you want the user to be able to configure a DynamoDB stream as an event source for a Lambda function, you need to grant the following additional permissions:

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "DDBpermissions1",
            "Effect": "Allow",
            "Action": [
                "dynamodb:DescribeStream",
                "dynamodb:DescribeTable",
                "dynamodb:UpdateTable"
            ],
            "Resource": "arn:aws:dynamodb:region:account-id:table/*"
        },
        {
            "Sid": "DDBpermissions2",
            "Effect": "Allow",
            "Action": [
                "dynamodb:ListStreams",
                "dynamodb:ListTables"
            ],

```

```
        "Resource": "*"
    },
    {
        "Sid": "LambdaGetPolicyPerm",
        "Effect": "Allow",
        "Action": [
            "lambda:GetPolicy"
        ],
        "Resource": "arn:aws:lambda:region:account-id:function:*"
    },
    {
        "Sid": "LambdaEventSourcePerms",
        "Effect": "Allow",
        "Action": [
            "lambda:CreateEventSourceMapping",
            "lambda:DeleteEventSourceMapping",
            "lambda:GetEventSourceMapping",
            "lambda:ListEventSourceMappings",
            "lambda:UpdateEventSourceMapping"
        ],
        "Resource": "*"
    }
]
}
```

Important

For a Lambda function to read from a DynamoDB stream, the execution role associated with the Lambda function must have the correct permissions. Therefore, the user must also have the same permissions before you can grant the permissions to the execution role. You can grant these permissions by attaching the `AWSLambdaDynamoDBExecutionRole` predefined policy, first to the user and then to the execution role.

Amazon Kinesis Streams

The console lists all Amazon Kinesis streams in your account. After you select a stream, the console creates event source mappings in AWS Lambda. For this to work, you need to grant the following additional permissions:

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "PermissionForDescribeStream",
            "Effect": "Allow",
            "Action": [
                "kinesis:DescribeStream"
            ],
            "Resource": "arn:aws:kinesis:region:account-id:stream/*"
        },
        {
            "Sid": "PermissionForListStreams",
            "Effect": "Allow",
            "Action": [
                "kinesis:ListStreams"
            ],
            "Resource": "*"
        }
    ]
}
```

```
    },
    {
      "Sid": "PermissionForGetFunctionPolicy",
      "Effect": "Allow",
      "Action": [
        "lambda:GetPolicy"
      ],
      "Resource": "arn:aws:lambda:region:account-id:function:*"
    },
    {
      "Sid": "LambdaEventSourcePerms",
      "Effect": "Allow",
      "Action": [
        "lambda:CreateEventSourceMapping",
        "lambda>DeleteEventSourceMapping",
        "lambda:GetEventSourceMapping",
        "lambda:ListEventSourceMappings",
        "lambda:UpdateEventSourceMapping"
      ],
      "Resource": "*"
    }
  ]
}
```

Amazon S3

The console prepopulates the list of buckets in the AWS account and finds the bucket location for each bucket. When you configure Amazon S3 as an event source, the console updates the bucket notification configuration. For this to work, you need to grant the following additional permissions:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "S3Permissions",
      "Effect": "Allow",
      "Action": [
        "s3:GetBucketLocation",
        "s3:GetBucketNotification",
        "s3:PutBucketNotification",
        "s3:ListAllMyBuckets"
      ],
      "Resource": "arn:aws:s3:::*"
    },
    {
      "Sid": "AddPermissionToFunctionPolicy",
      "Effect": "Allow",
      "Action": [
        "lambda:AddPermission",
        "lambda:RemovePermission"
      ],
      "Resource": "arn:aws:lambda:region:account-id:function:*"
    }
  ]
}
```

Amazon SNS

The console lists Amazon Simple Notification Service (Amazon SNS) topics in your account. After you select a topic, AWS Lambda subscribes your Lambda function to that Amazon SNS topic. For this work, you need to grant the following additional permissions:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "SNSPerms",
      "Effect": "Allow",
      "Action": [
        "sns:ListSubscriptions",
        "sns:ListSubscriptionsByTopic",
        "sns:ListTopics",
        "sns:Subscribe",
        "sns:Unsubscribe"
      ],
      "Resource": "arn:aws:sns:region:account-id:*"
    },
    {
      "Sid": "AddPermissionToFunctionPolicy",
      "Effect": "Allow",
      "Action": [
        "lambda:AddPermission",
        "lambda:RemovePermission",
        "lambda:GetPolicy"
      ],
      "Resource": "arn:aws:lambda:region:account-id:function:*"
    },
    {
      "Sid": "LambdaListESMappingsPerms",
      "Effect": "Allow",
      "Action": [
        "lambda:ListEventSourceMappings"
      ],
      "Resource": "*"
    }
  ]
}
```

AWS IoT

The console lists all of the AWS IoT rules. After you select a rule, the console populates the rest of the information associated with that rule in the user interface. If you select an existing rule, the console updates it with information so that events are sent to AWS Lambda. You can also create a new rule. To do these things, the user must have the following additional permissions:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "IoTperms",
      "Effect": "Allow",
      "Action": [
```

```
        "iot:GetTopicRule",
        "iot:CreateTopicRule",
        "iot:ReplaceTopicRule"
    ],
    "Resource": "arn:aws:iot:region:account-id:*"
  },
  {
    "Sid": "IoTlistTopicRulePerms",
    "Effect": "Allow",
    "Action": [
      "iot:ListTopicRules"
    ],
    "Resource": "*"
  },
  {
    "Sid": "LambdaPerms",
    "Effect": "Allow",
    "Action": [
      "lambda:AddPermission",
      "lambda:RemovePermission",
      "lambda:GetPolicy"
    ],
    "Resource": "arn:aws:lambda:region:account-id:function:*"
  }
]
```

Using Resource-Based Policies for AWS Lambda (Lambda Function Policies)

A Lambda function is one of the resources in AWS Lambda. You can add permissions to the policy associated with a Lambda function. Permissions policies attached to Lambda functions are referred to as *resource-based policies* (or *Lambda function policies* in Lambda). You use Lambda function policies to manage Lambda function invocation permissions (see [Invoke](#) (p. 303)).

Important

Before you create resource-based policies, we recommend that you first review the introductory topics that explain the basic concepts and options available for you to manage access to your AWS Lambda resources. For more information, see [Overview of Managing Access Permissions to Your AWS Lambda Resources](#) (p. 241).

Lambda function policies are primarily used when you are setting up an event source in AWS Lambda to grant a service or an event source permissions to invoke your Lambda function (see [Invoke](#) (p. 303)). An exception to this is when an event source (for example, Amazon DynamoDB or Amazon Kinesis) uses the pull model, where permissions are managed in the Lambda function execution role instead. For more information, see [Event Source Mapping](#) (p. 10).

Lambda function policies also make it easy to grant cross-account permissions to invoke your Lambda function. Suppose you want to grant cross-account permissions (for example, permissions to Amazon S3) to invoke your Lambda function. Instead of creating an IAM role to grant cross-account permissions, you can add the relevant permissions in a Lambda function policy.

Note

If the custom application and the Lambda function it invokes belong to the same AWS account, you don't need to grant explicit permissions using the policy attached to the Lambda function.

AWS Lambda provides the following API operations to manage a permissions policy associated with a Lambda function:

- [AddPermission](#) (p. 272)
- [GetPolicy](#) (p. 301)
- [RemovePermission](#) (p. 321)

Note

The AWS Lambda console is the easiest way to manage event sources and their permissions in a Lambda function policy. If the AWS service console for the event source supports configuring event source mapping, you can use that console too. As you configure new event sources or modify existing event sources, the console automatically modifies the permissions policy associated with the Lambda function.

The console doesn't support directly modifying permissions in a function policy. You must use either the AWS CLI or the AWS SDKs. The following are AWS CLI examples of the API operations listed earlier in this topic:

Examples

- [Example 1: Allow Amazon S3 to Invoke a Lambda Function](#) (p. 259)
- [Example 2: Allow Amazon API Gateway to Invoke a Lambda Function](#) (p. 260)
- [Example 3: Allow a User Application Created by Another AWS Account to Invoke a Lambda Function \(Cross-Account Scenario\)](#) (p. 261)
- [Example 4: Retrieve a Lambda Function Policy](#) (p. 261)
- [Example 5: Remove Permissions from a Lambda Function Policy](#) (p. 262)
- [Example 6: Working with Lambda Function Versioning, Aliases, and Permissions](#) (p. 262)

Example 1: Allow Amazon S3 to Invoke a Lambda Function

To grant Amazon S3 permission to invoke a Lambda function, you configure permissions as follows:

- Specify `s3.amazonaws.com` as the `principal` value.
- Specify `lambda:InvokeFunction` as the `action` for which you are granting permissions.

To ensure that the event is generated from a specific bucket that is owned by a specific AWS account, you also specify the following:

- Specify the bucket ARN as the `source-arn` value to restrict events from a specific bucket.
- Specify the AWS account ID that owns the bucket, to ensure that the named bucket is owned by the account.

The following example AWS CLI command adds a permission to the `helloworld` Lambda function policy granting Amazon S3 permissions to invoke the function.

```
aws lambda add-permission \  
--region us-west-2 \  
--function-name helloworld \  
--statement-id 1 \  
--principal s3.amazonaws.com \  

```

```
--action lambda:InvokeFunction \  
--source-arn arn:aws:s3:::examplebucket \  
--source-account 111111111111 \  
--profile adminuser
```

The example assumes that the `adminuser` (who has full permissions) is adding this permission. Therefore, the `--profile` parameter specifies the `adminuser` profile.

In response, AWS Lambda returns the following JSON code. The `Statement` value is a JSON string version of the statement added to the Lambda function policy.

```
{  
  "Statement": "{\n\"Condition\":{\n\"StringEquals\":{\n\"AWS:SourceAc  
count\":\n\"111111111111\"},  
          \n\"ArnLike\":{\n\"AWS:SourceArn\":\n\"arn:aws:s3:::examplebuck  
et\"}},  
          \n\"Action\":[\n\"lambda:InvokeFunction\"],  
          \n\"Resource\":\n\"arn:aws:lambda:us-west-2:111111111111:func  
tion:helloworld\",  
          \n\"Effect\":\n\"Allow\", \n\"Principal\":{\n\"Service\":\n\"s3.amazonaws.com\"},  
          \n\"Sid\":\n\"1\"}"  
}
```

For information about the push model, see [Event Source Mapping \(p. 10\)](#).

Example 2: Allow Amazon API Gateway to Invoke a Lambda Function

To grant permissions to allow Amazon API Gateway to invoke a Lambda function, do the following:

- Specify `apigateway.amazonaws.com` as the `principal` value.
- Specify `lambda:InvokeFunction` as the action for which you are granting permissions.
- Specify the API Gateway endpoint ARN as the `source-arn` value.

The following example AWS CLI command adds a permission to the `helloworld` Lambda function policy granting API Gateway permissions to invoke the function.

```
aws lambda add-permission \  
--region us-west-2 \  
--function-name helloworld \  
--statement-id 5 \  
--principal apigateway.amazonaws.com \  
--action lambda:InvokeFunction \  
--source-arn arn:aws:execute-api:region:account-id:api-id/stage/method/resource-  
path" \  
--profile adminuser
```

In response, AWS Lambda returns the following JSON code. The `Statement` value is a JSON string version of the statement added to the Lambda function policy.

```
{
  "Statement": "{ \"Condition\": { \"ArnLike\": { \"AWS:SourceArn\": \"arn:aws:apigateway:us-east-1:my-api-id:/test/petstorewalkthrough/pets\" } },
    \"Action\": [ \"lambda:InvokeFunction\" ],
    \"Resource\": \"arn:aws:lambda:us-west-2:account-id:function:helloworld\",
    \"Effect\": \"Allow\",
    \"Principal\": { \"Service\": \"apigateway.amazonaws.com\" },
    \"Sid\": \"5\" }"
}
```

Example 3: Allow a User Application Created by Another AWS Account to Invoke a Lambda Function (Cross-Account Scenario)

To grant permissions to another AWS account (that is, to create a cross-account scenario), you specify the AWS account ID as the `principal` value as shown in the following AWS CLI command:

```
aws lambda add-permission \
--region us-west-2 \
--function-name helloworld \
--statement-id 3 \
--principal 111111111111 \
--action lambda:InvokeFunction \
--profile adminuser
```

In response, AWS Lambda returns the following JSON code. The `Statement` value is a JSON string version of the statement added to the Lambda function policy.

```
{
  "Statement": "{ \"Action\": [ \"lambda:InvokeFunction\" ],
    \"Resource\": \"arn:aws:lambda:us-west-2:account-id:function:helloworld\",
    \"Effect\": \"Allow\",
    \"Principal\": { \"AWS\": \"account-id\" },
    \"Sid\": \"3\" }"
}
```

Example 4: Retrieve a Lambda Function Policy

To retrieve your Lambda function policy, you use the `get-policy` command:

```
aws lambda get-policy \
--function-name example \
--profile adminuser
```

Example 5: Remove Permissions from a Lambda Function Policy

To remove permissions from your Lambda function policy, you use the `remove-permission` command, specifying the function name and statement ID:

```
aws lambda remove-permission \  
--function-name example \  
--statement-id 1 \  
--profile adminuser
```

Example 6: Working with Lambda Function Versioning, Aliases, and Permissions

For more information about permissions policies for Lambda function versions and aliases, see [Versioning, Aliases, and Resource Policies](#) (p. 114).

Lambda API Permissions: Actions, Resources, and Conditions Reference

When you are setting up [Access Control](#) (p. 240) and writing permissions policies that you can attach to an IAM identity (identity-based policies), you can use the following table as a reference. The list includes each AWS Lambda API operation, the corresponding actions for which you can grant permissions to perform the action, and the AWS resource for which you can grant the permissions. You specify the actions in the policy's `Action` field, and you specify the resource value in the policy's `Resource` field.

Note

Permissions for the AWS Lambda `Invoke` API in the following table can also be granted by using resource-based policies. For more information, see [Using Resource-Based Policies for AWS Lambda \(Lambda Function Policies\)](#) (p. 258).

You can use AWS-wide condition keys in your AWS Lambda policies to express conditions. For a complete list of AWS-wide keys, see [Available Keys for Conditions](#) in the *IAM User Guide*.

Note

To specify an action, use the `lambda:` prefix followed by the API operation name (for example, `lambda:CreateFunction`).

AWS Lambda API and Required Permissions for Actions

[AddPermission](#) (p. 272)

Action(s): `lambda:AddPermission`

Resource: `arn:aws:lambda:region:account-id:?/*`

[CreateEventSourceMapping](#) (p. 278)

Action(s): `lambda:CreateEventSourceMapping`

Resource: `arn:aws:lambda:region:account-id:?`

[CreateFunction](#) (p. 282)

Action(s): `lambda:CreateFunction`

Resource: arn:aws:lambda:*region*:*account-id*:?
[DeleteEventSourceMapping \(p. 288\)](#)
Action(s): lambda:DeleteEventSourceMapping

Resource: arn:aws:lambda:*region*:*account-id*:?
[DeleteFunction \(p. 290\)](#)
Action(s): lambda:DeleteFunction,

Resource: arn:aws:lambda:*region*:*account-id*:?
[GetEventSourceMapping \(p. 294\)](#)
Action(s): lambda:GetEventSourceMapping

Resource: arn:aws:lambda:*region*:*account-id*:?
[GetFunction \(p. 296\)](#)
Action(s): lambda:GetFunction

Resource: arn:aws:lambda:*region*:*account-id*:?
[GetFunctionConfiguration \(p. 298\)](#)
Action(s): lambda:DescribeMountTargetSecurityGroups,

Resource: arn:aws:lambda:*region*:*account-id*:?
[GetPolicy \(p. 301\)](#)
Action(s): lambda:DescribeMountTargets

Resource: arn:aws:lambda:*region*:*account-id*:?
[Invoke \(p. 303\)](#)
Action(s): lambda:DescribeTags

Resource: arn:aws:lambda:*region*:*account-id*:?
[InvokeAsync \(p. 307\)](#)
Action(s): lambda:ModifyMountTargetSecurityGroups

Resource: arn:aws:lambda:*region*:*account-id*:?
[ListEventSourceMappings \(p. 311\)](#)
Action(s): lambda>ListEventSourceMappings

Resource: arn:aws:lambda:*region*:*account-id*:?
[ListFunctions \(p. 313\)](#)
Action(s): lambda>ListFunctions

Resource: arn:aws:lambda:*region*:*account-id*:?
[RemovePermission \(p. 321\)](#)
Action(s): lambda:RemovePermission

Resource: arn:aws:lambda:*region*:*account-id*:?
[UpdateEventSourceMapping \(p. 325\)](#)
Action(s): lambda:UpdateEventSourceMapping

Resource: arn:aws:lambda:*region*:*account-id*:?
[UpdateFunctionCode \(p. 328\)](#)
Action(s): lambda:UpdateFunctionCode

Resource: arn:aws:lambda:*region*:*account-id*:?
[UpdateFunctionConfiguration \(p. 332\)](#)
Action(s): lambda:UpdateFunctionConfiguration

Resource: `arn:aws:lambda:region:account-id:?`

Policy Templates

When you create an AWS Lambda function in the console using one of the blueprints, Lambda allows you to create a role for your function from a list of Lambda policy templates.

By selecting one of these templates, your Lambda function automatically creates the role with the requisite permissions attached to that policy.

The following lists the permissions that are applied to each policy template in the **Policy templates** list. The policy templates are named after the blueprints to which they correspond. Lambda will automatically populate the placeholder items (such as *region* and *accountId*) with the appropriate information. For more information on creating a Lambda function using policy templates, see [Step 2.1: Create a Hello World Lambda Function](#) (p. 39).

Basic: 'Basic Lambda Permissions'

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": "logs:CreateLogGroup",
      "Resource": "arn:aws:logs:region:accountId:*"
    },
    {
      "Effect": "Allow",
      "Action": [
        "logs:CreateLogStream",
        "logs:PutLogEvents"
      ],
      "Resource": [
        "arn:aws:logs:region:accountId:log-group:[logGroups]:*"
      ]
    }
  ]
}
```

VPCAccess: 'Lambda VPC Access Permissions'

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "ec2:CreateNetworkInterface",
        "ec2:DeleteNetworkInterface",
        "ec2:DescribeNetworkInterfaces",
        "ec2:DetachNetworkInterface"
      ],
      "Resource": "arn:aws:ec2:region:accountId:network-interface/*"
    }
  ]
}
```

```
}  
}
```

Kinesis: 'Lambda Kinesis stream poller permissions'

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": "lambda:InvokeFunction",  
      "Resource": "arn:aws:lambda:region:accountId:function:functionName*"  
    },  
    {  
      "Effect": "Allow",  
      "Action": "kinesis:ListStreams",  
      "Resource": "arn:aws:kinesis:region:accountId:stream/*"  
    },  
    {  
      "Effect": "Allow",  
      "Action": [  
        "kinesis:DescribeStream",  
        "kinesis:GetRecords",  
        "kinesis:GetShardIterator"  
      ],  
      "Resource": "arn:aws:kinesis:region:accountId:stream/streamName"  
    }  
  ]  
}
```

DynamoDB: 'Lambda DynamoDB stream poller permissions'

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": "lambda:InvokeFunction",  
      "Resource": "arn:aws:lambda:region:accountId:function:functionName*"  
    },  
    {  
      "Effect": "Allow",  
      "Action": [  
        "dynamodb:DescribeStream",  
        "dynamodb:GetRecords",  
        "dynamodb:GetShardIterator",  
        "dynamodb:ListStreams"  
      ],  
      "Resource": "arn:aws:dynamodb:region:accountId:table/tableName/stream/*"  
    }  
  ]  
}
```

```
}  
]  
}
```

CloudFormation: 'CloudFormation stack read-only permissions'

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": [  
        "cloudformation:DescribeStacks"  
      ],  
      "Resource": "*"   
    }  
  ]  
}
```

AMI: 'AMI read-only permissions'

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": [  
        "ec2:DescribeImages"  
      ],  
      "Resource": "*"   
    }  
  ]  
}
```

KMS: 'KMS decryption permissions'

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": [  
        "kms:Decrypt"  
      ],  
      "Resource": "*"   
    }  
  ]  
}
```


S3: 'S3 object read-only permissions'

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "s3:GetObject"
      ],
      "Resource": "arn:aws:s3:::*"
    }
  ]
}
```

Elasticsearch: 'Elasticsearch permissions'

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "es:ESHttpPost"
      ],
      "Resource": "*"
    }
  ]
}
```

SES: 'SES bounce permissions'

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "ses:SendBounce"
      ],
      "Resource": "*"
    }
  ]
}
```

TestHarness: 'Test Harness permissions'

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
```

```
        "Effect": "Allow",
        "Action": [
            "dynamodb:PutItem"
        ],
        "Resource": "arn:aws:dynamodb:region:accountId:table/*"
    },
    {
        "Effect": "Allow",
        "Action": [
            "lambda:Invoke"
        ],
        "Resource": "arn:aws:lambda:region:accountId:function:*"
    }
]
```

Microservice: 'Simple Microservice permissions'

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "dynamodb:DeleteItem",
        "dynamodb:GetItem",
        "dynamodb:PutItem",
        "dynamodb:Scan",
        "dynamodb:UpdateItem"
      ],
      "Resource": "arn:aws:dynamodb:region:accountId:table/*"
    }
  ]
}
```

VPN: 'VPN Connection Monitor permissions'

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "cloudwatch:PutMetricData"
      ],
      "Resource": "*"
    },
    {
      "Effect": "Allow",
      "Action": [
        "ec2:DescribeRegions",
        "ec2:DescribeVpnConnections"
      ],
      "Resource": "*"
    }
  ]
}
```

```
}  
]  
}
```

SQS: 'SQS Poller permissions'

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": [  
        "sqs:DeleteMessage",  
        "sqs:ReceiveMessage"  
      ],  
      "Resource": "arn:aws:sqs:*"  
    },  
    {  
      "Effect": "Allow",  
      "Action": [  
        "lambda:Invoke"  
      ],  
      "Resource": "arn:aws:lambda:region:accountId:function:functionName"  
    }  
  ]  
}
```

IoTButton: 'AWS IoT Button permissions'

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": [  
        "sns:ListSubscriptionsByTopic",  
        "sns:CreateTopic",  
        "sns:SetTopicAttributes",  
        "sns:Subscribe",  
        "sns:Publish"  
      ],  
      "Resource": "*"  
    }  
  ]  
}
```

API Reference

This section contains the AWS Lambda API Reference documentation. When making the API calls, you will need to authenticate your request by providing a signature. AWS Lambda supports signature version 4. For more information, see [Signature Version 4 Signing Process](#) in the *Amazon Web Services General Reference*.

For an overview of the service, see [What Is AWS Lambda? \(p. 1\)](#). For information about how the service works, see [How It Works \(p. 3\)](#).

You can use the AWS CLI to explore the AWS Lambda API. This guide provides several tutorials that use the AWS CLI.

Topics

- [Actions \(p. 270\)](#)
- [Data Types \(p. 336\)](#)

Actions

The following actions are supported:

- [AddPermission \(p. 272\)](#)
- [CreateAlias \(p. 275\)](#)
- [CreateEventSourceMapping \(p. 278\)](#)
- [CreateFunction \(p. 282\)](#)
- [DeleteAlias \(p. 287\)](#)
- [DeleteEventSourceMapping \(p. 288\)](#)
- [DeleteFunction \(p. 290\)](#)
- [GetAlias \(p. 292\)](#)
- [GetEventSourceMapping \(p. 294\)](#)
- [GetFunction \(p. 296\)](#)
- [GetFunctionConfiguration \(p. 298\)](#)
- [GetPolicy \(p. 301\)](#)
- [Invoke \(p. 303\)](#)

- [InvokeAsync](#) (p. 307)
- [ListAliases](#) (p. 309)
- [ListEventSourceMappings](#) (p. 311)
- [ListFunctions](#) (p. 313)
- [ListVersionsByFunction](#) (p. 315)
- [PublishVersion](#) (p. 317)
- [RemovePermission](#) (p. 321)
- [UpdateAlias](#) (p. 323)
- [UpdateEventSourceMapping](#) (p. 325)
- [UpdateFunctionCode](#) (p. 328)
- [UpdateFunctionConfiguration](#) (p. 332)

AddPermission

Adds a permission to the resource policy associated with the specified AWS Lambda function. You use resource policies to grant permissions to event sources that use *push* model. In a *push* model, event sources (such as Amazon S3 and custom applications) invoke your Lambda function. Each permission you add to the resource policy allows an event source, permission to invoke the Lambda function.

For information about the push model, see [AWS Lambda: How it Works](#).

If you are using versioning, the permissions you add are specific to the Lambda function version or alias you specify in the AddPermission request via the `Qualifier` parameter. For more information about versioning, see [AWS Lambda Function Versioning and Aliases](#).

This operation requires permission for the `lambda:AddPermission` action.

Request Syntax

```
POST /2015-03-31/functions/FunctionName/policy?Qualifier=Qualifier HTTP/1.1
Content-type: application/json
```

```
{
  "Action (p. 273)": "string",
  "EventSourceToken (p. 273)": "string",
  "Principal (p. 273)": "string",
  "SourceAccount (p. 273)": "string",
  "SourceArn (p. 273)": "string",
  "StatementId (p. 273)": "string"
}
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 272)

Name of the Lambda function whose resource policy you are updating by adding a new permission.

You can specify a function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example,

`arn:aws:lambda:us-west-2:account-id:function:Thumbnail`). AWS Lambda also allows you to specify partial ARN (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\LATEST|[a-zA-Z0-9_-]+))?
```

Qualifier (p. 272)

You can use this optional query parameter to describe a qualified ARN using a function version or an alias name. The permission will then apply to the specific qualified ARN. For example, if you specify function version 2 as the qualifier, then permission applies only when request is made using qualified function ARN:

```
arn:aws:lambda:aws-region:acct-id:function:function-name:2
```

If you specify an alias name, for example `PROD`, then the permission is valid only for requests made using the alias ARN:

```
arn:aws:lambda:aws-region:acct-id:function:function-name:PROD
```

If the qualifier is not specified, the permission is valid only when requests is made using unqualified function ARN.

```
arn:aws:lambda:aws-region:acct-id:function:function-name
```

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `([a-zA-Z0-9$_-]+)`

The request requires the following data in JSON format.

The AWS Lambda action you want to allow in this statement. Each Lambda action is a string starting with `lambda:` followed by the API name (see [Actions](#)). For example, `lambda:CreateFunction`. You can use wildcard (`lambda:*`) to grant permission for all AWS Lambda actions.

Type: String

Pattern: (lambda:[*]|lambda:[a-zA-Z]+|[*])

Required: Yes

A unique token that must be supplied by the principal invoking the function. This is currently only used for Alexa Smart Home functions.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

Pattern: `[a-zA-Z0-9.\ -]+`

Required: No

The principal who is getting this permission. It can be Amazon S3 service Principal (`s3.amazonaws.com`) if you want Amazon S3 to invoke the function, an AWS account ID if you are granting cross-account permission, or any valid AWS service principal such as `sns.amazonaws.com`. For example, you might want to allow a custom application in another AWS account to push events to AWS Lambda by invoking your function.

Type: String

Pattern: . *

Required: Yes

This parameter is used for S3, SES, CloudWatch Logs and CloudWatch Rules only. The AWS account ID (without a hyphen) of the source owner. For example, if the `SourceArn` identifies a bucket, then this is the bucket owner's account ID. You can use this additional condition to ensure the bucket you specify is owned by a specific account (it is possible the bucket owner deleted the bucket and some other AWS account created the bucket). You can also use this condition to specify all sources (that is, you don't specify the `SourceArn`) owned by a specific account.

Type: String

Pattern: `\d{12}`

Required: No

This is optional; however, when granting Amazon S3 permission to invoke your function, you should specify this field with the Amazon Resource Name (ARN) as its value. This ensures that only events generated from the specified source can invoke the function.

If you add a permission for the Amazon S3 principal without providing the source ARN, any AWS account that creates a mapping to your function ARN can send events to invoke your Lambda function from Amazon S3.

Type: String

Pattern: `arn:aws:([a-zA-Z0-9\-.]+):([a-z]{2}-[a-z]+-\d{1})?:([a-z]{12})?:([a-z]{1,2})`

Required: No

A unique statement identifier.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 100.

Pattern: ([a-zA-Z0-9-_.]+)

Required: Yes

Response Syntax

```
HTTP/1.1 201
Content-type: application/json

{
  "Statement (p. 274)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 201 response. The following data is returned in JSON format by the service.

Statement (p. 274)

The permission statement you specified in the request. The response returns the same as a string using a backslash ("\") as an escape character in the JSON.

Type: String

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

PolicyLengthExceededException

Lambda function access policy is limited to 20 KB.

HTTP Status Code: 400

ResourceConflictException

The resource already exists.

HTTP Status Code: 409

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

CreateAlias

Creates an alias that points to the specified Lambda function version. For more information, see [Introduction to AWS Lambda Aliases](#).

Alias names are unique for a given function. This requires permission for the `lambda:CreateAlias` action.

Request Syntax

```
POST /2015-03-31/functions/FunctionName/aliases HTTP/1.1
Content-type: application/json

{
  "Description (p. 275)": "string",
  "FunctionVersion (p. 275)": "string",
  "Name (p. 275)": "string"
}
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 275)

Name of the Lambda function for which you want to create an alias.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\SLATEST|[a-zA-Z0-9_-]+))?`

Request Body

The request requires the following data in JSON format.

Description (p. 275)

Description of the alias.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

Required: No

FunctionVersion (p. 275)

Lambda function version for which you are creating the alias.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\SLATEST|[0-9]+)`

Required: Yes

Name (p. 275)

Name for the alias you are creating.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `(?!^[0-9]+$)([a-zA-Z0-9_-]+)`

Required: Yes

Response Syntax

```
HTTP/1.1 201
Content-type: application/json

{
  "AliasArn (p. 276)": "string",
  "Description (p. 276)": "string",
  "FunctionVersion (p. 276)": "string",
  "Name (p. 276)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 201 response.
The following data is returned in JSON format by the service.

AliasArn (p. 276)

Lambda function ARN that is qualified using the alias name as the suffix. For example, if you create an alias called `BETA` that points to a `helloworld` function version, the ARN is
`arn:aws:lambda:aws-regions:acct-id:function:helloworld:BETA`.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\$LATEST|[a-zA-Z0-9_-]+))?`

Description (p. 276)

Alias description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

FunctionVersion (p. 276)

Function version to which the alias points.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\$LATEST|[0-9]+)`

Name (p. 276)

Alias name.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `(?!^[0-9]+$)([a-zA-Z0-9_-]+)`

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceConflictException

The resource already exists.

HTTP Status Code: 409

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

CreateEventSourceMapping

Identifies a stream as an event source for a Lambda function. It can be either an Amazon Kinesis stream or an Amazon DynamoDB stream. AWS Lambda invokes the specified function when records are posted to the stream.

This association between a stream source and a Lambda function is called the event source mapping.

Important

This event source mapping is relevant only in the AWS Lambda pull model, where AWS Lambda invokes the function. For more information, go to [AWS Lambda: How it Works](#) in the *AWS Lambda Developer Guide*.

You provide mapping information (for example, which stream to read from and which Lambda function to invoke) in the request body.

Each event source, such as an Amazon Kinesis or a DynamoDB stream, can be associated with multiple AWS Lambda function. A given Lambda function can be associated with multiple AWS event sources.

If you are using versioning, you can specify a specific function version or an alias via the function name parameter. For more information about versioning, see [AWS Lambda Function Versioning and Aliases](#).

This operation requires permission for the `lambda:CreateEventSourceMapping` action.

Request Syntax

```
POST /2015-03-31/event-source-mappings/ HTTP/1.1
Content-type: application/json

{
  "BatchSize (p. 278)": number,
  "Enabled (p. 278)": boolean,
  "EventSourceArn (p. 278)": "string",
  "FunctionName (p. 279)": "string",
  "StartingPosition (p. 279)": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request requires the following data in JSON format.

BatchSize (p. 278)

The largest number of records that AWS Lambda will retrieve from your event source at the time of invoking your function. Your function receives an event with all the retrieved records. The default is 100 records.

Type: Integer

Valid Range: Minimum value of 1. Maximum value of 10000.

Required: No

Enabled (p. 278)

Indicates whether AWS Lambda should begin polling the event source. By default, `Enabled` is true.

Type: Boolean

Required: No

EventSourceArn (p. 278)

The Amazon Resource Name (ARN) of the Amazon Kinesis or the Amazon DynamoDB stream that is the event source. Any record added to this stream could cause AWS Lambda to invoke your

Lambda function, it depends on the `BatchSize`. AWS Lambda POSTs the Amazon Kinesis event, containing records, to your Lambda function as JSON.

Type: String

Pattern: `arn:aws:([a-zA-Z0-9\-.]+):([a-z]{2}-[a-z]+\d{1})?:([a-z]{12})?:([a-z]{1,2})`

Required: Yes

FunctionName (p. 278)

The Lambda function to invoke when AWS Lambda detects an event on the stream.

You can specify the function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example,

`arn:aws:lambda:us-west-2:account-id:function:ThumbNail`).

If you are using versioning, you can also provide a qualified function ARN (ARN that is qualified with function version or alias name as suffix). For more information about versioning, see [AWS Lambda Function Versioning and Aliases](#)

AWS Lambda also allows you to specify only the function name with the account ID qualifier (for example, `account-id:Thumbnail`).

Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1})?:([a-z]{12})?:([a-z]{1,2})?:([a-zA-Z0-9_]+)(:(\d+|LATEST|[a-zA-Z0-9_]+))?`

Required: Yes

StartingPosition (p. 278)

The position in the stream where AWS Lambda should start reading. For more information, go to [ShardIteratorType](#) in the *Amazon Kinesis API Reference*.

Type: String

Valid Values: `TRIM_HORIZON` | `LATEST`

Required: Yes

Response Syntax

```
HTTP/1.1 202
Content-type: application/json

{
  "BatchSize (p. 280)": number,
  "EventSourceArn (p. 280)": "string",
  "FunctionArn (p. 280)": "string",
  "LastModified (p. 280)": number,
  "LastProcessingResult (p. 280)": "string",
  "State (p. 280)": "string",
  "StateTransitionReason (p. 280)": "string",
  "UUID (p. 280)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 202 response. The following data is returned in JSON format by the service.

The largest number of records that AWS Lambda will retrieve from your event source at the time of invoking your function. Your function receives an event with all the retrieved records.

Valid Range: Minimum value of 1. Maximum value of 10000.

The Amazon Resource Name (ARN) of the Amazon Kinesis stream that is the source of events.

Pattern: `arn:aws:([a-zA-Z0-9_-])+:([a-z]{2}-[a-z]+\-\d{1})?:(\d{12})?:(.*)`

The Lambda function to invoke when AWS Lambda detects an event on the stream.

Pattern:

```
arn:aws:lambda:[a-z]{2}-[a-z]+-\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\$LATEST|[a-zA-Z0-9_-]+))?
```

The UTC time string indicating the last time the event mapping was updated.

Type: Timestamp

The result of the last AWS Lambda invocation of your Lambda function.

Type: String

The state of the event source mapping. It can be Creating, Enabled, Disabled, Enabling, Disabling, Updating, or Deleting.

Type: String

The reason the event source mapping is in its current state. It is either user-requested or an AWS Lambda-initiated state transition.

Type: String

The AWS Lambda assigned opaque identifier for the mapping.

Type: String

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

The resource already exists.

HTTP Status Code: 409

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

CreateFunction

Creates a new Lambda function. The function metadata is created from the request parameters, and the code for the function is provided by a .zip file in the request body. If the function name already exists, the operation will fail. Note that the function name is case-sensitive.

If you are using versioning, you can also publish a version of the Lambda function you are creating using the `Publish` parameter. For more information about versioning, see [AWS Lambda Function Versioning and Aliases](#).

This operation requires permission for the `lambda:CreateFunction` action.

Request Syntax

```
POST /2015-03-31/functions HTTP/1.1
Content-type: application/json

{
  "Code (p. 282)": {
    "S3Bucket (p. 339)": "string",
    "S3Key (p. 339)": "string",
    "S3ObjectVersion (p. 339)": "string",
    "ZipFile (p. 339)": blob
  },
  "Description (p. 282)": "string",
  "FunctionName (p. 283)": "string",
  "Handler (p. 283)": "string",
  "MemorySize (p. 283)": number,
  "Publish (p. 283)": boolean,
  "Role (p. 283)": "string",
  "Runtime (p. 283)": "string",
  "Timeout (p. 283)": number,
  "VpcConfig (p. 284)": {
    "SecurityGroupIds (p. 343)": [ "string" ],
    "SubnetIds (p. 343)": [ "string" ]
  }
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request requires the following data in JSON format.

Code (p. 282)

The code for the Lambda function.

Type: [FunctionCode \(p. 339\)](#) object

Required: Yes

Description (p. 282)

A short, user-defined function description. Lambda does not use this value. Assign a meaningful description as you see fit.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

Required: No

FunctionName (p. 282)

The name you want to assign to the function you are uploading. The function names appear in the console and are returned in the [ListFunctions \(p. 313\)](#) API. Function names are used to specify functions to other AWS Lambda APIs, such as [Invoke \(p. 303\)](#).

Type: String

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\LATEST|[a-zA-Z0-9_-]+))?`

Required: Yes

Handler (p. 282)

The function within your code that Lambda calls to begin execution. For Node.js, it is the `module-name.export` value in your function. For Java, it can be `package.class-name:handler` or `package.class-name`. For more information, see [Lambda Function Handler \(Java\)](#).

Type: String

Length Constraints: Maximum length of 128.

Pattern: `[^\s]+`

Required: Yes

MemorySize (p. 282)

The amount of memory, in MB, your Lambda function is given. Lambda uses this memory size to infer the amount of CPU and memory allocated to your function. Your function use-case determines your CPU and memory requirements. For example, a database operation might need less memory compared to an image processing function. The default value is 128 MB. The value must be a multiple of 64 MB.

Type: Integer

Valid Range: Minimum value of 128. Maximum value of 1536.

Required: No

Publish (p. 282)

This boolean parameter can be used to request AWS Lambda to create the Lambda function and publish a version as an atomic operation.

Type: Boolean

Required: No

Role (p. 282)

The Amazon Resource Name (ARN) of the IAM role that Lambda assumes when it executes your function to access any other Amazon Web Services (AWS) resources. For more information, see [AWS Lambda: How it Works](#).

Type: String

Pattern: `arn:aws:iam::\d{12}:role/?[a-zA-Z0-9+=,.\@_-/_]+`

Required: Yes

Runtime (p. 282)

The runtime environment for the Lambda function you are uploading.

To use the Node.js runtime v4.3, set the value to "nodejs4.3". To use earlier runtime (v0.10.42), set the value to "nodejs".

Type: String

Valid Values: `nodejs` | `nodejs4.3` | `java8` | `python2.7`

Required: Yes

Timeout (p. 282)

The function execution time at which Lambda should terminate the function. Because the execution time has cost implications, we recommend you set this value based on your expected execution time. The default is 3 seconds.

Type: Integer

Valid Range: Minimum value of 1.

Required: No

VpcConfig (p. 282)

If your Lambda function accesses resources in a VPC, you provide this parameter identifying the list of security group IDs and subnet IDs. These must belong to the same VPC. You must provide at least one security group and one subnet ID.

Type: [VpcConfig \(p. 343\)](#) object

Required: No

Response Syntax

```
HTTP/1.1 201
Content-type: application/json

{
  "CodeSha256 (p. 284)": "string",
  "CodeSize (p. 284)": number,
  "Description (p. 284)": "string",
  "FunctionArn (p. 284)": "string",
  "FunctionName (p. 285)": "string",
  "Handler (p. 285)": "string",
  "LastModified (p. 285)": "string",
  "MemorySize (p. 285)": number,
  "Role (p. 285)": "string",
  "Runtime (p. 285)": "string",
  "Timeout (p. 285)": number,
  "Version (p. 285)": "string",
  "VpcConfig (p. 285)": {
    "SecurityGroupIds (p. 344)": [ "string" ],
    "SubnetIds (p. 344)": [ "string" ],
    "VpcId (p. 344)": "string"
  }
}
```

Response Elements

If the action is successful, the service sends back an HTTP 201 response. The following data is returned in JSON format by the service.

CodeSha256 (p. 284)

It is the SHA256 hash of your function deployment package.

Type: String

CodeSize (p. 284)

The size, in bytes, of the function .zip file you uploaded.

Type: Long

Description (p. 284)

The user-provided description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

FunctionArn (p. 284)

The Amazon Resource Name (ARN) assigned to the function.

Type: String

Pattern:

arn:aws:lambda:[a-z]{2}-[a-z]+-\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\\${LATEST}|[a-zA-Z0-9_-]+))?

FunctionName (p. 284)

The name of the function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_]+)(:(\${LATEST}|[a-zA-Z0-9_]+))?`

Handler (p. 284)

The function Lambda calls to begin executing your function.

Type: String

Length Constraints: Maximum length of 128.

Pattern: `[\s]+`

LastModified (p. 284)

The time stamp of the last time you updated the function.

Type: String

MemorySize (p. 284)

The memory size, in MB, you configured for the function. Must be a multiple of 64 MB.

Type: Integer

Valid Range: Minimum value of 128. Maximum value of 1536.

Role (p. 284)

The Amazon Resource Name (ARN) of the IAM role that Lambda assumes when it executes your function to access any other Amazon Web Services (AWS) resources.

Type: String

Pattern: `arn:aws:iam::\d{12}:role/?[a-zA-Z0-9+=,.\@_-/_]+`

Runtime (p. 284)

The runtime environment for the Lambda function.

To use the Node.js runtime v4.3, set the value to "nodejs4.3". To use earlier runtime (v0.10.42), set the value to "nodejs".

Type: String

Valid Values: `nodejs | nodejs4.3 | java8 | python2.7`

Timeout (p. 284)

The function execution time at which Lambda should terminate the function. Because the execution time has cost implications, we recommend you set this value based on your expected execution time. The default is 3 seconds.

Type: Integer

Valid Range: Minimum value of 1.

Version (p. 284)

The version of the Lambda function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\${LATEST}|[0-9]+)`

VpcConfig (p. 284)

VPC configuration associated with your Lambda function.

Type: [VpcConfigResponse \(p. 344\)](#) object

Errors

CodeStorageExceededException

You have exceeded your maximum total code size per account. [Limits](#)

HTTP Status Code: 400

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceConflictException

The resource already exists.

HTTP Status Code: 409

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

DeleteAlias

Deletes the specified Lambda function alias. For more information, see [Introduction to AWS Lambda Aliases](#).

This requires permission for the `lambda:DeleteAlias` action.

Request Syntax

```
DELETE /2015-03-31/functions/FunctionName/aliases/Name HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 287)

The Lambda function name for which the alias is created. Deleting an alias does not delete the function version to which it is pointing.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_]+)(:(\LATEST|[a-zA-Z0-9_]+))?
```

Name (p. 287)

Name of the alias to delete.

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `(?!^[0-9]+$)([a-zA-Z0-9_]+)`

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 204
```

Response Elements

If the action is successful, the service sends back an HTTP 204 response with an empty HTTP body.

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

DeleteEventSourceMapping

Removes an event source mapping. This means AWS Lambda will no longer invoke the function for events in the associated source.

This operation requires permission for the `lambda:DeleteEventSourceMapping` action.

Request Syntax

```
DELETE /2015-03-31/event-source-mappings/UUID HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

UUID (p. 288)

The event source mapping ID.

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 202
Content-type: application/json

{
  "BatchSize (p. 288)": number,
  "EventSourceArn (p. 288)": "string",
  "FunctionArn (p. 288)": "string",
  "LastModified (p. 289)": number,
  "LastProcessingResult (p. 289)": "string",
  "State (p. 289)": "string",
  "StateTransitionReason (p. 289)": "string",
  "UUID (p. 289)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 202 response.

The following data is returned in JSON format by the service.

BatchSize (p. 288)

The largest number of records that AWS Lambda will retrieve from your event source at the time of invoking your function. Your function receives an event with all the retrieved records.

Type: Integer

Valid Range: Minimum value of 1. Maximum value of 10000.

EventSourceArn (p. 288)

The Amazon Resource Name (ARN) of the Amazon Kinesis stream that is the source of events.

Type: String

Pattern: `arn:aws:([a-zA-Z0-9\-\-])+:([a-z]{2}-[a-z]+\-\d{1})?:(\d{12})?:(.*)`

FunctionArn (p. 288)

The Lambda function to invoke when AWS Lambda detects an event on the stream.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\$LATEST|[a-zA-Z0-9_-]+))?`

LastModified (p. 288)

The UTC time string indicating the last time the event mapping was updated.

Type: Timestamp

LastProcessingResult (p. 288)

The result of the last AWS Lambda invocation of your Lambda function.

Type: String

State (p. 288)

The state of the event source mapping. It can be `Creating`, `Enabled`, `Disabled`, `Enabling`, `Disabling`, `Updating`, or `Deleting`.

Type: String

StateTransitionReason (p. 288)

The reason the event source mapping is in its current state. It is either user-requested or an AWS Lambda-initiated state transition.

Type: String

UUID (p. 288)

The AWS Lambda assigned opaque identifier for the mapping.

Type: String

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

DeleteFunction

Deletes the specified Lambda function code and configuration.

If you are using the versioning feature and you don't specify a function version in your `DeleteFunction` request, AWS Lambda will delete the function, including all its versions, and any aliases pointing to the function versions. To delete a specific function version, you must provide the function version via the `Qualifier` parameter. For information about function versioning, see [AWS Lambda Function Versioning and Aliases](#).

When you delete a function the associated resource policy is also deleted. You will need to delete the event source mappings explicitly.

This operation requires permission for the `lambda:DeleteFunction` action.

Request Syntax

```
DELETE /2015-03-31/functions/FunctionName?Qualifier=Qualifier HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 290)

The Lambda function to delete.

You can specify the function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example, `arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). If you are using versioning, you can also provide a qualified function ARN (ARN that is qualified with function version or alias name as suffix). AWS Lambda also allows you to specify only the function name with the account ID qualifier (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\s*LATEST|[a-zA-Z0-9_-]+))?
```

Qualifier (p. 290)

Using this optional parameter you can specify a function version (but not the `$LATEST` version) to direct AWS Lambda to delete a specific function version. If the function version has one or more aliases pointing to it, you will get an error because you cannot have aliases pointing to it. You can delete any function version but not the `$LATEST`, that is, you cannot specify `$LATEST` as the value of this parameter. The `$LATEST` version can be deleted only when you want to delete all the function versions and aliases.

You can only specify a function version, not an alias name, using this parameter. You cannot delete a function version using its alias.

If you don't specify this parameter, AWS Lambda will delete the function, including all of its versions and aliases.

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `([a-zA-Z0-9$_-]+)`

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 204
```

Response Elements

If the action is successful, the service sends back an HTTP 204 response with an empty HTTP body.

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceConflictException

The resource already exists.

HTTP Status Code: 409

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

GetAlias

Returns the specified alias information such as the alias ARN, description, and function version it is pointing to. For more information, see [Introduction to AWS Lambda Aliases](#).

This requires permission for the `lambda:GetAlias` action.

Request Syntax

```
GET /2015-03-31/functions/FunctionName/aliases/Name HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 292)

Function name for which the alias is created. An alias is a subresource that exists only in the context of an existing Lambda function so you must specify the function name.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}):(\d{12}):?function:([a-zA-Z0-9_-]+)(:(\d{12}|[a-zA-Z0-9_-]+))?`

Name (p. 292)

Name of the alias for which you want to retrieve information.

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `(?!^[0-9]+$)([a-zA-Z0-9_-]+)`

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "AliasArn (p. 292)": "string",
  "Description (p. 293)": "string",
  "FunctionVersion (p. 293)": "string",
  "Name (p. 293)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

AliasArn (p. 292)

Lambda function ARN that is qualified using the alias name as the suffix. For example, if you create an alias called `BETA` that points to a helloworld function version, the ARN is

`arn:aws:lambda:aws-regions:acct-id:function:helloworld:BETA`.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+\d{1}:\d{12}:function:[a-zA-Z0-9_-]+:(\d{12}|[a-zA-Z0-9_-]+)?`

Description (p. 292)

Alias description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

FunctionVersion (p. 292)

Function version to which the alias points.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: (`\$LATEST` | `[0-9]+`)

Name (p. 292)

Alias name.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: (`?!^[0-9]+`) (`[a-zA-Z0-9-_-]`)

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

GetEventSourceMapping

Returns configuration information for the specified event source mapping (see [CreateEventSourceMapping](#) (p. 278)).

This operation requires permission for the `lambda:GetEventSourceMapping` action.

Request Syntax

```
GET /2015-03-31/event-source-mappings/UUID HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

UUID (p. 294)

The AWS Lambda assigned ID of the event source mapping.

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "BatchSize (p. 294)": number,
  "EventSourceArn (p. 294)": "string",
  "FunctionArn (p. 294)": "string",
  "LastModified (p. 295)": number,
  "LastProcessingResult (p. 295)": "string",
  "State (p. 295)": "string",
  "StateTransitionReason (p. 295)": "string",
  "UUID (p. 295)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

BatchSize (p. 294)

The largest number of records that AWS Lambda will retrieve from your event source at the time of invoking your function. Your function receives an event with all the retrieved records.

Type: Integer

Valid Range: Minimum value of 1. Maximum value of 10000.

EventSourceArn (p. 294)

The Amazon Resource Name (ARN) of the Amazon Kinesis stream that is the source of events.

Type: String

Pattern: `arn:aws:([a-zA-Z0-9\-_])+:([a-z]{2}-[a-z]+\-\d{1})?:(\d{12})?:(.*)`

FunctionArn (p. 294)

The Lambda function to invoke when AWS Lambda detects an event on the stream.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\$LATEST|[a-zA-Z0-9_-]+))?`

LastModified (p. 294)

The UTC time string indicating the last time the event mapping was updated.

Type: Timestamp

LastProcessingResult (p. 294)

The result of the last AWS Lambda invocation of your Lambda function.

Type: String

State (p. 294)

The state of the event source mapping. It can be `Creating`, `Enabled`, `Disabled`, `Enabling`, `Disabling`, `Updating`, or `Deleting`.

Type: String

StateTransitionReason (p. 294)

The reason the event source mapping is in its current state. It is either user-requested or an AWS Lambda-initiated state transition.

Type: String

UUID (p. 294)

The AWS Lambda assigned opaque identifier for the mapping.

Type: String

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

GetFunction

Returns the configuration information of the Lambda function and a presigned URL link to the .zip file you uploaded with [CreateFunction](#) (p. 282) so you can download the .zip file. Note that the URL is valid for up to 10 minutes. The configuration information is the same information you provided as parameters when uploading the function.

Using the optional `Qualifier` parameter, you can specify a specific function version for which you want this information. If you don't specify this parameter, the API uses unqualified function ARN which return information about the `$LATEST` version of the Lambda function. For more information, see [AWS Lambda Function Versioning and Aliases](#).

This operation requires permission for the `lambda:GetFunction` action.

Request Syntax

```
GET /2015-03-31/functions/FunctionName?Qualifier=Qualifier HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 296)

The Lambda function name.

You can specify a function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example, `arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). AWS Lambda also allows you to specify a partial ARN (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length. Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+-\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_]+)(:(\LATEST|[a-zA-Z0-9_]+))?
```

Qualifier (p. 296)

Using this optional parameter to specify a function version or an alias name. If you specify function version, the API uses qualified function ARN for the request and returns information about the specific Lambda function version. If you specify an alias name, the API uses the alias ARN and returns information about the function version to which the alias points. If you don't provide this parameter, the API uses unqualified function ARN and returns information about the `$LATEST` version of the Lambda function.

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `([a-zA-Z0-9$_-]+)`

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "Code (p. 297)": {
    "Location (p. 340)": "string",
    "RepositoryType (p. 340)": "string"
```

```
},  
"Configuration (p. 297)": {  
  "CodeSha256 (p. 341)": "string",  
  "CodeSize (p. 341)": number,  
  "Description (p. 341)": "string",  
  "FunctionArn (p. 341)": "string",  
  "FunctionName (p. 341)": "string",  
  "Handler (p. 341)": "string",  
  "LastModified (p. 341)": "string",  
  "MemorySize (p. 341)": number,  
  "Role (p. 341)": "string",  
  "Runtime (p. 342)": "string",  
  "Timeout (p. 342)": number,  
  "Version (p. 342)": "string",  
  "VpcConfig (p. 342)": {  
    "SecurityGroupIds (p. 344)": [ "string" ],  
    "SubnetIds (p. 344)": [ "string" ],  
    "VpcId (p. 344)": "string"  
  }  
}  
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.
The following data is returned in JSON format by the service.

Code (p. 296)

The object for the Lambda function location.

Type: [FunctionCodeLocation](#) (p. 340) object

Configuration (p. 296)

A complex type that describes function metadata.

Type: [FunctionConfiguration](#) (p. 341) object

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

GetFunctionConfiguration

Returns the configuration information of the Lambda function. This the same information you provided as parameters when uploading the function by using [CreateFunction](#) (p. 282).

If you are using the versioning feature, you can retrieve this information for a specific function version by using the optional `Qualifier` parameter and specifying the function version or alias that points to it. If you don't provide it, the API returns information about the `$LATEST` version of the function. For more information about versioning, see [AWS Lambda Function Versioning and Aliases](#).

This operation requires permission for the `lambda:GetFunctionConfiguration` operation.

Request Syntax

```
GET /2015-03-31/functions/FunctionName/configuration?Qualifier=Qualifier HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 298)

The name of the Lambda function for which you want to retrieve the configuration information.

You can specify a function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example,

`arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). AWS Lambda also allows you to specify a partial ARN (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-])(:(\s*LATEST|[a-zA-Z0-9_-]))?
```

Qualifier (p. 298)

Using this optional parameter you can specify a function version or an alias name. If you specify function version, the API uses qualified function ARN and returns information about the specific function version. If you specify an alias name, the API uses the alias ARN and returns information about the function version to which the alias points.

If you don't specify this parameter, the API uses unqualified function ARN, and returns information about the `$LATEST` function version.

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `([a-zA-Z0-9$_-]+)`

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "CodeSha256 (p. 299)": "string",
  "CodeSize (p. 299)": number,
  "Description (p. 299)": "string",
  "FunctionArn (p. 299)": "string",
  "FunctionName (p. 299)": "string",
```



```
"Handler (p. 299)": "string",
"LastModified (p. 299)": "string",
"MemorySize (p. 299)": number,
"Role (p. 300)": "string",
"Runtime (p. 300)": "string",
"Timeout (p. 300)": number,
"Version (p. 300)": "string",
"VpcConfig (p. 300)": {
  "SecurityGroupIds (p. 344)": [ "string" ],
  "SubnetIds (p. 344)": [ "string" ],
  "VpcId (p. 344)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.
The following data is returned in JSON format by the service.

CodeSha256 (p. 298)

It is the SHA256 hash of your function deployment package.

Type: String

CodeSize (p. 298)

The size, in bytes, of the function .zip file you uploaded.

Type: Long

Description (p. 298)

The user-provided description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

FunctionArn (p. 298)

The Amazon Resource Name (ARN) assigned to the function.

Type: String

Pattern:

arn:aws:lambda:[a-z]{2}-[a-z]+-\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\sLATEST|[a-zA-Z0-9_-]+))?

FunctionName (p. 298)

The name of the function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

(arn:aws:lambda:)?([a-z]{2}-[a-z]+-\d{1}):(\d{12}):?(function:)?([a-zA-Z0-9_-]+)(:(\$LATEST|[a-zA-Z0-9_-]+))?

Handler (p. 298)

The function Lambda calls to begin executing your function.

Type: String

Length Constraints: Maximum length of 128.

Pattern: [^\s]+

LastModified (p. 298)

The time stamp of the last time you updated the function.

Type: String

MemorySize (p. 298)

The memory size, in MB, you configured for the function. Must be a multiple of 64 MB.

Type: Integer

Valid Range: Minimum value of 128. Maximum value of 1536.

Role (p. 298)

The Amazon Resource Name (ARN) of the IAM role that Lambda assumes when it executes your function to access any other Amazon Web Services (AWS) resources.

Type: String

Pattern: `arn:aws:iam::\d{12}:role/?[a-zA-Z_0-9+=,.\@-_/]+`

Runtime (p. 298)

The runtime environment for the Lambda function.

To use the Node.js runtime v4.3, set the value to "nodejs4.3". To use earlier runtime (v0.10.42), set the value to "nodejs".

Type: String

Valid Values: `nodejs` | `nodejs4.3` | `java8` | `python2.7`

Timeout (p. 298)

The function execution time at which Lambda should terminate the function. Because the execution time has cost implications, we recommend you set this value based on your expected execution time. The default is 3 seconds.

Type: Integer

Valid Range: Minimum value of 1.

Version (p. 298)

The version of the Lambda function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\${LATEST}|[0-9]+)`

VpcConfig (p. 298)

VPC configuration associated with your Lambda function.

Type: [VpcConfigResponse](#) (p. 344) object

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

GetPolicy

Returns the resource policy associated with the specified Lambda function.

If you are using the versioning feature, you can get the resource policy associated with the specific Lambda function version or alias by specifying the version or alias name using the `Qualifier` parameter. For more information about versioning, see [AWS Lambda Function Versioning and Aliases](#).

For information about adding permissions, see [AddPermission](#) (p. 272).

You need permission for the `lambda:GetPolicy` action.

Request Syntax

```
GET /2015-03-31/functions/FunctionName/policy?Qualifier=Qualifier HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 301)

Function name whose resource policy you want to retrieve.

You can specify the function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example,

`arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). If you are using versioning, you can also provide a qualified function ARN (ARN that is qualified with function version or alias name as suffix). AWS Lambda also allows you to specify only the function name with the account ID qualifier (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_]+)(:(\LATEST|[a-zA-Z0-9_]+))?
```

Qualifier (p. 301)

You can specify this optional query parameter to specify a function version or an alias name in which case this API will return all permissions associated with the specific qualified ARN. If you don't provide this parameter, the API will return permissions that apply to the unqualified function ARN.

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `([a-zA-Z0-9$_-]+)`

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "Policy (p. 302)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

Policy (p. 301)

The resource policy associated with the specified function. The response returns the same as a string using a backslash ("\") as an escape character in the JSON.

Type: String

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

Invoke

Invokes a specific Lambda function. For an example, see [Create the Lambda Function and Test It Manually](#).

If you are using the versioning feature, you can invoke the specific function version by providing function version or alias name that is pointing to the function version using the `Qualifier` parameter in the request. If you don't provide the `Qualifier` parameter, the `$LATEST` version of the Lambda function is invoked. Invocations occur at least once in response to an event and functions must be idempotent to handle this. For information about the versioning feature, see [AWS Lambda Function Versioning and Aliases](#).

This operation requires permission for the `lambda:InvokeFunction` action.

Request Syntax

```
POST /2015-03-31/functions/FunctionName/invocations?Qualifier=Qualifier HTTP/1.1
X-Amz-Invocation-Type: InvocationType
X-Amz-Log-Type: LogType
X-Amz-Client-Context: ClientContext

Payload
```

URI Request Parameters

The request requires the following URI parameters.

ClientContext (p. 303)

Using the `ClientContext` you can pass client-specific information to the Lambda function you are invoking. You can then process the client information in your Lambda function as you choose through the context variable. For an example of a `ClientContext` JSON, see [PutEvents](#) in the *Amazon Mobile Analytics API Reference and User Guide*.

The `ClientContext` JSON must be base64-encoded.

FunctionName (p. 303)

The Lambda function name.

You can specify a function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example, `arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). AWS Lambda also allows you to specify a partial ARN (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length. Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\${LATEST}|[a-zA-Z0-9_-]+))?
```

InvocationType (p. 303)

By default, the `Invoke` API assumes `RequestResponse` invocation type. You can optionally request asynchronous execution by specifying `Event` as the `InvocationType`. You can also use this parameter to request AWS Lambda to not execute the function but do some verification, such as if the caller is authorized to invoke the function and if the inputs are valid. You request this by specifying `DryRun` as the `InvocationType`. This is useful in a cross-account scenario when you want to verify access to a function without running it.

Valid Values: `Event` | `RequestResponse` | `DryRun`

LogType (p. 303)

You can set this optional parameter to `Tail` in the request only if you specify the `InvocationType` parameter with value `RequestResponse`. In this case, AWS Lambda returns the base64-encoded last 4 KB of log data produced by your Lambda function in the `x-amz-log-result` header.

Valid Values: `None` | `Tail`

Qualifier (p. 303)

You can use this optional parameter to specify a Lambda function version or alias name. If you specify a function version, the API uses the qualified function ARN to invoke a specific Lambda function. If you specify an alias name, the API uses the alias ARN to invoke the Lambda function version to which the alias points.

If you don't provide this parameter, then the API uses unqualified function ARN which results in invocation of the `$LATEST` version.

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: (| [a-zA-Z0-9\$_-]+)

Request Body

The request requires the following data in JSON format.

Payload (p. 303)

JSON that you want to provide to your Lambda function as input.

Type: Binary data

Required: No

Response Syntax

```
HTTP/1.1 StatusCode
X-Amz-Function-Error: FunctionError
X-Amz-Log-Result: LogResult
```

```
Payload
```

Response Elements

If the action is successful, the service sends back the following HTTP response.

StatusCode (p. 304)

The HTTP status code will be in the 200 range for successful request. For the `RequestResponse` invocation type this status code will be 200. For the `Event` invocation type this status code will be 202. For the `DryRun` invocation type the status code will be 204.

The response returns the following HTTP headers.

FunctionError (p. 304)

Indicates whether an error occurred while executing the Lambda function. If an error occurred this field will have one of two values; `Handled` or `Unhandled`. `Handled` errors are errors that are reported by the function while the `Unhandled` errors are those detected and reported by AWS Lambda. Unhandled errors include out of memory errors and function timeouts. For information about how to report an `Handled` error, see [Programming Model](#).

LogResult (p. 304)

It is the base64-encoded logs for the Lambda function invocation. This is present only if the invocation type is `RequestResponse` and the logs were requested.

The response returns the following as the HTTP body.

<varlistentry> **Payload (p. 304)**

It is the JSON representation of the object returned by the Lambda function. In This is present only if the invocation type is `RequestResponse`.

In the event of a function error this field contains a message describing the error. For the `Handled` errors the Lambda function will report this message. For `Unhandled` errors AWS Lambda reports the message.

</varlistentry>

Errors

EC2AccessDeniedException

HTTP Status Code: 502

EC2ThrottledException

AWS Lambda was throttled by Amazon EC2 during Lambda function initialization using the execution role provided for the Lambda function.

HTTP Status Code: 502

EC2UnexpectedException

AWS Lambda received an unexpected EC2 client exception while setting up for the Lambda function.

HTTP Status Code: 502

ENILimitReachedException

AWS Lambda was not able to create an Elastic Network Interface (ENI) in the VPC, specified as part of Lambda function configuration, because the limit for network interfaces has been reached.

HTTP Status Code: 502

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

InvalidRequestContentException

The request body could not be parsed as JSON.

HTTP Status Code: 400

InvalidSecurityGroupIDException

The Security Group ID provided in the Lambda function VPC configuration is invalid.

HTTP Status Code: 502

InvalidSubnetIDException

The Subnet ID provided in the Lambda function VPC configuration is invalid.

HTTP Status Code: 502

InvalidZipFileException

HTTP Status Code: 502

RequestTooLargeException

The request payload exceeded the `Invoke` request body JSON input limit. For more information, see [Limits](#).

HTTP Status Code: 413

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

SubnetIPAddressLimitReachedException

AWS Lambda was not able to set up VPC access for the Lambda function because one or more configured subnets has no available IP addresses.

HTTP Status Code: 502

TooManyRequestsException

HTTP Status Code: 429

UnsupportedMediaTypeException

The content type of the `Invoke` request body is not JSON.

HTTP Status Code: 415

InvokeAsync

Important

This API is deprecated. We recommend you use `Invoke` API (see [Invoke \(p. 303\)](#)).

Submits an invocation request to AWS Lambda. Upon receiving the request, Lambda executes the specified function asynchronously. To see the logs generated by the Lambda function execution, see the CloudWatch Logs console.

This operation requires permission for the `lambda:InvokeFunction` action.

Request Syntax

```
POST /2014-11-13/functions/FunctionName/invoke-async/ HTTP/1.1
```

InvokeArgs

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 307)

The Lambda function name.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(am:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\LATEST|[a-zA-Z0-9_-]+))?`

Request Body

The request requires the following data in JSON format.

InvokeArgs (p. 307)

JSON that you want to provide to your Lambda function as input.

Type: Binary data

Required: Yes

Response Syntax

```
HTTP/1.1 Status
```

Response Elements

If the action is successful, the service sends back the following HTTP response.

Status (p. 307)

It will be 202 upon success.

Errors

InvalidRequestContentException

The request body could not be parsed as JSON.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

Example

Invoke a Lambda function

The following example uses a `POST` request to invoke a Lambda function.

Sample Request

```
POST /2014-11-13/functions/helloworld/invoke-async/ HTTP/1.1
[input json]
```

Sample Response

```
HTTP/1.1 202 Accepted

x-amzn-requestid: f037bc5c-5a08-11e4-b02e-af446c3f9d0d
content-length: 0
connection: keep-alive
date: Wed, 22 Oct 2014 16:31:55 GMT
content-type: application/json
```

ListAliases

Returns list of aliases created for a Lambda function. For each alias, the response includes information such as the alias ARN, description, alias name, and the function version to which it points. For more information, see [Introduction to AWS Lambda Aliases](#).

This requires permission for the `lambda:ListAliases` action.

Request Syntax

```
GET /2015-03-31/functions/FunctionName/aliases?FunctionVersion=FunctionVersion&Marker=Marker&MaxItems=MaxItems HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 309)

Lambda function name for which the alias is created.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_]+)(:(\LATEST|[a-zA-Z0-9_]+))?`

FunctionVersion (p. 309)

If you specify this optional parameter, the API returns only the aliases that are pointing to the specific Lambda function version, otherwise the API returns all of the aliases created for the Lambda function.

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\LATEST|[0-9]+)`

Marker (p. 309)

Optional string. An opaque pagination token returned from a previous `ListAliases` operation. If present, indicates where to continue the listing.

MaxItems (p. 309)

Optional integer. Specifies the maximum number of aliases to return in response. This parameter value must be greater than 0.

Valid Range: Minimum value of 1. Maximum value of 10000.

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "Aliases (p. 310)": [
    {
      "AliasArn (p. 337)": "string",
      "Description (p. 337)": "string",
      "FunctionVersion (p. 337)": "string",
      "Name (p. 337)": "string"
    }
  ],
}
```

```
}  
  "NextMarker (p. 310)": "string"
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.
The following data is returned in JSON format by the service.

Aliases (p. 309)

A list of aliases.

Type: array of [AliasConfiguration \(p. 337\)](#) objects

NextMarker (p. 309)

A string, present if there are more aliases.

Type: String

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

ListEventSourceMappings

Returns a list of event source mappings you created using the `CreateEventSourceMapping` (see [CreateEventSourceMapping](#) (p. 278)).

For each mapping, the API returns configuration information. You can optionally specify filters to retrieve specific event source mappings.

If you are using the versioning feature, you can get list of event source mappings for a specific Lambda function version or an alias as described in the `FunctionName` parameter. For information about the versioning feature, see [AWS Lambda Function Versioning and Aliases](#).

This operation requires permission for the `lambda:ListEventSourceMappings` action.

Request Syntax

```
GET /2015-03-31/event-source-mappings/?EventSourceArn=EventSourceArn&FunctionName=FunctionName&Marker=Marker&MaxItems=MaxItems HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

EventSourceArn (p. 311)

The Amazon Resource Name (ARN) of the Amazon Kinesis stream. (This parameter is optional.)

Pattern: `arn:aws:([a-zA-Z0-9_-])+:([a-z]{2}-[a-z]+-\d{1})?:([a-z]{12})?:([a-z]{1,3})`

FunctionName (p. 311)

The name of the Lambda function.

You can specify the function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example,

`arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). If you are using versioning, you can also provide a qualified function ARN (ARN that is qualified with function version or alias name as suffix). AWS Lambda also allows you to specify only the function name with the account ID qualifier (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+-\d{1})?:([a-z]{12})?:([a-z]{1,3})?([a-zA-Z0-9_]+)(:(\d{1,5}|[a-zA-Z0-9_]+))?`

Marker (p. 311)

Optional string. An opaque pagination token returned from a previous `ListEventSourceMappings` operation. If present, specifies to continue the list from where the returning call left off.

MaxItems (p. 311)

Optional integer. Specifies the maximum number of event sources to return in response. This value must be greater than 0.

Valid Range: Minimum value of 1. Maximum value of 10000.

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 200
Content-type: application/json
```

```
{
  "EventSourceMappings (p. 312)": [
    {
      "BatchSize (p. 338)": number,
      "EventSourceArn (p. 338)": "string",
      "FunctionArn (p. 338)": "string",
      "LastModified (p. 338)": number,
      "LastProcessingResult (p. 338)": "string",
      "State (p. 338)": "string",
      "StateTransitionReason (p. 338)": "string",
      "UUID (p. 338)": "string"
    }
  ],
  "NextMarker (p. 312)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response. The following data is returned in JSON format by the service.

EventSourceMappings (p. 311)

An array of `EventSourceMappingConfiguration` objects.

Type: array of [EventSourceMappingConfiguration \(p. 338\)](#) objects

NextMarker (p. 311)

A string, present if there are more event source mappings.

Type: String

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

ListFunctions

Returns a list of your Lambda functions. For each function, the response includes the function configuration information. You must use [GetFunction](#) (p. 296) to retrieve the code for your function.

This operation requires permission for the `lambda:ListFunctions` action.

If you are using versioning feature, the response returns list of \$LATEST versions of your functions. For information about the versioning feature, see [AWS Lambda Function Versioning and Aliases](#).

Request Syntax

```
GET /2015-03-31/functions/?Marker=Marker&MaxItems=MaxItems HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

Marker (p. 313)

Optional string. An opaque pagination token returned from a previous `ListFunctions` operation. If present, indicates where to continue the listing.

MaxItems (p. 313)

Optional integer. Specifies the maximum number of AWS Lambda functions to return in response. This parameter value must be greater than 0.

Valid Range: Minimum value of 1. Maximum value of 10000.

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "Functions (p. 314)": [
    {
      "CodeSha256 (p. 341)": "string",
      "CodeSize (p. 341)": number,
      "Description (p. 341)": "string",
      "FunctionArn (p. 341)": "string",
      "FunctionName (p. 341)": "string",
      "Handler (p. 341)": "string",
      "LastModified (p. 341)": "string",
      "MemorySize (p. 341)": number,
      "Role (p. 341)": "string",
      "Runtime (p. 342)": "string",
      "Timeout (p. 342)": number,
      "Version (p. 342)": "string",
      "VpcConfig (p. 342)": {
        "SecurityGroupIds (p. 344)": [ "string" ],
        "SubnetIds (p. 344)": [ "string" ],
        "VpcId (p. 344)": "string"
      }
    }
  ],
}
```

```
}  
  "NextMarker (p. 314)": "string"
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.
The following data is returned in JSON format by the service.

Functions (p. 313)

A list of Lambda functions.

Type: array of [FunctionConfiguration \(p. 341\)](#) objects

NextMarker (p. 313)

A string, present if there are more functions.

Type: String

Errors

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

ListVersionsByFunction

List all versions of a function. For information about the versioning feature, see [AWS Lambda Function Versioning and Aliases](#).

Request Syntax

```
GET /2015-03-31/functions/FunctionName/versions?Marker=Marker&MaxItems=MaxItems
HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 315)

Function name whose versions to list. You can specify a function name (for example, Thumbnail) or you can specify Amazon Resource Name (ARN) of the function (for example, arn:aws:lambda:us-west-2:account-id:function:ThumbNail). AWS Lambda also allows you to specify a partial ARN (for example, account-id:Thumbnail). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length. Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_]+)(:(\LATEST|[a-zA-Z0-9_]+))?
```

Marker (p. 315)

Optional string. An opaque pagination token returned from a previous ListVersionsByFunction operation. If present, indicates where to continue the listing.

MaxItems (p. 315)

Optional integer. Specifies the maximum number of AWS Lambda function versions to return in response. This parameter value must be greater than 0.

Valid Range: Minimum value of 1. Maximum value of 10000.

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "NextMarker (p. 316)": "string",
  "Versions (p. 316)": [
    {
      "CodeSha256 (p. 341)": "string",
      "CodeSize (p. 341)": number,
      "Description (p. 341)": "string",
      "FunctionArn (p. 341)": "string",
      "FunctionName (p. 341)": "string",
      "Handler (p. 341)": "string",
      "LastModified (p. 341)": "string",
      "MemorySize (p. 341)": number,
      "Role (p. 341)": "string",
      "Runtime (p. 342)": "string",
```

```
    "Timeout (p. 342)": number,
    "Version (p. 342)": "string",
    "VpcConfig (p. 342)": {
      "SecurityGroupIds (p. 344)": [ "string" ],
      "SubnetIds (p. 344)": [ "string" ],
      "VpcId (p. 344)": "string"
    }
  }
]
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response. The following data is returned in JSON format by the service.

NextMarker (p. 315)

A string, present if there are more function versions.

Type: String

Versions (p. 315)

A list of Lambda function versions.

Type: array of [FunctionConfiguration \(p. 341\)](#) objects

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

PublishVersion

Publishes a version of your function from the current snapshot of \$LATEST. That is, AWS Lambda takes a snapshot of the function code and configuration information from \$LATEST and publishes a new version. The code and configuration cannot be modified after publication. For information about the versioning feature, see [AWS Lambda Function Versioning and Aliases](#).

Request Syntax

```
POST /2015-03-31/functions/FunctionName/versions HTTP/1.1
Content-type: application/json

{
  "CodeSha256 (p. 317)": "string",
  "Description (p. 317)": "string"
}
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 317)

The Lambda function name. You can specify a function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example, `arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). AWS Lambda also allows you to specify a partial ARN (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length. Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\d+$LATEST|[a-zA-Z0-9_-]+))?`

Request Body

The request requires the following data in JSON format.

CodeSha256 (p. 317)

The SHA256 hash of the deployment package you want to publish. This provides validation on the code you are publishing. If you provide this parameter value must match the SHA256 of the \$LATEST version for the publication to succeed.

Type: String

Required: No

Description (p. 317)

The description for the version you are publishing. If not provided, AWS Lambda copies the description from the \$LATEST version.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

Required: No

Response Syntax

```
HTTP/1.1 201
Content-type: application/json
```

```
{
  "CodeSha256 (p. 318)": "string",
  "CodeSize (p. 318)": number,
  "Description (p. 318)": "string",
  "FunctionArn (p. 318)": "string",
  "FunctionName (p. 318)": "string",
  "Handler (p. 318)": "string",
  "LastModified (p. 319)": "string",
  "MemorySize (p. 319)": number,
  "Role (p. 319)": "string",
  "Runtime (p. 319)": "string",
  "Timeout (p. 319)": number,
  "Version (p. 319)": "string",
  "VpcConfig (p. 319)": {
    "SecurityGroupIds (p. 344)": [ "string" ],
    "SubnetIds (p. 344)": [ "string" ],
    "VpcId (p. 344)": "string"
  }
}
```

Response Elements

If the action is successful, the service sends back an HTTP 201 response. The following data is returned in JSON format by the service.

CodeSha256 (p. 317)

It is the SHA256 hash of your function deployment package.

Type: String

CodeSize (p. 317)

The size, in bytes, of the function .zip file you uploaded.

Type: Long

Description (p. 317)

The user-provided description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

FunctionArn (p. 317)

The Amazon Resource Name (ARN) assigned to the function.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+-\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\${LATEST}|[a-zA-Z0-9_-]+))?`

FunctionName (p. 317)

The name of the function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+-\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\${LATEST}|[a-zA-Z0-9_-]+))?`

Handler (p. 317)

The function Lambda calls to begin executing your function.

Type: String

Length Constraints: Maximum length of 128.

Pattern: `[^\s]+`

LastModified (p. 317)

The time stamp of the last time you updated the function.

Type: String

MemorySize (p. 317)

The memory size, in MB, you configured for the function. Must be a multiple of 64 MB.

Type: Integer

Valid Range: Minimum value of 128. Maximum value of 1536.

Role (p. 317)

The Amazon Resource Name (ARN) of the IAM role that Lambda assumes when it executes your function to access any other Amazon Web Services (AWS) resources.

Type: String

Pattern: `arn:aws:iam::\d{12}:role/?[a-zA-Z_0-9+=,.\@_\/]+`

Runtime (p. 317)

The runtime environment for the Lambda function.

To use the Node.js runtime v4.3, set the value to "nodejs4.3". To use earlier runtime (v0.10.42), set the value to "nodejs".

Type: String

Valid Values: `nodejs | nodejs4.3 | java8 | python2.7`

Timeout (p. 317)

The function execution time at which Lambda should terminate the function. Because the execution time has cost implications, we recommend you set this value based on your expected execution time. The default is 3 seconds.

Type: Integer

Valid Range: Minimum value of 1.

Version (p. 317)

The version of the Lambda function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\$\{LATEST|[0-9]+\})`

VpcConfig (p. 317)

VPC configuration associated with your Lambda function.

Type: [VpcConfigResponse \(p. 344\)](#) object

Errors

CodeStorageExceededException

You have exceeded your maximum total code size per account. [Limits](#)

HTTP Status Code: 400

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

RemovePermission

You can remove individual permissions from an resource policy associated with a Lambda function by providing a statement ID that you provided when you added the permission.

If you are using versioning, the permissions you remove are specific to the Lambda function version or alias you specify in the `AddPermission` request via the `Qualifier` parameter. For more information about versioning, see [AWS Lambda Function Versioning and Aliases](#).

Note that removal of a permission will cause an active event source to lose permission to the function. You need permission for the `lambda:RemovePermission` action.

Request Syntax

```
DELETE /2015-03-31/functions/FunctionName/policy/StatementId?Qualifier=Qualifier
HTTP/1.1
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 321)

Lambda function whose resource policy you want to remove a permission from.

You can specify a function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example, `arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). AWS Lambda also allows you to specify a partial ARN (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\LATEST|[a-zA-Z0-9_-]+))?
```

Qualifier (p. 321)

You can specify this optional parameter to remove permission associated with a specific function version or function alias. If you don't specify this parameter, the API removes permission associated with the unqualified function ARN.

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `([a-zA-Z0-9$_-]+)`

StatementId (p. 321)

Statement ID of the permission to remove.

Length Constraints: Minimum length of 1. Maximum length of 100.

Pattern: `([a-zA-Z0-9_-]+)`

Request Body

The request does not have a request body.

Response Syntax

```
HTTP/1.1 204
```

Response Elements

If the action is successful, the service sends back an HTTP 204 response with an empty HTTP body.

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

UpdateAlias

Using this API you can update the function version to which the alias points and the alias description. For more information, see [Introduction to AWS Lambda Aliases](#).

This requires permission for the `lambda:UpdateAlias` action.

Request Syntax

```
PUT /2015-03-31/functions/FunctionName/aliases/Name HTTP/1.1
Content-type: application/json

{
  "Description (p. 323)": "string",
  "FunctionVersion (p. 323)": "string"
}
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 323)

The function name for which the alias is created.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_]+)(:(\sLATEST|[a-zA-Z0-9_]+))?`

Name (p. 323)

The alias name.

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `(?!^[0-9]+$)([a-zA-Z0-9_]+)`

Request Body

The request requires the following data in JSON format.

Description (p. 323)

You can change the description of the alias using this parameter.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

Required: No

FunctionVersion (p. 323)

Using this parameter you can change the Lambda function version to which the alias points.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\sLATEST|[0-9]+)`

Required: No

Response Syntax

```
HTTP/1.1 200
Content-type: application/json
```

```
{
  "AliasArn (p. 324)": "string",
  "Description (p. 324)": "string",
  "FunctionVersion (p. 324)": "string",
  "Name (p. 324)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.
The following data is returned in JSON format by the service.

AliasArn (p. 323)

Lambda function ARN that is qualified using the alias name as the suffix. For example, if you create an alias called `BETA` that points to a `helloworld` function version, the ARN is
`arn:aws:lambda:aws-regions:acct-id:function:helloworld:BETA`.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+-\d{1}:\d{12}:function:[a-zA-Z0-9-]+:(\${LATEST}|[a-zA-Z0-9-]+)?`

Description (p. 323)

Alias description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

FunctionVersion (p. 323)

Function version to which the alias points.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\${LATEST}|[0-9]+)`

Name (p. 323)

Alias name.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `(?!^[0-9]+$)([a-zA-Z0-9-]+)`

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

UpdateEventSourceMapping

You can update an event source mapping. This is useful if you want to change the parameters of the existing mapping without losing your position in the stream. You can change which function will receive the stream records, but to change the stream itself, you must create a new mapping.

If you are using the versioning feature, you can update the event source mapping to map to a specific Lambda function version or alias as described in the `FunctionName` parameter. For information about the versioning feature, see [AWS Lambda Function Versioning and Aliases](#).

If you disable the event source mapping, AWS Lambda stops polling. If you enable again, it will resume polling from the time it had stopped polling, so you don't lose processing of any records. However, if you delete event source mapping and create it again, it will reset.

This operation requires permission for the `lambda:UpdateEventSourceMapping` action.

Request Syntax

```
PUT /2015-03-31/event-source-mappings/UUID HTTP/1.1
Content-type: application/json

{
  "BatchSize (p. 325)": number,
  "Enabled (p. 325)": boolean,
  "FunctionName (p. 325)": "string"
}
```

URI Request Parameters

The request requires the following URI parameters.

UUID (p. 325)

The event source mapping identifier.

Request Body

The request requires the following data in JSON format.

BatchSize (p. 325)

The maximum number of stream records that can be sent to your Lambda function for a single invocation.

Type: Integer

Valid Range: Minimum value of 1. Maximum value of 10000.

Required: No

Enabled (p. 325)

Specifies whether AWS Lambda should actively poll the stream or not. If disabled, AWS Lambda will not poll the stream.

Type: Boolean

Required: No

FunctionName (p. 325)

The Lambda function to which you want the stream records sent.

You can specify a function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example,

`arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). AWS Lambda also allows you to specify a partial ARN (for example, `account-id:Thumbnail`).

If you are using versioning, you can also provide a qualified function ARN (ARN that is qualified with function version or alias name as suffix). For more information about versioning, see [AWS Lambda Function Versioning and Aliases](#)

Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\d{4}|[a-zA-Z0-9_-]+))?`

Required: No

Response Syntax

```
HTTP/1.1 202
Content-type: application/json

{
  "BatchSize (p. 326)": number,
  "EventSourceArn (p. 326)": "string",
  "FunctionArn (p. 326)": "string",
  "LastModified (p. 326)": number,
  "LastProcessingResult (p. 326)": "string",
  "State (p. 327)": "string",
  "StateTransitionReason (p. 327)": "string",
  "UUID (p. 327)": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 202 response.

The following data is returned in JSON format by the service.

BatchSize (p. 326)

The largest number of records that AWS Lambda will retrieve from your event source at the time of invoking your function. Your function receives an event with all the retrieved records.

Type: Integer

Valid Range: Minimum value of 1. Maximum value of 10000.

EventSourceArn (p. 326)

The Amazon Resource Name (ARN) of the Amazon Kinesis stream that is the source of events.

Type: String

Pattern: `arn:aws:([a-zA-Z0-9\-.]+):([a-z]{2}-[a-z]+\d{1}):?(\d{12}):?(\d{4}|[a-zA-Z0-9_-]+)`

FunctionArn (p. 326)

The Lambda function to invoke when AWS Lambda detects an event on the stream.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+\d{1}:\d{12}:function:[a-zA-Z0-9_-]+:(\d{4}|[a-zA-Z0-9_-]+)?`

LastModified (p. 326)

The UTC time string indicating the last time the event mapping was updated.

Type: Timestamp

LastProcessingResult (p. 326)

The result of the last AWS Lambda invocation of your Lambda function.

Type: String

State (p. 326)

The state of the event source mapping. It can be `Creating`, `Enabled`, `Disabled`, `Enabling`, `Disabling`, `Updating`, or `Deleting`.

Type: String

StateTransitionReason (p. 326)

The reason the event source mapping is in its current state. It is either user-requested or an AWS Lambda-initiated state transition.

Type: String

UUID (p. 326)

The AWS Lambda assigned opaque identifier for the mapping.

Type: String

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceConflictException

The resource already exists.

HTTP Status Code: 409

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

UpdateFunctionCode

Updates the code for the specified Lambda function. This operation must only be used on an existing Lambda function and cannot be used to update the function configuration.

If you are using the versioning feature, note this API will always update the `$LATEST` version of your Lambda function. For information about the versioning feature, see [AWS Lambda Function Versioning and Aliases](#).

This operation requires permission for the `lambda:UpdateFunctionCode` action.

Request Syntax

```
PUT /2015-03-31/functions/FunctionName/code HTTP/1.1
Content-type: application/json

{
  "Publish (p. 328)": boolean,
  "S3Bucket (p. 328)": "string",
  "S3Key (p. 329)": "string",
  "S3ObjectVersion (p. 329)": "string",
  "ZipFile (p. 329)": blob
}
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 328)

The existing Lambda function name whose code you want to replace.

You can specify a function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example,

`arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). AWS Lambda also allows you to specify a partial ARN (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_]+)(:(\LATEST|[a-zA-Z0-9_]+))?`

Request Body

The request requires the following data in JSON format.

Publish (p. 328)

This boolean parameter can be used to request AWS Lambda to update the Lambda function and publish a version as an atomic operation.

Type: Boolean

Required: No

S3Bucket (p. 328)

Amazon S3 bucket name where the .zip file containing your deployment package is stored. This bucket must reside in the same AWS region where you are creating the Lambda function.

Type: String

Length Constraints: Minimum length of 3. Maximum length of 63.

Pattern: `^[0-9A-Za-z\.\-_]*(?<!\.\.)$`

Required: No

S3Key (p. 328)

The Amazon S3 object (the deployment package) key name you want to upload.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Required: No

S3ObjectVersion (p. 328)

The Amazon S3 object (the deployment package) version you want to upload.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Required: No

ZipFile (p. 328)

The contents of your zip file containing your deployment package. If you are using the web API directly, the contents of the zip file must be base64-encoded. If you are using the AWS SDKs or the AWS CLI, the SDKs or CLI will do the encoding for you. For more information about creating a .zip file, go to [Execution Permissions](#) in the *AWS Lambda Developer Guide*.

Type: Base64-encoded binary data

Required: No

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "CodeSha256 (p. 329)": "string",
  "CodeSize (p. 329)": number,
  "Description (p. 330)": "string",
  "FunctionArn (p. 330)": "string",
  "FunctionName (p. 330)": "string",
  "Handler (p. 330)": "string",
  "LastModified (p. 330)": "string",
  "MemorySize (p. 330)": number,
  "Role (p. 330)": "string",
  "Runtime (p. 330)": "string",
  "Timeout (p. 330)": number,
  "Version (p. 330)": "string",
  "VpcConfig (p. 331)": {
    "SecurityGroupIds (p. 344)": [ "string" ],
    "SubnetIds (p. 344)": [ "string" ],
    "VpcId (p. 344)": "string"
  }
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response. The following data is returned in JSON format by the service.

CodeSha256 (p. 329)

It is the SHA256 hash of your function deployment package.

Type: String

CodeSize (p. 329)

The size, in bytes, of the function .zip file you uploaded.

Type: Long

Description (p. 329)

The user-provided description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

FunctionArn (p. 329)

The Amazon Resource Name (ARN) assigned to the function.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\${LATEST}|[a-zA-Z0-9_-]+))?`

FunctionName (p. 329)

The name of the function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}):?(\d{12}):?(function:)?([a-zA-Z0-9_-]+)(:(\${LATEST}|[a-zA-Z0-9_-]+))?`

Handler (p. 329)

The function Lambda calls to begin executing your function.

Type: String

Length Constraints: Maximum length of 128.

Pattern: `[\^\\s]+`

LastModified (p. 329)

The time stamp of the last time you updated the function.

Type: String

MemorySize (p. 329)

The memory size, in MB, you configured for the function. Must be a multiple of 64 MB.

Type: Integer

Valid Range: Minimum value of 128. Maximum value of 1536.

Role (p. 329)

The Amazon Resource Name (ARN) of the IAM role that Lambda assumes when it executes your function to access any other Amazon Web Services (AWS) resources.

Type: String

Pattern: `arn:aws:iam::\d{12}:role/?[a-zA-Z_0-9+=,.\@\-_/+]`

Runtime (p. 329)

The runtime environment for the Lambda function.

To use the Node.js runtime v4.3, set the value to "nodejs4.3". To use earlier runtime (v0.10.42), set the value to "nodejs".

Type: String

Valid Values: `nodejs | nodejs4.3 | java8 | python2.7`

Timeout (p. 329)

The function execution time at which Lambda should terminate the function. Because the execution time has cost implications, we recommend you set this value based on your expected execution time. The default is 3 seconds.

Type: Integer

Valid Range: Minimum value of 1.

Version (p. 329)

The version of the Lambda function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\${LATEST}|[0-9]+)`

VpcConfig (p. 329)

VPC configuration associated with your Lambda function.

Type: [VpcConfigResponse \(p. 344\)](#) object

Errors

CodeStorageExceededException

You have exceeded your maximum total code size per account. [Limits](#)

HTTP Status Code: 400

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

UpdateFunctionConfiguration

Updates the configuration parameters for the specified Lambda function by using the values provided in the request. You provide only the parameters you want to change. This operation must only be used on an existing Lambda function and cannot be used to update the function's code.

If you are using the versioning feature, note this API will always update the `$LATEST` version of your Lambda function. For information about the versioning feature, see [AWS Lambda Function Versioning and Aliases](#).

This operation requires permission for the `lambda:UpdateFunctionConfiguration` action.

Request Syntax

```
PUT /2015-03-31/functions/FunctionName/configuration HTTP/1.1
Content-type: application/json
```

```
{
  "Description (p. 332)": "string",
  "Handler (p. 333)": "string",
  "MemorySize (p. 333)": number,
  "Role (p. 333)": "string",
  "Runtime (p. 333)": "string",
  "Timeout (p. 333)": number,
  "VpcConfig (p. 333)": {
    "SecurityGroupIds (p. 343)": [ "string" ],
    "SubnetIds (p. 343)": [ "string" ]
  }
}
```

URI Request Parameters

The request requires the following URI parameters.

FunctionName (p. 332)

The name of the Lambda function.

You can specify a function name (for example, `Thumbnail`) or you can specify Amazon Resource Name (ARN) of the function (for example, `arn:aws:lambda:us-west-2:account-id:function:ThumbNail`). AWS Lambda also allows you to specify a partial ARN (for example, `account-id:Thumbnail`). Note that the length constraint applies only to the ARN. If you specify only the function name, it is limited to 64 character in length.

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

```
(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}:)?(\d{12}:)?(function:)?([a-zA-Z0-9_-]+)(:(\${LATEST}|[a-zA-Z0-9_-]+))?
```

Request Body

The request requires the following data in JSON format.

Description (p. 332)

A short user-defined function description. AWS Lambda does not use this value. Assign a meaningful description as you see fit.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

Required: No

Handler (p. 332)

The function that Lambda calls to begin executing your function. For Node.js, it is the `module-name.export` value in your function.

Type: String

Length Constraints: Maximum length of 128.

Pattern: `[\s]+`

Required: No

MemorySize (p. 332)

The amount of memory, in MB, your Lambda function is given. AWS Lambda uses this memory size to infer the amount of CPU allocated to your function. Your function use-case determines your CPU and memory requirements. For example, a database operation might need less memory compared to an image processing function. The default value is 128 MB. The value must be a multiple of 64 MB.

Type: Integer

Valid Range: Minimum value of 128. Maximum value of 1536.

Required: No

Role (p. 332)

The Amazon Resource Name (ARN) of the IAM role that Lambda will assume when it executes your function.

Type: String

Pattern: `arn:aws:iam::\d{12}:role/?[a-zA-Z_0-9+=,.\@\-_/\]+`

Required: No

Runtime (p. 332)

The runtime environment for the Lambda function.

To use the Node.js runtime v4.3, set the value to "nodejs4.3". To use earlier runtime (v0.10.42), set the value to "nodejs".

Type: String

Valid Values: `nodejs` | `nodejs4.3` | `java8` | `python2.7`

Required: No

Timeout (p. 332)

The function execution time at which AWS Lambda should terminate the function. Because the execution time has cost implications, we recommend you set this value based on your expected execution time. The default is 3 seconds.

Type: Integer

Valid Range: Minimum value of 1.

Required: No

VpcConfig (p. 332)

If your Lambda function accesses resources in a VPC, you provide this parameter identifying the list of security group IDs and subnet IDs. These must belong to the same VPC. You must provide at least one security group and one subnet ID.

Type: [VpcConfig \(p. 343\)](#) object

Required: No

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "CodeSha256 (p. 334)": "string",
```

```

"CodeSize (p. 334)": number,
"Description (p. 334)": "string",
"FunctionArn (p. 334)": "string",
"FunctionName (p. 334)": "string",
"Handler (p. 334)": "string",
"LastModified (p. 334)": "string",
"MemorySize (p. 335)": number,
"Role (p. 335)": "string",
"Runtime (p. 335)": "string",
"Timeout (p. 335)": number,
"Version (p. 335)": "string",
"VpcConfig (p. 335)": {
  "SecurityGroupIds (p. 344)": [ "string" ],
  "SubnetIds (p. 344)": [ "string" ],
  "VpcId (p. 344)": "string"
}
}

```

Response Elements

If the action is successful, the service sends back an HTTP 200 response. The following data is returned in JSON format by the service.

CodeSha256 (p. 333)

It is the SHA256 hash of your function deployment package.

Type: String

CodeSize (p. 333)

The size, in bytes, of the function .zip file you uploaded.

Type: Long

Description (p. 333)

The user-provided description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

FunctionArn (p. 333)

The Amazon Resource Name (ARN) assigned to the function.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+-\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\${LATEST}|[a-zA-Z0-9_-]+))?`

FunctionName (p. 333)

The name of the function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+-\d{1}):?(\d{12}):?(function:)?([a-zA-Z0-9_-]+)(:(\${LATEST}|[a-zA-Z0-9_-]+))?`

Handler (p. 333)

The function Lambda calls to begin executing your function.

Type: String

Length Constraints: Maximum length of 128.

Pattern: `[\^\s]+`

LastModified (p. 333)

The time stamp of the last time you updated the function.

Type: String

MemorySize (p. 333)

The memory size, in MB, you configured for the function. Must be a multiple of 64 MB.

Type: Integer

Valid Range: Minimum value of 128. Maximum value of 1536.

Role (p. 333)

The Amazon Resource Name (ARN) of the IAM role that Lambda assumes when it executes your function to access any other Amazon Web Services (AWS) resources.

Type: String

Pattern: `arn:aws:iam::\d{12}:role/?[a-zA-Z_0-9+=,.\@_\/]+`

Runtime (p. 333)

The runtime environment for the Lambda function.

To use the Node.js runtime v4.3, set the value to "nodejs4.3". To use earlier runtime (v0.10.42), set the value to "nodejs".

Type: String

Valid Values: `nodejs` | `nodejs4.3` | `java8` | `python2.7`

Timeout (p. 333)

The function execution time at which Lambda should terminate the function. Because the execution time has cost implications, we recommend you set this value based on your expected execution time. The default is 3 seconds.

Type: Integer

Valid Range: Minimum value of 1.

Version (p. 333)

The version of the Lambda function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\$(LATEST|[0-9])+)`

VpcConfig (p. 333)

VPC configuration associated with your Lambda function.

Type: [VpcConfigResponse \(p. 344\)](#) object

Errors

InvalidParameterValueException

One of the parameters in the request is invalid. For example, if you provided an IAM role for AWS Lambda to assume in the `CreateFunction` or the `UpdateFunctionConfiguration` API, that AWS Lambda is unable to assume you will get this exception.

HTTP Status Code: 400

ResourceNotFoundException

The resource (for example, a Lambda function or access policy statement) specified in the request does not exist.

HTTP Status Code: 404

ServiceException

The AWS Lambda service encountered an internal error.

HTTP Status Code: 500

TooManyRequestsException

HTTP Status Code: 429

Data Types

The following data types are supported:

- [AliasConfiguration](#) (p. 337)
- [EventSourceMappingConfiguration](#) (p. 338)
- [FunctionCode](#) (p. 339)
- [FunctionCodeLocation](#) (p. 340)
- [FunctionConfiguration](#) (p. 341)
- [VpcConfig](#) (p. 343)
- [VpcConfigResponse](#) (p. 344)

AliasConfiguration

Provides configuration information about a Lambda function version alias.

Contents

AliasArn

Lambda function ARN that is qualified using the alias name as the suffix. For example, if you create an alias called `BETA` that points to a `helloworld` function version, the ARN is `arn:aws:lambda:aws-regions:acct-id:function:helloworld:BETA`.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+-\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\$LATEST|[a-zA-Z0-9_-]+))?`

Required: No

Description

Alias description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

Required: No

FunctionVersion

Function version to which the alias points.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\$LATEST|[0-9]+)`

Required: No

Name

Alias name.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 128.

Pattern: `(?!^[0-9]+$)([a-zA-Z0-9_-]+)`

Required: No

FunctionCode

The code for the Lambda function.

Contents

S3Bucket

Amazon S3 bucket name where the .zip file containing your deployment package is stored. This bucket must reside in the same AWS region where you are creating the Lambda function.

Type: String

Length Constraints: Minimum length of 3. Maximum length of 63.

Pattern: `^[0-9A-Za-z\.\-_]*(?<!\.)$`

Required: No

S3Key

The Amazon S3 object (the deployment package) key name you want to upload.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Required: No

S3ObjectVersion

The Amazon S3 object (the deployment package) version you want to upload.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Required: No

ZipFile

The contents of your zip file containing your deployment package. If you are using the web API directly, the contents of the zip file must be base64-encoded. If you are using the AWS SDKs or the AWS CLI, the SDKs or CLI will do the encoding for you. For more information about creating a .zip file, go to [Execution Permissions](#) in the *AWS Lambda Developer Guide*.

Type: Base64-encoded binary data

Required: No

FunctionCodeLocation

The object for the Lambda function location.

Contents

Location

The presigned URL you can use to download the function's .zip file that you previously uploaded.
The URL is valid for up to 10 minutes.

Type: String

Required: No

RepositoryType

The repository from which you can download the function.

Type: String

Required: No

FunctionConfiguration

A complex type that describes function metadata.

Contents

CodeSha256

It is the SHA256 hash of your function deployment package.

Type: String

Required: No

CodeSize

The size, in bytes, of the function .zip file you uploaded.

Type: Long

Required: No

Description

The user-provided description.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 256.

Required: No

FunctionArn

The Amazon Resource Name (ARN) assigned to the function.

Type: String

Pattern:

`arn:aws:lambda:[a-z]{2}-[a-z]+\d{1}:\d{12}:function:[a-zA-Z0-9_-]+(:(\sLATEST|[a-zA-Z0-9_-]+))?`

Required: No

FunctionName

The name of the function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 140.

Pattern:

`(arn:aws:lambda:)?([a-z]{2}-[a-z]+\d{1}):?(\d{12}):?(function:)?([a-zA-Z0-9_-]+):?(\sLATEST|[a-zA-Z0-9_-]+)?`

Required: No

Handler

The function Lambda calls to begin executing your function.

Type: String

Length Constraints: Maximum length of 128.

Pattern: `[\s]`

Required: No

LastModified

The time stamp of the last time you updated the function.

Type: String

Required: No

MemorySize

The memory size, in MB, you configured for the function. Must be a multiple of 64 MB.

Type: Integer

Valid Range: Minimum value of 128. Maximum value of 1536.

Required: No

Role

The Amazon Resource Name (ARN) of the IAM role that Lambda assumes when it executes your function to access any other Amazon Web Services (AWS) resources.

Type: String

Pattern: `arn:aws:iam::\d{12}:role/?[a-zA-Z_0-9+=,.\@_\/]+`

Required: No

Runtime

The runtime environment for the Lambda function.

To use the Node.js runtime v4.3, set the value to "nodejs4.3". To use earlier runtime (v0.10.42), set the value to "nodejs".

Type: String

Valid Values: `nodejs` | `nodejs4.3` | `java8` | `python2.7`

Required: No

Timeout

The function execution time at which Lambda should terminate the function. Because the execution time has cost implications, we recommend you set this value based on your expected execution time. The default is 3 seconds.

Type: Integer

Valid Range: Minimum value of 1.

Required: No

Version

The version of the Lambda function.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 1024.

Pattern: `(\${LATEST}|[0-9]+)`

Required: No

VpcConfig

VPC configuration associated with your Lambda function.

Type: [VpcConfigResponse \(p. 344\)](#) object

Required: No

VpcConfig

If your Lambda function accesses resources in a VPC, you provide this parameter identifying the list of security group IDs and subnet IDs. These must belong to the same VPC. You must provide at least one security group and one subnet ID.

Contents

SecurityGroupIds

A list of one or more security groups IDs in your VPC.

Type: array of Strings

Array Members: Maximum number of 5 items.

Required: No

SubnetIds

A list of one or more subnet IDs in your VPC.

Type: array of Strings

Array Members: Maximum number of 16 items.

Required: No

VpcConfigResponse

VPC configuration associated with your Lambda function.

Contents

SecurityGroupIds

A list of security group IDs associated with the Lambda function.

Type: array of Strings

Array Members: Maximum number of 5 items.

Required: No

SubnetIds

A list of subnet IDs associated with the Lambda function.

Type: array of Strings

Array Members: Maximum number of 16 items.

Required: No

VpcId

The VPC ID associated with your Lambda function.

Type: String

Required: No

Document History

The following table describes the important changes to the *AWS Lambda Developer Guide*.

Relevant Dates to this History:

- **Current product version:** 2015-03-31
- **Last documentation update:** June 23, 2016

Change	Description	Date
Asia Pacific (Sydney) Region	Lambda is now available in the Asia Pacific (Sydney) Region. For more information about Lambda regions and endpoints, see Regions and Endpoints in the <i>AWS General Reference</i> .	In this release
Updates to the Lambda console	The Lambda console has been updated to simplify the role-creation process. For more information, see Step 2.1: Create a Hello World Lambda Function (p. 39).	In this release
AWS Lambda now supports Node.js runtime v4.3	AWS Lambda added support for Node.js runtime v4.3. For more information, see Programming Model (Node.js) (p. 51).	April 07, 2016
EU (Frankfurt) region	Lambda is now available in the EU (Frankfurt) region. For more information about Lambda regions and endpoints, see Regions and Endpoints in the <i>AWS General Reference</i> .	March 14, 2016
VPC support	You can now configure a Lambda function to access resources in your VPC. For more information, see Configuring a Lambda Function to Access Resources in an Amazon VPC (p. 220). For example walkthroughs, see Tutorials: Configuring a Lambda Function to Access Resources in an Amazon VPC (p. 223).	February 11, 2016

Change	Description	Date
Content reorganization	<p>The reorganized content now provides the following:</p> <ul style="list-style-type: none"> • Getting Started (p. 35) – Contains a console-based exercise in which you create a Hello World Lambda function. You explore the AWS Lambda console features, including blueprints that enable you to create Lambda functions with just a few clicks. • Use Cases (p. 125) – Provides examples of how to use AWS Lambda with other AWS services or your custom applications as event sources, invoke over HTTPS, and set up AWS Lambda to invoke your Lambda function at scheduled interval. • Programming Model (p. 51) – Explains programming model core concepts and describes language-specific details. Regardless of the language you choose, there is a common pattern to writing code for a Lambda function. • Creating a Deployment Package (p. 89) – Explains how to create deployment packages for Lambda function code that is authored in languages supported by AWS Lambda (Python, Java, and Node.js). 	December 9, 2015
AWS Lambda runtime has been updated.	<p>AWS Lambda runtime has been updated with the following SDK and Linux kernel versions in this release:</p> <ul style="list-style-type: none"> • AWS SDK for JavaScript: 2.2.12 • Boto SDK: 1.2.1 • Linux kernel version: 3.14.48-33.39.amzn1.x86_64. <p>For more information, see Lambda Execution Environment and Available Libraries (p. 33).</p>	November 4, 2015
Versioning support, Python for developing code for Lambda functions, scheduled events, and increase in execution time	<p>AWS Lambda introduces the following features in this release.</p> <ul style="list-style-type: none"> • Python: You can now develop your Lambda function code using Python. For more information, see Programming Model (p. 51). • Versioning: You can maintain one or more versions of your Lambda function. Versioning allows you to control which Lambda function version is executed in different environments (for example, development, testing, or production). For more information, see AWS Lambda Function Versioning and Aliases (p. 101). • Scheduled events: You can also set up AWS Lambda to invoke your code on a regular, scheduled basis using the AWS Lambda console. You can specify a fixed rate (number of hours, days, or weeks) or you can specify a cron expression. For an example, see Using AWS Lambda with Scheduled Events (p. 207). • Increase in execution time: You can now set up your Lambda functions to run for up to five minutes allowing longer running functions such as large volume data ingestion and processing jobs. 	October 08, 2015

Change	Description	Date
Two new walkthroughs	<p>The following new walkthroughs are added. They both use Java Lambda function.</p> <p>Tutorial: Using AWS Lambda with Amazon DynamoDB (p. 152)</p> <p>Using AWS Lambda as Mobile Application Backend (Custom Event Source: Android) (p. 193)</p>	August 27, 2015
Support for DynamoDB Streams	<p>DynamoDB Streams is now generally available and you can use it in all the regions where DynamoDB is available. You can enable DynamoDB Streams for your table and use a Lambda function as a trigger for the table. Triggers are custom actions you take in response to updates made to the DynamoDB table. For an example walkthrough, see Tutorial: Using AWS Lambda with Amazon DynamoDB (p. 152).</p>	July 14, 2015
AWS Lambda now supports invoking Lambda functions with REST-compatible clients.	<p>Until now, to invoke your Lambda function from your web, mobile, or IoT application you needed the AWS SDKs (for example, AWS SDK for Java, AWS SDK for Android, or AWS SDK for iOS). Now, AWS Lambda supports invoking a Lambda function with REST-compatible clients through a customized API that you can create using Amazon API Gateway. You can send requests to your Lambda function endpoint URL. You can configure security on the endpoint to allow open access, leverage AWS Identity and Access Management (IAM) to authorize access, or use API keys to meter access to your Lambda functions by others.</p> <p>For an example Getting Started exercise, see Using AWS Lambda with Amazon API Gateway (On-Demand Over HTTPS) (p. 180).</p> <p>For more information about the Amazon API Gateway, see http://aws.amazon.com/api-gateway/.</p>	July 09, 2015
The AWS Lambda console now provides blueprints to easily create Lambda functions and test them.	<p>AWS Lambda console provides a set of <i>blueprints</i>. Each blueprint provides a sample event source configuration and sample code for your Lambda function that you can use to easily create Lambda-based applications. All of the AWS Lambda Getting Started exercises now use the blueprints. For more information, see Getting Started (p. 35).</p>	In this release
AWS Lambda now supports Java to author your Lambda functions.	<p>You can now author Lambda code in Java. For more information, see Programming Model (p. 51).</p>	June 15, 2015
AWS Lambda now supports specifying an Amazon S3 object as the function .zip when creating or updating a Lambda function.	<p>You can upload a Lambda function deployment package (.zip file) to an Amazon S3 bucket in the same region where you want to create a Lambda function. Then, you can specify the bucket name and object key name when you create or update a Lambda function.</p>	May 28, 2015

Change	Description	Date
AWS Lambda now generally available with added support for mobile backends	<p>AWS Lambda is now generally available for production use. The release also introduces new features that make it easier to build mobile, tablet, and Internet of Things (IoT) backends using AWS Lambda that scale automatically without provisioning or managing infrastructure. AWS Lambda now supports both real-time (synchronous) and asynchronous events. Additional features include easier event source configuration and management. The permission model and the programming model have been simplified by the introduction of resource policies for your Lambda functions.</p> <p>The documentation has been updated accordingly. For information, see the following topics:</p> <p>How It Works (p. 3)</p> <p>Getting Started (p. 35)</p> <p>AWS Lambda</p>	April 9, 2015
Preview release	Preview release of the <i>AWS Lambda Developer Guide</i> .	November 13, 2014

AWS Glossary

For the latest AWS terminology, see the [AWS Glossary](#) in the *AWS General Reference*.