

Properties & Variants Guidelines


Streamlining Component Architecture for Scalable Design Systems

System Architecture

Curating Consumer Choice

Properties turn the complex into the consumable. Instead of creating hundreds of separate components, we expose a menu of **intended choices**.

- **Variants:** High-level design variations.
- **Properties:** Discrete attribute toggles.
- **Logic:** Rules for interaction and states.

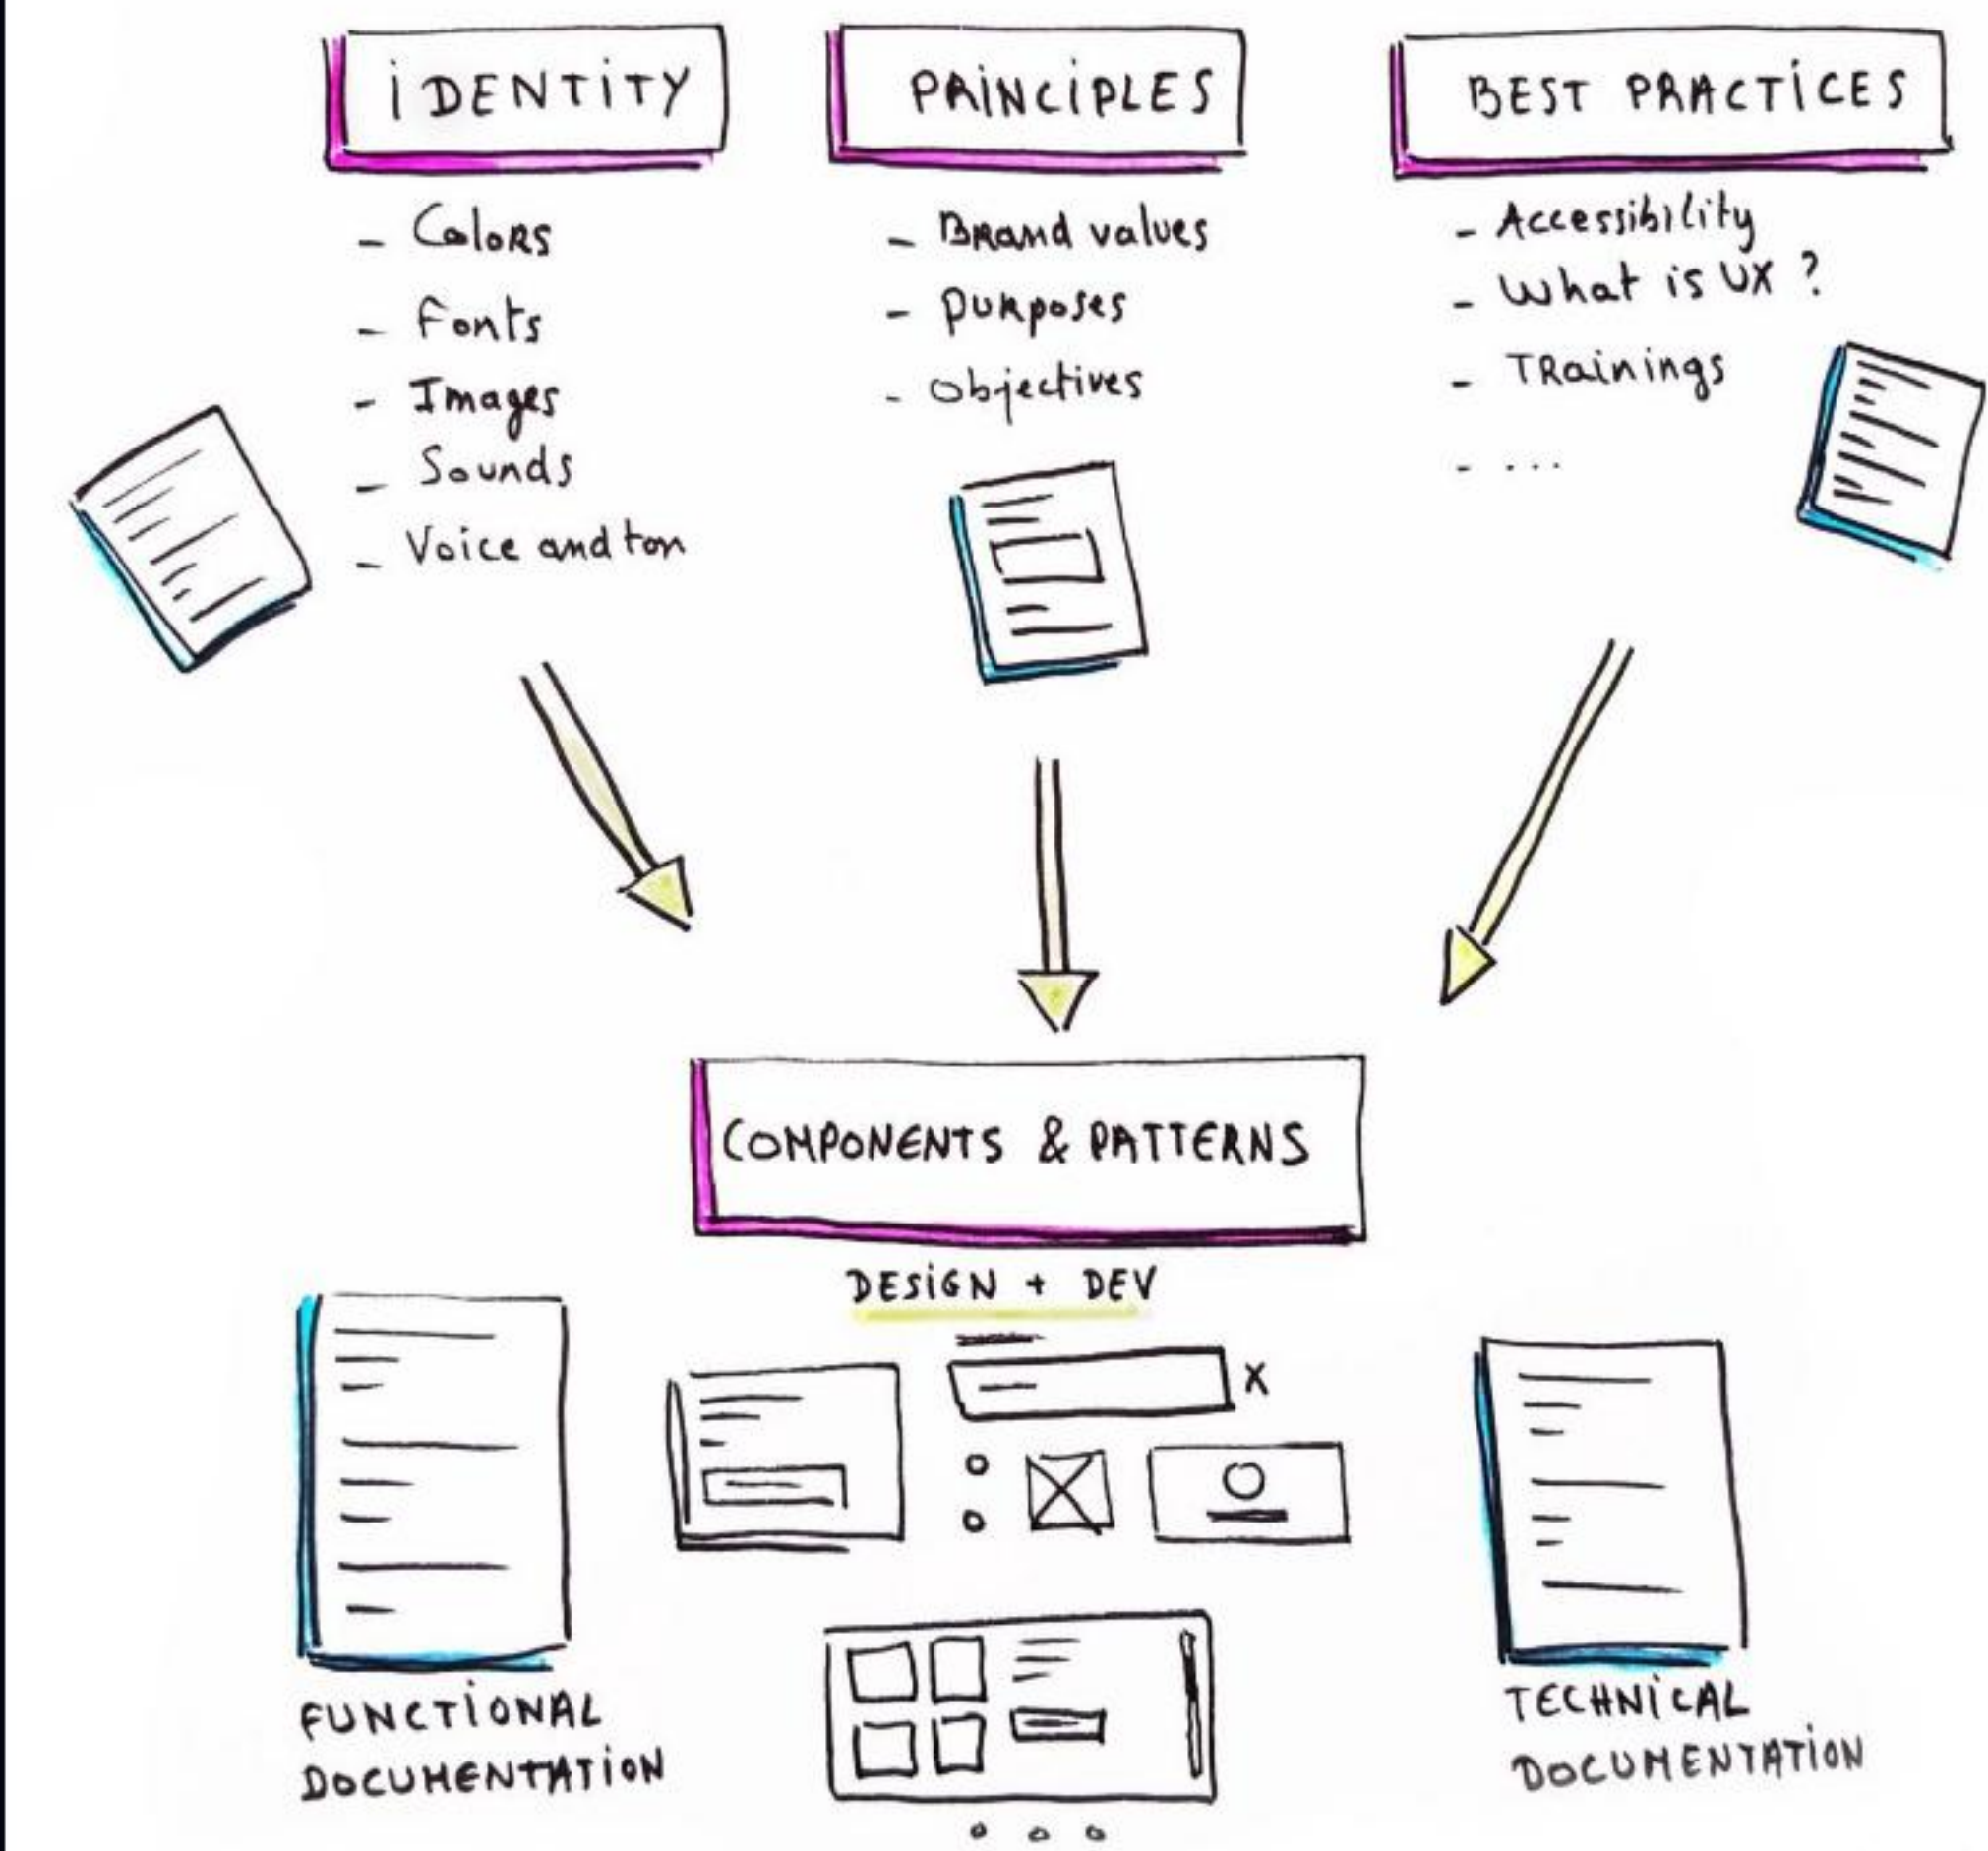

02 Variant — Core Logic



Consolidation

Group related versions of a component (e.g., primary and secondary buttons) into a single organized set.



Attributes

Define state, size, and type variations without duplicating the master structure.



Efficiency


Switch between states in instances instantly without detaching from the design system.

02 Variant — Interface

The Control Center

The right sidebar becomes a functional dashboard. Well-named properties guide designers toward correct implementations.

- **Dropdowns:** For multi-choice lists (Size, Type).
- **Toggles:** For Boolean switches (Show Icon).
- **Fields:** For Text Properties.

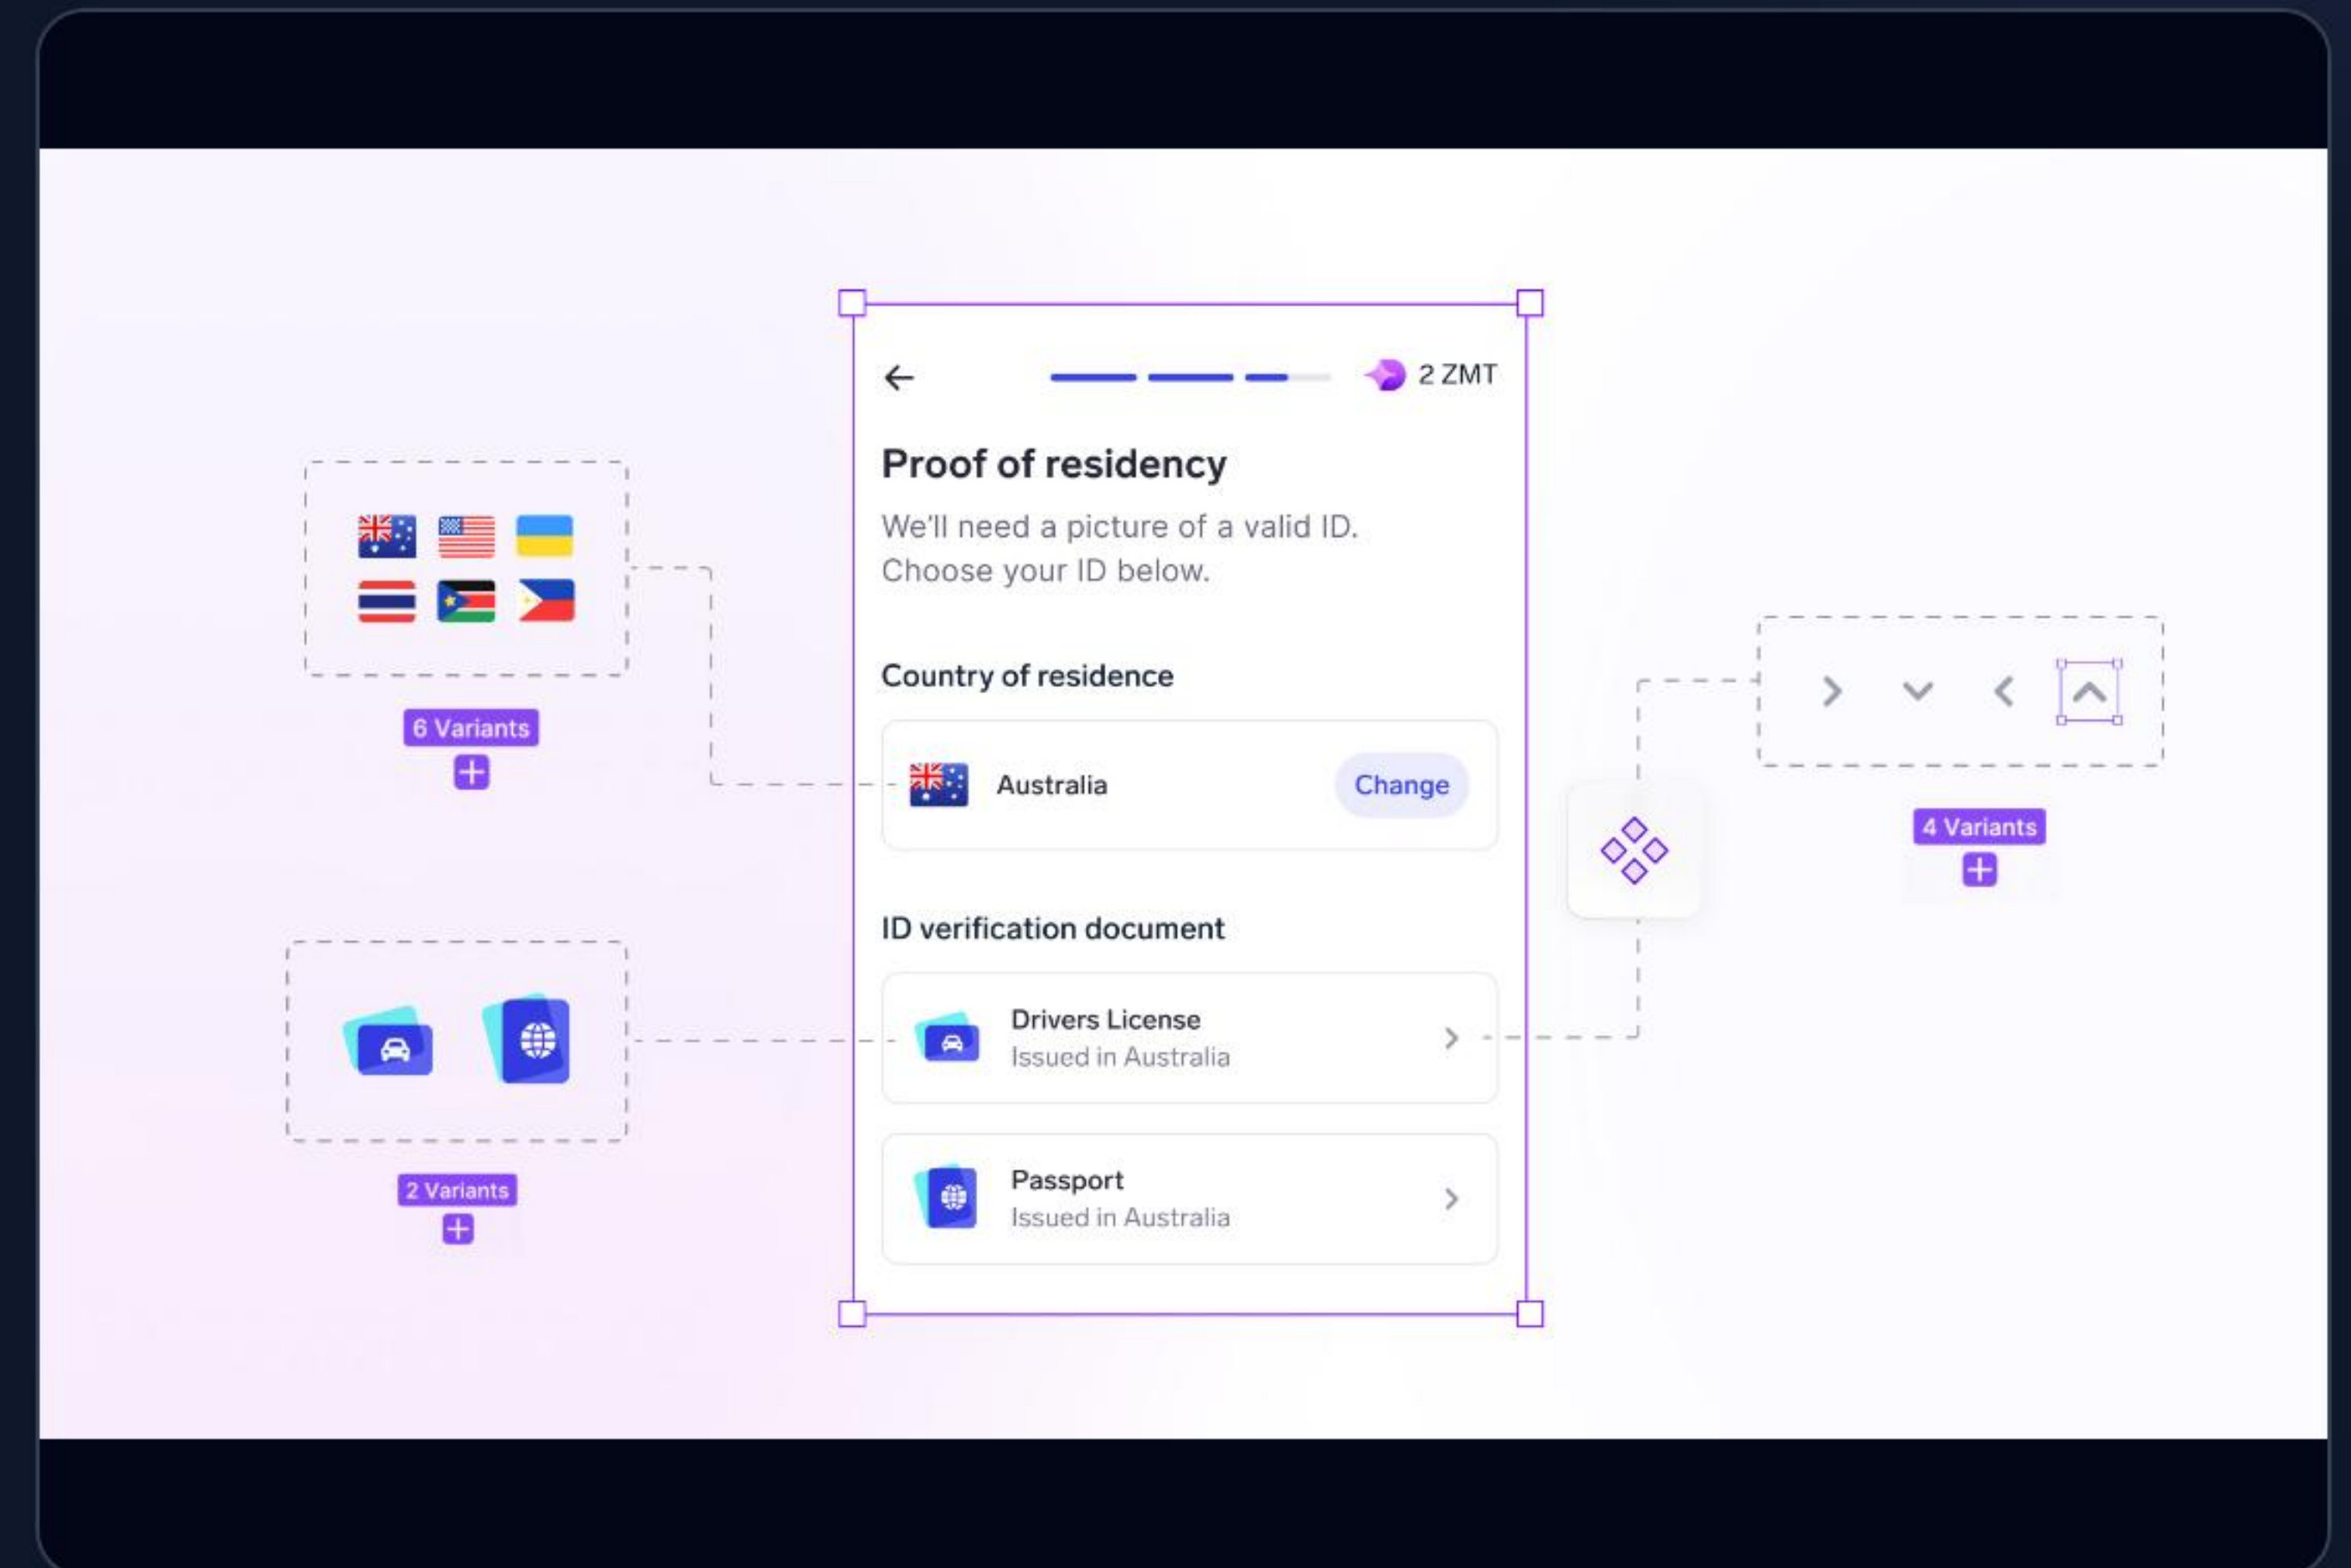

02 Variant — Boolean

Visibility Management

Use Boolean properties to handle optional elements like icons, labels, or badges without creating a new variant for every combination.

This drastically reduces "bloat" in your component library while keeping the UI flexible.

02 Variant — Sizing Strategy

Small (32px)

Density

Designed for compact data tables and navigation bars where space is at a premium.

Medium (40px)

Default

The standard size for most form factors and primary actions across web and mobile.

Large (48px)

Prominence

Used for Hero sections and major CTA moments to drive user conversion.

System Performance Impact



As we adopt component properties, the overall maintenance effort decreases despite system growth.

02 Variant — Hierarchy Types

Type	Usage	Visual Treatment
Primary	Main call to action	Solid background, High contrast
Secondary	Supportive actions	Outline / Stroke only
Ghost	Low priority / Tertiary	No border, Text only
Danger	Destructive events	Red background or text

02 Variant — States Logic

Interaction States


Variants are the best way to manage the lifecycle of a component during user interaction.

- **Default:** The baseline visual state.
- **Hover:** Feedback on cursor entry.
- **Pressed:** Visual confirmation of a tap/click.
- **Disabled:** Indicating non-interactivity.

 Button states matrix

State	Visual	Behavior
Default		
Hover		
Pressed		
Disabled		

02 Variant — Naming Standards

-  **Property=Value Syntax:** Use the standard `Property: Value` naming for clear mapping (e.g. `Type=Primary`).
-  **Semantic Intent:** Name based on purpose (e.g. `Success`) rather than literal color (e.g. `Green`).
-  **Boolean Naming:** Use "True/False" or "Yes/No" for switches to trigger Figma's toggle UI automatically.
-  **Consistent Ranking:** Order properties by importance: Type, Size, then State.

Efficiency Metrics

85%

Reduction in Set Size

Clean System Maintenance

By moving from legacy variants to modern properties, we reduce file weight and increase the rendering speed of complex prototype screens.

Rule of Thumb: If a change doesn't alter the internal geometry or state, use a Property instead of a Variant.

Questions?

Ensuring our design system remains lean, clean, and intuitive.

horizon.design/system-docs

Image Sources



Thumbnail
for

https://miro.medium.com/v2/resize:fit:1400/0*K47Pj_XdouvrNnal.jpeg


Source: medium.com

medium.com



https://cdn.prod.website-files.com/65c1ae21fb2191466dd6ce72/66027bf33924a89897285a61_64de5935647a9b3d9a1da3b0_64a65d0dacab0435669443fd_00_How%2520to%2520Use%2520Figma%2520Component%2520Properties.jpeg

Source: www.thedesignership.com

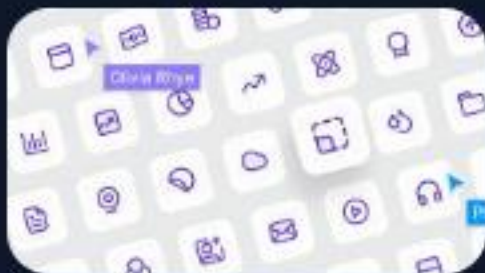

https://cdn.prod.website-files.com/6365d860c7b7a7191055eb8a/670c88aa4458519e4d802e7a_best-free-icon-sets-cover.webp

Source: www.untitledui.com



<https://www.sliderrevolution.com/wp-content/uploads/2025/09/buttonsefstates.jpg>

Source: www.sliderrevolution.com
