Trust depends on what the customer can verify

Review permission, price, failure and recovery at the moment of commitment.

HYPOTHETICAL EXAMPLE

01

Explain access before requesting it.

→


02

Show the commitment where the decision happens.


Explain access before requesting it.

Hypothetical reporting tool: describe actual access before asking for it.

WEAK REQUEST

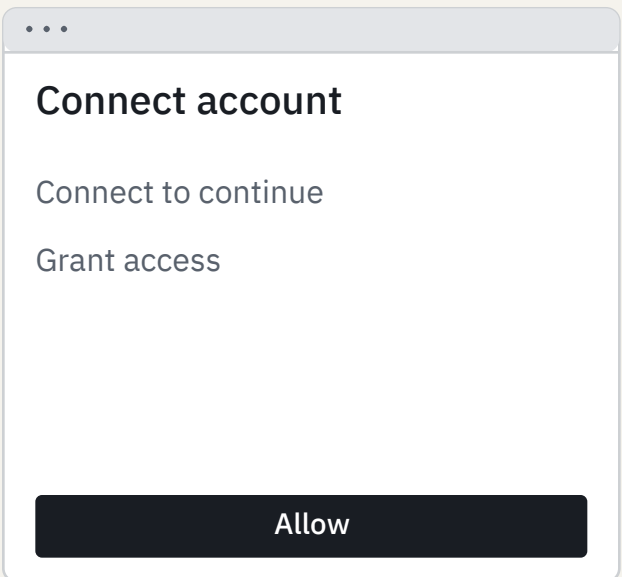

CLEARER REQUEST

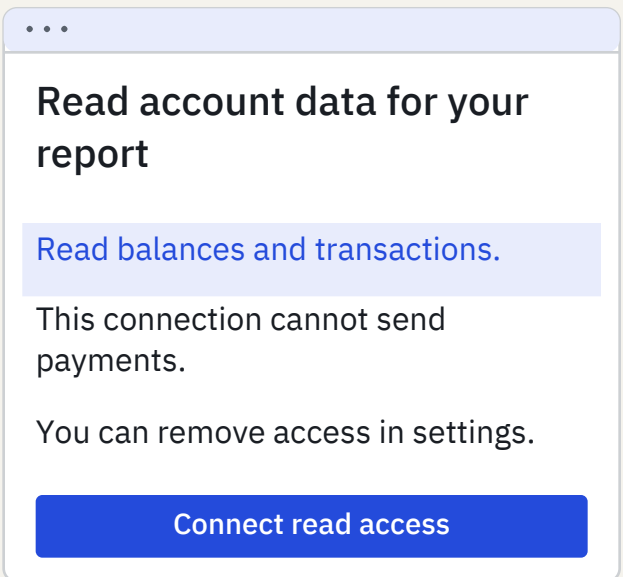

REVIEW CONDITION

Use only permission statements that match the actual integration.

Show the commitment where the decision happens.

A condition is harder to evaluate when the product reveals it after the customer has invested effort.

Moment	Information needed
Choose a plan	Price, billing period and meaningful limits.
Start a trial	When billing begins and how to stop it.
Confirm a change	What changes now and what happens to existing work.
Invite a teammate	What access the person will receive.

Make failure understandable and recoverable.

A failure message should tell the person whether their work is safe and which action is available now.

UNCLEAR

Something went wrong

The customer cannot tell whether the action happened or whether retrying is safe.

SPECIFIC

The upload failed. Your draft is saved.

Offer a retry when it is safe, and explain how to inspect the saved work.

Test the expectation, then the behaviour.

Before the action, ask what the person believes will happen. After it, ask what they can confirm.

Expected commitment

What does the customer think they are agreeing to?

Actual behaviour

What will the product really do?

Verification and recovery

How can they confirm the result or undo the action?