

Experimenting with Scaleable Forecasting Models

Matthew Coghlín

Pelumi Dacosta

Joseph Despres

Aneesh Gahi

Joseph Sigler

December 5, 2021

Introduction

Planning organizational activities such as inventory planning, staffing decisions, budgeting, all depend on an expected future value. Forecasting the practice of using current data available to make a prediction about the future a variable at a time that has not yet happened. Decision makers in government, businesses, and non-profit organizations all require accurate and reliable forecasts when planning their various activities. There are tremendous costs associated with forecasts that are either too high or too low. Therefore, as practitioners, it is essential to minimize forecasting error.

Organizations are collecting more and more data as it becomes cheaper to store and more convenient to collect. This presents the opportunity to use more data driven forecasts and less judgment based forecasts. For accurate, reliable, and interpretable forecasts a time-series expert is generally required to carefully tune model parameters (Taylor & Letham, 2018). Although, this approach is riggerois, it does not scale, any standard grocery store has more items to overwhelm anyone manually tuning models. Analysts could be asked to generate high quality forecasts for thousands, and even hundreds of thousands of series at a time. The goal of this project is to implement forecasting algorithms that generate high quality forecasts with minimal involvement, validate them with a training and testing partisan, and generate ensemble predictions made up of the various predictions.¹

Data

The data obtained for this project are provided as part of a Kaggle challenge where participants are to forecast daily retail sales demand (Kaggle, 2018). As

contestants, we are given 5 years of training data, with the daily sales of 50 different products from ten different stores. This is a total of 913,000 data points to train forecasting models. The goal is to forecast the next 90 days for each of the 50 products and 10 stores. Judged by Symmetric Mean Absolute Percentage Error (SMAPE) shown in Equation 1

$$\text{SMAPE} = \frac{100\%}{h} \sum_{t=1}^h \frac{|\hat{y}_t - y_t|}{(|y_t| + |\hat{y}_t|)/2}. \quad (1)$$

where y_t is the actual value, \hat{y}_t is the forecast, and h is the forecast horizon. This metric is used the account for the different magnitudes of many series to give a fair comparasent. Should you simply use Mean Absolute Percentage Error, there is an asymmatry as forecasting low is penalized more than forecasting high as well as errors in a series with a lower number of units (Hyndman & Koehler, 2006).

The data required very little preparation. There were several data points that were zero we switched to a one because the one of the algorithms did not support 0 values. After that we combined the stores and items into one string column to avoid nesting loops when iteration over stores and items. Notice Figure 1 shows data are highly seasonal with a slight upward trend and substantial noise.

After that, we separated into training and testing partisans to get an idea of what kind of model performance we can expect. We selected the first 1279 data points or 80% training set of our time-series. Then we separated the remainder of the data as a testing set. This prepares us for running the experiments.

Requirements

Selecting algorithms to generate high quality forecasts will have strict requirements. These need to be fast, accurate, and interpretable. To be fast, the models must have minimal parameters to tune or

¹Find the code and data used for this project <https://github.com/despresj/Data-Mining-Proj>

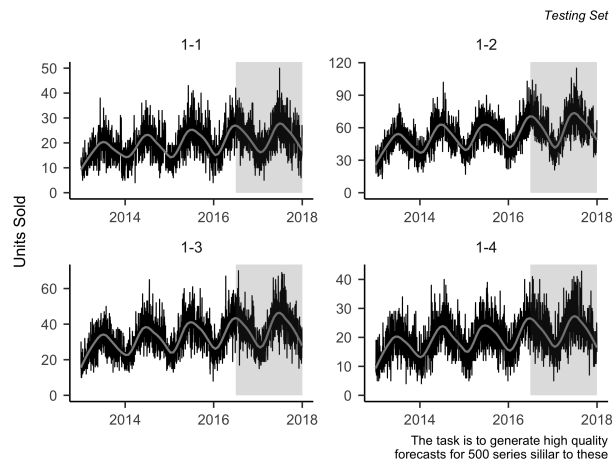


Figure 1: Daily Sales of the First Four Items in the First store

be accurate with some specified default parameters. Grid searching model parameters over many series is not feasible. If these algorithms are fast, many can be ran. Therefore, you can have a very good idea of what kind of performance to expect. Due to the high costs associated with forecasting errors, these models must be interpretable in the event a stakeholder is uncertain about the model. For obvious reasons, stakeholders should not be asked to place their faith in black-box forecasting models.

Models

There are many forecasting models, however we selected models that have been shown to perform well in practice and fit our project requirements. We choose to test two categories of models. First, classical models that have been successfully implemented with years of good results. They are derived with statistical methods and have strong theoretical justifications. Second, are newer machine learning based models. This is an open field and we are going to test different models and evaluate them strictly on their performance on testing data.

1. Seasonal Exponential Smoothing

2. Vector Autoregression

3. Autoregressive Distributed Lag

4. XGBoost

5. Prophet

6. Neural Prophet

1 Seasonal Exponential Smoothing

The Seasonal Exponential smoothing model, sometimes known as the Holt-Winters method, decomposes the timeseries into three components: Linear Seasonality, Linear Trend, and Gaussian noise (Hyndman & Athanasopoulos, 2018). This is a simple, interpretable model, that is fast to implement and has proven quite reliable.

2 Vector Auto Regression

The first algorithm we implement, is an autoregressive model. This takes the first 5 lag positions and uses them as regressors, then using timeseries decomposition, it models the seasonality (Hamilton, 1994). This model is commonly used to forecast economic variables.

3 Auto Regressive Distributed Lag

ARDL models add to the above auto regressive model, however in addition to seasonality with is fit with a vector of indicator variables. and trend, in this case we are adding an explanatory variable of time and fitting the model to lags of time.

Although there are many forecasting models to choose from, there is not much research on when a given forecasting model outperforms another. Due to the data having strong weekly swings, we implement several models with an autoregressive terms.

4 XGBoost

XGBoost is an implementation of a tree boosting system. This uses decision tree regression, and fits an ensemble of models fit to the data, then the residuals, then fits the residuals residuals. This

Table 1: Forecasting Model Performance

Model	Daily Forecast	Aggregated Weekly	Aggregated Monthly
FB Prophet	12.890	7.330	4.240
ARDL	16.830	8.940	4.480
Neural Prophet	18.440	10.460	7.610
Exponential Smoothing	19.310	14.880	13.540
Autoregression	23.930	17.510	16.250
Xgboost	30.350	28.850	28.430

Note: Measured in SMAPE see Equation 1

ensemble of tree boosting is quite robust and is useful for a variety of different regression and classification tasks (Chen et al., 2015).

5 Facebook’s Prophet

Facebook released a forecasting library designed specifically to meet the challenges of generating many high quality forecasts. The model prophet is a General Additive model, that consists of three functions, trend which fits a periodic logistic population growth model (we did not limit the growth, however that is a parameter), seasonality is a Fourier series fit to the remaining seasonal component, and a holiday parameter which is a vector of user specified holiday periods, the holiday periods saw a drop in sales, however not enough to justify us specifying specific dates (Taylor & Letham, 2018).

6 NeuralProphet

NeuralProphet, is a forecasting library that expanding on Facebook’s prophet. It does so by including an autoregressive term in the general additive model and uses neural networks to generate the autoregressive terms in the model (Triebe et al., 2021).

Performance

Although the Kaggle challenge we are participating in is asking for a daily sales forecast, we are going

to cover aggregated forecast performance because stakeholders are often far more concerned with weekly or monthly forecasts than daily. The selected forecasting models varied in performance quite dramatically. See Table 1 the the SMAPE of each model. First, we speak to the validity of each model given the performance on these testing data. Although there are 500 series, this is retail sales demand and it exhibits similar patterns. Of the selected models Facebook’s prophet outperformed the rest at each level of aggregation. This is not surprising as it is percicely designed for the task of forecasting at scale (Taylor & Letham, 2018). As the level of aggregation increases, we observe lower errors.

An advantage of forecasting at this scale is that it shows the level of model performance to expect from each model. See histograms of testing set errors in Figure 2. Notice, XGBoost was consistently forecasting lower than the actual value. Where neural prophet was overforecsating. There may be applications where over or underforecasting may be prefered, however we are looking for the most accurate models would prefer those adjustment to be made heuristically.

Table 2 contains descriptive statistics of the each model’s performance. Note that the median error of prophet was much lower than in all the other models except for Exponential smoothing. Another consideration is the standard deviation of forecasting errors. This is an important consideration depending on the application. Low standard deviation in

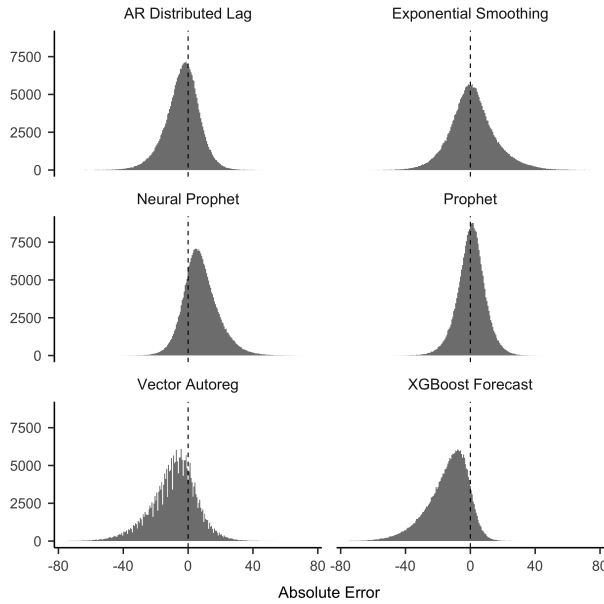


Figure 2: Distribution of forecasting errors

forecasting error is highly desirable. The advantage.

Of the models tested, Prophet had the best performance in SMAPE, had the median near zero, and the lowest standard deviation of error.

Kaggle Challenge

The challenge is simple generate the best daily forecasts measured by SMAPE. Since we are not limited in entries we are going to attempt a variety of methods. In this section we will discuss various attempts at this challenge as well as the result. The challenge has passed, so we have access to the leaderboards. The top score is a SMAPE of 12.07 (Kaggle, 2018). Therefore, we will compare the models the strategies to that.

1. Weight an Average Based on Features
2. Just Use Prophet
3. Ensemble of the Top Three Models

1 Weighted Average

Improving current models can prove very valueable. Therefore, we will attempt some machine learning methods to combine the models. The goal is to use machine learning to predict when a given forecast. Therefore, we will employ a feature detection algorithm to classify the best model. There are many different shapes and patterns a timeseries plot can take. Seasonality, flatpoints, noise, and many other are quantified in the Tsfeatures package (Montero-Manso, Athanasopoulos, Hyndman, & Talagala, 2020). We ran this algorithm on each series collecting 30 quantified features. The central question of this study is to determine if we can determine which forecast will perform the best given these features.

Using different models, we tried KNN, logistic regression, XGBoost, and an artificial neural network. The algortyms were able to select the best with an accuracy of 0.28.

Of the top score on kaggle this method wildly underperformed scoring an SMAPE of 20.74. This is worse than nearly all the models performance on testing data. Since we do not have access to the testing data, we cannot be sure what went wrong. Our suspicion is that combining all the forecasts in a weighted average all smoothed out all the noise and was not able to capture daily swings.

2 Just Use Prophet

After that, there is the most simple submission. That is to simply use the top performing model and submit the result. The Prophet model scored a SMAPE of 14.10. However, the deviation from the testing set performance is a cause for concern. It is a full two points worse than the testing set. We speculate that is the result of the challenge data starts at starting at the beginning of the year. This is the lowest point in the seasonality for these products. Regardless, this method should be considered given the simplicity of just one model.

Table 2: Descriptive Statistics

Model	Median	Standard Deviation	95th Percentile	5th Percentile
AR Distributed Lag	-2.861	10.505	12.472	-21.776
Exponential Smoothing	0.704	14.098	26.306	-20.514
Neural Prophet	6.863	10.874	27.095	-8.262
Prophet	0.731	8.660	14.355	-13.956
Vector Autoreg	-7.500	14.374	12.627	-34.667
XGBoost Forecast	-11.973	12.889	3.153	-38.347

3 Ensemble of the Top Three Models

Given a weak performance of the weighted average and the strong performance of the Prophet model, we investigate one more approach. This method is going to use a selected ensemble of ARDL, Prophet, and Neural Prophet. We will use the probability weights from machine learning to predict the most accurate model for each given day. This method received a score of 14.58. This is not as accurate as just using Prophet. Additionally, it is far more complicated.

Conclusions

The best result is seen using Facebook's Prophet forecasting model, which is developed specifically for the task of forecasting at a scale far beyond even this task.

References

- Chen, T., He, T., Benesty, M., Khotilovich, V., Tang, Y., Cho, H., et al. (2015). Xgboost: extreme gradient boosting. *R package version 0.4-2*, 1(4), 1–4.
- Hamilton, J. D. (1994). *Time series analysis*. Princeton University Press.
- Hyndman, R. J., & Athanasopoulos, G. (2018). *Forecasting: principles and practice*. OTexts.
- Hyndman, R. J., & Koehler, A. B. (2006). Another look at measures of forecast accuracy. *International journal of forecasting*, 22(4), 679–688.
- Kaggle. (2018). *Store item demand forecasting challenge*.
- Montero-Manso, P., Athanasopoulos, G., Hyndman, R. J., & Talagala, T. S. (2020). Fforma: Feature-based forecast model averaging. *International Journal of Forecasting*, 36(1), 86–92.
- Taylor, S. J., & Letham, B. (2018). Forecasting at scale. *The American Statistician*, 72(1), 37–45.
- Triebe, O., Hewamalage, H., Pilyugina, P., Laptev, N., Bergmeir, C., & Rajagopal, R. (2021). *Neuralprophet: Explainable forecasting at scale*.