Aprendizagem Aplicada à Segurança

Class 6: Anomaly Detection II, autoencoders, time, space and the state of the art

Mário Antunes

October 23, 2026


Universidade de Aveiro

Class 03_01 in one frame


- Model **normal**, score the departure $s(\mathbf{x})$, set t at 1% false alarms on normal validation data.
- KDD99, 1.8% attacks: ten classic detectors reach AUPRC 0.33 to 0.68.
- The GMM is best; PCA has the best F1.
- r2l looks like normal traffic: every detector struggles; a classifier misses attack kinds it never saw.
- Today: can **learned representations** do better, and what about anomalies in **time** and across **sensors**?

Why neural detectors?

- Hand-made features work for tables like KDD99; they are poor for raw **sequences**, **images**, **many sensors**.
- A neural network learns the features from normal data; the price: tuning, training time, less transparency.
- Deep and shallow detectors share a few principles (Ruff et al. 2021):

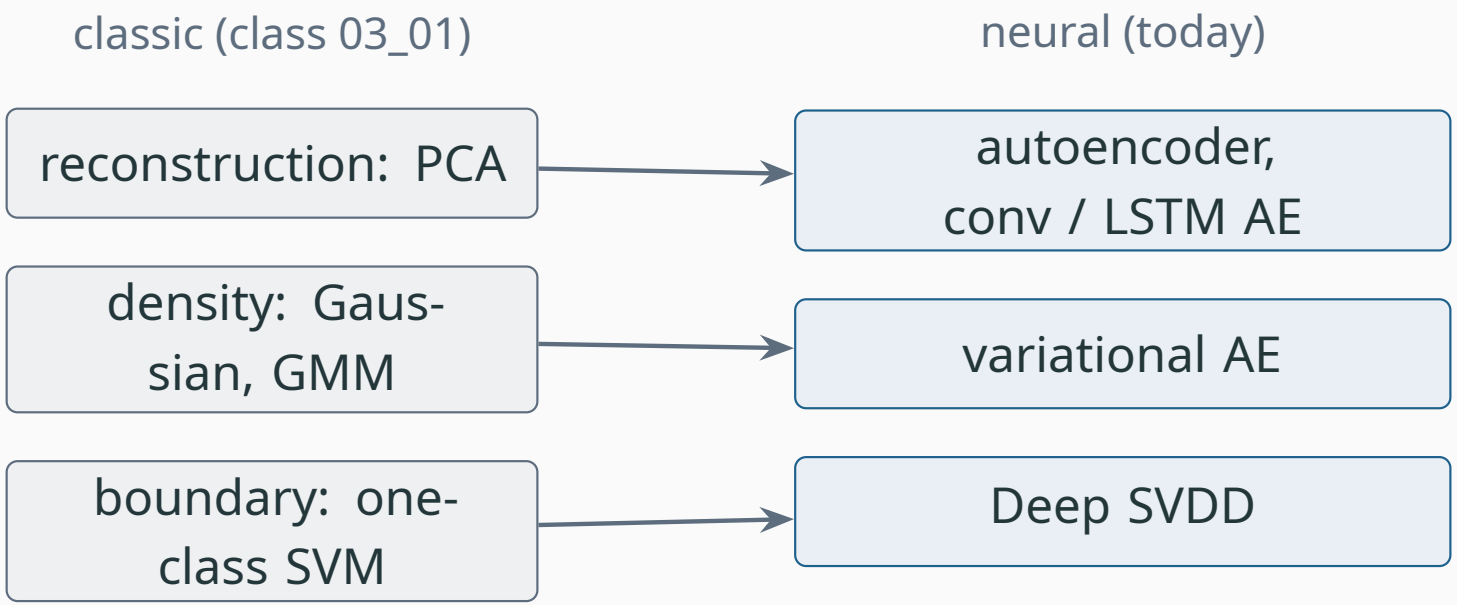


The autoencoder: squeeze, then rebuild

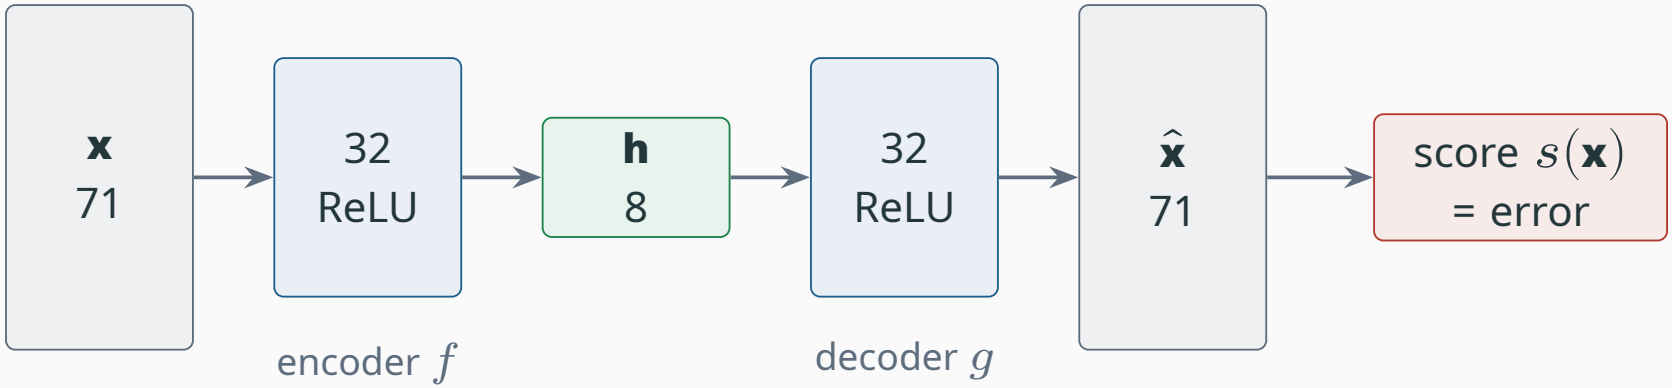

- Train $\hat{\mathbf{x}} = g(f(\mathbf{x}))$ on **normal** rows to minimise $\frac{1}{n}\sum_i \|\mathbf{x}_i - \hat{\mathbf{x}}_i\|^2$.
- The 8-unit **code h** cannot copy 71 numbers: it keeps the structure of normal data only.


Normal rebuilds well, attacks do not

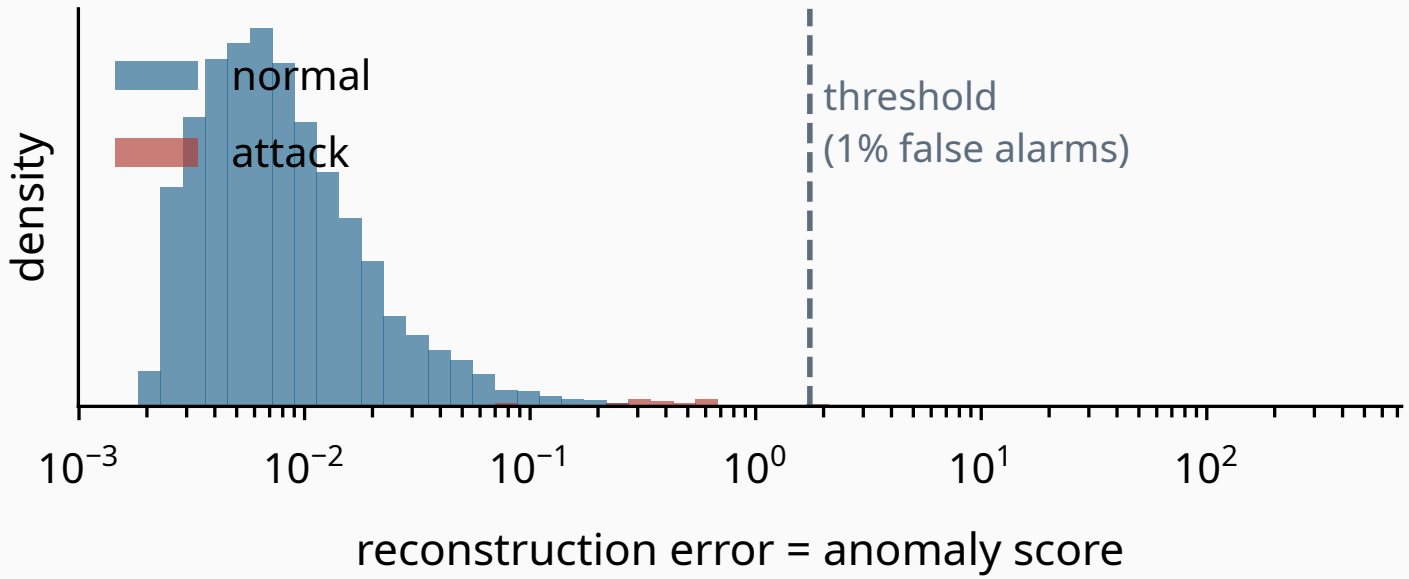

- Test set, 1.8% attacks: the score is the reconstruction error; attacks sit to the right of the threshold.
- The threshold is the 99% quantile of the validation scores of normal rows.


A linear autoencoder is PCA

linear code: PCA

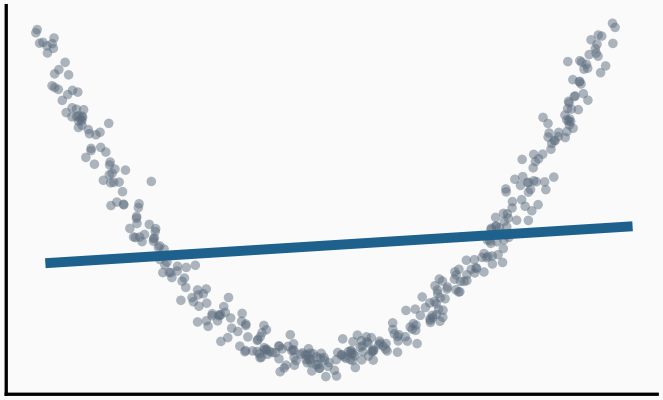

mean squared error 0.215

AE: code of 1 unit, tanh layers

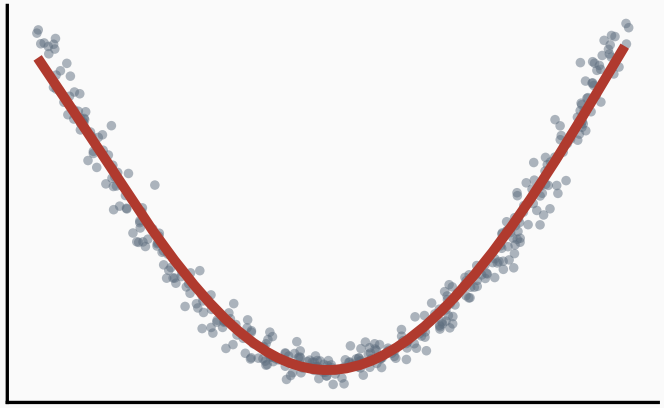

mean squared error 0.003


- Without activations, $\hat{\mathbf{x}} = W_2 W_1 \mathbf{x}$ and the best rank-k map is the PCA projection $V_k V_k^\top$ (Baldi and Hornik 1989).
- The ReLU or tanh layers bend the subspace into a curved surface: the only gain over PCA.

Terminology: four variations on the autoencoder

Model	Change	Why
sparse AE	$+\lambda\|\mathbf{h}\|_1$ on the code	few active units, less copying
denoising AE	input $\mathbf{x}+\epsilon$, target $\mathbf{x}$ (Vincent et al. 2008)	learns the shape, not the points
variational AE	code is a distribution (Kingma and Welling 2014)	a density, not only a surface
Deep SVDD	no decoder; pull $\phi(\mathbf{x})$ to a centre (Ruff et al. 2018)	one-class boundary in learned space

- All four use the same protocol: train on normal rows, threshold on normal validation rows.

Variational AE: a code with uncertainty

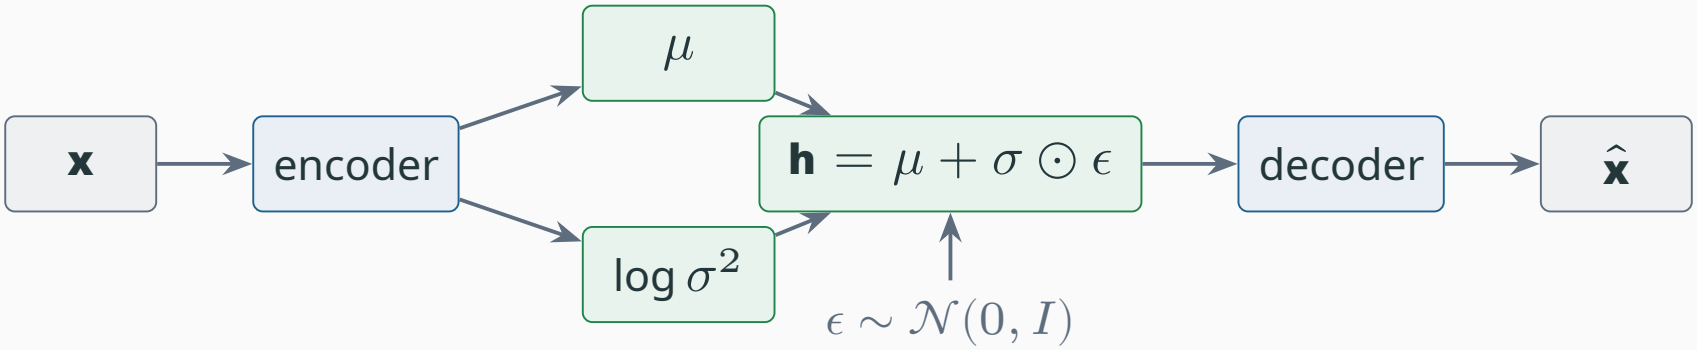

- The encoder outputs a mean μ and a log-variance; the code is **sampled** around the mean.
- Score: the reconstruction error. In practice clip $\log \sigma^2$ and the gradient norm, or a seed can diverge (it did here).

Variational AE: definition of the loss


- Loss = reconstruction + β times the distance of the code distribution from $\mathcal{N}(0, I)$:

$$\mathcal{L} = \|\mathbf{x} - \hat{\mathbf{x}}\|^2 + \beta \,\mathrm{KL} \quad \text{(definition)}$$

$$\mathrm{KL} = -\frac{1}{2} \sum_j \left(1 + \log \sigma_j^2 - \mu_j^2 - \sigma_j^2\right) \quad \text{(definition)}$$

- The sum runs over the code units j. Why the sampling is differentiable: appendix.

Deep SVDD: a sphere in a learned space

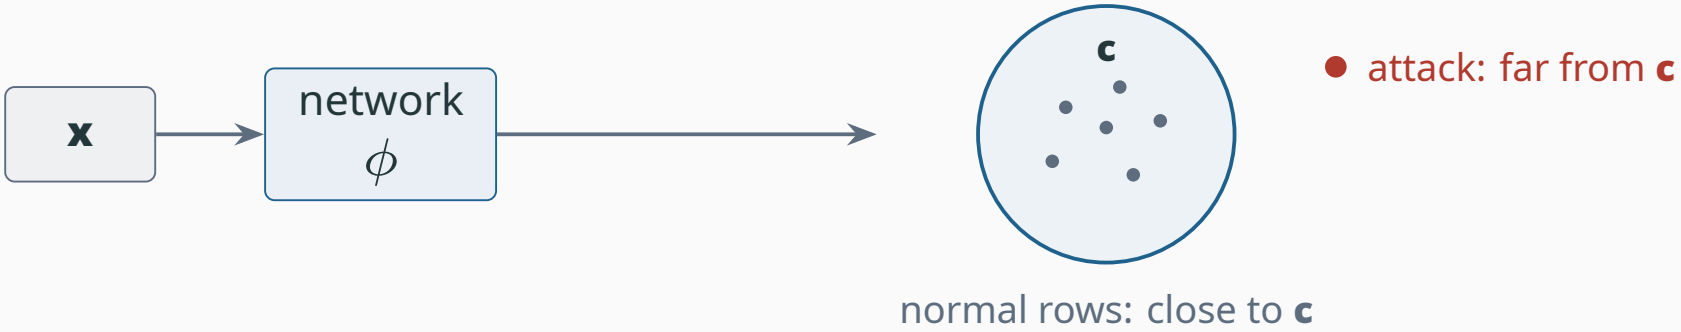

- A network ϕ maps normal rows close to a fixed centre **c**; the score is the distance to it.
- Deep SAD adds a few labelled anomalies that are pushed *away* from **c** (Ruff et al. 2020).

Deep SVDD: definition and collapse


$$\min_{\phi} \frac{1}{n} \sum_{i} \|\phi(\mathbf{x}_i) - \mathbf{c}\|^2, \qquad s(\mathbf{x}) = \|\phi(\mathbf{x}) - \mathbf{c}\|^2 \quad \text{(definition)}$$

- $\mathbf{c}$ is the mean of the initial outputs, then fixed.
- **Collapse:** if ϕ may output a constant, $\phi(\mathbf{x}) = \mathbf{c}$ for every $\mathbf{x}$ is a perfect, useless solution.
- Remedies of the paper: no bias terms, no bounded activations (Ruff et al. 2018).

DEMO 04


`notebooks/02-anomaly/notebook_04.ipynb`

Deep detectors land in the same band

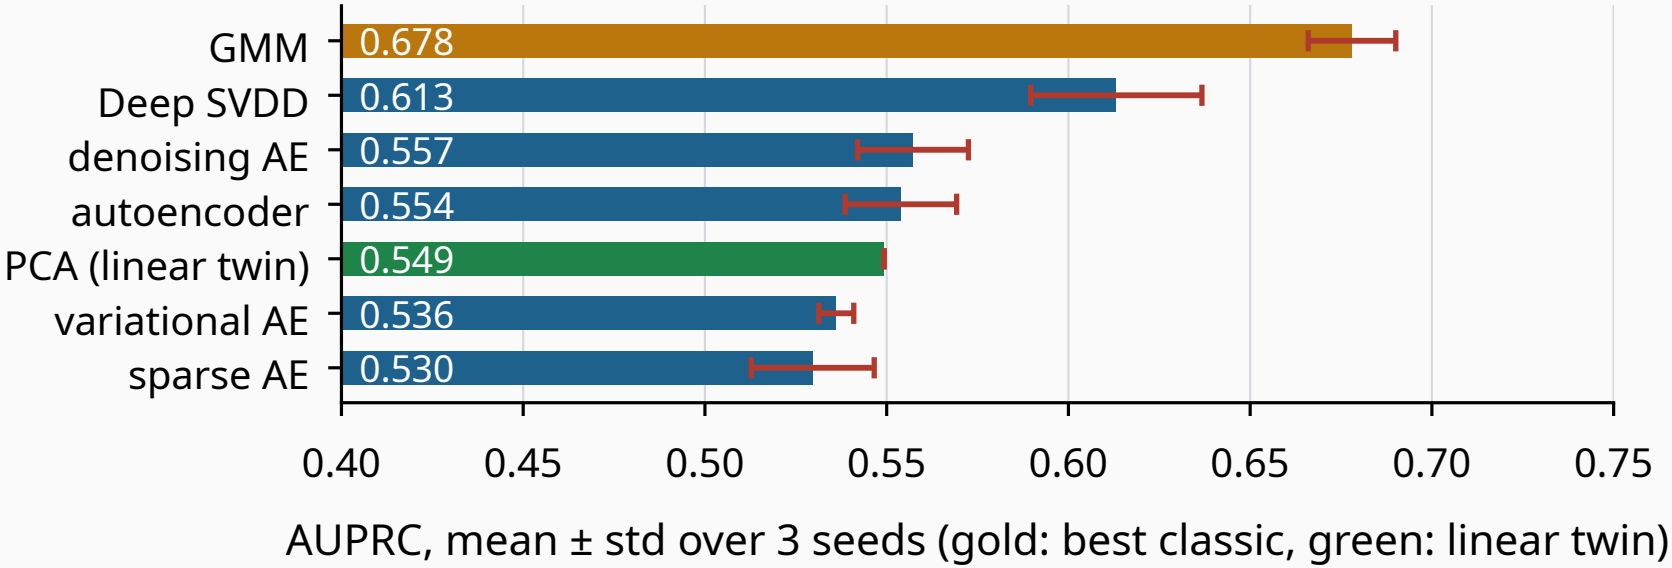

- Mean of 3 seeds, default sizes (code 8), 20 epochs, 2-3 s each on a CPU.
- The mixture still leads; the AE equals its linear twin.
- PCA keeps the best F1 (0.637) and r2l recall (0.45).
- Depth is no free lunch on hand-made features (Han et al. 2022).

How big should the code be?

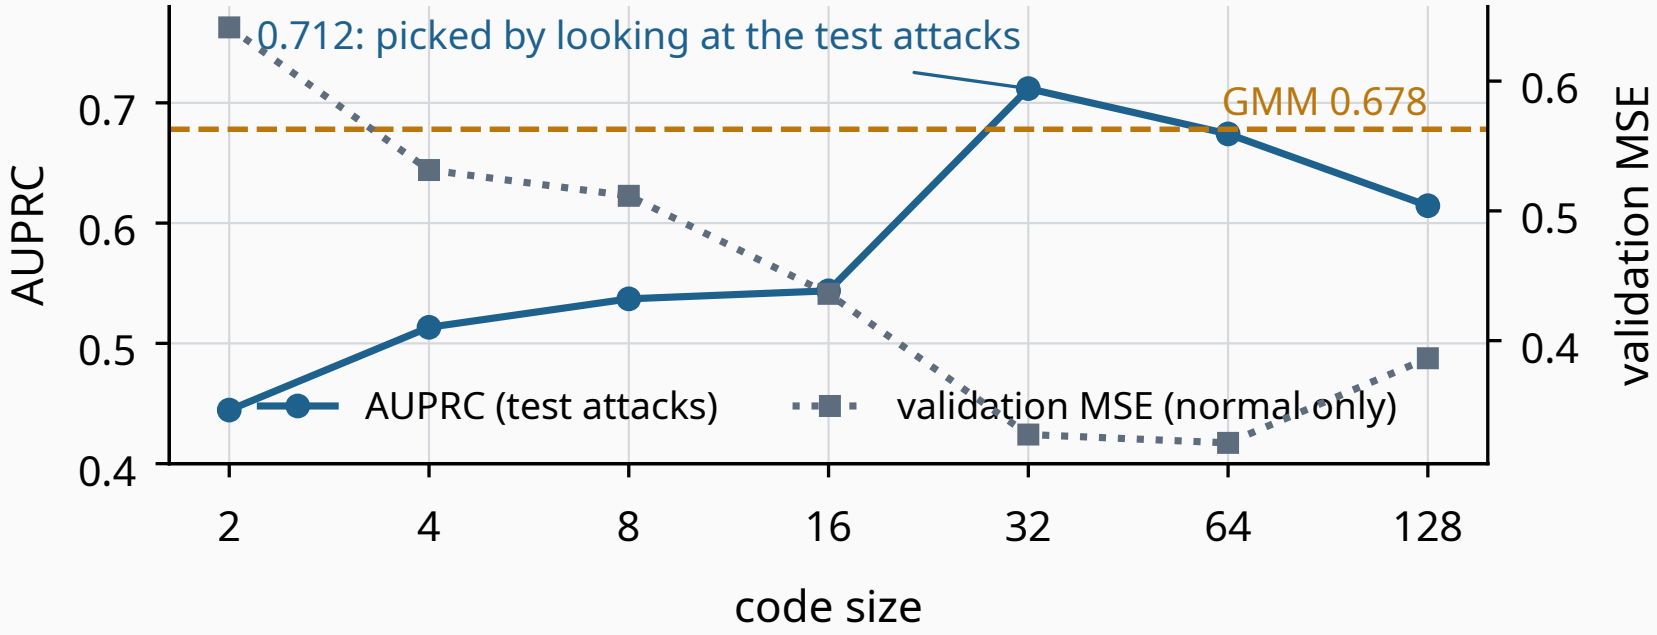


- Too small: normal traffic does not fit. Too large: the AE starts to copy attacks too.
- **Who chose 32?** We looked at the test attacks. The validation MSE of normal rows prefers 64.

Tuning without anomalies is guessing


- A one-class detector has no labelled anomalies to tune code size, epochs, ν, k on.
- A gain from tuning on the test attacks is **not** a gain.
- Report the default, or tune on a separate labelled set.
- Options: a few labelled anomalies (semi-supervised), a simulated attack set, or robust defaults over seeds.

Explaining an alarm: error per feature

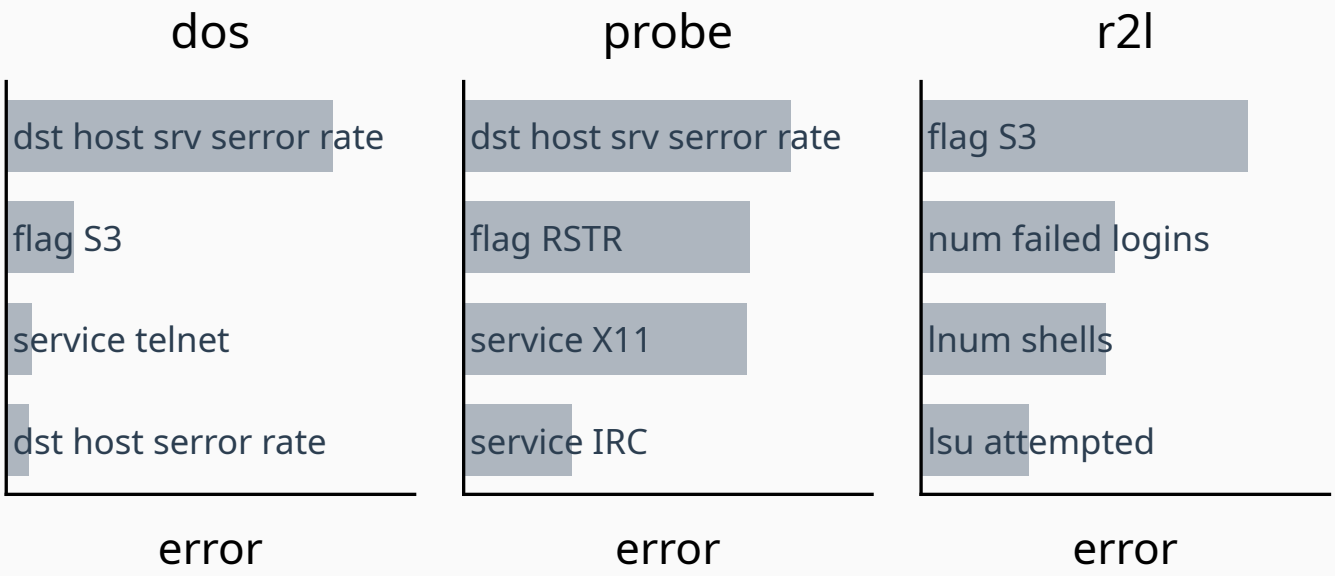


- The reconstruction error is a sum over features: the largest terms name the reason.
- A triage hint: SYN-error rates for floods, failed logins and shells for intrusions.

A value can be normal and still wrong *now*

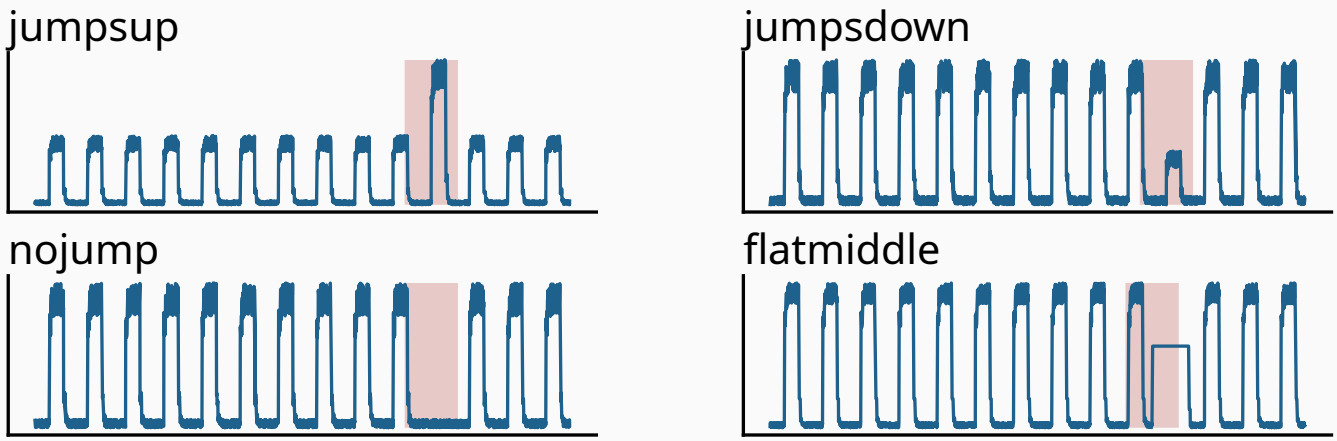

- A **contextual** anomaly (80 requests/s: normal at noon, not at 3 a.m.) needs a **window**.
- Only jumpsup leaves the normal range; jumpsdown, nojump (no daily rise) and flatmiddle stay inside it.
- Four NAB series (Lavin and Ahmad 2015), 14 days, red = anomaly: train on days 1-8, threshold = max score of day 9 + 10%.

Three one-liners, one autoencoder

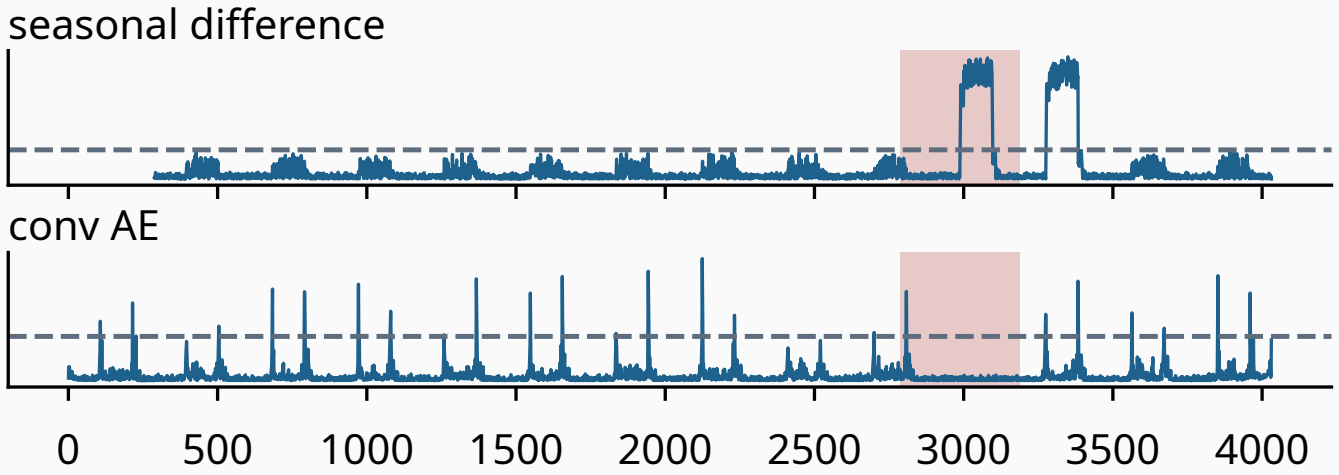

time step (5 min); red: the anomaly window, dashed: threshold

- One-liners: $|x_t|$; **seasonal difference** $|x_t - x_{t-288}|$; moving std. **Conv AE**: windows of 288 steps.
- AE score of step t: the squared error **at** t, averaged over the windows holding it.
- Plot: the seasonal difference (top) echoes a day later, the conv AE does not.

DEMO 05

notebooks/02-anomaly/notebook_05.ipynb

Found, and at what price


	|x|	seasonal diff	moving std 1h	conv AE
jumpsup	found, 0	found, 114	found, 1	found, 0
jumpsdown	missed	found, 112	missed	found, 3
nojump	missed	found, 108	missed	found, 35
flatmiddle	missed	found, 355	missed	found, 1

- Each cell: found or missed, then false alarms outside the NAB window.
- The seasonal difference finds all four but echoes (~110 false alarms); the conv AE finds all four with 1 to 35.
- An LSTM AE over 8-hour windows **misses** nojump: the window must hold the context.

The benchmarks are telling us something

- Several popular time-series benchmarks are solvable by one-liners, and their labels have errors (Wu and Keogh 2021).
- TSB-AD (40 data sets, 40 methods): simple and statistical methods are often as good as deep ones (Liu and Paparrizos 2024).
- Time-series **foundation models** (pre-trained on many series, used zero-shot): no better than moving-window one-liners for anomaly detection.
- Lesson: always run the one-liners first; a deep model must beat them on *your* data.


Example 2: a small water plant

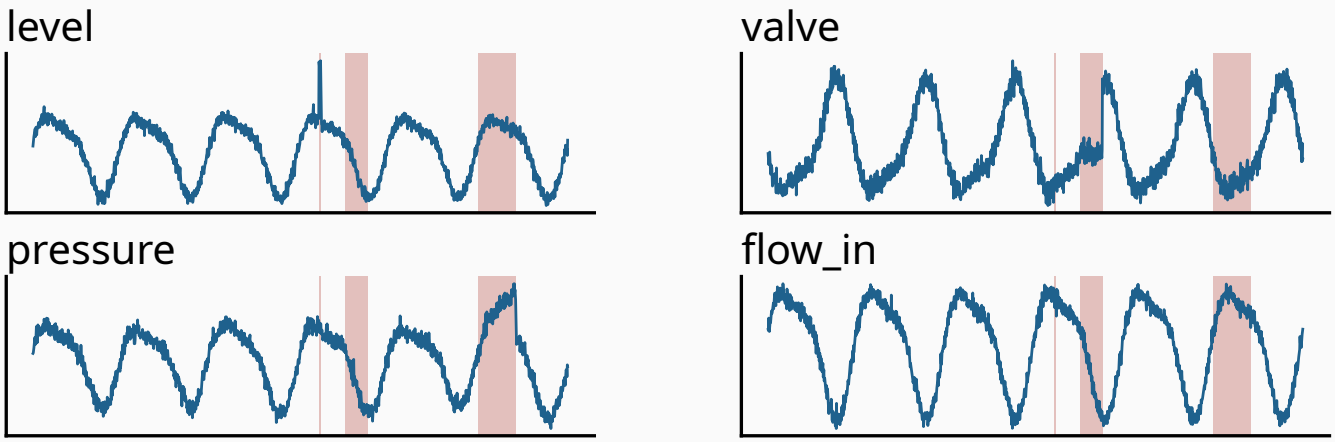

- 8 sensors, two hidden processes: **demand** (daily cycle), **heat** (slow wander); correlated in **space** and **time**.
- Events in the second half (red): **spike** on level (+1.2, 30 min); **drift** of pressure (slow ramp, 10 h).
- **Freeze** of the valve: a stale value for 6 h, every value normal.

Graphs of sensors: predict each one from the others

- Graph-based detectors learn which sensors depend on which and alarm when one departs from what its neighbours predict (GDN (Deng and Hooi 2021)).

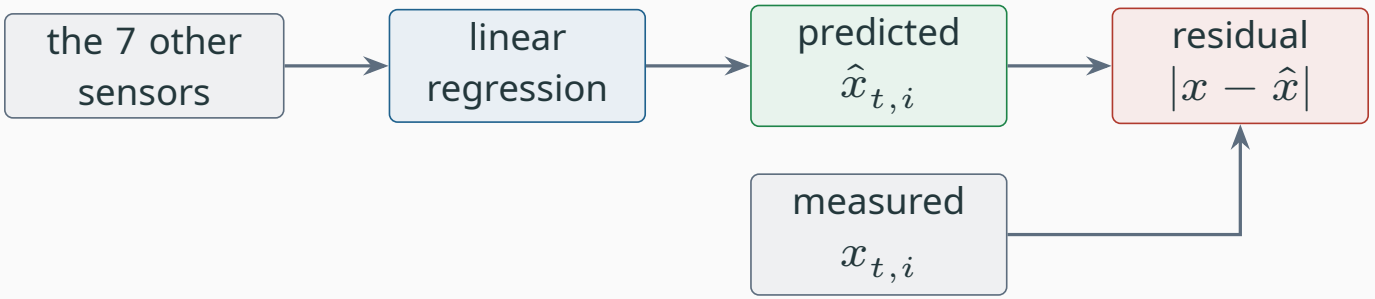


$$s_t = \max_i \left| x_{t,i} - \hat{x}_{t,i}(\mathbf{x}_{t,-i}) \right| \quad \text{(definition)}$$

- A frozen valve reports a normal value, but not the one its neighbours predict.

DEMO 06

notebooks/02-anomaly/notebook_06.ipynb


Space beats per-sensor checks

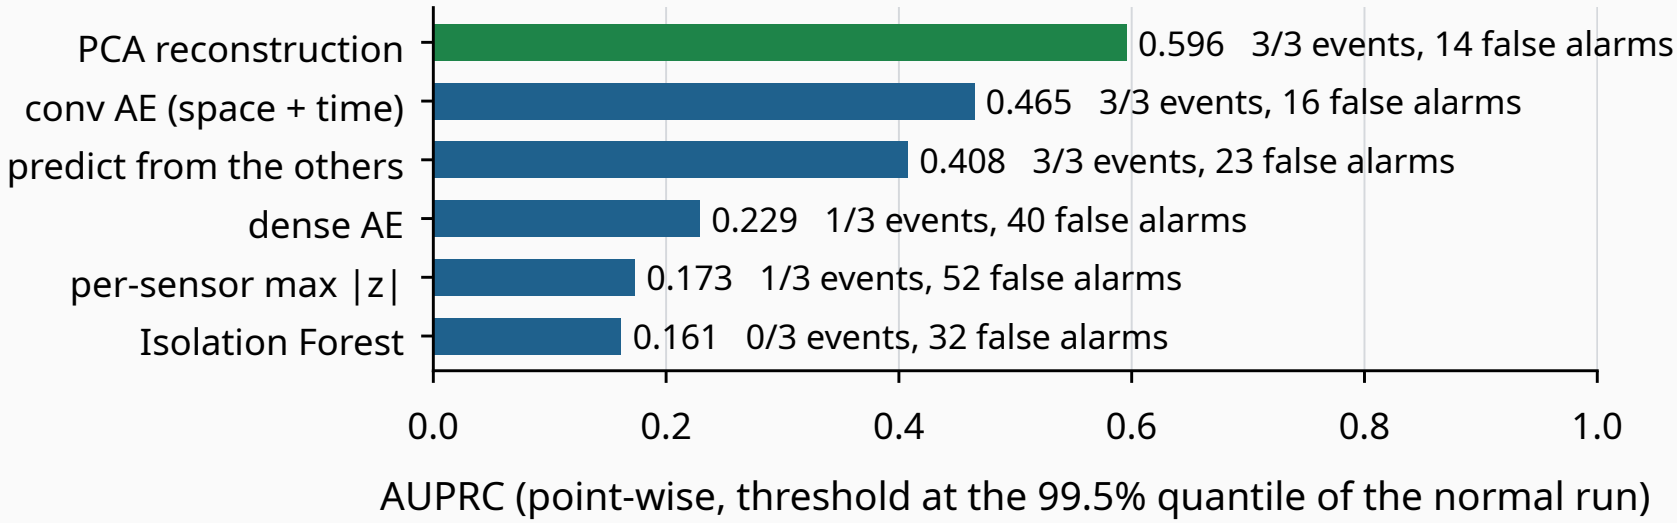

- The freeze and the drift break **relations**, not ranges: only models of the relations see them.
- With smooth, strongly correlated sensors the linear model wins; time pays off when the anomaly is in the *shape* (NAB).

The point-adjust trap

- **Point-adjusted** F1 (many papers): one flagged point counts the whole anomalous segment as found.

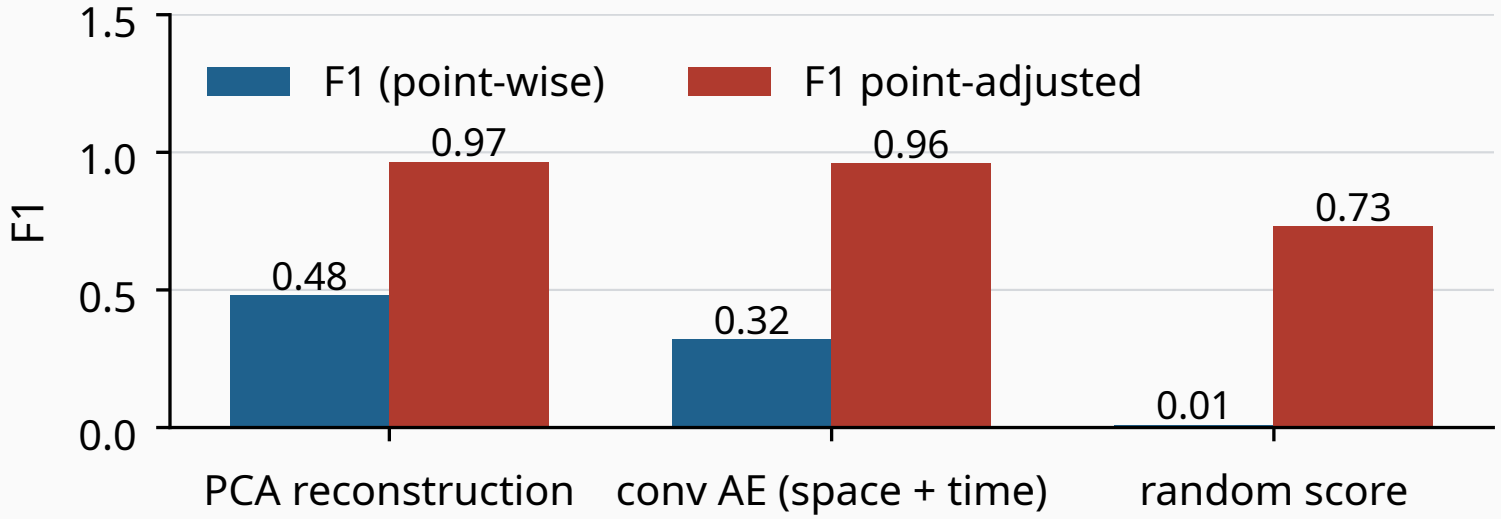

- A random score looks almost as good as the best detector (Kim et al. 2022).
- Report point-wise metrics, events found, delay, false alarms, baselines.

A map of the newer tools

Kitsune
online ensemble of small AEs on packet statistics
assumes live traffic is clean

GDN
graph of sensor dependencies
names the sensor

TranAD
transformer reconstruction
gains on benchmarks with known flaws

Foundation models
pre-trained fore-casters, zero-shot
about as good as one-liners

- Sources: Kitsune (Mirsky et al. 2018), GDN (Deng and Hooi 2021), TranAD (Tuli et al. 2022).
- Each brings a real idea; none removes the base rate, the threshold, or the need for baselines.

What to take from the literature

- No detector wins everywhere, on tables (Han et al. 2022) or on series (Liu and Paparrizos 2024).
- Evaluation choices (duplicates, point adjust, tuning on the test set) move results more than architectures.
- A good deep detector is a good **representation** plus the same protocol as class 03_01.
- Next class: the same detectors as **targets**. What an attacker can change decides what they are worth.

Labs and practice guide

Notebook	Content
04	AE, sparse, denoising, variational, Deep SVDD on KDD99; code size; explanations
05	NAB: one-liners vs conv AE vs LSTM AE; per-step scores
06	Example 2: per-sensor vs space vs space + time; point-adjust; attribution

- All neural models: Keras 3 on the JAX backend, CPU is enough (each notebook under 2 minutes).
- **Guide** `practice/anomaly/guide_03_02`: an AE by hand in Keras, its PCA twin, a conv AE on NAB, baselines.

Take-aways

- An autoencoder is PCA with curves; Deep SVDD is a one-class boundary in a learned space.
- On hand-made features, deep detectors match the classic ones; their tuning has no labels to rely on.
- Time: score windows, localise the error per step, and beat the seasonal one-liner first.
- Space: anomalies that break **relations** need a model of the relations (PCA, graphs, AEs over sensors).
- Distrust point-adjusted F1 and benchmark gains without baselines.

The reparameterisation trick

- Sampling $\mathbf{h} \sim \mathcal{N}(\mu, \operatorname{diag} \sigma^2)$ is not differentiable in μ, σ.
- Write $\mathbf{h} = \mu + \sigma \odot \epsilon$ with $\epsilon \sim \mathcal{N}(0, I)$: the randomness moves to an input, and $\partial \mathbf{h} / \partial \mu = I$, $\partial \mathbf{h} / \partial \sigma = \operatorname{diag} \epsilon$.
- KL of two Gaussians per code unit, closed form: $\mathrm{KL}(\mathcal{N}(\mu, \sigma^2) \| \mathcal{N}(0, 1)) = \frac{1}{2}(\mu^2 + \sigma^2 - \log \sigma^2 - 1)$.
- Summed over the units it gives the loss term of the VAE frame.

Why a linear AE recovers the PCA subspace

- Minimise $\sum_i \|\mathbf{x}_i - W_2 W_1 \mathbf{x}_i\|^2$ (centred data): $P = W_2 W_1$ has rank at most k.
- For a fixed rank-k projection P the error is $\mathrm{tr}(S) - \mathrm{tr}(PS)$, S the scatter matrix.
- $\mathrm{tr}(PS)$ is maximal when P projects onto the top k eigenvectors of S (Ky Fan): $P = V_k V_k^\top$.
- The AE finds the same subspace, not necessarily the same basis: W_1 can be any invertible mix of $V_k^\top$ (Baldi and Hornik 1989).

References

Baldi, Pierre, and Kurt Hornik. 1989. “Neural Networks and Principal Component Analysis: Learning from Examples Without Local Minima.” Neural Networks 2 (1).

Deng, Ailin, and Bryan Hooi. 2021. “Graph Neural Network-Based Anomaly Detection in Multivariate Time Series.” AAAI Conference on Artificial Intelligence.

Han, Songqiao, Xiyang Hu, Hailiang Huang, Minqi Jiang, and Yue Zhao. 2022. “ADBench: Anomaly Detection Benchmark.” Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks.

Kim, Siwon, Kukjin Choi, Hyun-Soo Choi, Byunghan Lee, and Sungroh Yoon. 2022. “Towards a Rigorous Evaluation of Time-Series Anomaly Detection.” AAAI Conference on Artificial Intelligence.

Kingma, Diederik P., and Max Welling. 2014. “Auto-Encoding Variational Bayes.” International Conference on Learning Representations (ICLR).

Lavin, Alexander, and Subutai Ahmad. 2015. “Evaluating Real-Time Anomaly Detection Algorithms – the Numenta Anomaly Benchmark.” IEEE International Conference on Machine Learning and Applications (ICMLA).

Liu, Qinghua, and John Paparrizos. 2024. “The Elephant in the Room: Towards a Reliable Time-Series Anomaly Detection Benchmark.” Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks.

Mirsky, Yisroel, Tomer Doitshman, Yuval Elovici, and Asaf Shabtai. 2018. “Kitsune: An Ensemble of Autoencoders for Online Network Intrusion Detection.” Network and Distributed System Security Symposium (NDSS).

Ruff, Lukas, Jacob R. Kauffmann, Robert A. Vandermeulen, et al. 2021. “A Unifying Review of Deep and Shallow Anomaly Detection.” Proceedings of the IEEE 109 (5).

Ruff, Lukas, Robert A. Vandermeulen, Nico Görnitz, et al. 2020. “Deep Semi-Supervised Anomaly Detection.” International Conference on Learning Representations (ICLR).

Ruff, Lukas, Robert Vandermeulen, Nico Görnitz, et al. 2018. “Deep One-Class Classification.” International Conference on Machine Learning (ICML).

Tuli, Shreshth, Giuliano Casale, and Nicholas R. Jennings. 2022. “TranAD: Deep Transformer Networks for Anomaly Detection in Multivariate Time Series Data.” Proceedings of the VLDB Endowment 15 (6).

Vincent, Pascal, Hugo Larochelle, Yoshua Bengio, and Pierre-Antoine Manzagol. 2008. “Extracting and Composing Robust Features with Denoising Autoencoders.” International Conference on Machine Learning (ICML).

Wu, Renjie, and Eamonn J. Keogh. 2021. “Current Time Series Anomaly Detection Benchmarks Are Flawed and Are Creating the Illusion of Progress.” IEEE Transactions on Knowledge and Data Engineering.