

# From Impressionism to Expressionism: Automatically Identifying Van Gogh's Paintings

Guilherme Folego, Otavio Gomes, Anderson Rocha

RECOD Lab, Institute of Computing,  
University of Campinas (Unicamp), Brazil



# Introduction

The main research question we wanted to address was:

**Given a painting of interest, was it portrayed by Vincent van Gogh?**



# Introduction

This is an interesting and important question because the authorship of a painting influences its artistic, social, historic, and monetary values [1].

[1] G. E. Newman and P. Bloom, "Art and authenticity: The importance of originals in judgments of value.," *Journal of Experimental Psychology*, vol. 141, no. 3, pp. 558, 2012.

# Introduction

This is an interesting and important question because the authorship of a painting influences its artistic, social, historic, and monetary values [1].

Art specialists often employ methods that are potentially invasive, and, consequently, may interfere with the painting [2].

[1] G. E. Newman and P. Bloom, "Art and authenticity: The importance of originals in judgments of value.," *Journal of Experimental Psychology*, vol. 141, no. 3, pp. 558, 2012.

[2] J. Ragai, "The scientific detection of forgery in paintings," *Proceedings of the American Philosophical Society*, vol. 157, no. 2, pp. 164–175, 2013.

# Introduction

This is an interesting and important question because the authorship of a painting influences its artistic, social, historic, and monetary values [1].

Art specialists often employ methods that are potentially invasive, and, consequently, may interfere with the painting [2].

Machine learning and image processing techniques can help!

[1] G. E. Newman and P. Bloom, "Art and authenticity: The importance of originals in judgments of value.," *Journal of Experimental Psychology*, vol. 141, no. 3, pp. 558, 2012.

[2] J. Ragai, "The scientific detection of forgery in paintings," *Proceedings of the American Philosophical Society*, vol. 157, no. 2, pp. 164–175, 2013.

# Related work

Johnson et al. [6] investigated attribution for van Gogh's paintings.  
Approaches: wavelet, Hidden Markov Model, Support Vector Machine, and Multidimensional Scaling.

[6] C. R. Johnson, E. Hendriks, I. J. Bereznoy, E. Brevdo, S. M. Hughes, I. Daubechies, J. Li, E. Postma, and J. Z. Wang, "Image processing for artist identification," *IEEE Signal Processing Magazine*, vol. 25, no. 4, pp. 37–48, 2008.

# Related work

Johnson et al. [6] investigated attribution for van Gogh's paintings. Approaches: wavelet, Hidden Markov Model, Support Vector Machine, and Multidimensional Scaling.

Li et al. [5] performed statistical hypothesis testing for distinguishing van Gogh from his contemporaries based on brush stroke analysis.

[6] C. R. Johnson, E. Hendriks, I. J. Bereznoy, E. Brevdo, S. M. Hughes, I. Daubechies, J. Li, E. Postma, and J. Z. Wang, "Image processing for artist identification," *IEEE Signal Processing Magazine*, vol. 25, no. 4, pp. 37–48, 2008.

[5] J. Li, L. Yao, E. Hendriks, and J. Z. Wang, "Rhythmic brushstrokes distinguish van Gogh from his contemporaries: Findings via automated brushstroke extraction," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 34, no. 6, pp. 1159–1176, 2012.

# Related work

Khan et al. [11] used state-of-the-art image processing techniques to classify paintings within 91 artists.


To the best of our knowledge, this work provided the only public dataset for painting identification to this day, although without standardization with respect to image density (in Pixels per Inch).





# Our method



The proposed pipeline consists of four steps:

1. Divide each image into smaller patches
2. Extract features using a Convolutional Neural Network
3. Apply patch classifier
  - a. At training time, generate the patch classifier model
  - b. At test time, calculate the classification score for each patch
4. Use patch classification scores for a final response


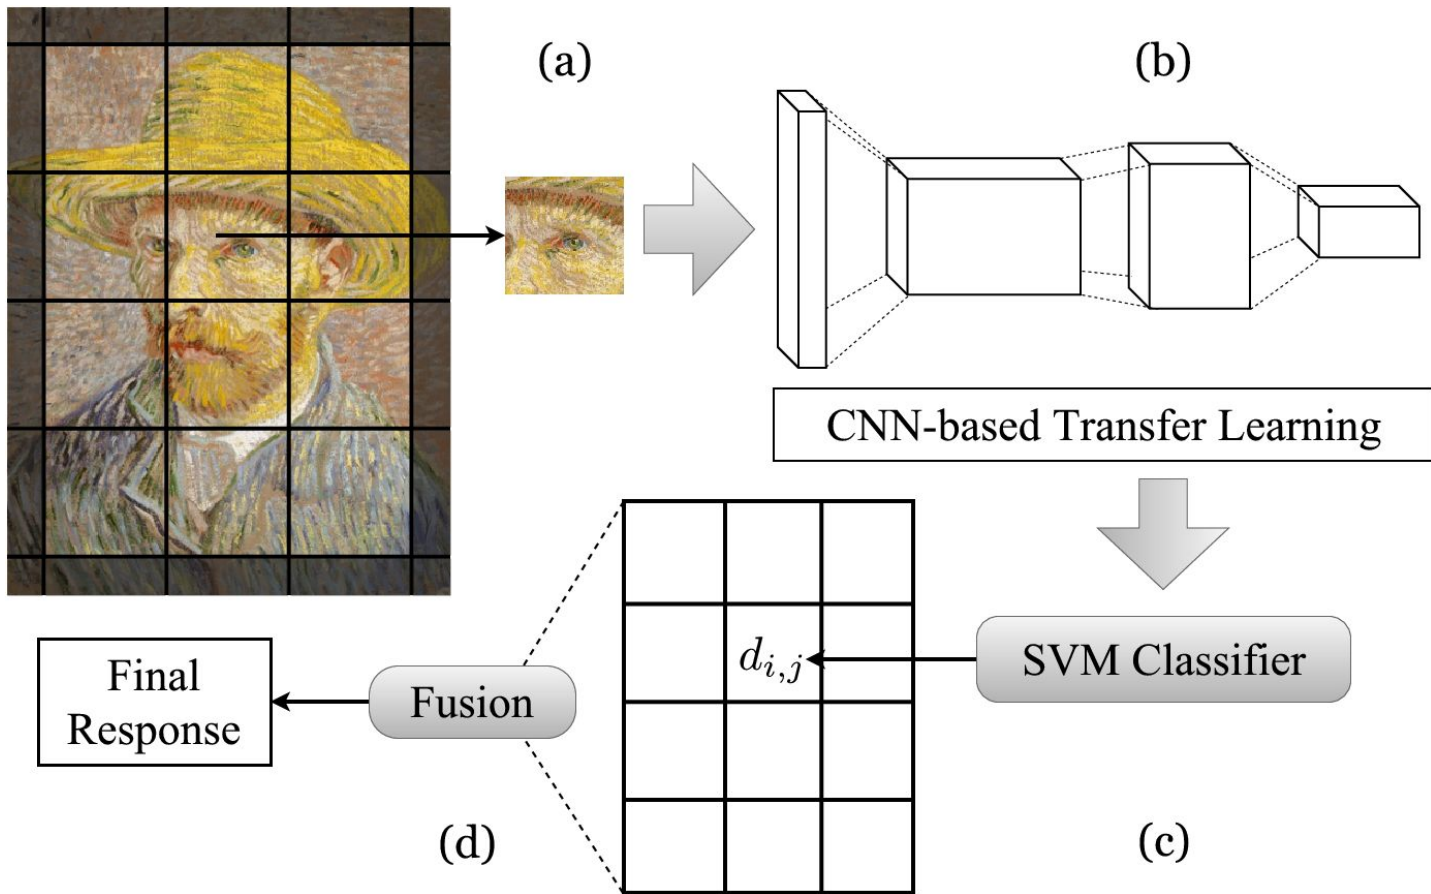


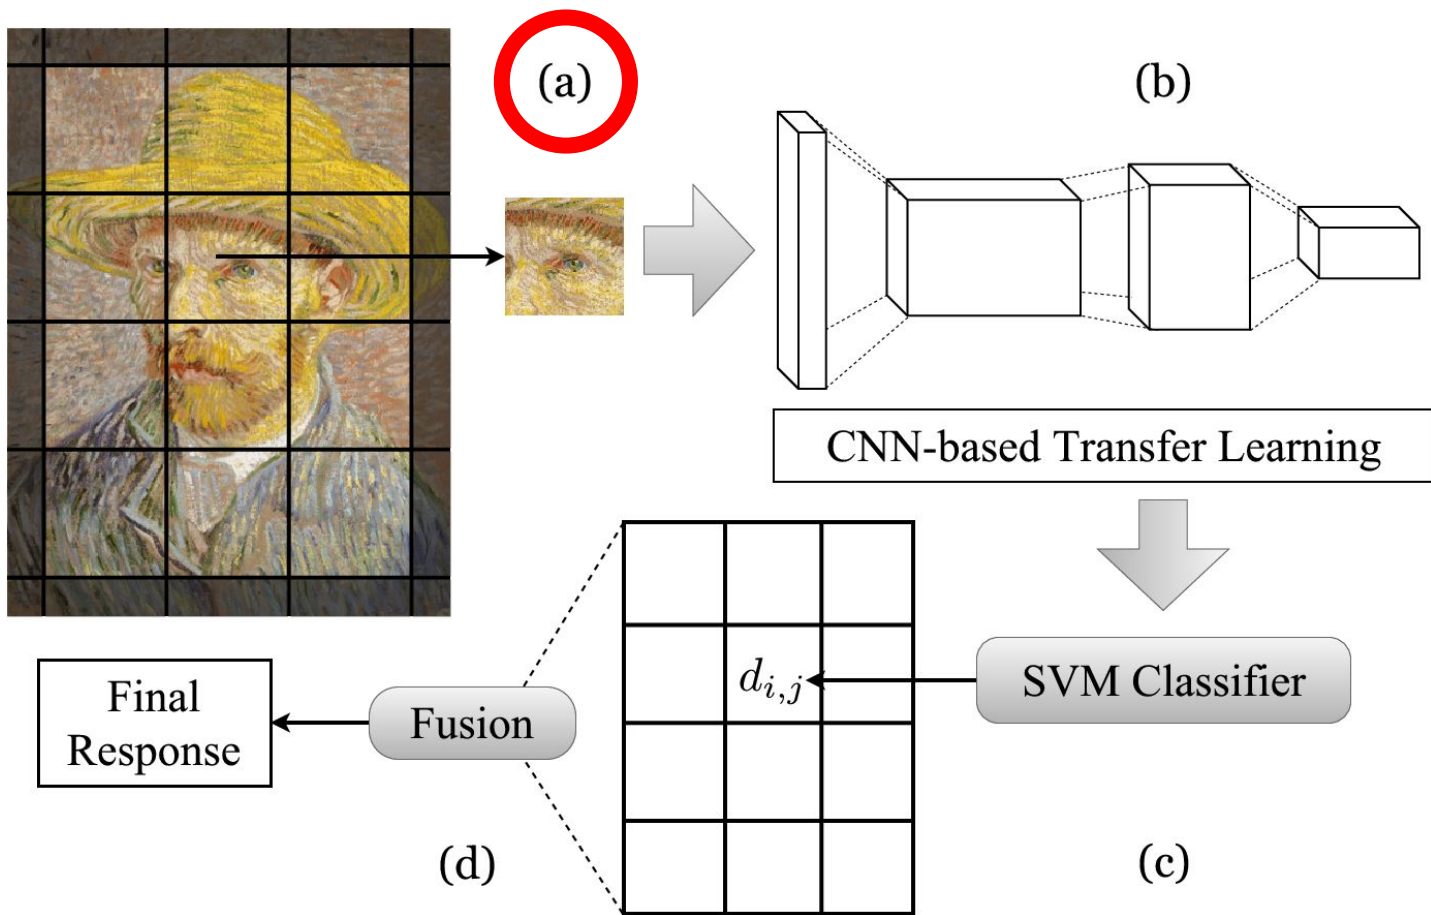

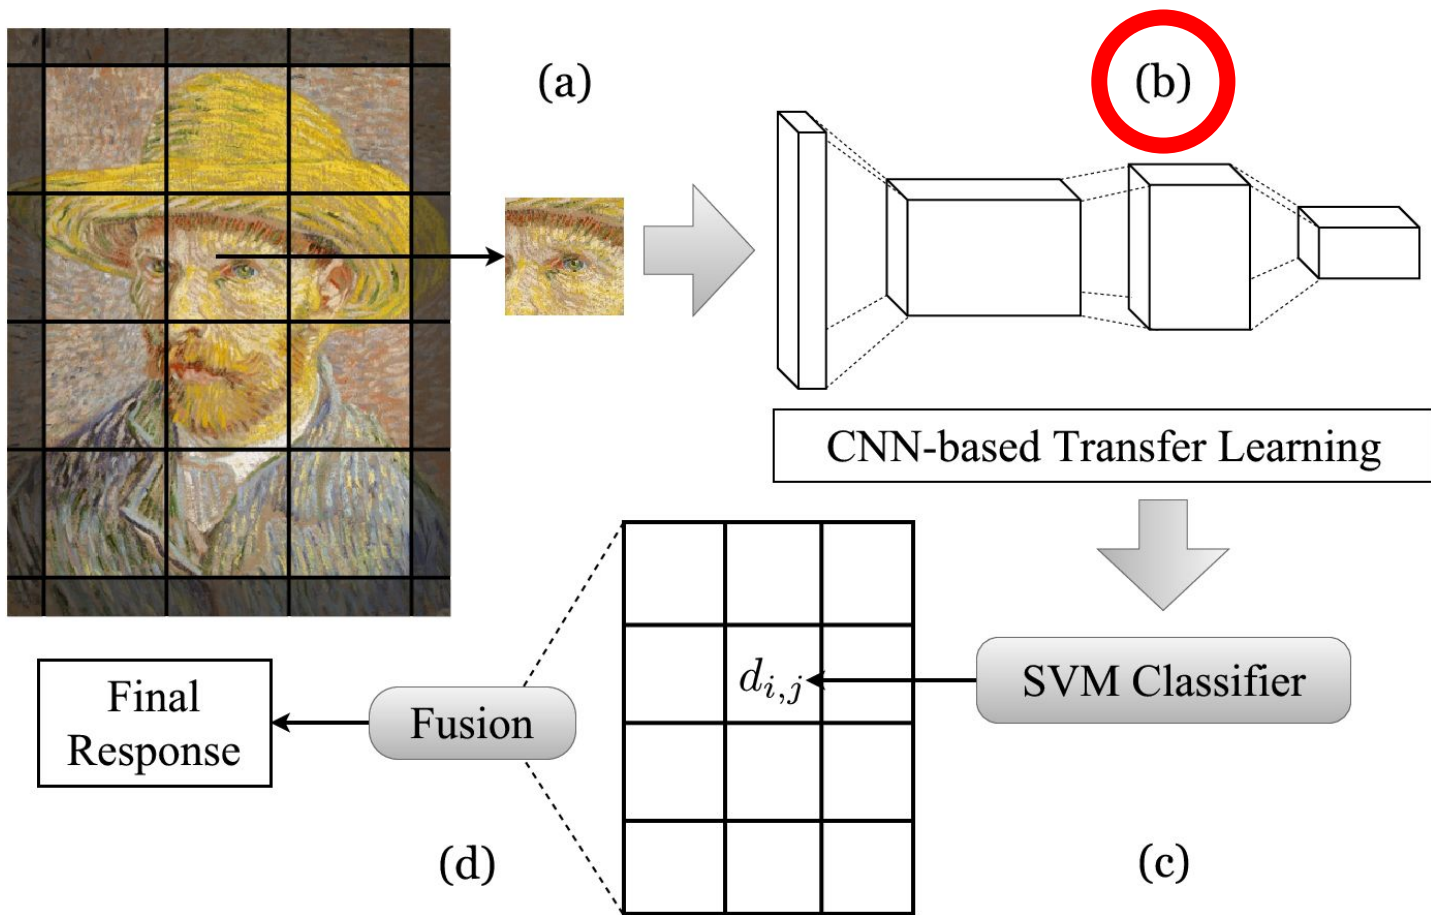

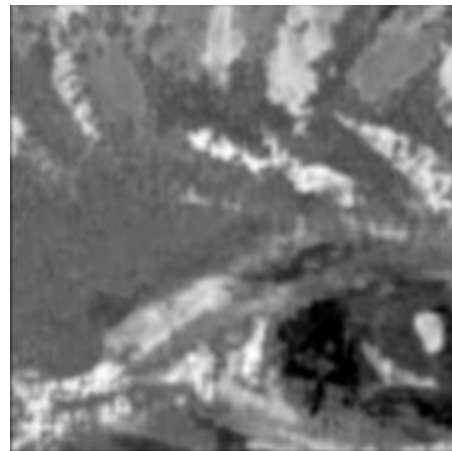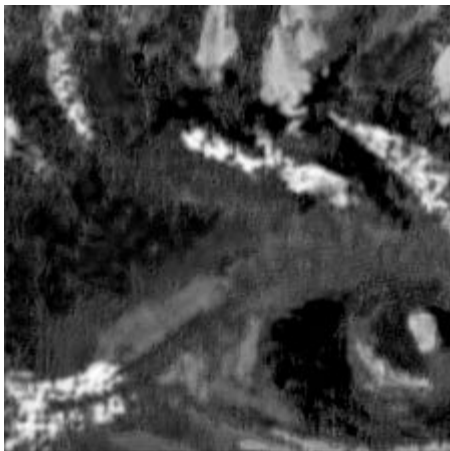



Features emphasizing brush strokes

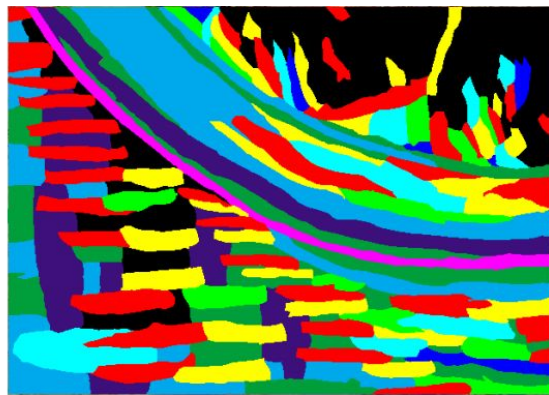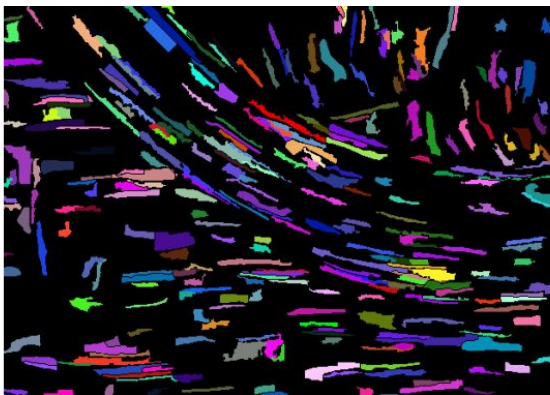

Images from Li et al. [5]



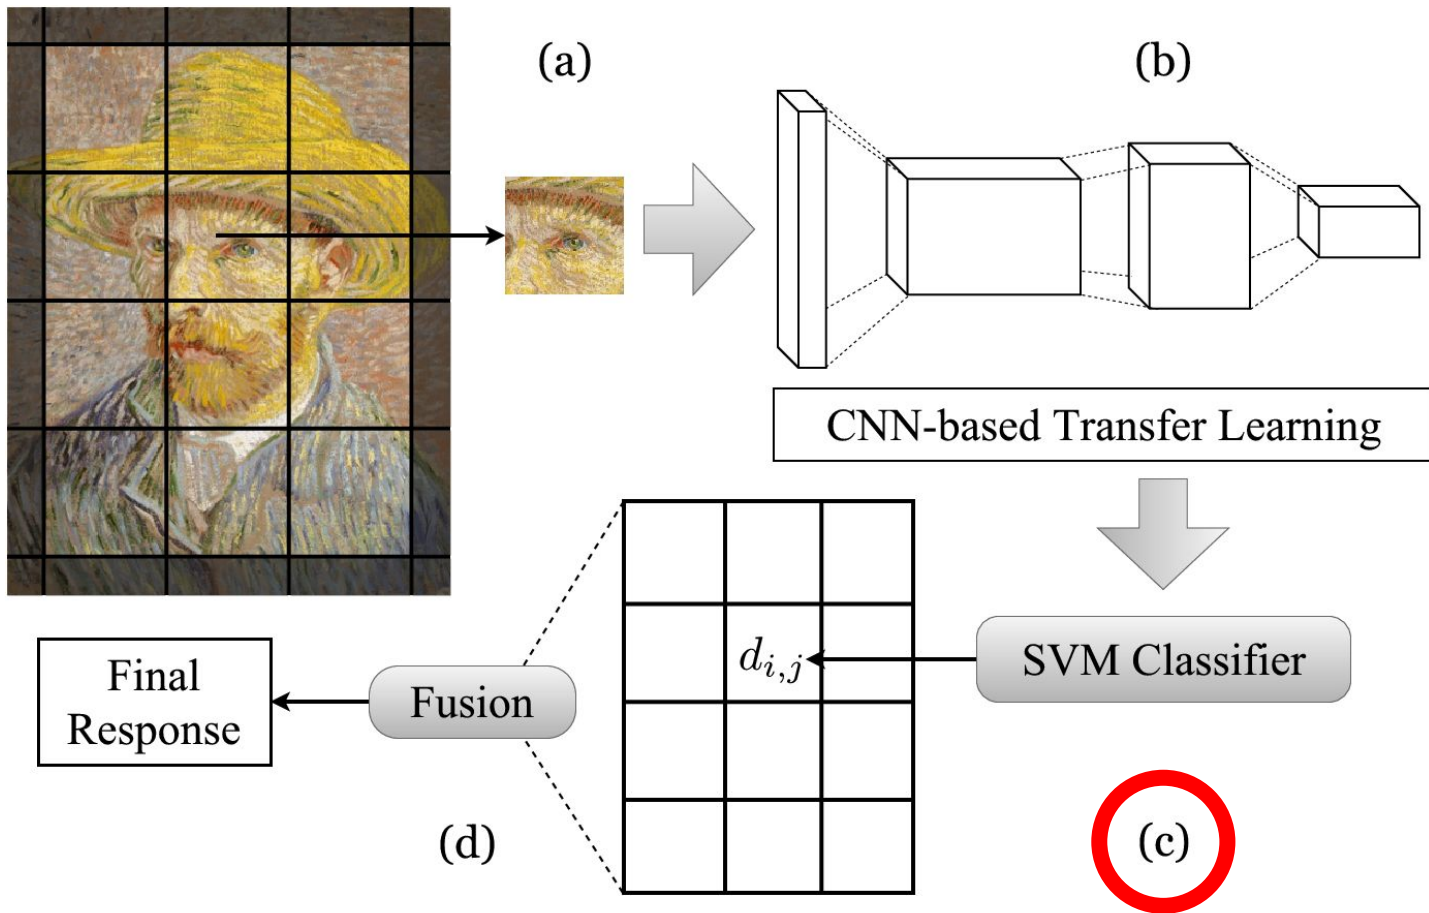

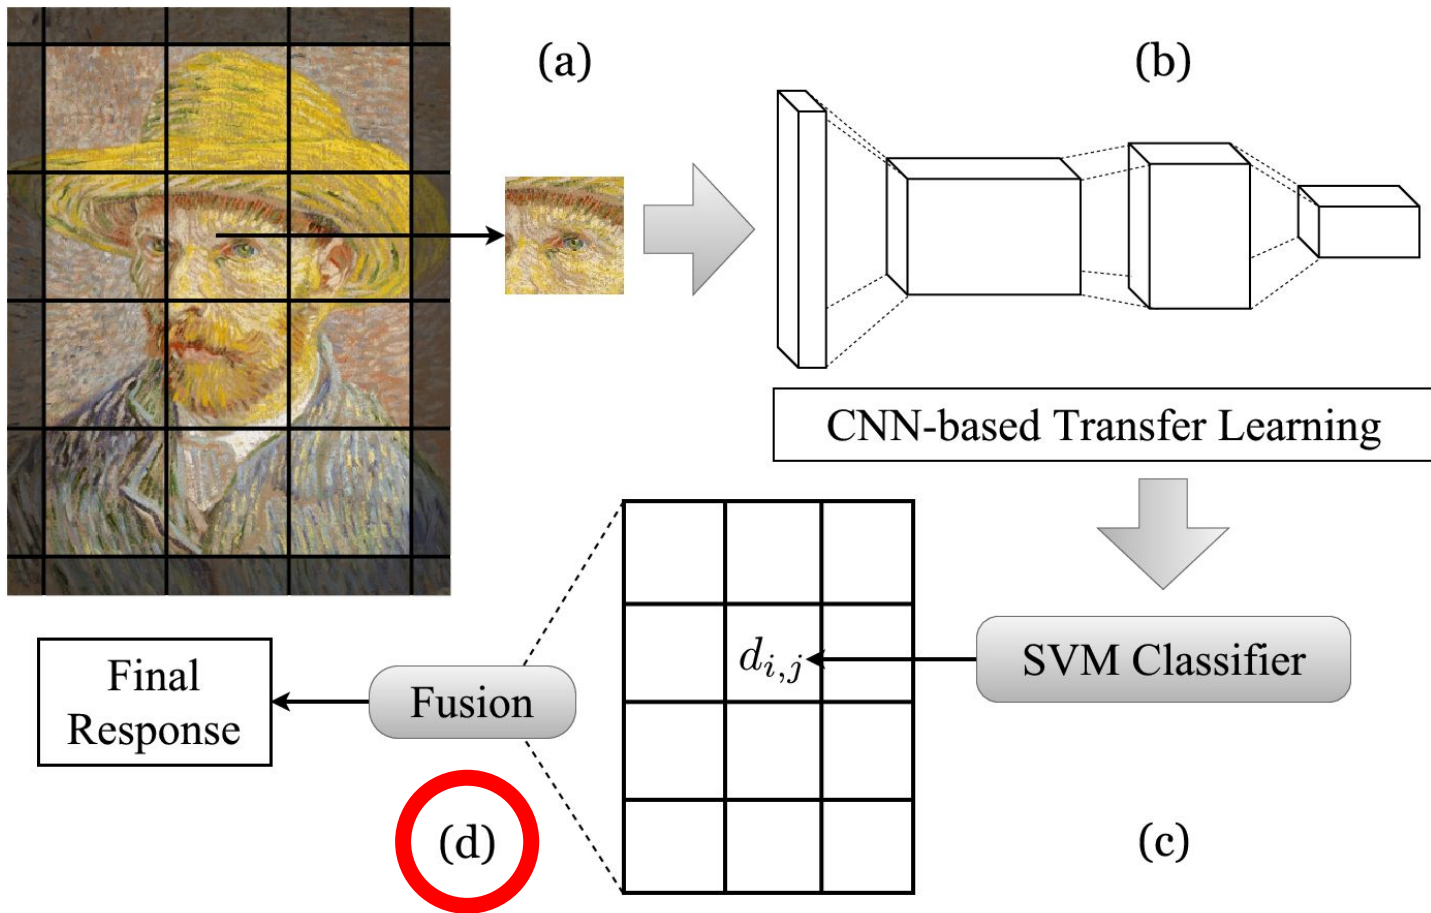



# Our method

Considering the two groups of positive and negative distances, we analyzed different fusion approaches:

- Mode
- Sum
- Far
- Mean
- Median

# Our method

To the best of our knowledge, we created the very first public dataset for painting identification with high quality images and density standardization.

We gathered over 27,000 images from more than 200 categories in Wikimedia Commons [17].

The **VGDB-2016** dataset contains 207 van Gogh and 124 non-van Gogh paintings, which were randomly split, forming a standard evaluation protocol.

It also contains 2 paintings whose authorship are still under debate.

# Results

**Mode**

True  
Class

	+	-
+	22	3
-	3	39

***SMM***


	+	-
+	24	1
-	4	38

**Far**


	+	-
+	24	1
-	3	39

92.3%


Best F1-Score (*Far*)

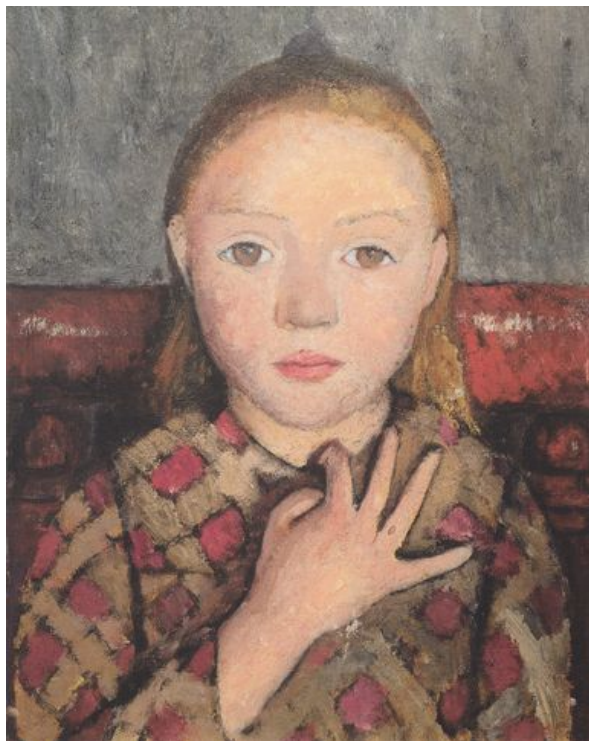


Portrait of a Girl  
Paula Modersohn-Becker

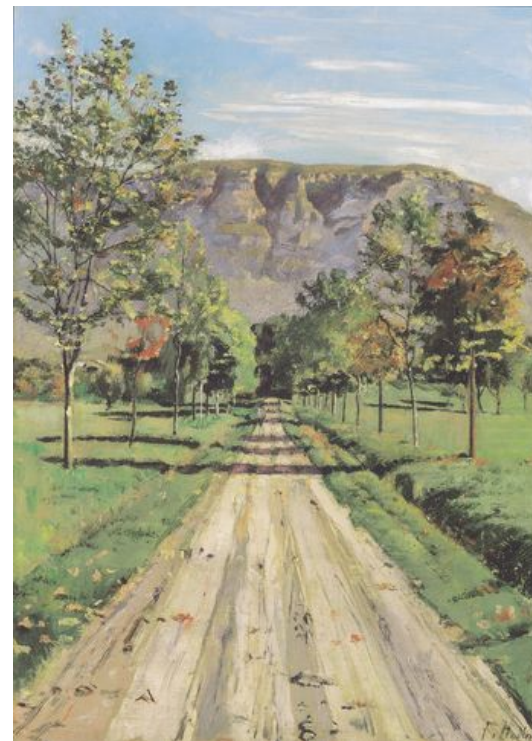

The Road to Evordes  
Ferdinand Hodler

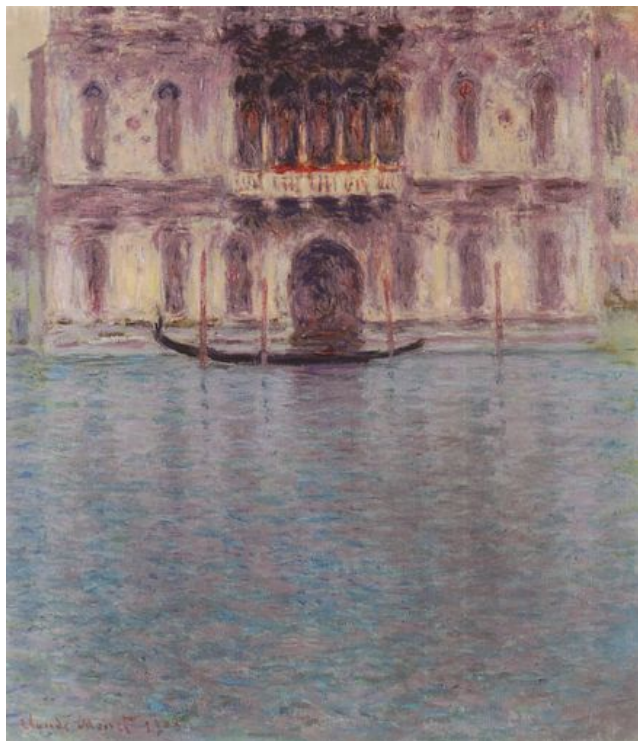


The Palazzo Contarini, Venice  
Claude Monet

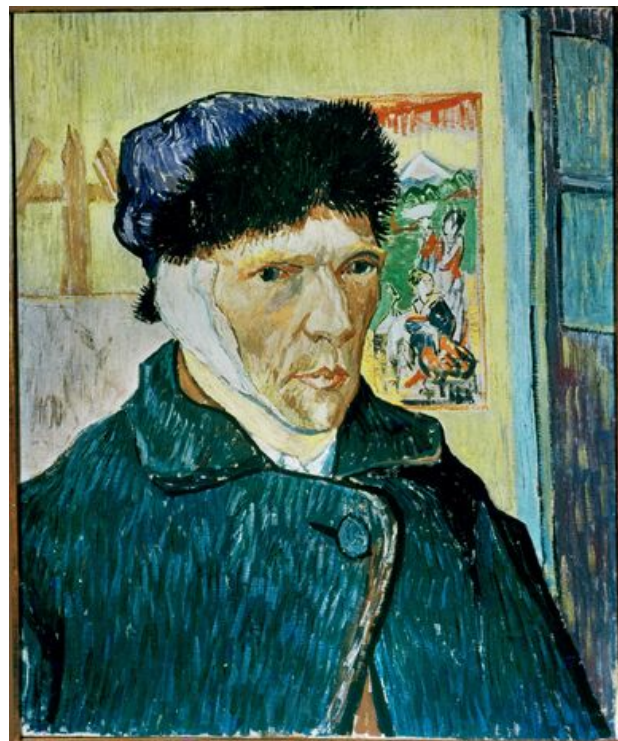

Self-portrait with Bandaged Ear  
Vincent van Gogh



Kingfischer

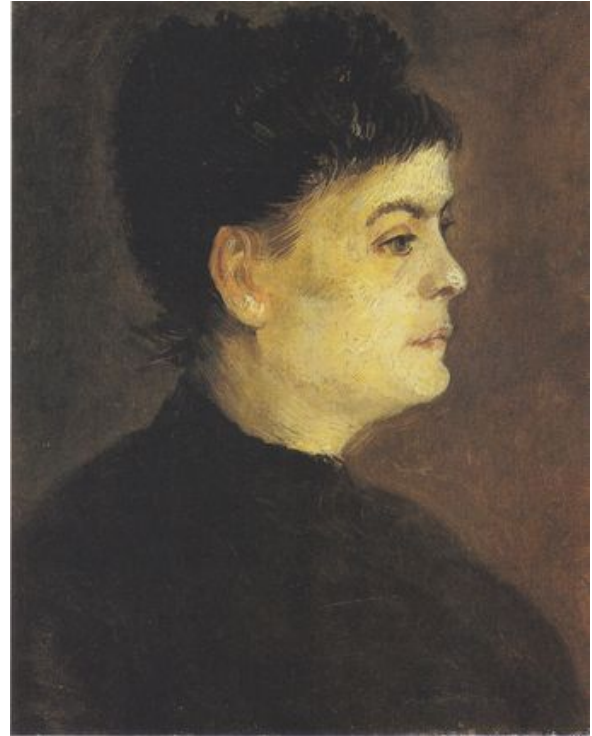

Portrait of a Woman

# References

- The paper is available at IEEE Xplore (*free access until October 6, 2016*)
  - <https://dx.doi.org/10.1109/icip.2016.7532335>
- The dataset is available at figshare (CC BY 4.0)
  - <https://dx.doi.org/10.6084/m9.figshare.3370627>
- The source code is available at GitHub (Apache 2.0)
  - <https://github.com/gfolego/vangogh>
- There is also an entry in Kaggle Datasets
  - <https://www.kaggle.com/gfolego/vangogh>



You are free and encouraged  
to use and distribute the  
dataset and the source code  
developed in this paper!

*Oh Yes!* IT'S  
**FREE**

# Contact

Anderson Rocha

[anderson.rocha@ic.unicamp.br](mailto:anderson.rocha@ic.unicamp.br)

# Thank you!

---