Assignment 4

Create a private bucket in aws.upload a file and check by presigned url weather you can access the file or not

Step 1

Login on aws console, after login search ‘S3’ service from search bar and click on it , open the S3 page.

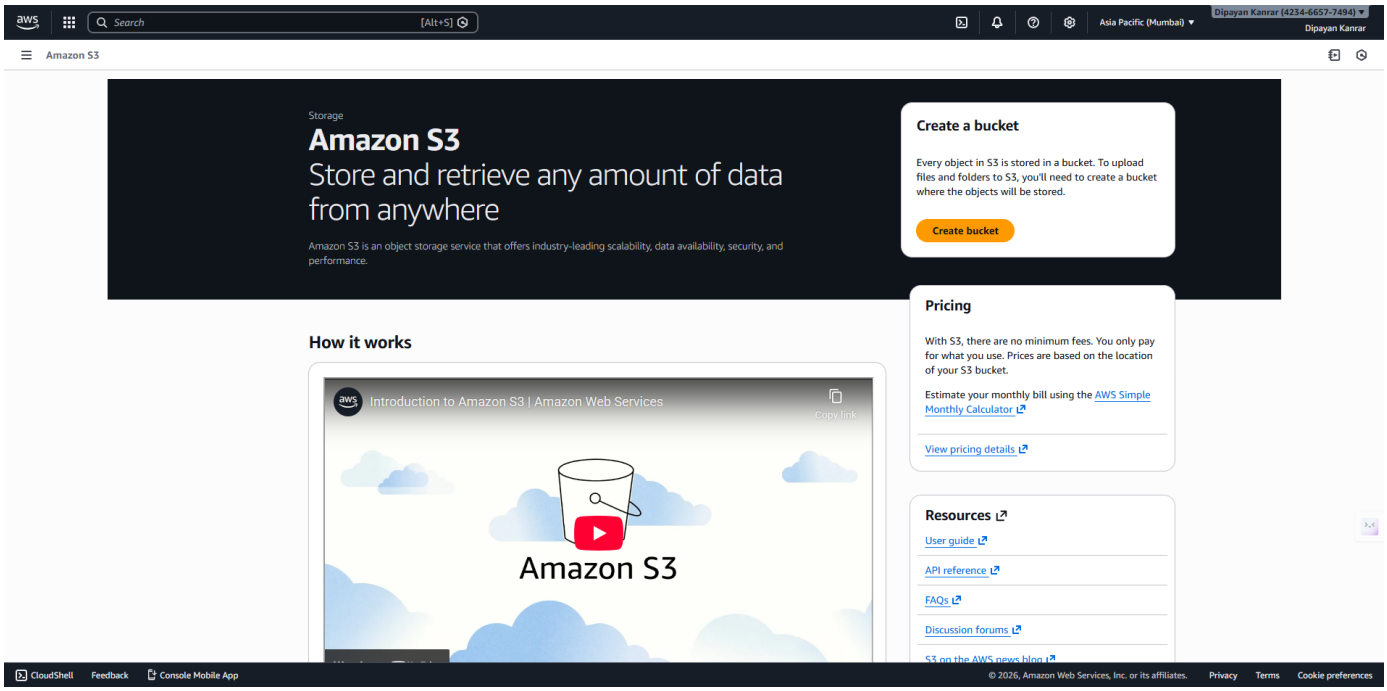

Step 2

Click create bucket option. After that a page will open , then provide bucket name, click enabled ACL’s option, Uncheak ‘Block all public access’ option, disable ‘Bucket Versioning’,after that click create bucket option .

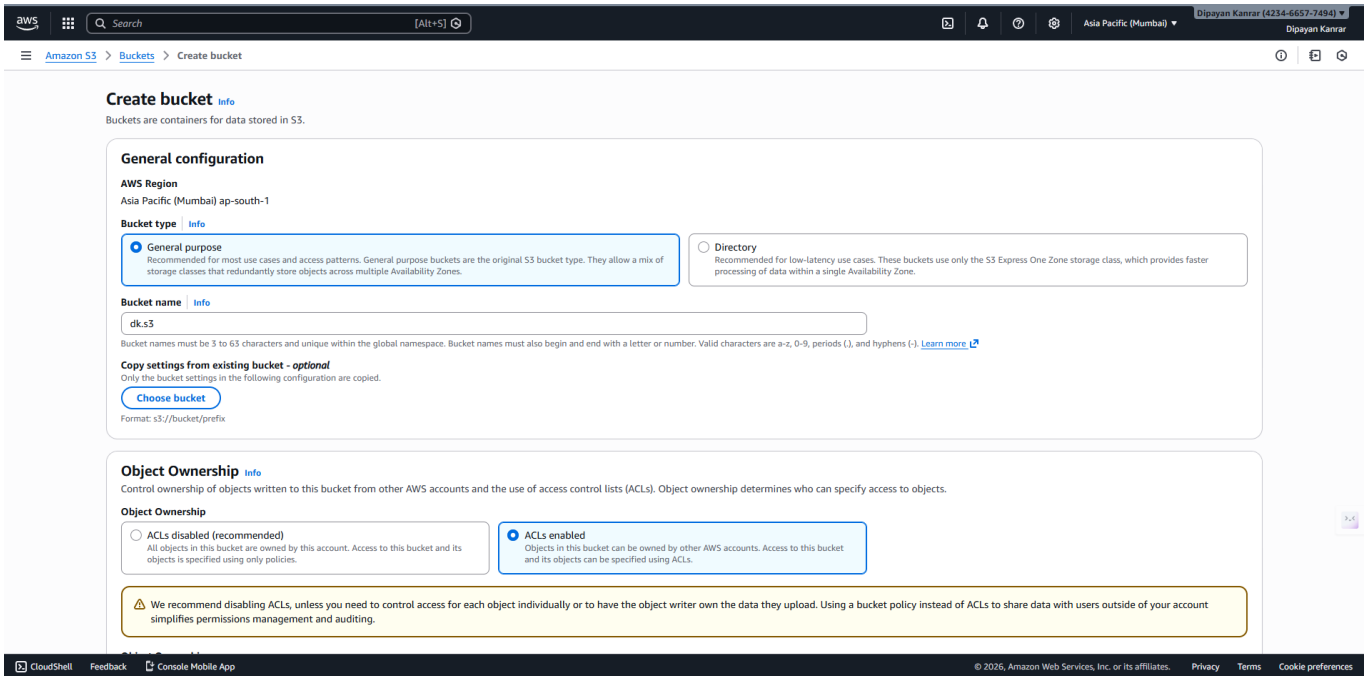

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more

- [x] **Block *all* public access**
  Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
  - [x] **Block public access to buckets and objects granted through *new* access control lists (ACLs)**
    S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
  - [x] **Block public access to buckets and objects granted through *any* access control lists (ACLs)**
    S3 will ignore all ACLs that grant public access to buckets and objects.
  - [x] **Block public access to buckets and objects granted through *new* public bucket or access point policies**
    S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
  - [x] **Block public and cross-account access to buckets and objects through *any* public bucket or access point policies**
    S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more

Bucket Versioning

- (•) Disable
- ( ) Enable

Tags - *optional*

You can use bucket tags to analyze, manage and specify permissions for a bucket. Learn more

> You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. Learn more

No tags associated with this bucket.

Add new tag

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Search [Alt+S] Asia Pacific (Mumbai) Dipayan Kanrar (4234-6657-7494) Dipayan Kanrar
Amazon S3 > Buckets > Create bucket
You can use bucket tags to analyze, manage and specify permissions for a bucket. Learn more
You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. Learn more
No tags associated with this bucket.
Add new tag
You can add up to 50 tags.

Default encryption Info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type Info

Secure your objects with two separate layers of encryption. For details on pricing, see **DSSE-KMS pricing** on the **Storage** tab of the Amazon S3 pricing page.

- (•) Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ( ) Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ( ) Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. Learn more

- ( ) Disable
- (•) Enable

▸ Advanced settings

> After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel Create bucket

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 3: Bucket is created

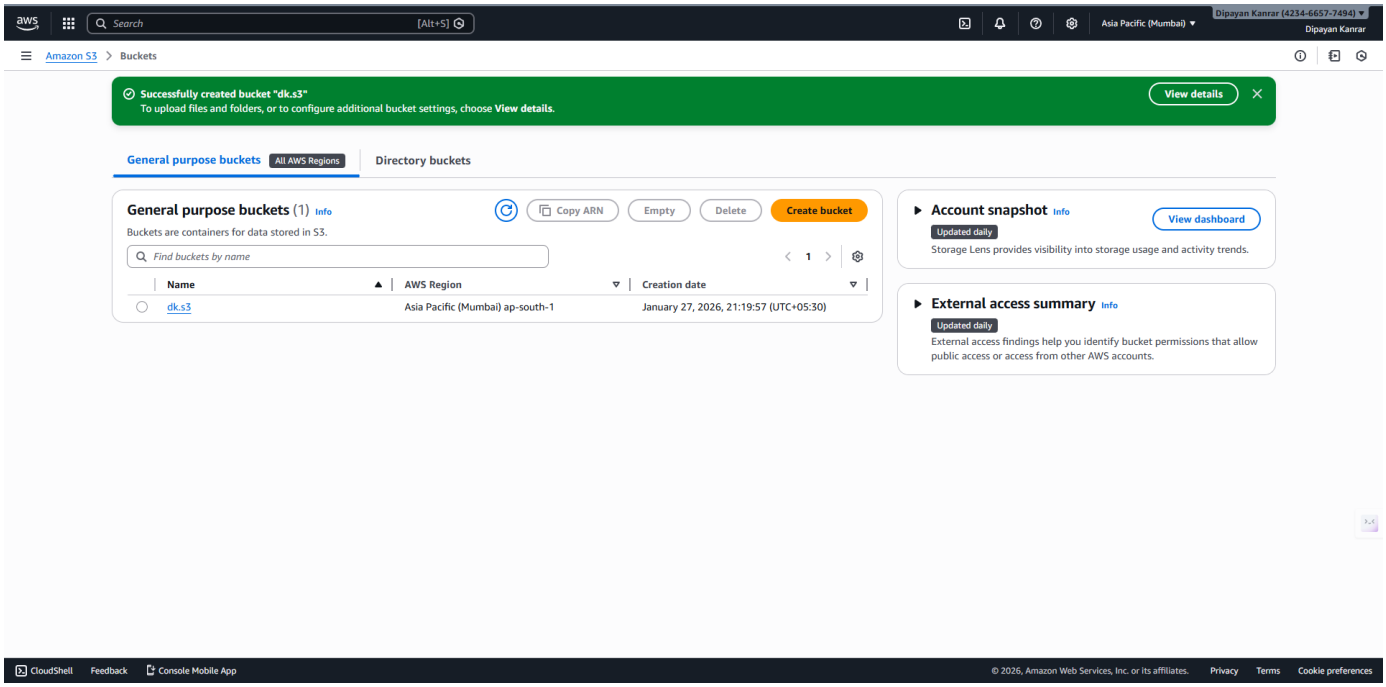

Step 4: Open the bucket, click upload option, add any file.

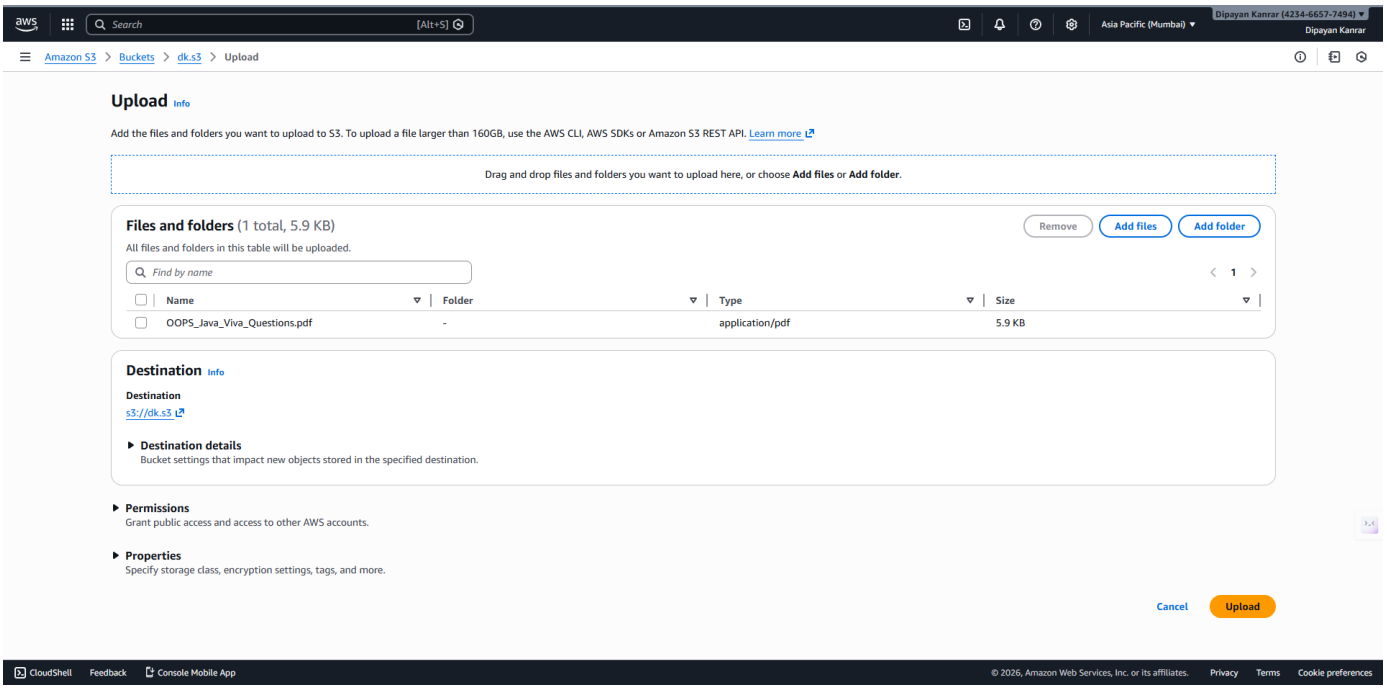

Step 5: File upload successfully

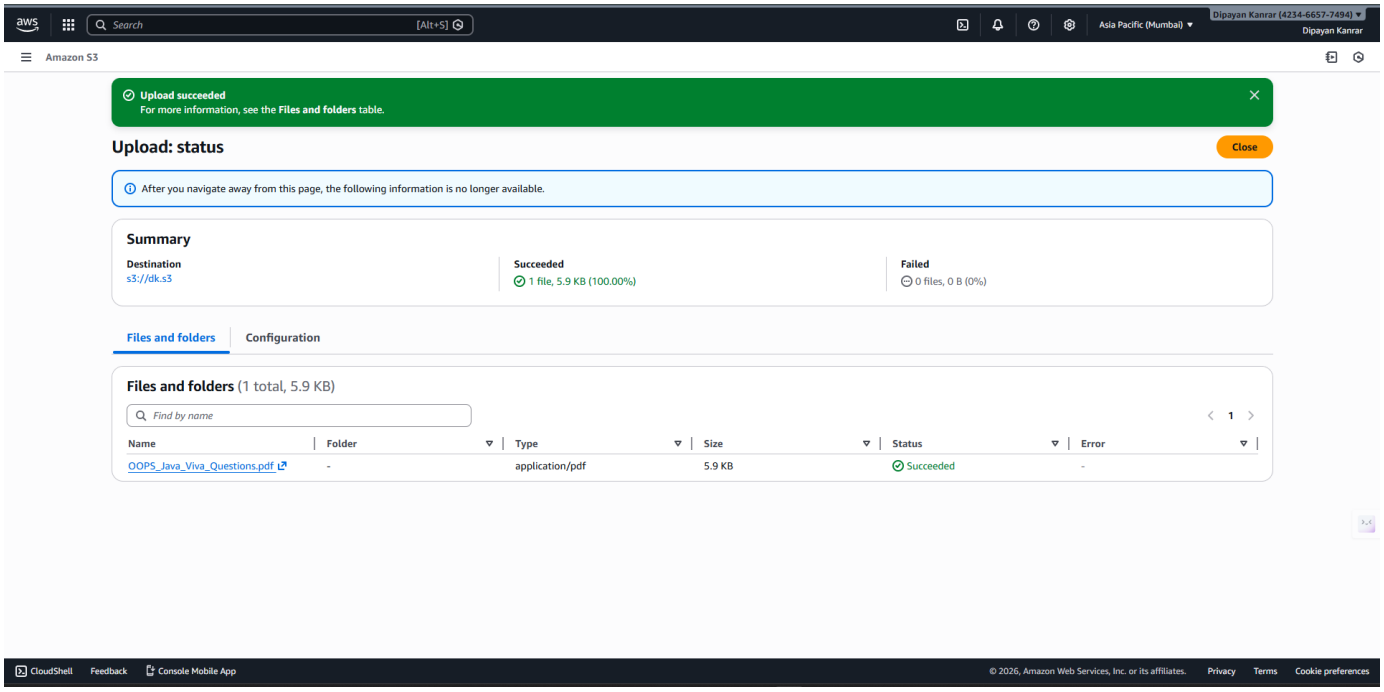

Step 6: Click on that file, then a page will open where we can see the properties of that file.

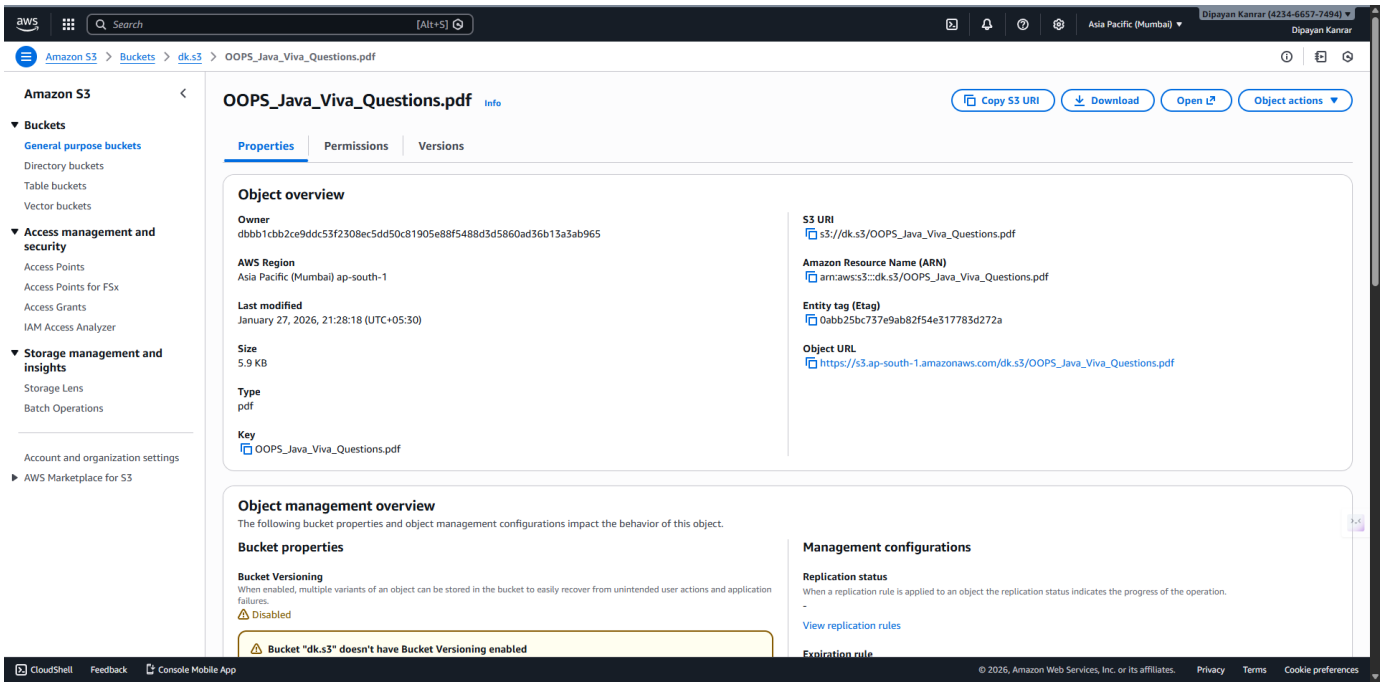
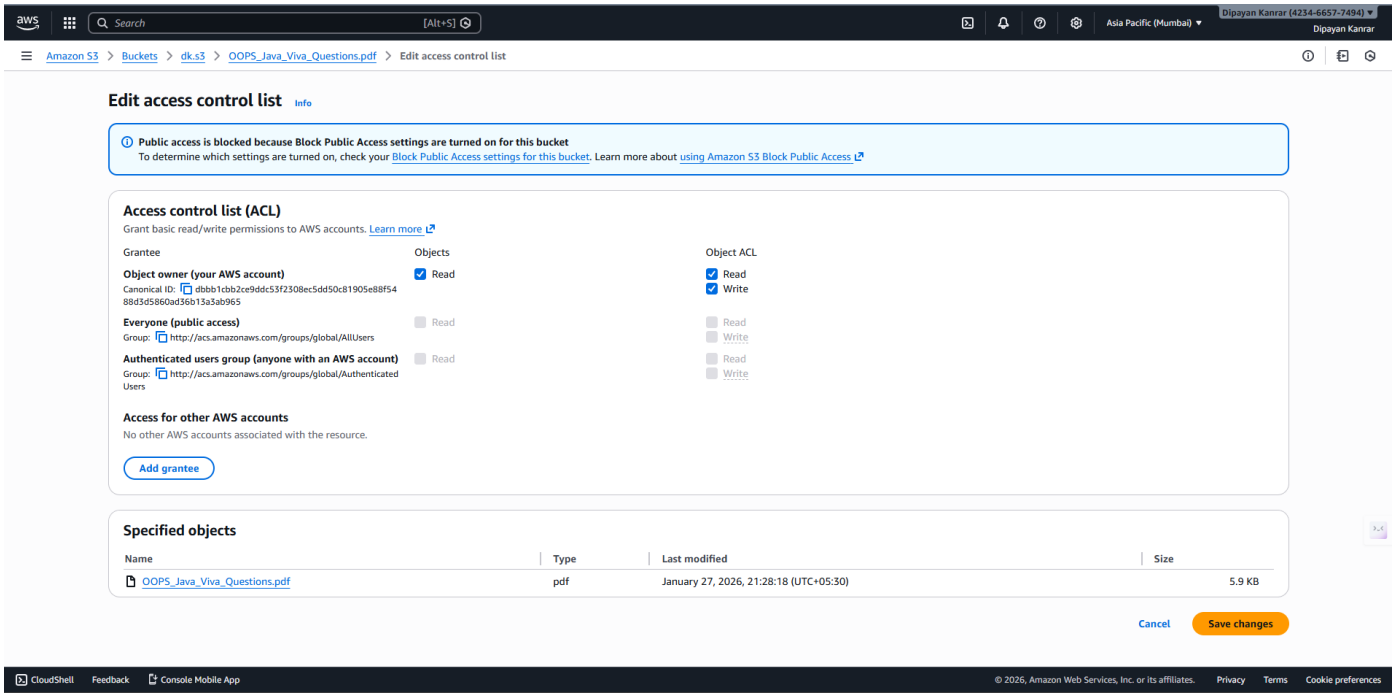
Step 7: Click on permission option, and edit the permissions as need(Read or write), click save changes