

Web Technologies 1 Project Report

Authors: Dmitriy Gagarin, Rakhmetolla Sultan-Ali, Abylay Opayev
September 12, 2026

Anatomy of a Real page

When researching local tobacco shops, we found that almost all stores do not use full-featured websites, but instead relying on instagram accounts and 2GIS listings.

To analyze a real website, we studied Galmart's website, an established supermarket chain. However, since it doesn't completely match our theme and contained multiple non-semantic practices, we decided to build the website from scratch.

Analyzed Website Head Metadata

The analyzed website is <https://galmart.kz>, the doctype is `<!DOCTYPE html>`, lang is `lang="ru"`, charset is `<meta charset="UTF-8">`, viewport is `<meta name="viewport" content="width=device-width, initial-scale=1.0">` and finally the title is `<title>Главная страница | Сеть супермаркетов galmart</title>`. Here is three additional meta tags as well. First one is description: `<meta name="description" content="Доставка продуктов питания и товаров для дома из супермаркетов Galmart в Астане.">`, second one is keywords: `<meta name="keywords" content="продукты, супермаркет Астана, доставка еды, Galmart">`, and last one is robots: `<meta name="robots" content="index, follow">`.

Structural Analysis

An analysis of the source code reveals that its layout is heavily overloaded with non-semantic `<div>` containers instead of proper elements. The main header navigation and product category list are wrapped in `<div class="header-menu">` and `<div class="categories-list">` wrappers instead of a dedicated `<nav>` element. Individual product cards on the homepage are styled using flexbox `<div class="product-card">` containers rather than standalone `<article>` tags. Forms use `<form>` element, input fields are not grouped with `<fieldset>`, and input descriptors use `<span>` tags instead of semantic `<label>` tags.

Structural Mistakes

First mistake is clear overuse of `<div>` wrappers. The main navigation and category dropdown menus are built using `<div class="nav-container">` tags. Our

resolution is that across all pages, all navigation links are wrapped inside structural `<nav>` elements.



Image 1 – Navigation

Next mistake is missing `<article>` tags for product listings. On our catalog.html and news.html pages, every distinct product and category description is encapsulated within its own `<article>` tag.

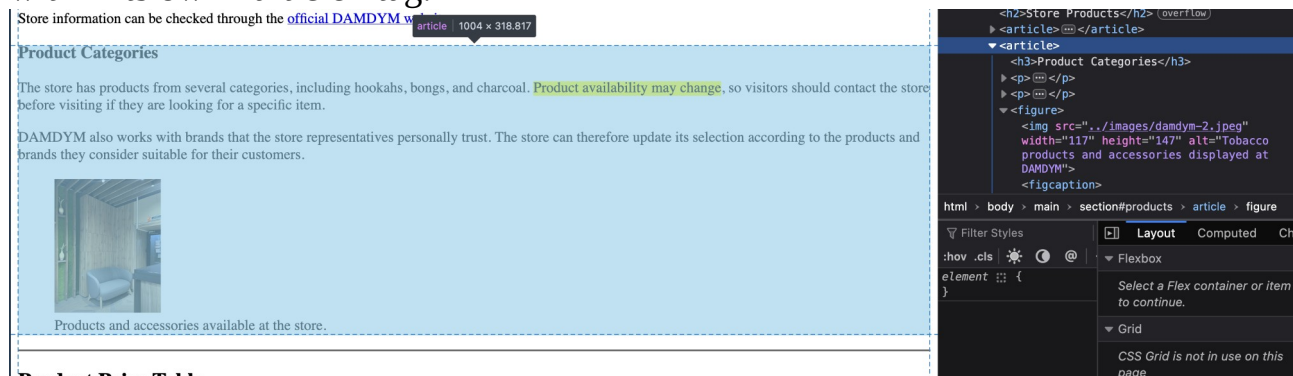


Image 2 – Articles

The last mistake is unstructured form layout without `<fieldset>` containers. On our feedback form in qa.html and login.html, fields are divided into three sections using `<fieldset>` tags, with each being labeled with a `<legend>` header.

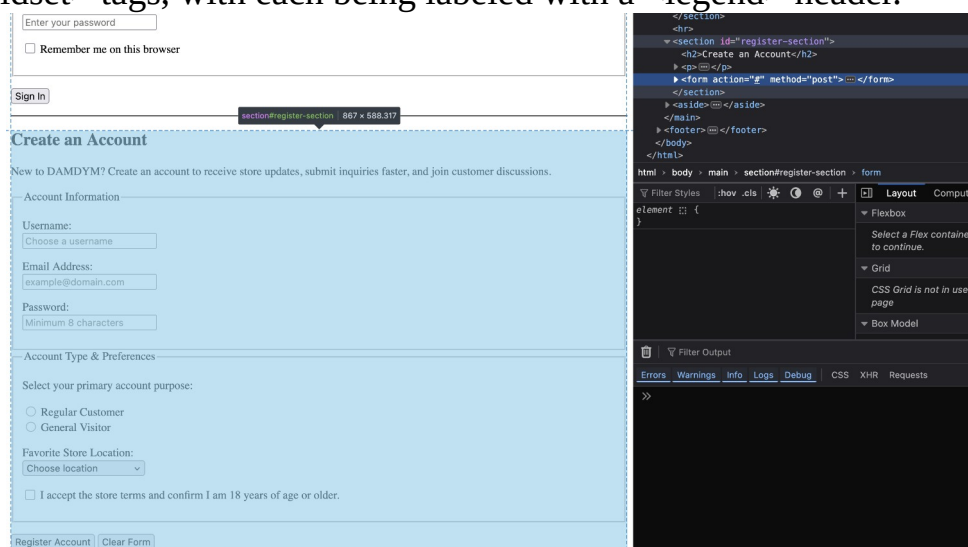


Image 3 - Login

Web Page Architecture

A web page is basically a plain text document formatted with HyperText Markup Language (HTML) tags that set up document structure and content hierarchy. When a browser loads an HTML file, it reads and parses the raw HTML string byte by byte to make the Document Object Model (DOM) – a memory tree representation of every tag, attribute and text. The browser engine then processes this DOM tree alongside browser default styles to figure out layout dimensions, position elements on the screen and render the final page to the user. In the scope of this project, we prioritized semantic HTML5 over generic `<div>` containers as outlined in the assignment requirements.

Semantic Tag Choices

Instead of wrapping the store image in `index.html` inside a `<div class="image-wrapper">`, we used `<figure>` paired with `<figcaption>`. This semantically connects the visual with its caption in the DOM.

In `catalog.html`, product filters are placed inside an `<aside>` tag to inform search engines and assistive technologies that the filter sidebar contains additional controls secondary to main content area `<main>`.

Each product entry represents a unit of content. Using `<article>` allows proper accessibility and document structure compared to non-semantic containers.

Pressing Submit on a Form

When a client presses any Submit button on the website, the browser validates all native HTML constraints. If validation passes, the browser attempts to execute the form's action attribute. Since our project is just the front-end the browser simply sends a request back to the current URL without doing anything with the data.

File Structure and Pages Overview

Our project uses proper folder structure with an `images` directory for images and a `pages` directory that holds all our HTML pages.

`Index.html` serves as the primary landing page, it includes store hours, age notices, and a photo of the store itself.

`News.html` displays store arrivals, stock categories, quotes and a product price grid build using tables.

`Forum.html` provides a community discussion space wrapped in `<section>` and `<article>` tags, rules formatted using ordered lists, nested topic lists and a terminology glossary.

Qa.html features store FAQs and a customer feedback form using many input types like text, email, tel, number, date, radio, select, checkbox and textarea.

Colophon.html documents technical project details, team member role distributions, relative link explanations, contact links and technical text formatting <code>.

Login.html implements sign-in and registration forms with HTML attributes like requires, placeholder, minlength.

Catalog.html uses an <aside> sidebar with filter form controls, and a grid containing <article> tags for available products.

Bin.html displays selected items in a table, quantity input management, subtotal summaries, and delivery checkout forms.

Product-1.html, Product-2.html, Product-3.html are individual item pages showing specifications, ratings, prices, and direct add to card controls.

Tag Checklist

First ones are page skeleton and document structure tags:

<!DOCTYPE html> tells the browser that the document is written in modern HTML5 so it renders in standard mode.

```
~/WebstormProjects/web-tech/pages main*  
> grep -rn "<\!DOCTYPE html>" .  
./bin.html:1:<!DOCTYPE html>  
./index.html:1:<!DOCTYPE html>  
./catalog.html:1:<!DOCTYPE html>  
./product-1.html:1:<!DOCTYPE html>  
./login.html:1:<!DOCTYPE html>  
./forum.html:1:<!DOCTYPE html>  
./news.html:1:<!DOCTYPE html>  
./qa.html:1:<!DOCTYPE html>  
./product-2.html:1:<!DOCTYPE html>  
./colophon.html:1:<!DOCTYPE html>  
./product-3.html:1:<!DOCTYPE html>
```

Image 4 – doctype declaration

`<html lang="en">` declares the document root and specifies English as the main language.

```
~/WebstormProjects/web-tech/pages main*  
> grep -rn "<html lang=\"en\">" .  
./bin.html:2:<html lang="en">  
./index.html:2:<html lang="en">  
./catalog.html:2:<html lang="en">  
./product-1.html:2:<html lang="en">  
./login.html:2:<html lang="en">  
./forum.html:2:<html lang="en">  
./news.html:2:<html lang="en">  
./qa.html:2:<html lang="en">  
./product-2.html:2:<html lang="en">  
./colophon.html:2:<html lang="en">  
./product-3.html:2:<html lang="en">
```

Image 5 – document main language

`<head>` contains document metadata, character encoding settings and page title info.

```
~/WebstormProjects/web-tech/pages main*  
> grep -rn "<head>" .  
./bin.html:3:<head>  
./index.html:3:<head>  
./catalog.html:3:<head>  
./product-1.html:3:<head>  
./login.html:3:<head>  
./forum.html:3:<head>  
./news.html:3:<head>  
./qa.html:3:<head>  
./product-2.html:3:<head>  
./colophon.html:3:<head>  
./product-3.html:3:<head>
```

Image 6 – head

`<meta charset="UTF-8">` sets character encoding to UTF-8 to display characters and symbols like KZT currency accurately.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<meta charset=\"UTF-8\">" .
./bin.html:4:      <meta charset="UTF-8">
./index.html:4:    <meta charset="UTF-8">
./catalog.html:4:   <meta charset="UTF-8">
./product-1.html:4:   <meta charset="UTF-8">
./login.html:4:    <meta charset="UTF-8">
./forum.html:4:    <meta charset="UTF-8">
./news.html:4:     <meta charset="UTF-8">
./qa.html:4:      <meta charset="UTF-8">
./product-2.html:4:   <meta charset="UTF-8">
./colophon.html:4:  <meta charset="UTF-8">
./product-3.html:4:   <meta charset="UTF-8">
```

Image 7 – character encoding

`<meta name="viewport">` configures viewport scaling for responsive display rendering across different devices screen widths.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<meta name=\"viewport\" content=\"width=device-width, initial-scale=1.0\">" .
./bin.html:5:      <meta name="viewport" content="width=device-width, initial-scale=1.0">
./index.html:5:    <meta name="viewport" content="width=device-width, initial-scale=1.0">
./catalog.html:5:   <meta name="viewport" content="width=device-width, initial-scale=1.0">
./product-1.html:5:   <meta name="viewport" content="width=device-width, initial-scale=1.0">
./login.html:5:    <meta name="viewport" content="width=device-width, initial-scale=1.0">
./forum.html:5:    <meta name="viewport" content="width=device-width, initial-scale=1.0">
./news.html:5:     <meta name="viewport" content="width=device-width, initial-scale=1.0">
./qa.html:5:      <meta name="viewport" content="width=device-width, initial-scale=1.0">
./product-2.html:5:   <meta name="viewport" content="width=device-width, initial-scale=1.0">
./colophon.html:5:  <meta name="viewport" content="width=device-width, initial-scale=1.0">
./product-3.html:5:   <meta name="viewport" content="width=device-width, initial-scale=1.0">
```

Image 8 – viewport

`<meta name="description">` provides a page summary for search engine indexing.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<meta name=\"description\" content=\"\">" .
./bin.html:6:      <meta name="description" content="View items in your shopping cart and complete your order at DAMDYM store.">
./index.html:6:    <meta name="description" content="DAMDYM local tobacco shop offering quality hookah tobacco, coals, and accessories.">
./catalog.html:6:   <meta name="description" content="Browse available tobacco flavors, hookahs, and charcoal accessories at DAMDYM store.">
./product-1.html:6:   <meta name="description" content="MustHave Tobacco Pineapple Rings 25g price, specs, and details at DAMDYM.">
./login.html:6:    <meta name="description" content="Sign in or register for a customer account at DAMDYM store.">
./forum.html:6:    <meta name="description" content="Community forum for DAMDYM customers to discuss hookah flavors, coals, and store service.">
./news.html:6:     <meta name="description" content="Latest product additions, price tables, and store news from DAMDYM.">
./qa.html:6:      <meta name="description" content="Frequently Asked Questions and customer feedback form for DAMDYM store.">
./product-2.html:6:   <meta name="description" content="Chabacco Blend Berry Mix 50g details and specifications at DAMDYM.">
./colophon.html:6:  <meta name="description" content="Colophon documenting technical development details for the DAMDYM project website.">
./product-3.html:6:   <meta name="description" content="Crown Coconut Charcoal 72 pcs pack details at DAMDYM store.">
```

Image 9 – page summary

`<meta name="author">` identifies page author for metadata.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<meta name=\"author\" \" \" .
./bin.html:7:      <meta name="author" content="Abylay Opayev">
./index.html:7:      <meta name="author" content="Dmitriy Gagarin">
./catalog.html:7:      <meta name="author" content="Abylay Opayev">
./product-1.html:7:      <meta name="author" content="Abylay Opayev">
./login.html:7:      <meta name="author" content="Dmitriy Gagarin">
./forum.html:7:      <meta name="author" content="Rakhmetolla Sultan-Ali">
./news.html:7:      <meta name="author" content="Rakhmetolla Sultan-Ali">
./qa.html:7:      <meta name="author" content="Rakhmetolla Sultan-Ali">
./product-2.html:7:      <meta name="author" content="Abylay Opayev">
./colophon.html:7:      <meta name="author" content="Dmitriy Gagarin">
./product-3.html:7:      <meta name="author" content="Abylay Opayev">
```

Image 10 – page author

<title> sets the document title displayed in browser tabs

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<title>" .
./bin.html:8:      <title>DAMDYM – Shopping Cart</title>
./index.html:8:      <title>DAMDYM – Home</title>
./catalog.html:8:      <title>DAMDYM – Catalog</title>
./product-1.html:8:      <title>MustHave – Pineapple Rings (25g)</title>
./login.html:8:      <title>DAMDYM – Account Access</title>
./forum.html:8:      <title>DAMDYM – Forum</title>
./news.html:8:      <title>DAMDYM – News</title>
./qa.html:8:      <title>DAMDYM – Q&A</title>
./product-2.html:8:      <title>Chabacco – Berry Mix (50g)</title>
./colophon.html:8:      <title>DAMDYM – Colophon</title>
./product-3.html:8:      <title>Crown Charcoal – 72 pcs</title>
```

Image 11 – page title

<body> encapsulates all visible body content rendered on the screen.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<body>" .
./bin.html:11:<body>
./index.html:11:<body>
./catalog.html:11:<body>
./product-1.html:11:<body>
./login.html:11:<body>
./forum.html:11:<body>
./news.html:11:<body>
./qa.html:11:<body>
./product-2.html:11:<body>
./colophon.html:11:<body>
./product-3.html:11:<body>
```

Image 12 – page body

<header> represents the top banner header containing the store name across all pages.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<header>" .
./bin.html:12:<header>
./index.html:12:<header>
./catalog.html:12:<header>
./product-1.html:12:<header>
./login.html:12:<header>
./forum.html:12:<header>
./news.html:12:<header>
./qa.html:12:<header>
./product-2.html:12:<header>
./colophon.html:12:<header>
./product-3.html:12:<header>
```

Image 13 – header

<h1> biggest heading establishing the main subject on a page.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<h1>" .
./bin.html:28:    <h1>Your Shopping Cart</h1>
./index.html:28:    <h1>Welcome to DAMDYM Store</h1>
./catalog.html:28:    <h1>Product Catalog</h1>
./product-1.html:33:    <h1>MustHave Tobacco – Pineapple Rings (25g)</h1>
./login.html:28:    <h1>Customer Account Access</h1>
./forum.html:28:    <h1>Customer Community Forum</h1>
./news.html:28:    <h1>Store News & Products</h1>
./qa.html:28:    <h1>Questions & Answers</h1>
./product-2.html:33:    <h1>Chabacco Blend – Berry Mix (50g)</h1>
./colophon.html:28:    <h1>Colophon</h1>
./product-3.html:33:    <h1>Crown Coconut Charcoal – 72 pcs</h1>
```

Image 14 – heading 1

<main> encapsulates the main content area of a page.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<main>" .
./bin.html:27:<main>
./index.html:27:<main>
./catalog.html:27:<main>
./product-1.html:27:<main>
./login.html:27:<main>
./forum.html:27:<main>
./news.html:27:<main>
./qa.html:27:<main>
./product-2.html:27:<main>
./colophon.html:27:<main>
./product-3.html:27:<main>
```

Image 15 – main content area

<footer> defines the page footer containing store contacts, physical address, and copyright notices.

```
~/WebstormProjects/web-tech/pages main*  
> grep -rn "<footer>" .  
./bin.html:119:<footer>  
./index.html:66:<footer>  
./catalog.html:112:<footer>  
./product-1.html:72:<footer>  
./login.html:115:<footer>  
./forum.html:102:<footer>  
./news.html:108:<footer>  
./qa.html:105:<footer>  
./product-2.html:72:<footer>  
./colophon.html:87:<footer>  
./product-3.html:72:<footer>
```

Image 16 – footer

Next are structural and semantic sectioning tags:
<section> groups content logically into topics.

```
~/WebstormProjects/web-tech/pages main*  
> grep -rn "<section>" .  
./index.html:30: <section>  
./index.html:40: <section>  
./index.html:56: <section>  
./forum.html:51: <section>  
./forum.html:82: <section>  
./news.html:86: <section>  
./qa.html:30: <section>  
./qa.html:89: <section>  
./colophon.html:30: <section>  
./colophon.html:36: <section>  
./colophon.html:52: <section>  
./colophon.html:66: <section>  
./colophon.html:74: <section>
```

Image 17 – sections

<article> wraps self-contained content such as news posts, feature cards or product listings.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<article>" .
./index.html:42:      <article>
./index.html:46:      <article>
./index.html:50:      <article>
./catalog.html:82:     <article>
./catalog.html:91:     <article>
./catalog.html:99:     <article>
./product-1.html:32:    <article>
./forum.html:33:      <article>
./forum.html:73:      <article>
./news.html:32:      <article>
./news.html:43:      <article>
./qa.html:33:      <article>
./qa.html:37:      <article>
./qa.html:41:      <article>
./product-2.html:32:    <article>
./colophon.html:38:     <article>
./colophon.html:42:     <article>
./colophon.html:46:     <article>
./product-3.html:32:    <article>
```

Image 18 – articles

<aside> contains side information, such as store visit reminders and age warnings.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<aside>" .
./bin.html:114:      <aside>
./index.html:61:     <aside>
./catalog.html:30:     <aside>
./product-1.html:67:    <aside>
./login.html:110:     <aside>
./forum.html:96:      <aside>
./news.html:101:     <aside>
./qa.html:100:      <aside>
./product-2.html:67:    <aside>
./colophon.html:82:     <aside>
./product-3.html:67:    <aside>
```

Image 19 – side information

<figure> encapsulates media elements like photos alongside their text captions.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<figure>" .
./index.html:34:      <figure>
./news.html:36:      <figure>
./news.html:46:      <figure>
```

Image 20 – media encapsulation

<figcaption> supplies explicit caption directly tied to its parent <figure>.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<figcaption>" .
./index.html:36:      <figcaption>DAMDYM storefront at Turkestan 32 street.</figcaption>
./news.html:38:      <figcaption>Product display shelves at DAMDYM.</figcaption>
./news.html:48:      <figcaption>Featured tobacco packs and accessories.</figcaption>
```

Image 21 – explicit captions

Third category is tables and data display tags:

<table> defines a structured tabular data grid for displaying store product prices.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<table>" .
./bin.html:32:      <table>
./news.html:57:      <table>
```

Image 22 – tables

<caption> provides an accessible title description for the table data context.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<caption>" .
./bin.html:33:      <caption>Items currently in your shopping cart</caption>
./news.html:58:      <caption>Sample prices for popular products available at DAMDYM</caption>
```

Image 23 – table data descriptions

<thead> groups table header rows defining column titles.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<thead>" .
./bin.html:34:      <thead>
./news.html:59:      <thead>
```

Image 24 – column titles

<tbody> encapsulates primary data rows of the table

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<tbody>" .
./bin.html:43:      <tbody>
./news.html:66:      <tbody>
```

Image 25 – table body

<tr> defines individual horizontal rows in the table

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<tr>" .
./bin.html:35:         <tr>
./bin.html:44:         <tr>
./bin.html:56:         <tr>
./news.html:60:        <tr>
./news.html:67:        <tr>
./news.html:72:        <tr>
./news.html:77:        <tr>
```

Image 26 – horizontal rows

`<th scope="col">` header cell specifying column-level scope context for screen readers.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<th scope=\"col\"" .
./bin.html:36:         <th scope="col">Product</th>
./bin.html:37:         <th scope="col">Price per item</th>
./bin.html:38:         <th scope="col">Quantity</th>
./bin.html:39:         <th scope="col">Total</th>
./bin.html:40:         <th scope="col">Action</th>
./news.html:61:         <th scope="col">Product</th>
./news.html:62:         <th scope="col">Category</th>
./news.html:63:         <th scope="col">Price</th>
```

Image 27 – column context for screen readers.

`<th scope="row">` header cell specifying row-level scope context.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<th scope=\"row\"" .
./bin.html:45:         <th scope="row">MustHave Tobacco – Pineapple Rings (25g)</th>
./bin.html:57:         <th scope="row">Crown Coconut Charcoal – 72 pcs</th>
./news.html:68:         <th scope="row">Hookah Alpha Model X</th>
./news.html:73:         <th scope="row">Shotgunning Bong</th>
./news.html:78:         <th scope="row">FLAMES 25mm 72p.</th>
```

Image 28 – row context for screen readers.

`<td>` contains individual data cell values inside a table row.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<td>" .
./bin.html:46:         <td>1,750 ₸</td>
./bin.html:47:         <td>
./bin.html:51:         <td>3,500 ₸</td>
./bin.html:52:         <td>
./bin.html:58:         <td>2,250 ₸</td>
./bin.html:59:         <td>
./bin.html:63:         <td>2,250 ₸</td>
./bin.html:64:         <td>
./news.html:69:         <td>Hookahs</td>
./news.html:70:         <td>44,500 tenge</td>
./news.html:74:         <td>Bongs</td>
./news.html:75:         <td>14,000 tenge</td>
./news.html:79:         <td>Charcoals</td>
./news.html:80:         <td>5,000 tenge</td>
```

Image 29 – row data values.

Next are lists and navigation tags:

`<ul>` constructs an unordered bulleted list for main navigation links.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<ul>" .
./bin.html:16:      <ul>
./index.html:16:      <ul>
./catalog.html:16:      <ul>
./product-1.html:16:      <ul>
./product-1.html:53:          <ul>
./login.html:16:      <ul>
./forum.html:16:      <ul>
./forum.html:53:          <ul>
./forum.html:55:          <ul>
./forum.html:62:          <ul>
./news.html:16:      <ul>
./qa.html:16:      <ul>
./product-2.html:16:      <ul>
./product-2.html:53:          <ul>
./colophon.html:16:      <ul>
./product-3.html:16:      <ul>
./product-3.html:53:          <ul>
```

Image 30 – unordered lists

`<li>` defines individual list items within ordered or unordered lists.

```
./colophon.html:17:      <li><a href="index.html">Home</a></li>
./colophon.html:18:      <li><a href="catalog.html">Catalog</a></li>
./colophon.html:19:      <li><a href="bin.html">Cart</a></li>
./colophon.html:20:      <li><a href="news.html">News</a></li>
./colophon.html:21:      <li><a href="forum.html">Forum</a></li>
./colophon.html:22:      <li><a href="qa.html">Q&A</a></li>
./colophon.html:23:      <li><a href="login.html">Account</a></li>
./colophon.html:24:      <li><a href="colophon.html">Colophon</a></li>
./product-3.html:17:      <li><a href="index.html">Home</a></li>
./product-3.html:18:      <li><a href="catalog.html">Catalog</a></li>
./product-3.html:19:      <li><a href="bin.html">Cart</a></li>
./product-3.html:20:      <li><a href="news.html">News</a></li>
./product-3.html:21:      <li><a href="forum.html">Forum</a></li>
./product-3.html:22:      <li><a href="qa.html">Q&A</a></li>
./product-3.html:23:      <li><a href="login.html">Account</a></li>
./product-3.html:24:      <li><a href="colophon.html">Colophon</a></li>
./product-3.html:54:      <li><strong>Brand:</strong> Crown</li>
./product-3.html:55:      <li><strong>Type:</strong> Premium Coconut Charcoal</li>
./product-3.html:56:      <li><strong>Material:</strong> 100% Compressed Coconut Shell</li>
./product-3.html:57:      <li><strong>Pack Count:</strong> 72 Cubes</li>
```

Image 31 – list items

`<ol start="1">` creates an ordered list of forum posting rules with an explicit `start="1"` attribute.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<ol start" .
./forum.html:43:      <ol start="1">
```

Image 32 – ordered list

`<dl>`, `<dt>`, `<dd>` encapsulates term definition lists and descriptions.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<dl>" .
./forum.html:84:         <dl>
```

Image 33 – definition list

Next group is links and images tags:

`<a>` can be a relative link (`href="catalog.html"`), external link with security attributes (`target="_blank" rel="noopener noreferrer"`), `mailto:`, `tel:` and internal section anchor links (`href="#feedback"`).

```
./qa.html:17:         <li><a href="index.html">Home</a></li>
./qa.html:18:         <li><a href="catalog.html">Catalog</a></li>
./qa.html:19:         <li><a href="bin.html">Cart</a></li>
./qa.html:20:         <li><a href="news.html">News</a></li>
./qa.html:21:         <li><a href="forum.html">Forum</a></li>
./qa.html:22:         <li><a href="qa.html">Q&A</a></li>
./qa.html:23:         <li><a href="login.html">Account</a></li>
./qa.html:24:         <li><a href="colophon.html">Colophon</a></li>
./qa.html:33:         <article>
./qa.html:37:         <article>
./qa.html:41:         <article>
./qa.html:91:         <p><a href="#feedback">Jump to feedback form</a></p>
./qa.html:92:         <p>For immediate assistance: <a href="tel:+77071865022">
```

Image 34 – links

`` embeds images with optional dimensions and alt text.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<img>" .
./index.html:35:         
./news.html:37:         
./news.html:47:         
```

Image 35 – images

There are also inline text semantics and formatting tags:

`<strong>`, `<em>`, `<b>`, `<i>`, `<mark>`, `<small>`, `<sup>`, `<abbr>`, `<blockquote>`, `<q>`, `<cite>`, `<code>`, `<pre>`, `<kbd>`, `<samp>`, `<hr>`, `<br>`.

Due to the large amount of these tags, you will need to refer to source code to see their usage.

7th category are non-semantic containers like `<div>` and `<span>`:

`<div>` used strictly to group simple key-value metadata text where no semantic sectioning tag applies. Includes an inline comment.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<div>" .
./qa.html:96:         <div>
./colophon.html:69:         <div>Project title: DAMDYM Web Tech Project</div>
```

Image 36 – div containers

`<span>` wraps plain text within a block without altering content semantics, followed by an explanatory comment.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<span>"
./catalog.html:84:      <span>Strength: Strong</span>
./catalog.html:92:      <span>Strength: Medium</span>
./catalog.html:100:     <span>Category: Accessory</span>
./product-1.html:29: <p><a href="index.html">Home</a> &gt; <a href="catalog.html">Catalog</a> &gt; <span>MustHave - Pineapple Rings</span></p>
./qa.html:97: <p>Form status: <span>Active customer inquiry form.</span></p>
./product-2.html:29: <p><a href="index.html">Home</a> &gt; <a href="catalog.html">Catalog</a> &gt; <span>Chabacco - Berry Mix</span></p>
./colophon.html:70: <p>Course unit: <span>Web Technologies</span></p>
./product-3.html:29: <p><a href="index.html">Home</a> &gt; <a href="catalog.html">Catalog</a> &gt; <span>Crown Coconut Charcoal</span></p>
```

Image 37 – span containers

The last category is forms and interactive input control tags:

They include form elements <form>, <fieldset>, <legend>, <label>, <input>, <select>, <textarea>.

```
~/WebstormProjects/web-tech/pages main*
> grep -rn "<form>"
./bin.html:82:      <form action="#" method="post">
./catalog.html:32:      <form action="#" method="get">
./product-1.html:38:      <form action="bin.html" method="get">
./login.html:35:      <form action="#" method="post">
./login.html:63:      <form action="#" method="post">
./qa.html:52:      <form action="#" method="post">
./product-2.html:38:      <form action="bin.html" method="get">
./product-3.html:38:      <form action="bin.html" method="get">
```

Image 38 – forms