

ITMO-444

AWS CLI EC2

Jay Han

jhan38@hawk.illinoistech.edu


Checklist

Screenshot of a decomposed aws ec2 describe-instances command with each part labeled (service/operation/parameters).

```
Command:
aws ec2 describe-instances --filters "Name=instance-state-name,Values=running" --query "Reservations[*].Instances[*].[InstanceId]" --output table --region us-east-2

Labeled Breakdown:
- [Tool]      aws
- [Service]   ec2
- [Operation] describe-instances
- [Parameters] --filters, --query, --output, --region
```

Screenshot of the “Hello from...” web page from Example 2 (Part C5).

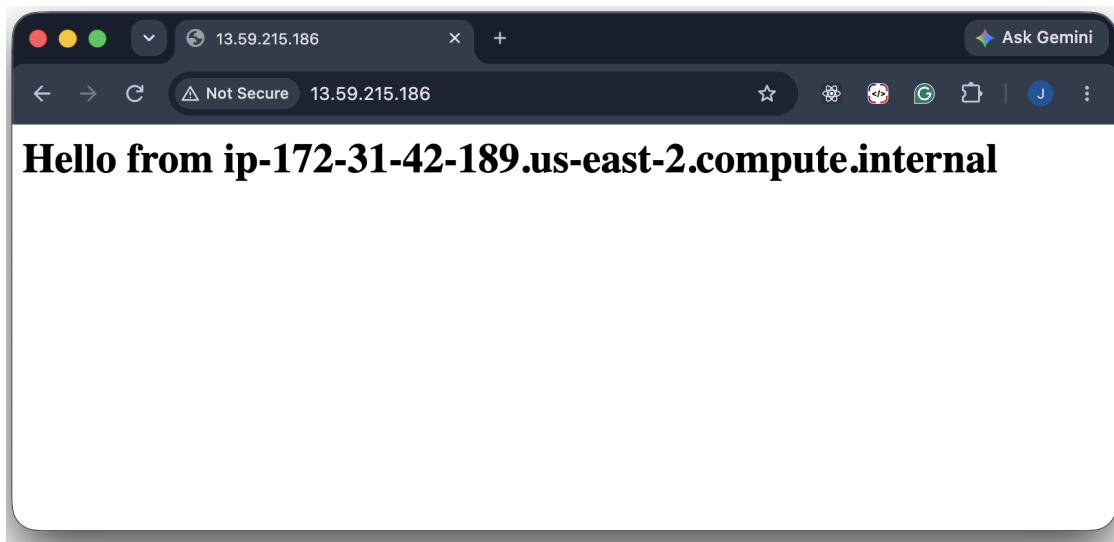

Screenshot of git status showing .env is not tracked, alongside your .gitignore file contents.

```
Jay 🍏 ~/Desktop/Repo/ITM0-444 ⌵ main git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

Jay 🍏 ~/Desktop/Repo/ITM0-444 ⌵ main cat .gitignore
*.pem
.env
```

Screenshot of create_instances.sh output showing 2 instance IDs.


```
Jay 🍏 ~/Desktop/Repo/ITM0-444 ⌵ main ./create_instances.sh
Launching 2 instance(s) in us-east-2...
Launched instance IDs:
i-0a57d76eb5c69b1b7    i-0987da515ecd3600b
Instance IDs saved to instance_ids.txt
```

Screenshot of delete_instances.sh output confirming termination.

```
Jay 🍏 ~/Desktop/Repo/ITM0-444 ⌵ main ./delete_instances.sh
Terminating instances: i-0a57d76eb5c69b1b7 i-0987da515ecd3600b
Waiting for instances to terminate...
All instances terminated successfully.
```

Link to your GitHub repo showing create_instances.sh, delete_instances.sh, .env.example, and .gitignore (but not .env).

```
Jay 🍏 ~/Desktop/Repo/ITM0-444 ⌵ main git remote get-url origin
https://dev-jay-h:ghp_LN91tWvVN0hED2ncba0itlHXJi9NOW2C5wxv@github.com/dev-jay-h/ITM044.git
```

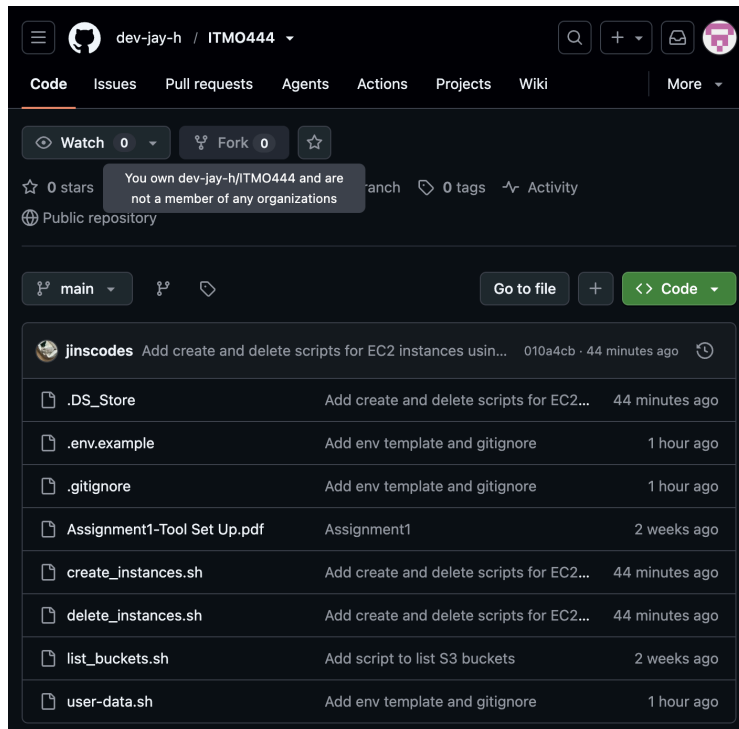

One paragraph explaining why environment files are excluded from Git, even in a “private” repository.

=> The `.env` files store sensitive credentials and resource identifiers that should never be placed in version control. This ensures that even in a "private" repository, the private settings can be made public by mistake. Collaborators or automated integrations may gain access to those secrets permanently, due to the inherent nature of Git history. Adhering to the Twelve-Factor App principles of excluding the `.env` file and providing the `.env.example` template allows to keep the sensitive configurations strictly local, while keeping the repository secure and portable.