


The start

to test first application -
example new test (the
name of app below is the
same of the droplet)

See page 5

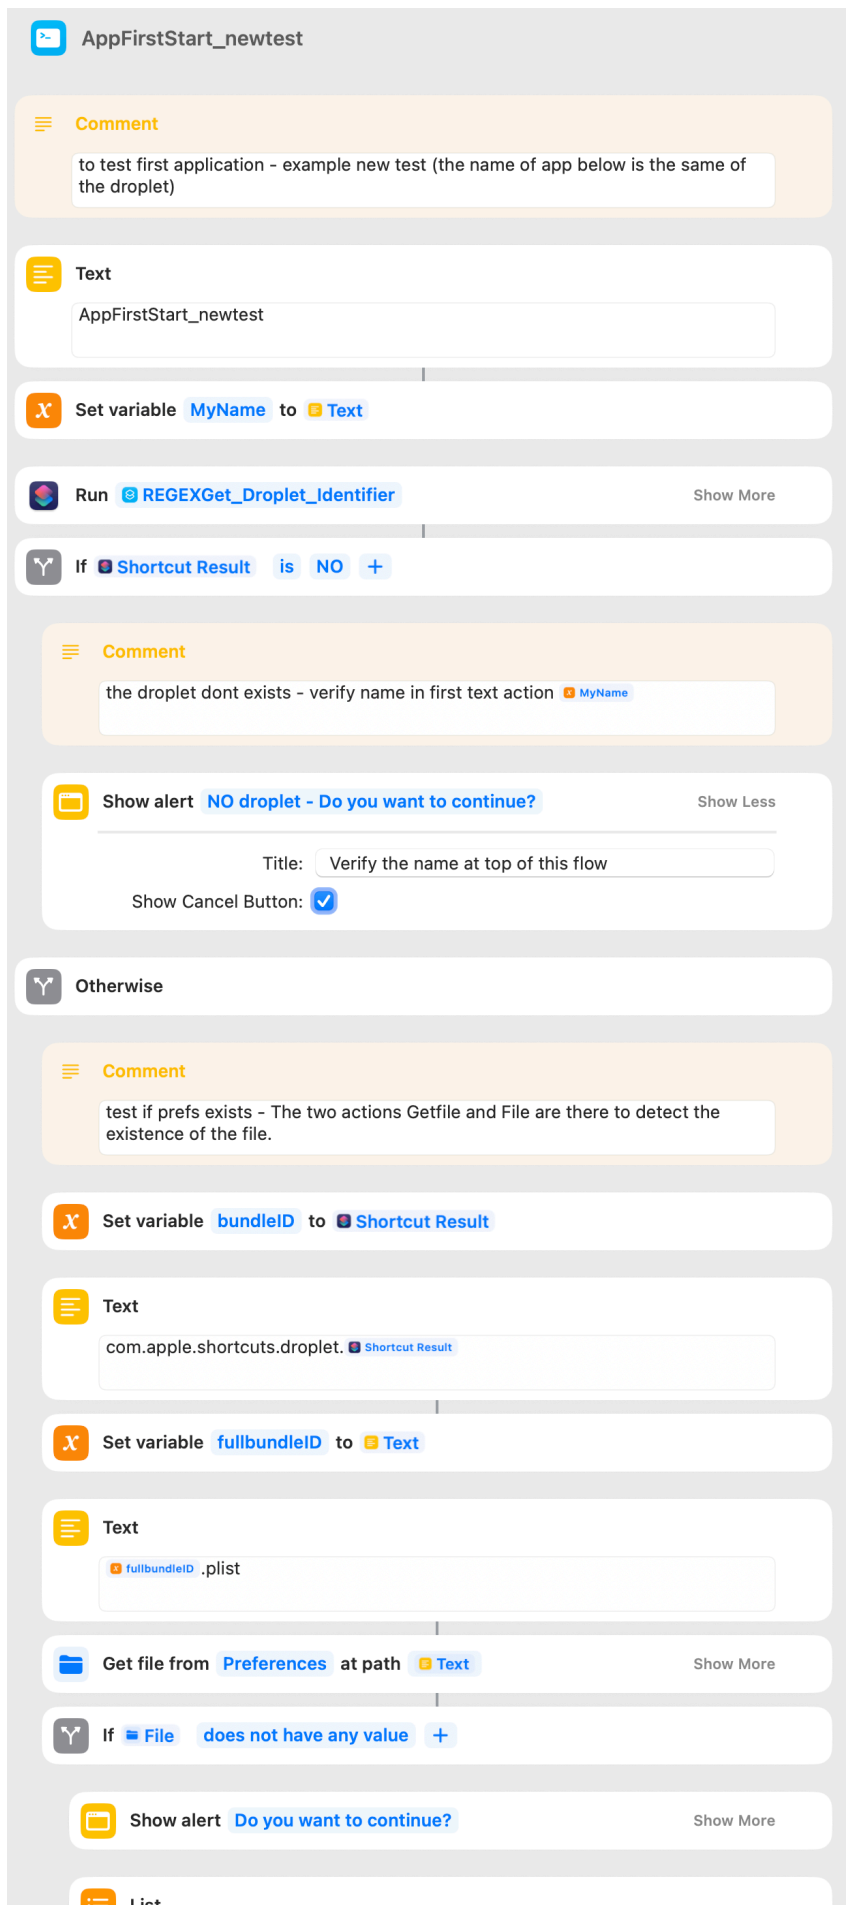

test if prefs exists - The
two actions Getfile and
File are there to detect the
existence of the file.


prefix is

com.apple.shortcuts.droplet.

NOTE : The bundleID
is unique in one
AppleID network. If
you share this
droplet to another
user (with different
AppleID) the bundleID
is different.

Part II

If no prefs file, make one
see page 6

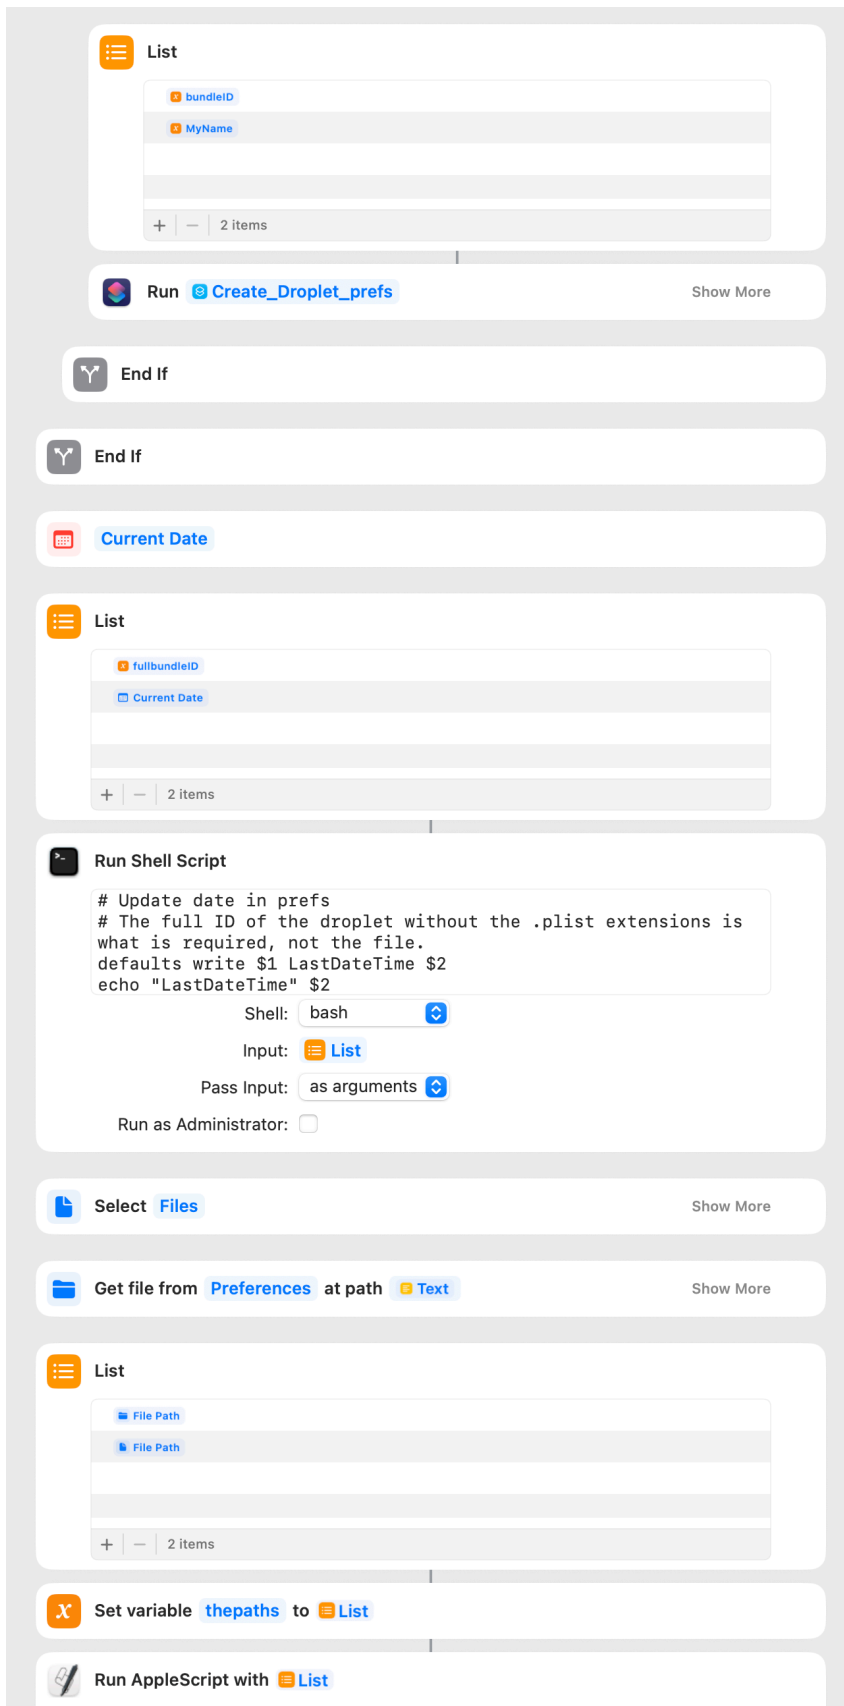

Update prefs with current
date
The command is **defaults**

Select a file and update
Recent files history

Part III

Allows the user to choose

Here, the option to delete
has been selected.

The last command re-
create an empty array



Part IV

Here, the option to show the recent files has been selected.


from the list of matches, group create a group (list) of text to populate choose action.

End with the below example. It can be used (and replaced) for other purposes. make a copy pf the droplet before and use the copy.

Here the selected file is opened with his default app.

Open file is unable to have input path as string (and make a file object. Applescript is there to compensate for this shortcoming.

On the following pages, you will find two (sub) droplets that will provide the identifier and create the default files.

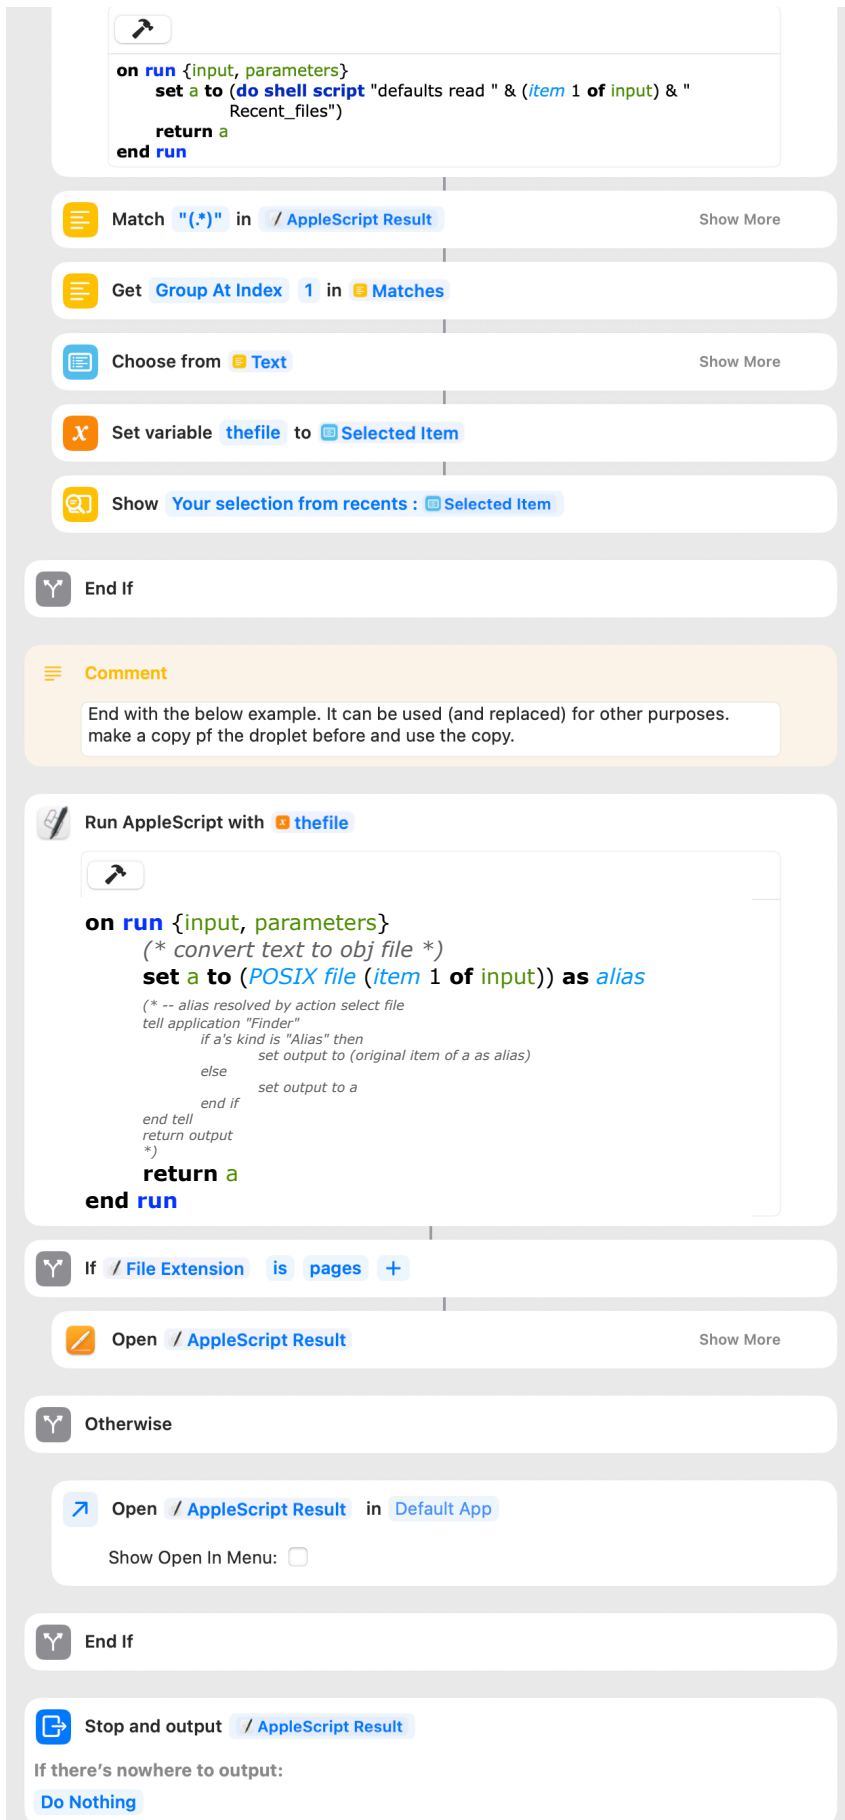

Preferences management Droplet Shortcut from Shortcuts

Identifier


The current droplet's unique identifier (shortcut) can be found by analysing the list based on its name.

shortcuts list --show-identifiers


`(.*)\\.({36}).{1}`

Pre-tested on the website

<https://regex101.com/r/cO8lqs/1>

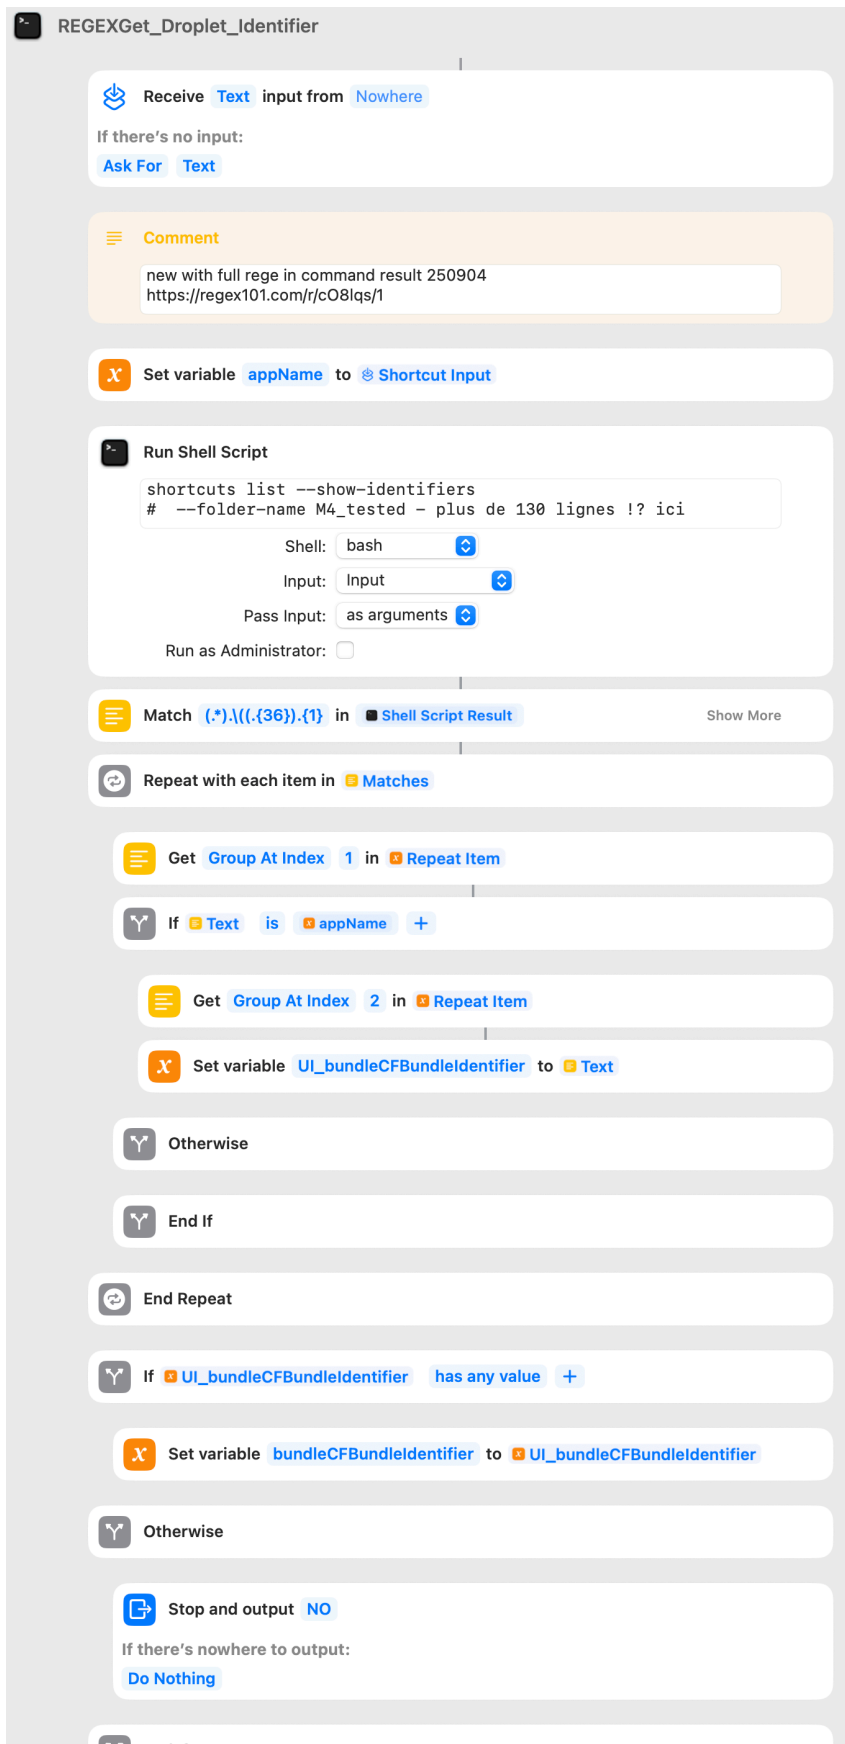

Preferences management Droplet Shortcut from Shortcuts

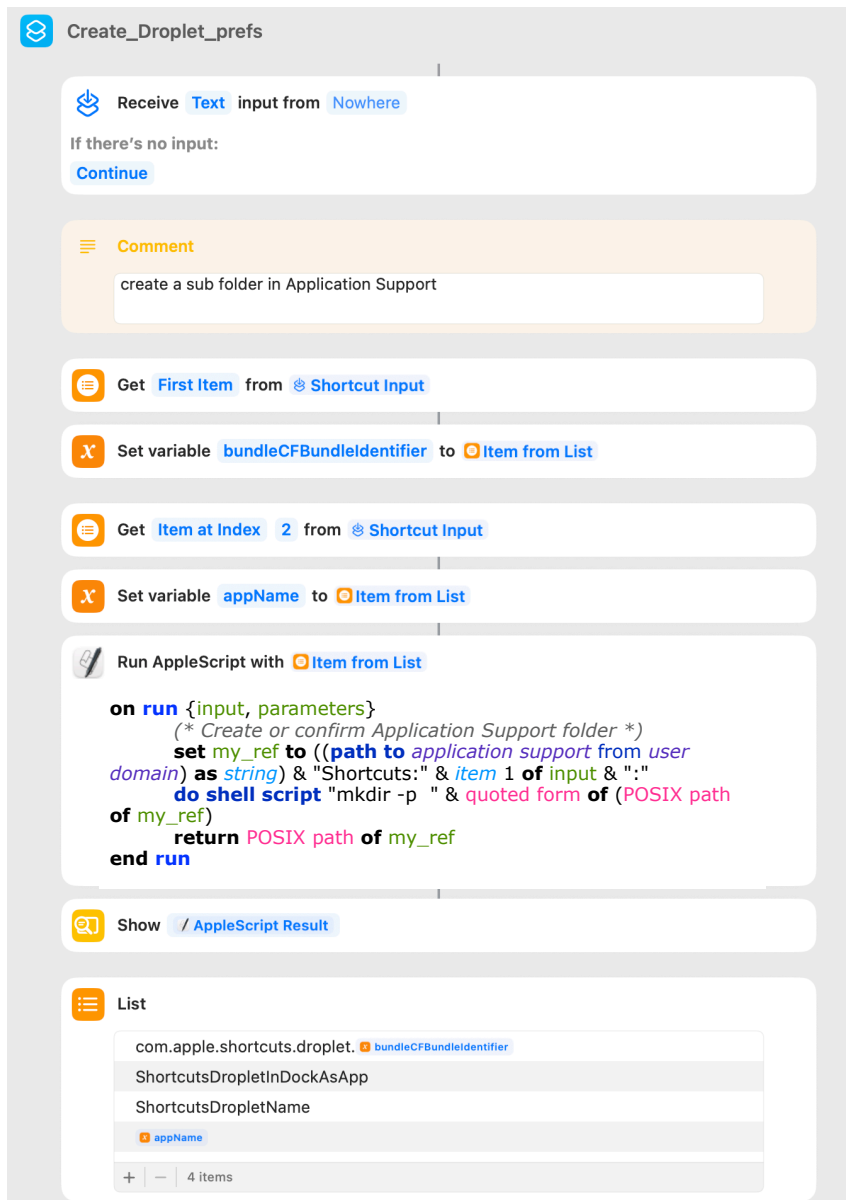

Default folder and files (next page)

by using shell mkdir, make
or confirm folders..

Here the path is :

Application support/
Shortcuts/nameoftheapp
(passed as input)

Note how AppleScript
defines the user folder.
(from user)

Preferences management Droplet Shortcut from Shortcuts

Use the 'defaults'
command to create the
contents of the prefs plist
file and fill in the fields.

By default, the plist file will
be in preferences.

The screenshot displays a macOS Shortcuts workflow for managing preferences. The workflow consists of several steps:

- List**: A list of defaults commands to be executed:

```
com.apple.shortcuts.droplet. bundleCFBundleIdentifier
ShortcutsDropletInDockAsApp
ShortcutsDropletName
appName
```
- Run Shell Script**: A script that uses the 'defaults' command to write values to a plist file:

```
defaults write $1 CFBundleIdentifier $1
defaults write $1 $2 -bool true
defaults write $1 $3 -string "$4"
defaults write $1 Recent_files -array
```

The script is configured with Shell: bash, Input: List, Pass Input: as arguments, and Run as Administrator: unchecked.
- Comment**: A comment stating "prefs file created with initial infos of this droplet app".
- List**: A list of the results of the previous steps, showing 2 items.
- Run AppleScript with List**: An AppleScript that processes the list of results to create a symbolic link to the preferences file:

```
on run {input, parameters}
(* Your script goes here *)
set my_pref to ((path to preferences from user domain) as string)
set foldpref to POSIX path of my_pref
set original to foldpref & item 1 of input & ".plist"
set symbolic to item 2 of input
do shell script "ln -s -f " & quoted form of original & " " &
quoted form of symbolic & "my_prefs.plist"
return original
end run
```
- Show**: A step to show the AppleScript result.
- Comment**: A final comment stating "And now a prefs plist is created for this droplet appName and a symbolic link in Application Support/Shortcuts/ appName".

An inset window titled "Preferences" shows the "AppFirstStart_newtest" preferences pane. It displays a list of preferences, including "my_prefs.plist", and a text area containing the following XML plist data:

```
<?xml version="1.0"
encoding="UTF-8"?>
<!DOCTYPE plist PUBLIC
"-//Apple//DTD PLIST 1.0//
EN" "http://www.apple.com/
DTDs/
PropertyList-1.0.dtd">
<plist version="1.0">
<dict>

<key>CFBundleIdentifier</
key>

<string>com.apple.shortcut
```

To facilitate access, we
create a symbolic link to
the file of the preferences
folder, here in the support
folder.

A simpler and shorter
name than the original.

