


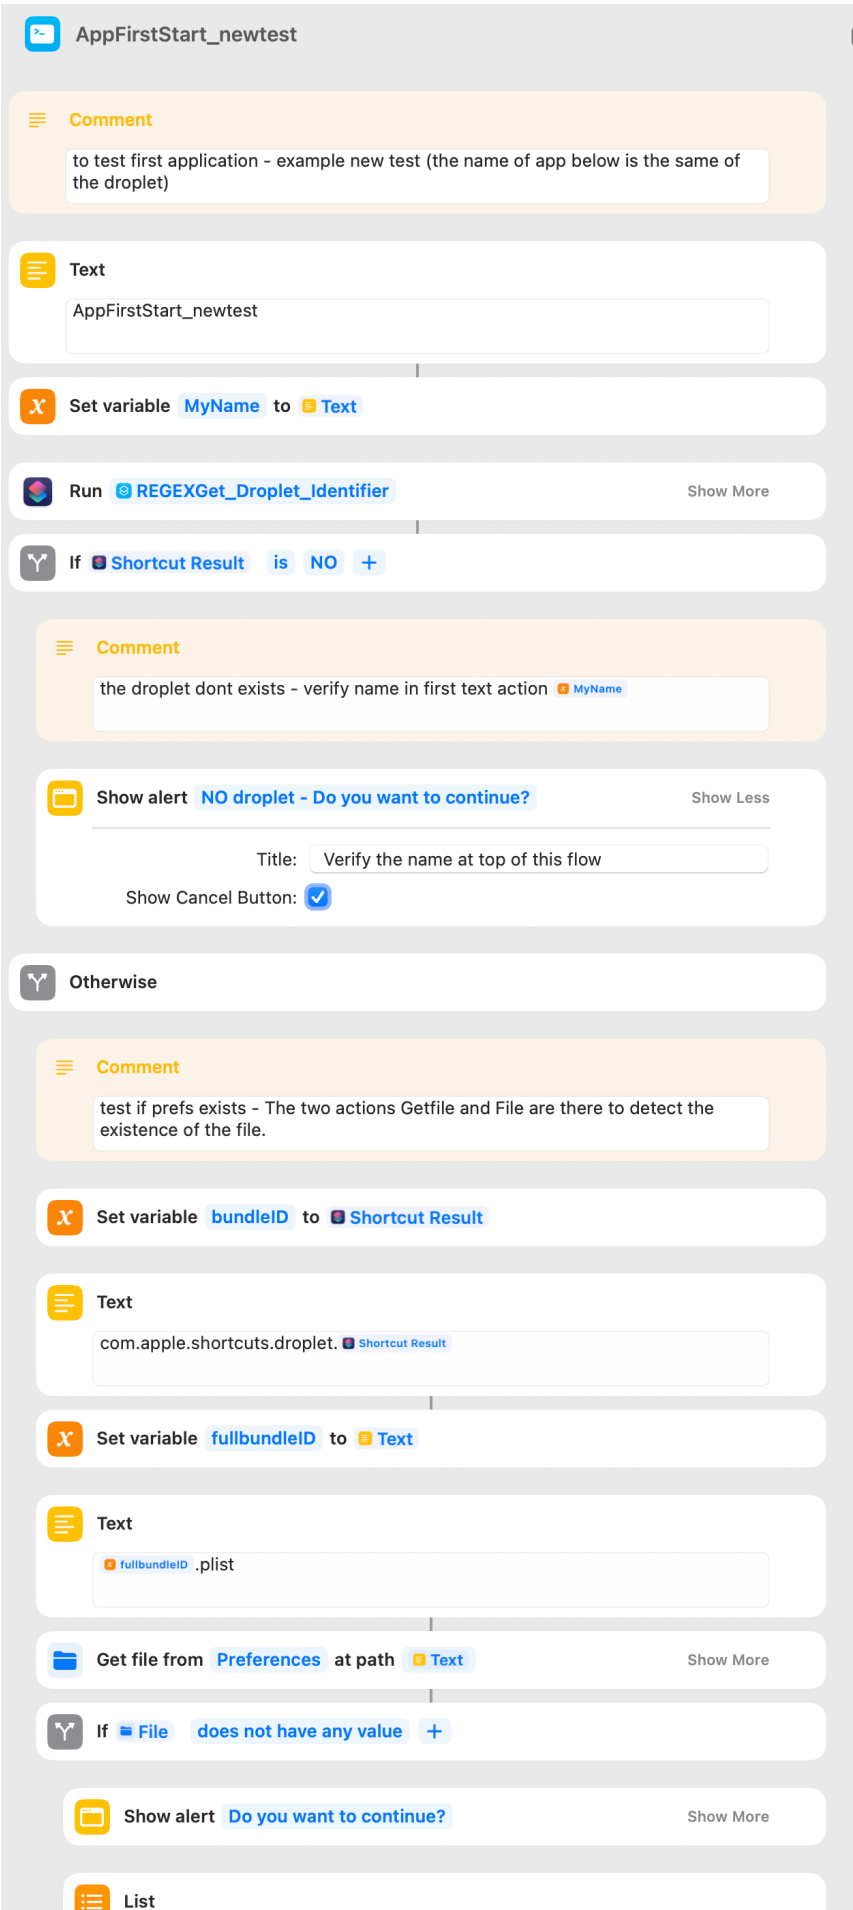

The start


to test first application -
example new test (the
name of app below is the
same of the droplet)

See page 5

test if prefs exists - The
two actions Getfile and
File are there to detect the
existence of the file.

Part II

If no prefs file, make one
see page 6

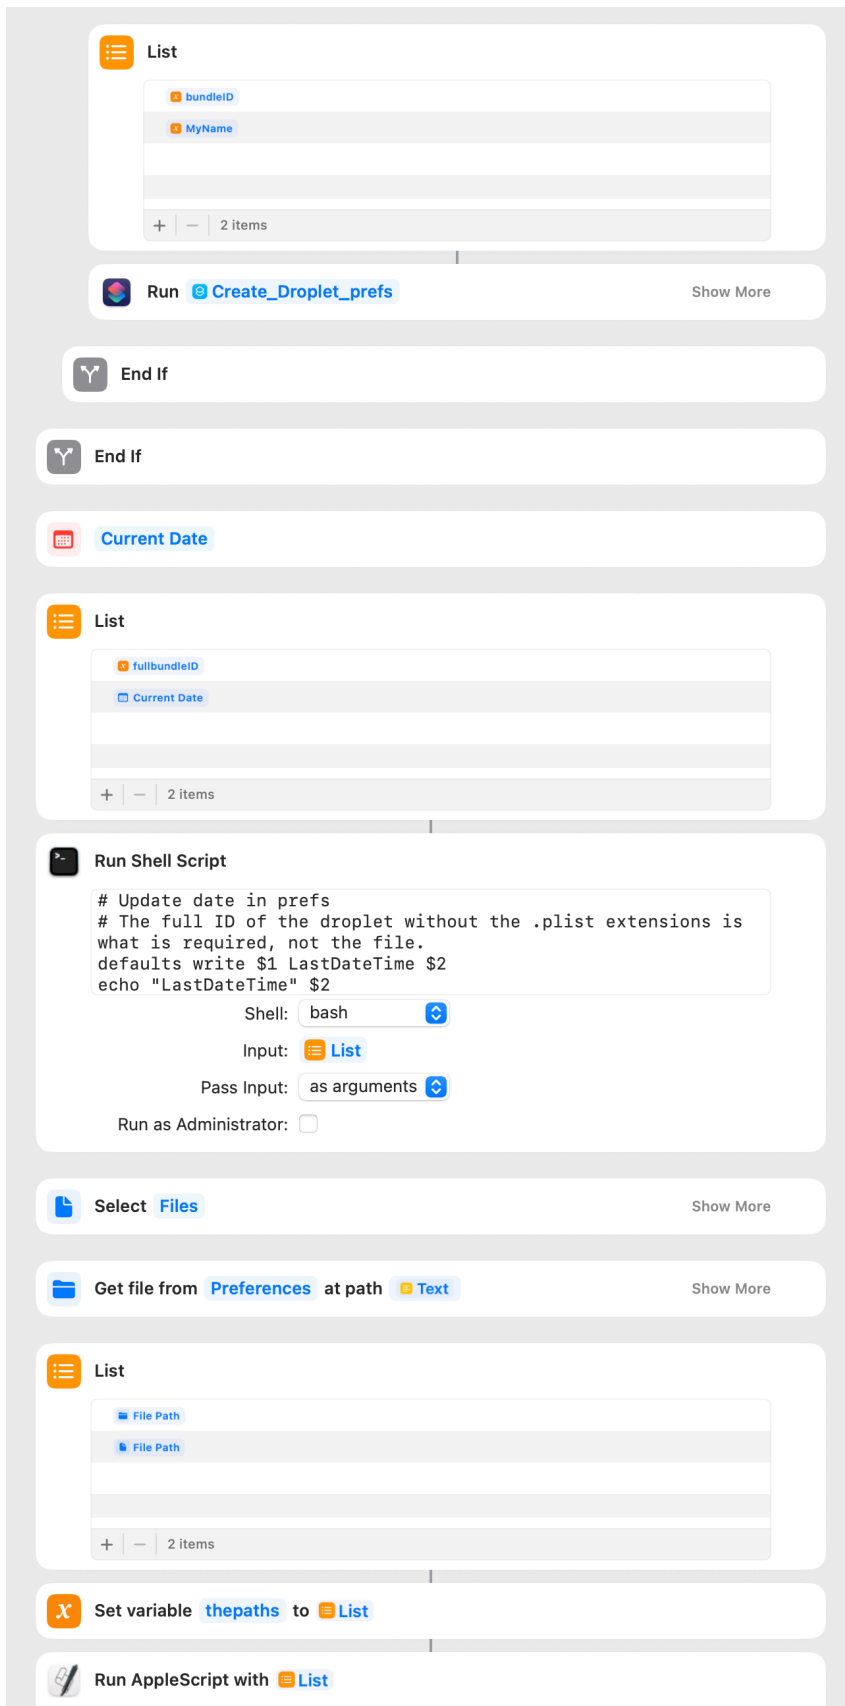

Update prefs with current
date

Select a file and update
Recent files history

Part III

Allows the user to choose

```
on run {input, parameters}
    set newpath to POSIX path of (item 2 of input)
    set plistpath to POSIX path of (item 1 of input)

    do shell script "/usr/libexec/PlistBuddy -c 'Add :Recent_files:0 string " &
        (newpath) & " " & (item 1 of input)
    --do shell script "/usr/libexec/PlistBuddy -c 'delete :Recent_files ' " & (item 1
        of input)
    --do shell script "defaults write " & (item 1 of input) & " Recent_files -array"
    return newpath
end run
```

AppleScript Result
See history of recent files
Clear Recents and view the selection
+ - 3 items

```
on run {input, parameters}
    (* Your script goes here *)
    set newpath to POSIX path of (item 2 of input)
    set plistpath to POSIX path of (item 1 of input)

    do shell script "/usr/libexec/PlistBuddy -c 'delete :Recent_files ' " &
        (item 1 of input)
    do shell script "defaults write " & (item 1 of input) & " Recent_files
        -array"
end run
```

Here, the option to delete
has been selected.

Part IV


Here, the option to show the recent files has been selected.


End with the below example. It can be used (and replaced) for other purposes. make a copy pf the droplet before and use the copy.

Here the selected file is opened with his default app.

Open file is unable to have input path as string (and make a file object. Applescript is there to compensate for this shortcoming.

On the following pages, you will find two (sub) droplets that will provide the identifier and create the default files.

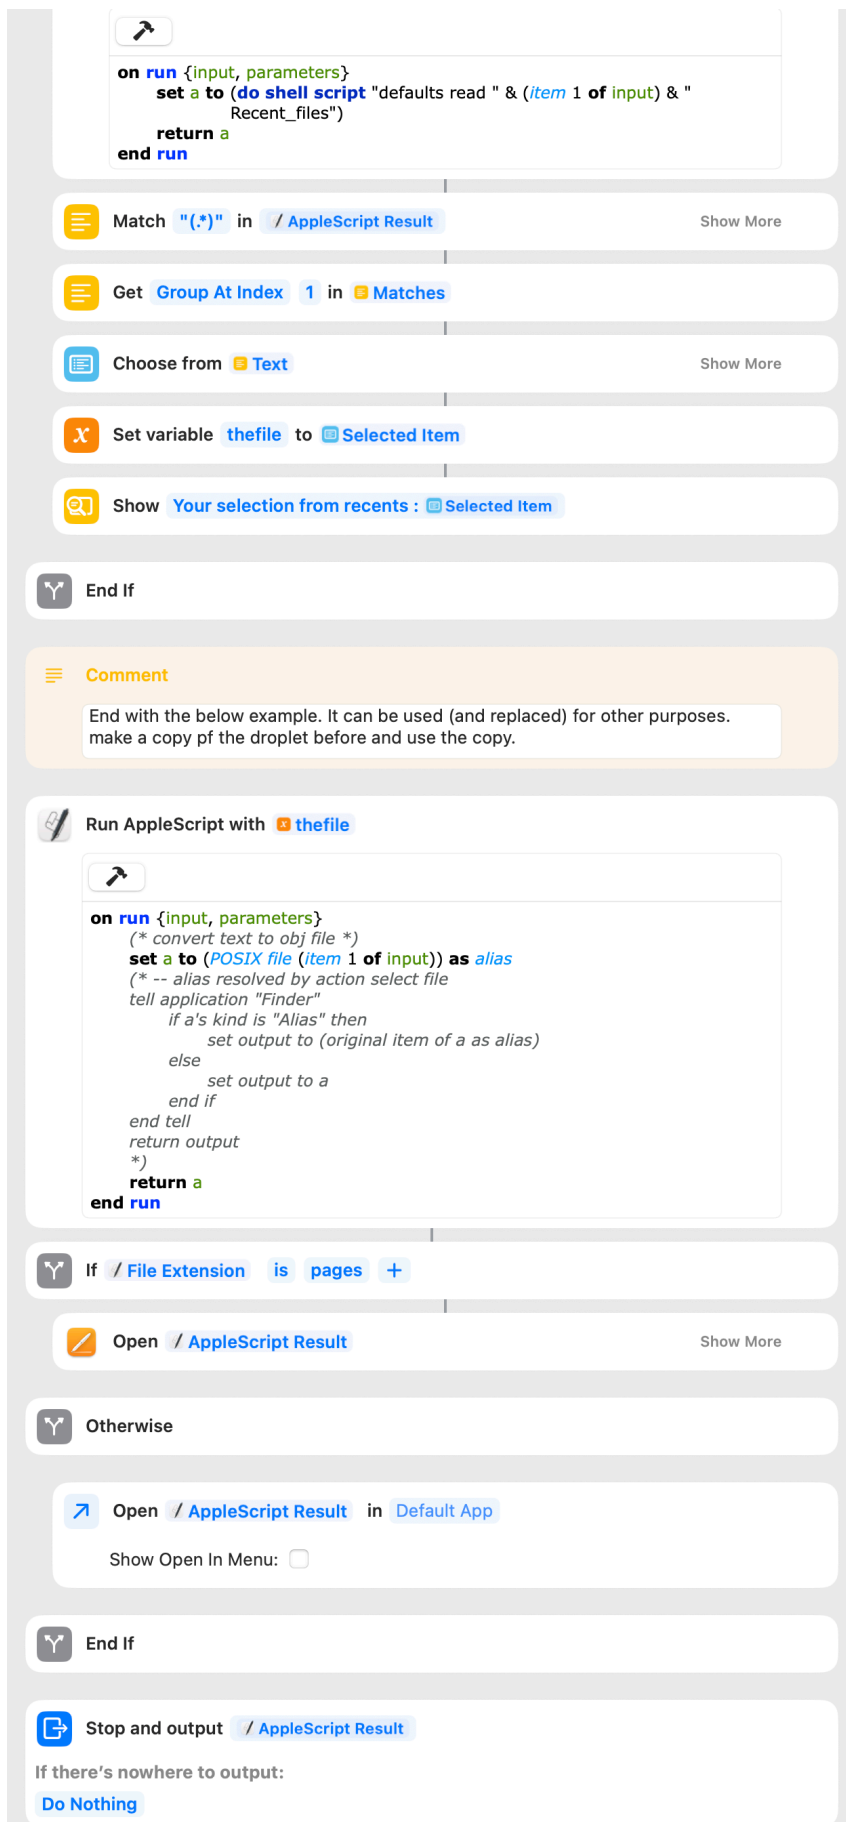

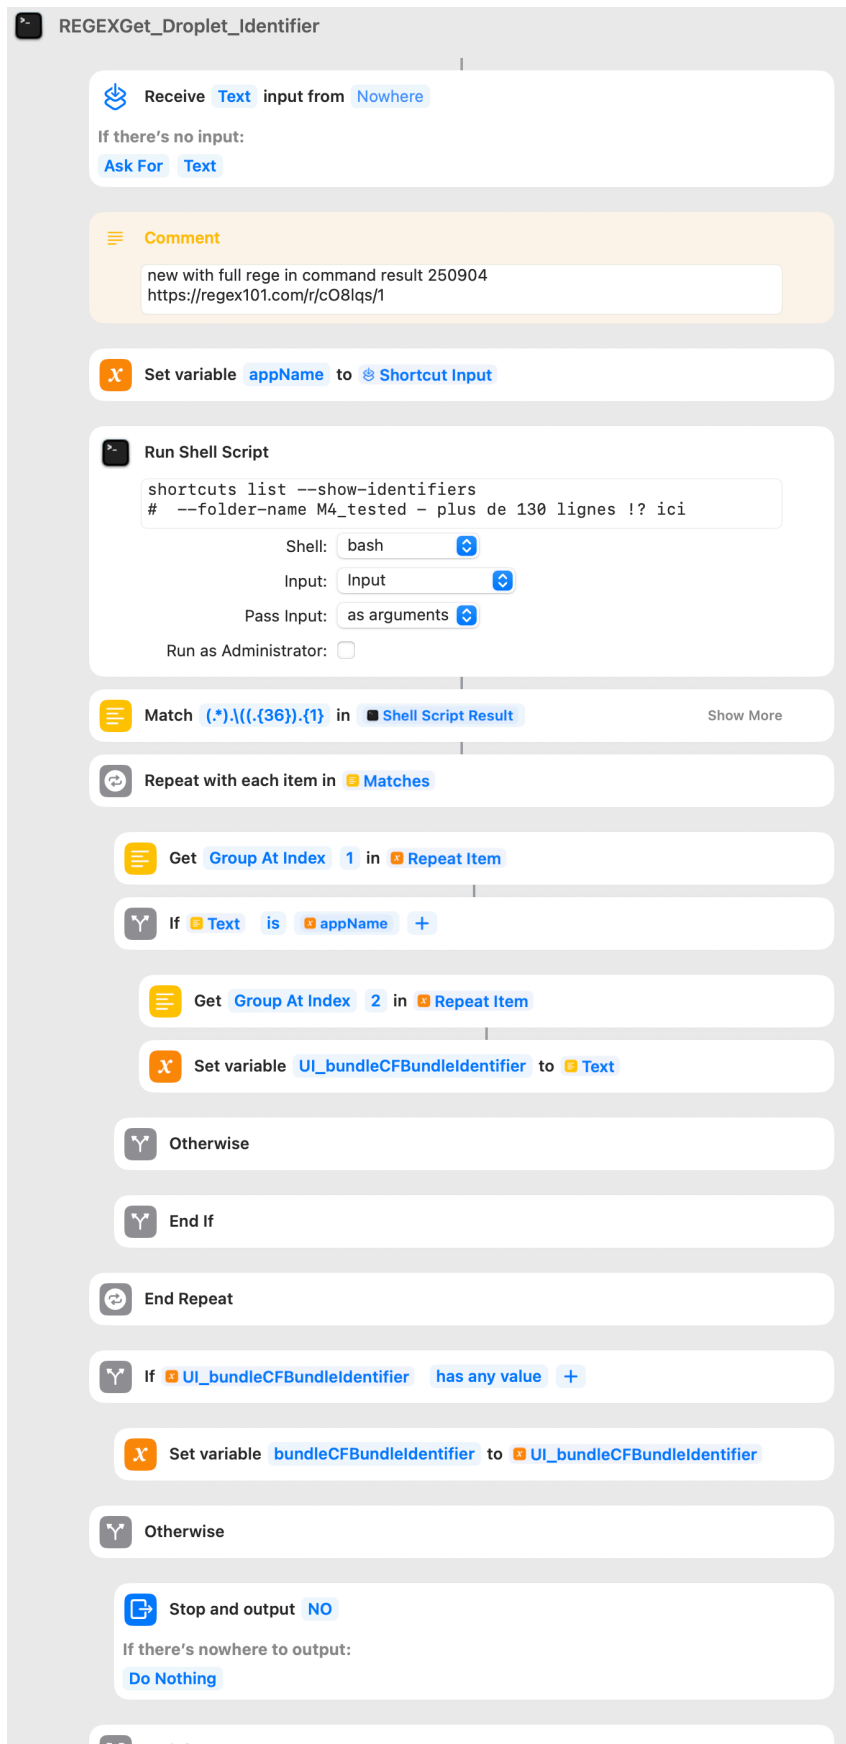

Identifier


The current droplet's unique identifier (shortcut) can be found by analysing the list based on its name.

`(.*).\\((.{36}).{1})`

Pre-tested on the website

<https://regex101.com/r/cO8lqs/1>

Preferences management Droplet Shortcut from Shortcuts

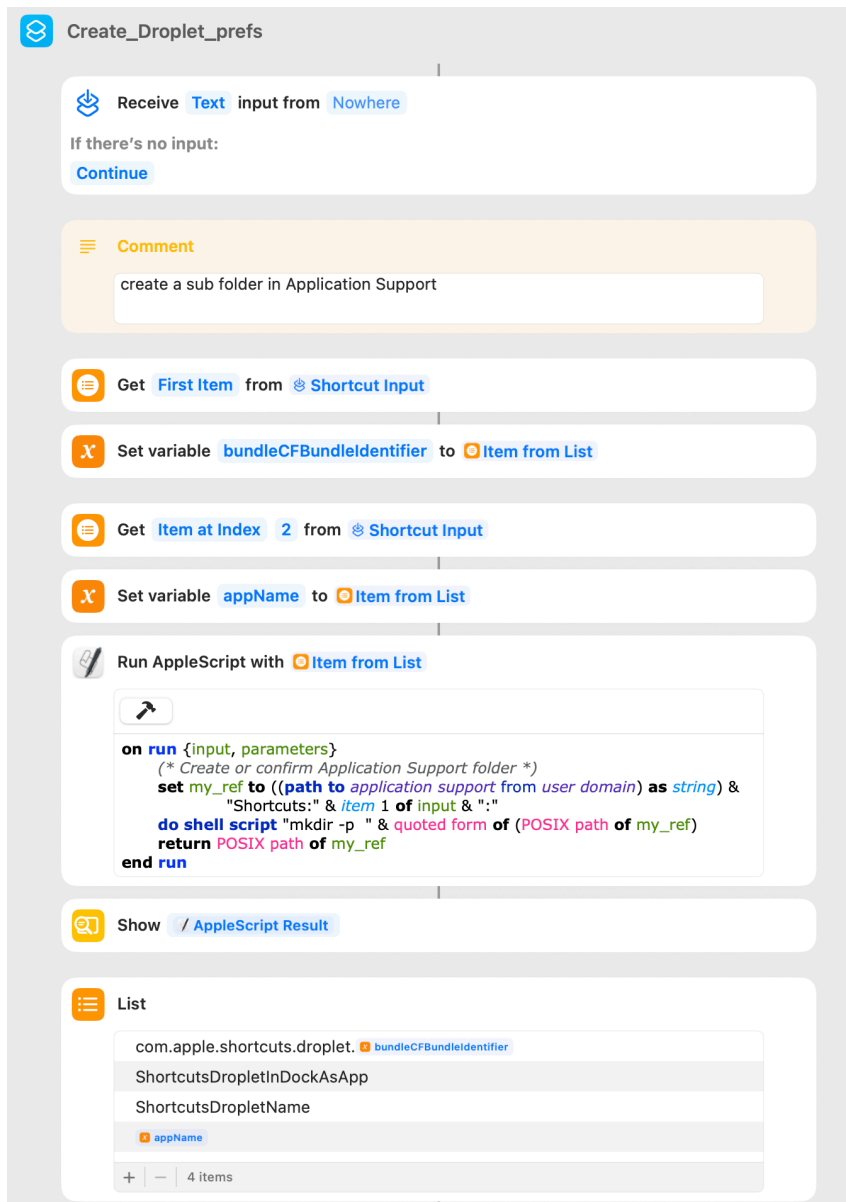

Default folder and files (next page)

by using shell mkdir, make
of confirm folders..

Here the path is :

Application support/
Shortcuts/nameoftheapp
(passed as input)

Preferences management Droplet Shortcut from Shortcuts

Use the 'defaults'
command to create the
contents of the prefs plist
file and fill in the fields.

By default, the plist file will
be in preferences.

The screenshot displays a Shortcuts workflow for managing preferences. It includes a 'List' step, a 'Run Shell Script' step, a 'Comment' step, another 'List' step, a 'Run AppleScript with List' step, a 'Show' step, and a final 'Comment' step. An inset window shows the 'Preferences' pane for 'AppFirstStart_newtest', displaying a list of folders and a 'my_prefs.plist' file. The 'my_prefs.plist' file is selected, showing its XML content.

```
com.apple.shortcuts.droplet. bundleCFBundleIdentifier
ShortcutsDropletInDockAsApp
ShortcutsDropletName
appName
+ - 4 items
```

```
defaults write $1 CFBundleIdentifier $1
defaults write $1 $2 -bool true
defaults write $1 $3 -string "$4"
defaults write $1 Recent_files -array
```

Shell: bash
Input: List
Pass Input: as arguments
Run as Administrator: ☐

prefs file created with initial infos of this droplet app

```
com.apple.shortcuts.droplet. bundleCFBundleIdentifier
/ AppleScript Result
+ - 2 items
```

```
on run {input, parameters}
(* Your script goes here *)
set my_pref to ((path to preferences from user domain) as string)
set foldpref to POSIX path of my_pref
set original to foldpref & item 1 of input & ".plist"
set symbolic to item 2 of input
do shell script "ln -s -f " & quoted form of original & " " & quoted form of symbolic & "my_prefs.plist"
return original
end run
```

Show / AppleScript Result

And now a prefs plist is created for this droplet appName and a symbolic link in Application Support/Shortcuts/ appName

AppFirstStart_newtest

my_prefs.plist

```
<?xml version="1.0"
encoding="UTF-8"?>
<!DOCTYPE plist PUBLIC
"-//Apple//DTD PLIST 1.0//
EN" "http://www.apple.com/
DTDs/
PropertyList-1.0.dtd">
<plist version="1.0">
<dict>

<key>CFBundleIdentifier</
key>

<string>com.apple.shortcut
```

fullPlisttoJ- son Rename file plus skim n... More...

imichel > Library > Application Support > Shortcuts > AppFirstStart_newtest > my_prefs.plist

To facilitate access, we
create a symbolic link to
the file of the preferences
folder, here in the support
folder.
A simpler and shorter
name than the original.

