

Tron Game Specification and Documentation

Yusupov Boburjon

Neptun: YTAJDI

December 6, 2025

1 Description of the Exercise

Create a game, with we can play the light-motorcycle battle (known from the Tron movie) in a top view. Two players play against each other with two motors, where each motor leaves a light trace behind of itself on the display. The motor goes in each seconds toward the direction, that the player has set recently. The first player can use the WASD keyboard buttons, while the second one can use the cursor buttons for steering. A player loses if its motor goes to the boundary of the game level, or it goes to the light trace of the other player. Ask the name of the players before the game starts, and let them choose the color their light traces. Increase the counter of the winner by one in the database at the end of the game. If the player does not exit in the database yet, then insert a record for him. Create a menu item, which displays a highscore table of the players for the 10 best scores. Also, create a menu item which restarts the game.

2 Analysis

The problem requires creating a graphical application that simulates a simplified version of the Tron light cycle game. The core requirements involve real-time movement, collision detection, and persistent data storage.

2.1 Key Components

- **Game Loop:** A mechanisms to update the game state at fixed intervals (timer).
- **Collision Detection:** Logic to determine if a player's position overlaps with walls, obstacles, or trails.
- **Input Handling:** distinct controls for two players sharing the same keyboard.
- **Data Persistence:** A database connection to store cumulative scores across sessions.
- **Level Generation:** An Algorithm to create distinct playable environments.

3 Implementation

3.1 Level Generation Algorithm

The level generation is handled by the `LevelGenerator` class. Instead of static files, we use a procedural approach to ensure infinite replayability.

- Algorithm Strategy:**
1. The number of obstacles is determined by the formula: $count = levelIndex \times 5$.
 2. Random (x, y) coordinates are generated within the grid bounds.
 3. **Safety Zones:** To ensure the game is playable, we define "safety zones" around the starting positions of Player 1 (top-left) and Player 2 (bottom-right).
 4. If a generated coordinate falls inside a safety zone, it is discarded, and a new one is picked.
 5. Valid coordinates are added to the list of obstacles.

3.2 Game Loop and Timing

The game uses a `javax.swing.Timer` set to trigger every 100ms. On each tick:

1. The model updates player positions based on their current direction.
2. Collision checks are performed.
3. The view (`JPanel`) is repainted to reflect the new state.

4 Events and Event Handlers

The application relies on the Swing Event Dispatch Thread (EDT) for handling user interactions and timer updates.

Event Source	Event Type	Handler Action
Timer (GamePanel)	ActionEvent	Calls <code>gameModel.update()</code> to advance game state and <code>repaint()</code> to update graphics.
Keyboard (GamePanel)	KeyEvent	Updates <code>Motor</code> direction: • WASD → Player 1 Direction • Arrows → Player 2 Direction • ESC → Return to Menu
Start Button (Menu)	ActionEvent	Validates names/colors and triggers <code>mainFrame.startGame()</code> .
HighScores Button	ActionEvent	Switches <code>CardLayout</code> to High-Score view and queries Database.

Table 1: Event Handling Mapping

5 Class Diagram

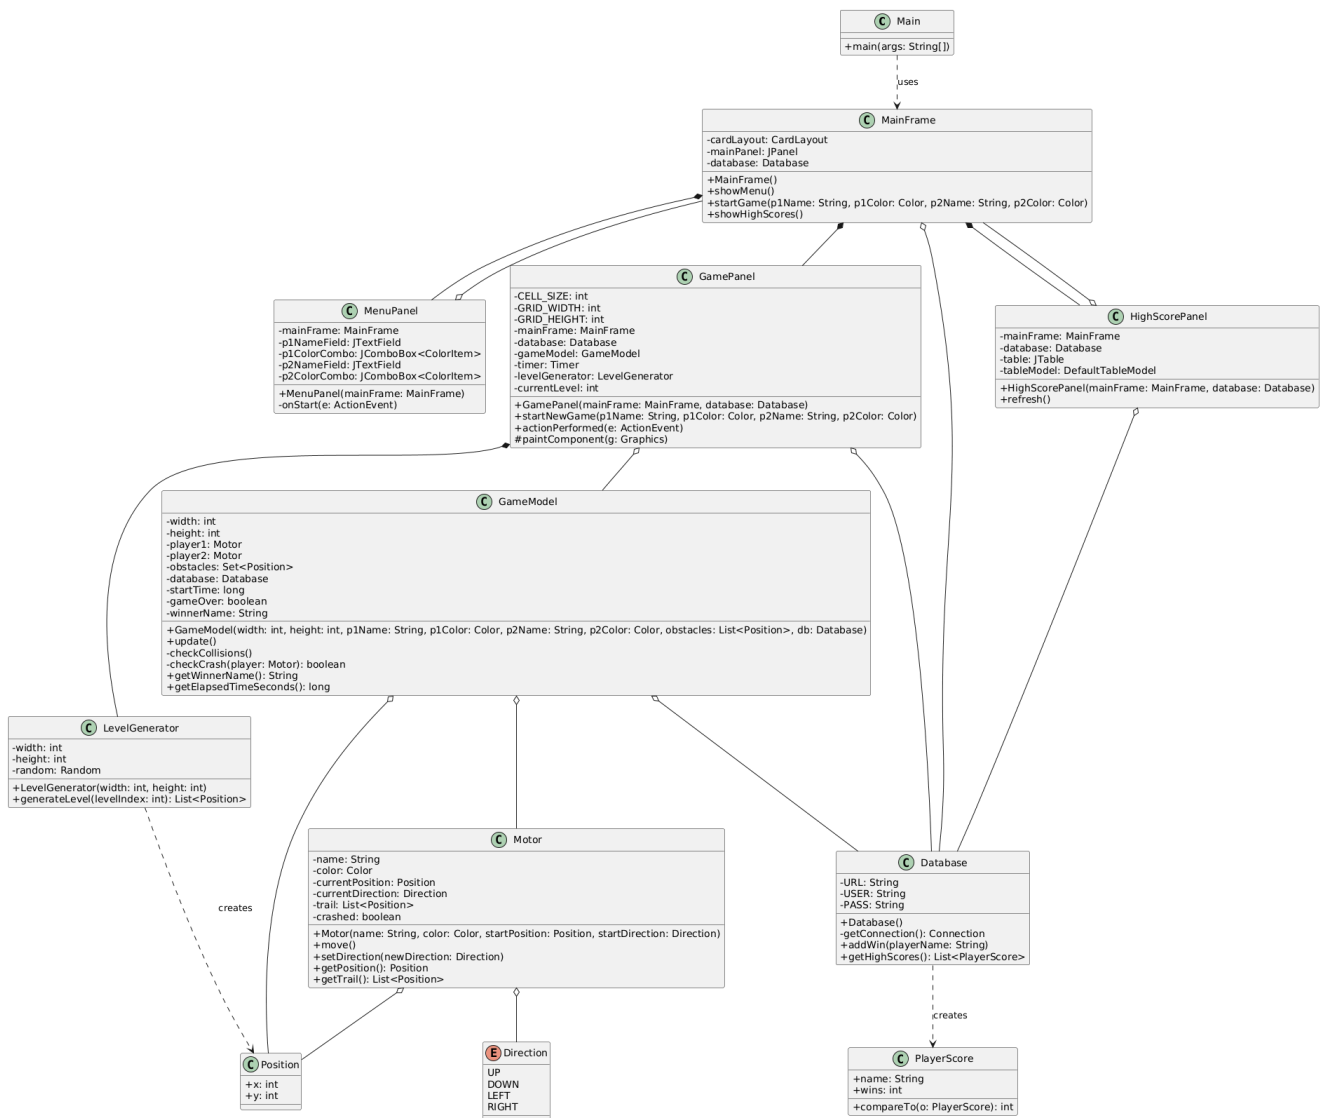


Figure 1: Class Diagram of the Tron Application

6 Class and Method Descriptions

6.1 Main Class (`tron.Main`)

Entry point for the application.

- `main(String[] args)`: Launches the application by creating the `MainFrame` on the Event Dispatch Thread.

6.2 Game Mechanics (`tron.logic`)

6.2.1 `GameModel`

Manages the core state of the game session.

- `update()`: Advances the game state by one tick. Moves players and checks for collisions.
- `checkCollisions()`: Determines if any player has crashed into walls, obstacles, or trails.
- `checkCrash(Motor player)`: detailed collision logic for a single player.
- `getWinnerName()`: Returns the name of the winner or "Draw".

6.2.2 `Motor`

Represents a player's entity.

- `move()`: Updates the motor's position based on its current direction and adds the new position to its trail.
- `setDirection(Direction newDirection)`: Changes the player's direction, preventing 180-degree turns.

6.2.3 `LevelGenerator`

Handles procedural generation of proper game levels.

- `generateLevel(int levelIndex)`: Creates a list of random `Positions` for obstacles. Ensures obstacles do not spawn in player starting safety zones.

6.3 Database Integration (`tron.db`)

6.3.1 `Database`

Handles JDBC connections to PostgreSQL.

- `addWin(String playerName)`: Increments the win count for a player in the 'results' table. Uses an 'INSERT ... ON CONFLICT DO UPDATE' statement.
- `getHighScores()`: Queries the top 10 players ordered by score.

6.4 User Interface (`tron.gui`)

6.4.1 MainFrame

The main container managing the application screens using ‘CardLayout’.

- `showMenu()`: Switches to start screen.
- `startGame(...)`: Switches to the game view and initializes a new session.
- `showHighScores()`: Switches to the high score table.

6.4.2 GamePanel

Renders the game loop.

- `actionPerformed(ActionEvent e)`: The game loop tick handler.
- `paintComponent(Graphics g)`: Draws the grid, players, trails, and obstacles.

7 Test Plan

The following table details the test cases implemented to verify the application's correctness. Tests are automated using JUnit 4.

Test Case	Input / Pre-condition	Expected Output / Post-condition
<i>GameModelTest</i>		
testInitialization	Initialize GameModel (60x40 grid, P1: Red, P2: Blue)	P1 at (5, 20), P2 at (54, 20), Game Over: False
testUpdateMovesPlayers	Initial state, call <code>update()</code>	P1 moves to (6, 20), P2 moves to (53, 20)
testWallCollision	P1 adjacent to wall, moving towards it. Call <code>update()</code> twice.	Game Over: True, Winner: P2 (Survivor)
testHeadOnCollision	P1 and P2 facing each other with 1 unit gap. Call <code>update()</code> .	Game Over: True, Winner: Draw
<i>MotorTest</i>		
testInitialization	Create Motor "Test" at (10, 10), Dir: RIGHT	Pos: (10, 10), Trail Size: 1, Crashed: False
testMove	Motor at (0, 0) RIGHT. Call <code>move()</code>	New Pos: (1, 0), Trail Size: 2
testDirectionChange	Motor RIGHT. Call <code>setDirection(UP)</code> then <code>move()</code>	New Pos: (0, -1) (moved UP)
testInvalidDirectionChange	Motor RIGHT. Call <code>setDirection(LEFT)</code> then <code>move()</code>	New Pos: (1, 0) (moved RIGHT, invalid turn ignored)
<i>LevelGeneratorTest</i>		
testGenerateLevelCount	Call <code>generateLevel(1)</code> and <code>generateLevel(2)</code>	Returns 5 obstacles for Lvl 1, 10 for Lvl 2
testSafetyZones	Generate 100 obstacles	0 obstacles in P1 corner (j10, j10) or P2 corner (iW-10, iH-10)
<i>Other</i>		
DirectionTest	Access Enum values	Enum contains UP, DOWN, LEFT, RIGHT
PositionTest	Create Position(5, 5)	x=5, y=5, correct equality check

Table 2: Detailed Test Plan