


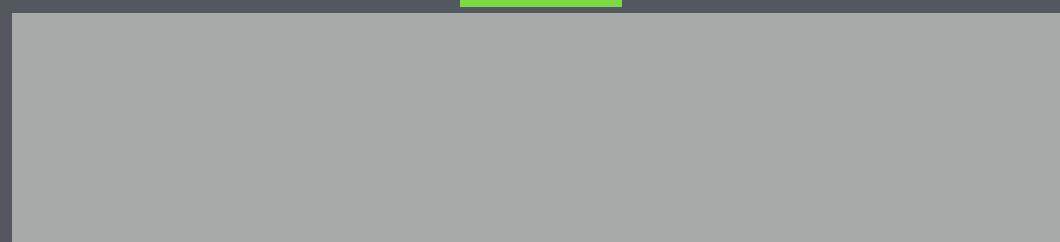




# Platformer levels

## Part 1





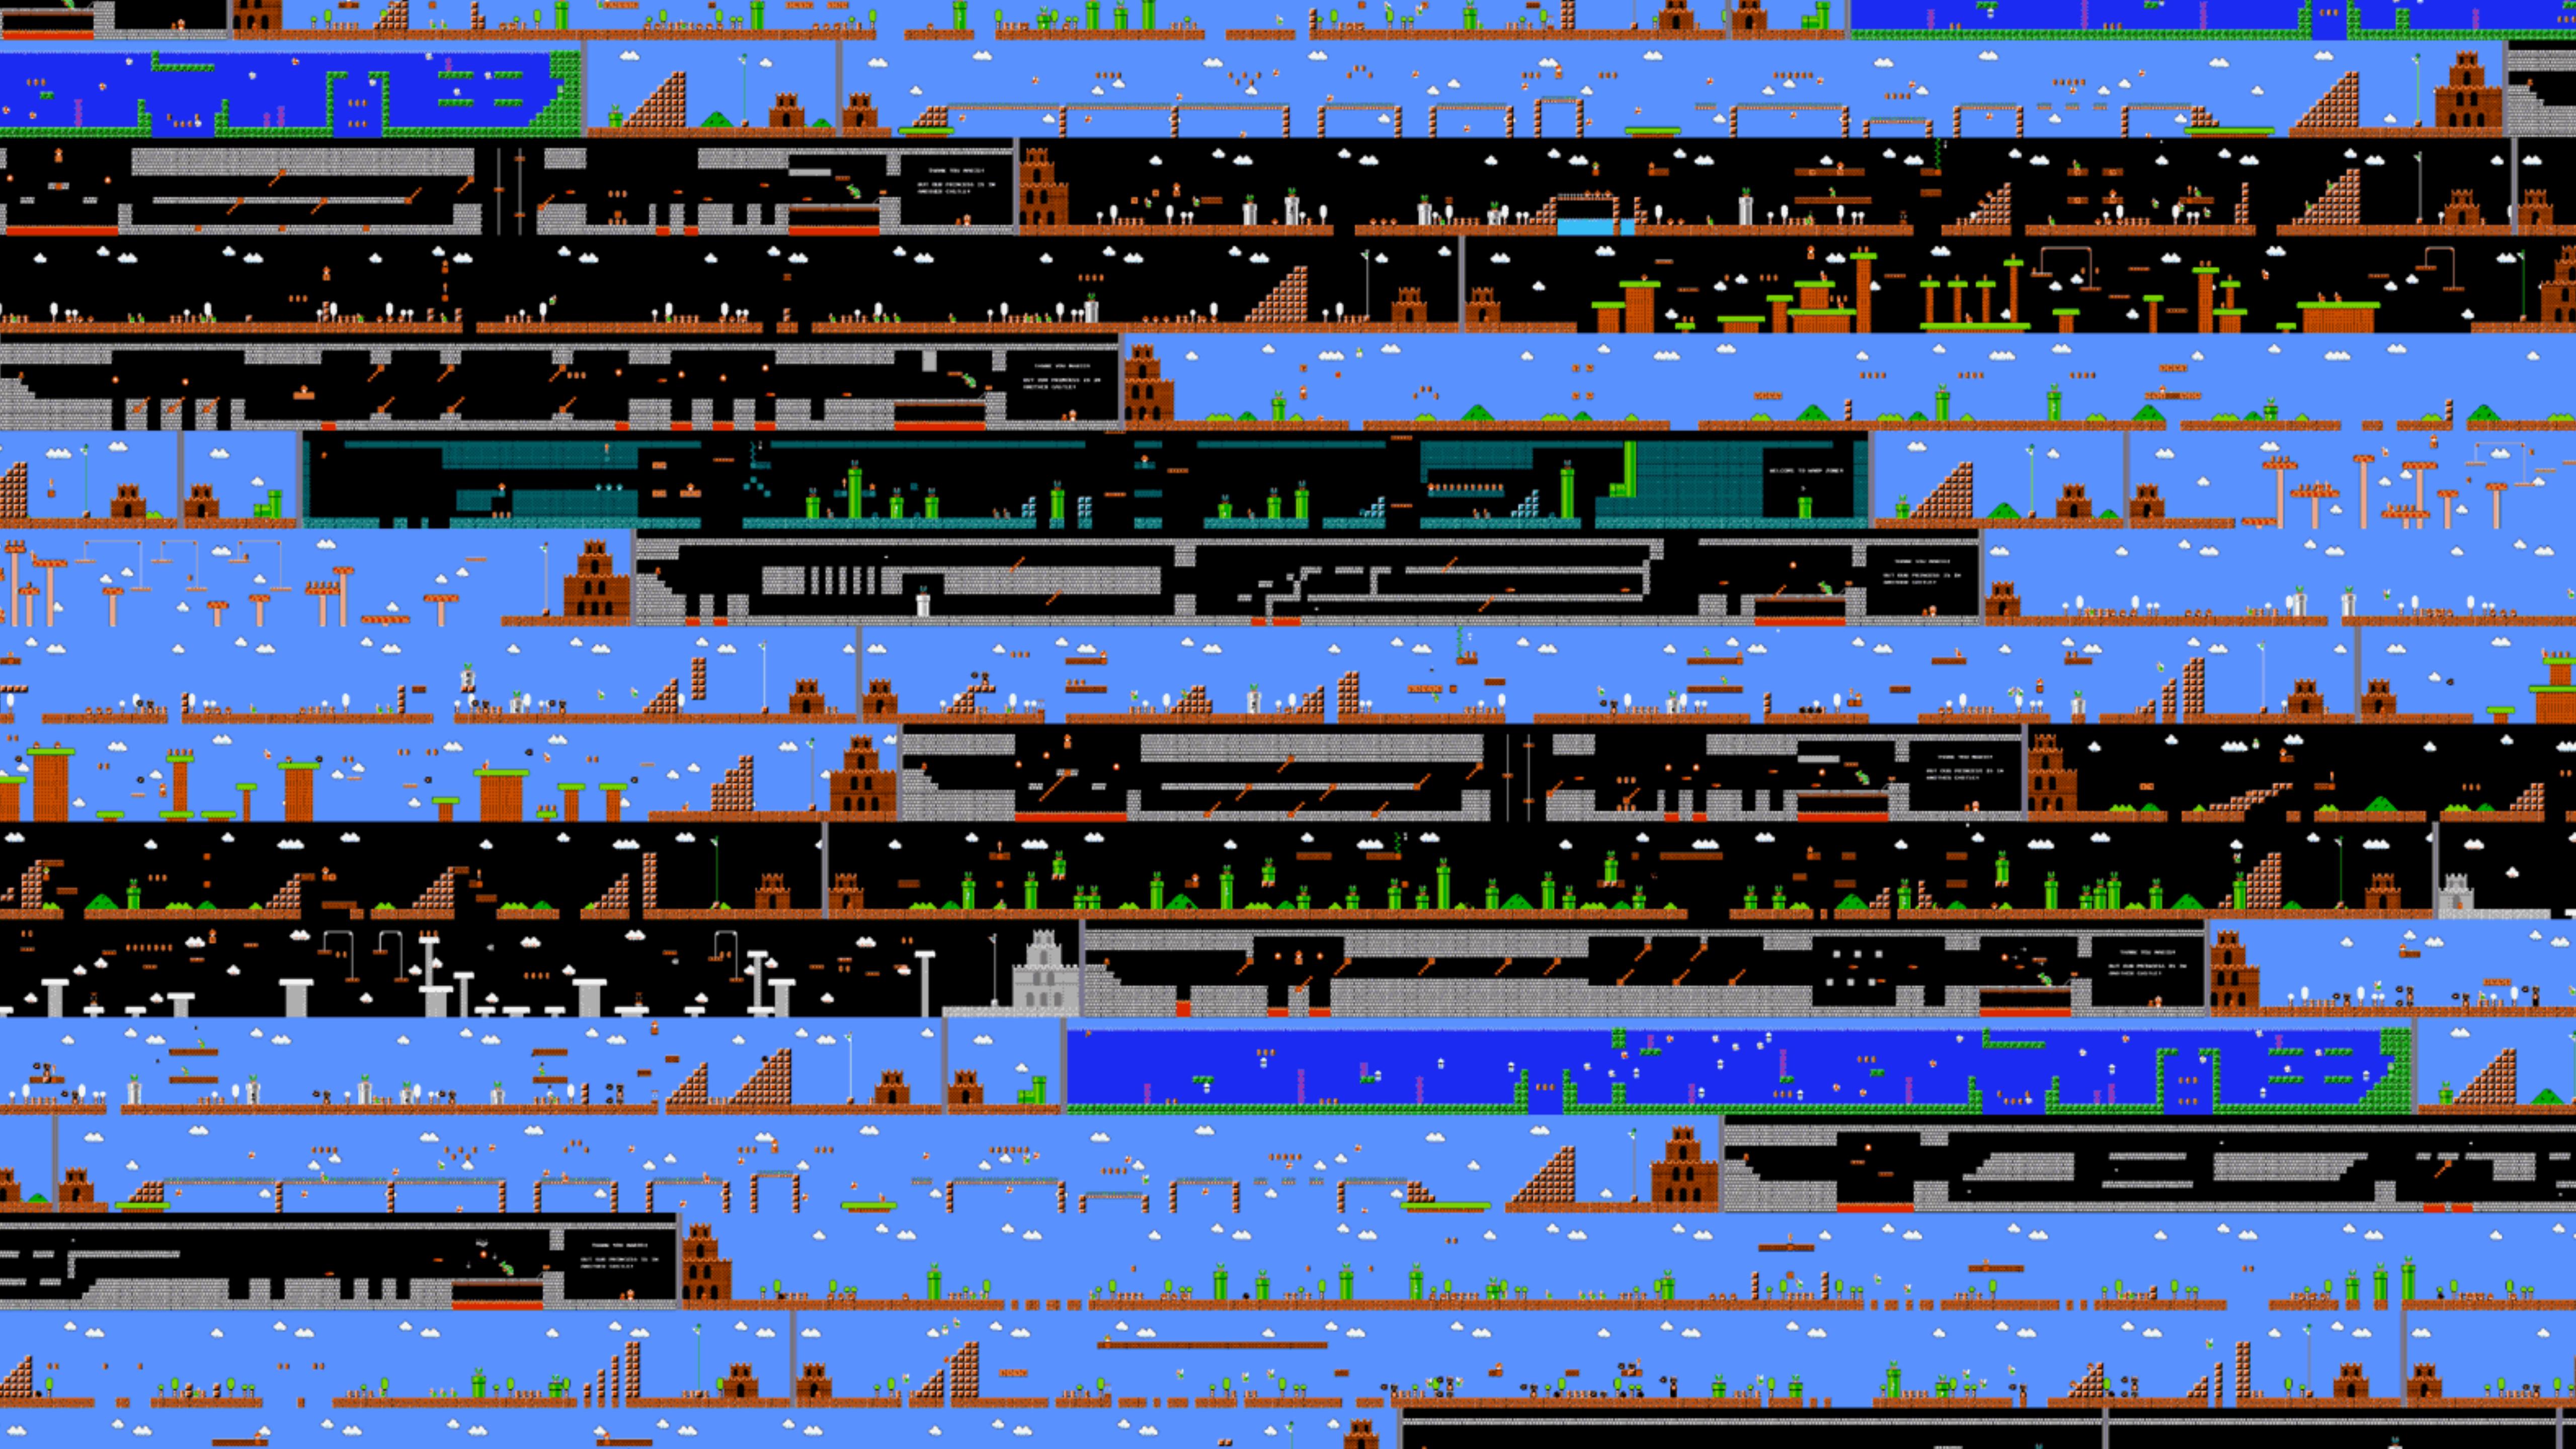



HEALTH



FUEL



BLAST-CARBINE

FPS: 59

TEXTURE: (PRESS N TO SWITCH)

TILED: FALSEPRESS T TO TOGGLE

X: 1828,409 - Y: 1476,546 - ROTATED: 3,150086

COLOR (KEYS UIOP TO CHANGE) --- RED: 1 - GREEN: 1 - BLUE: 1 - ALPHA: 1

MASS: IPRESS +/- TO INCREASE/DECREASE



MOVEABLE: OPRESS M TO TOGGLE

NO ROTATE: FALSEPRESS R TO TOGGLE

GEM FROM TEXTURE: FALSEPRESS Z TO TOGGLE

HURT: D - PUSH (A/S): D

COLLISION TYPE:

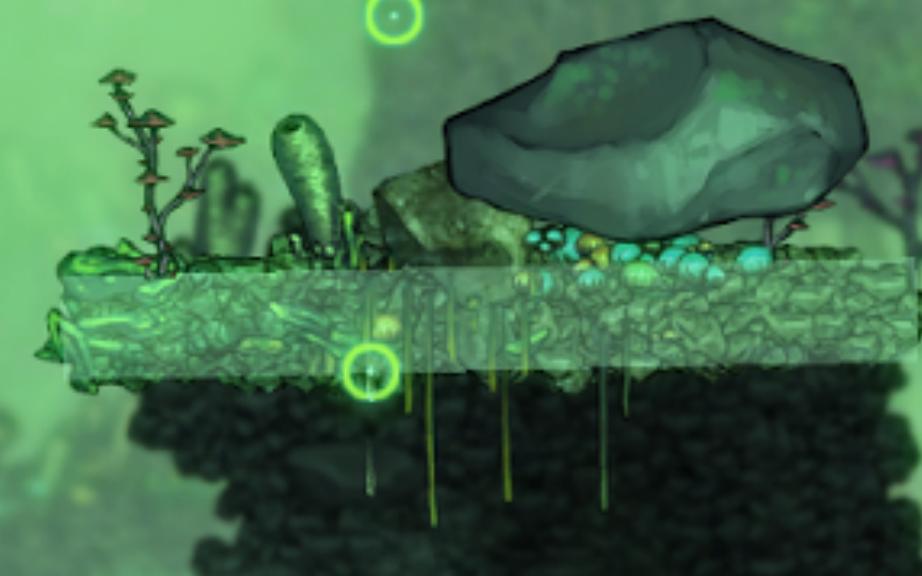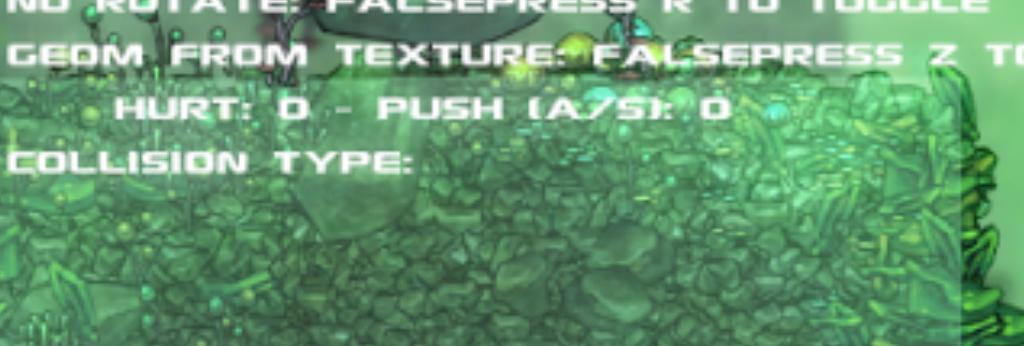

# Tile-based levels



MARIO  
000500

0 X 01

WORLD  
1-1


TIME  
321









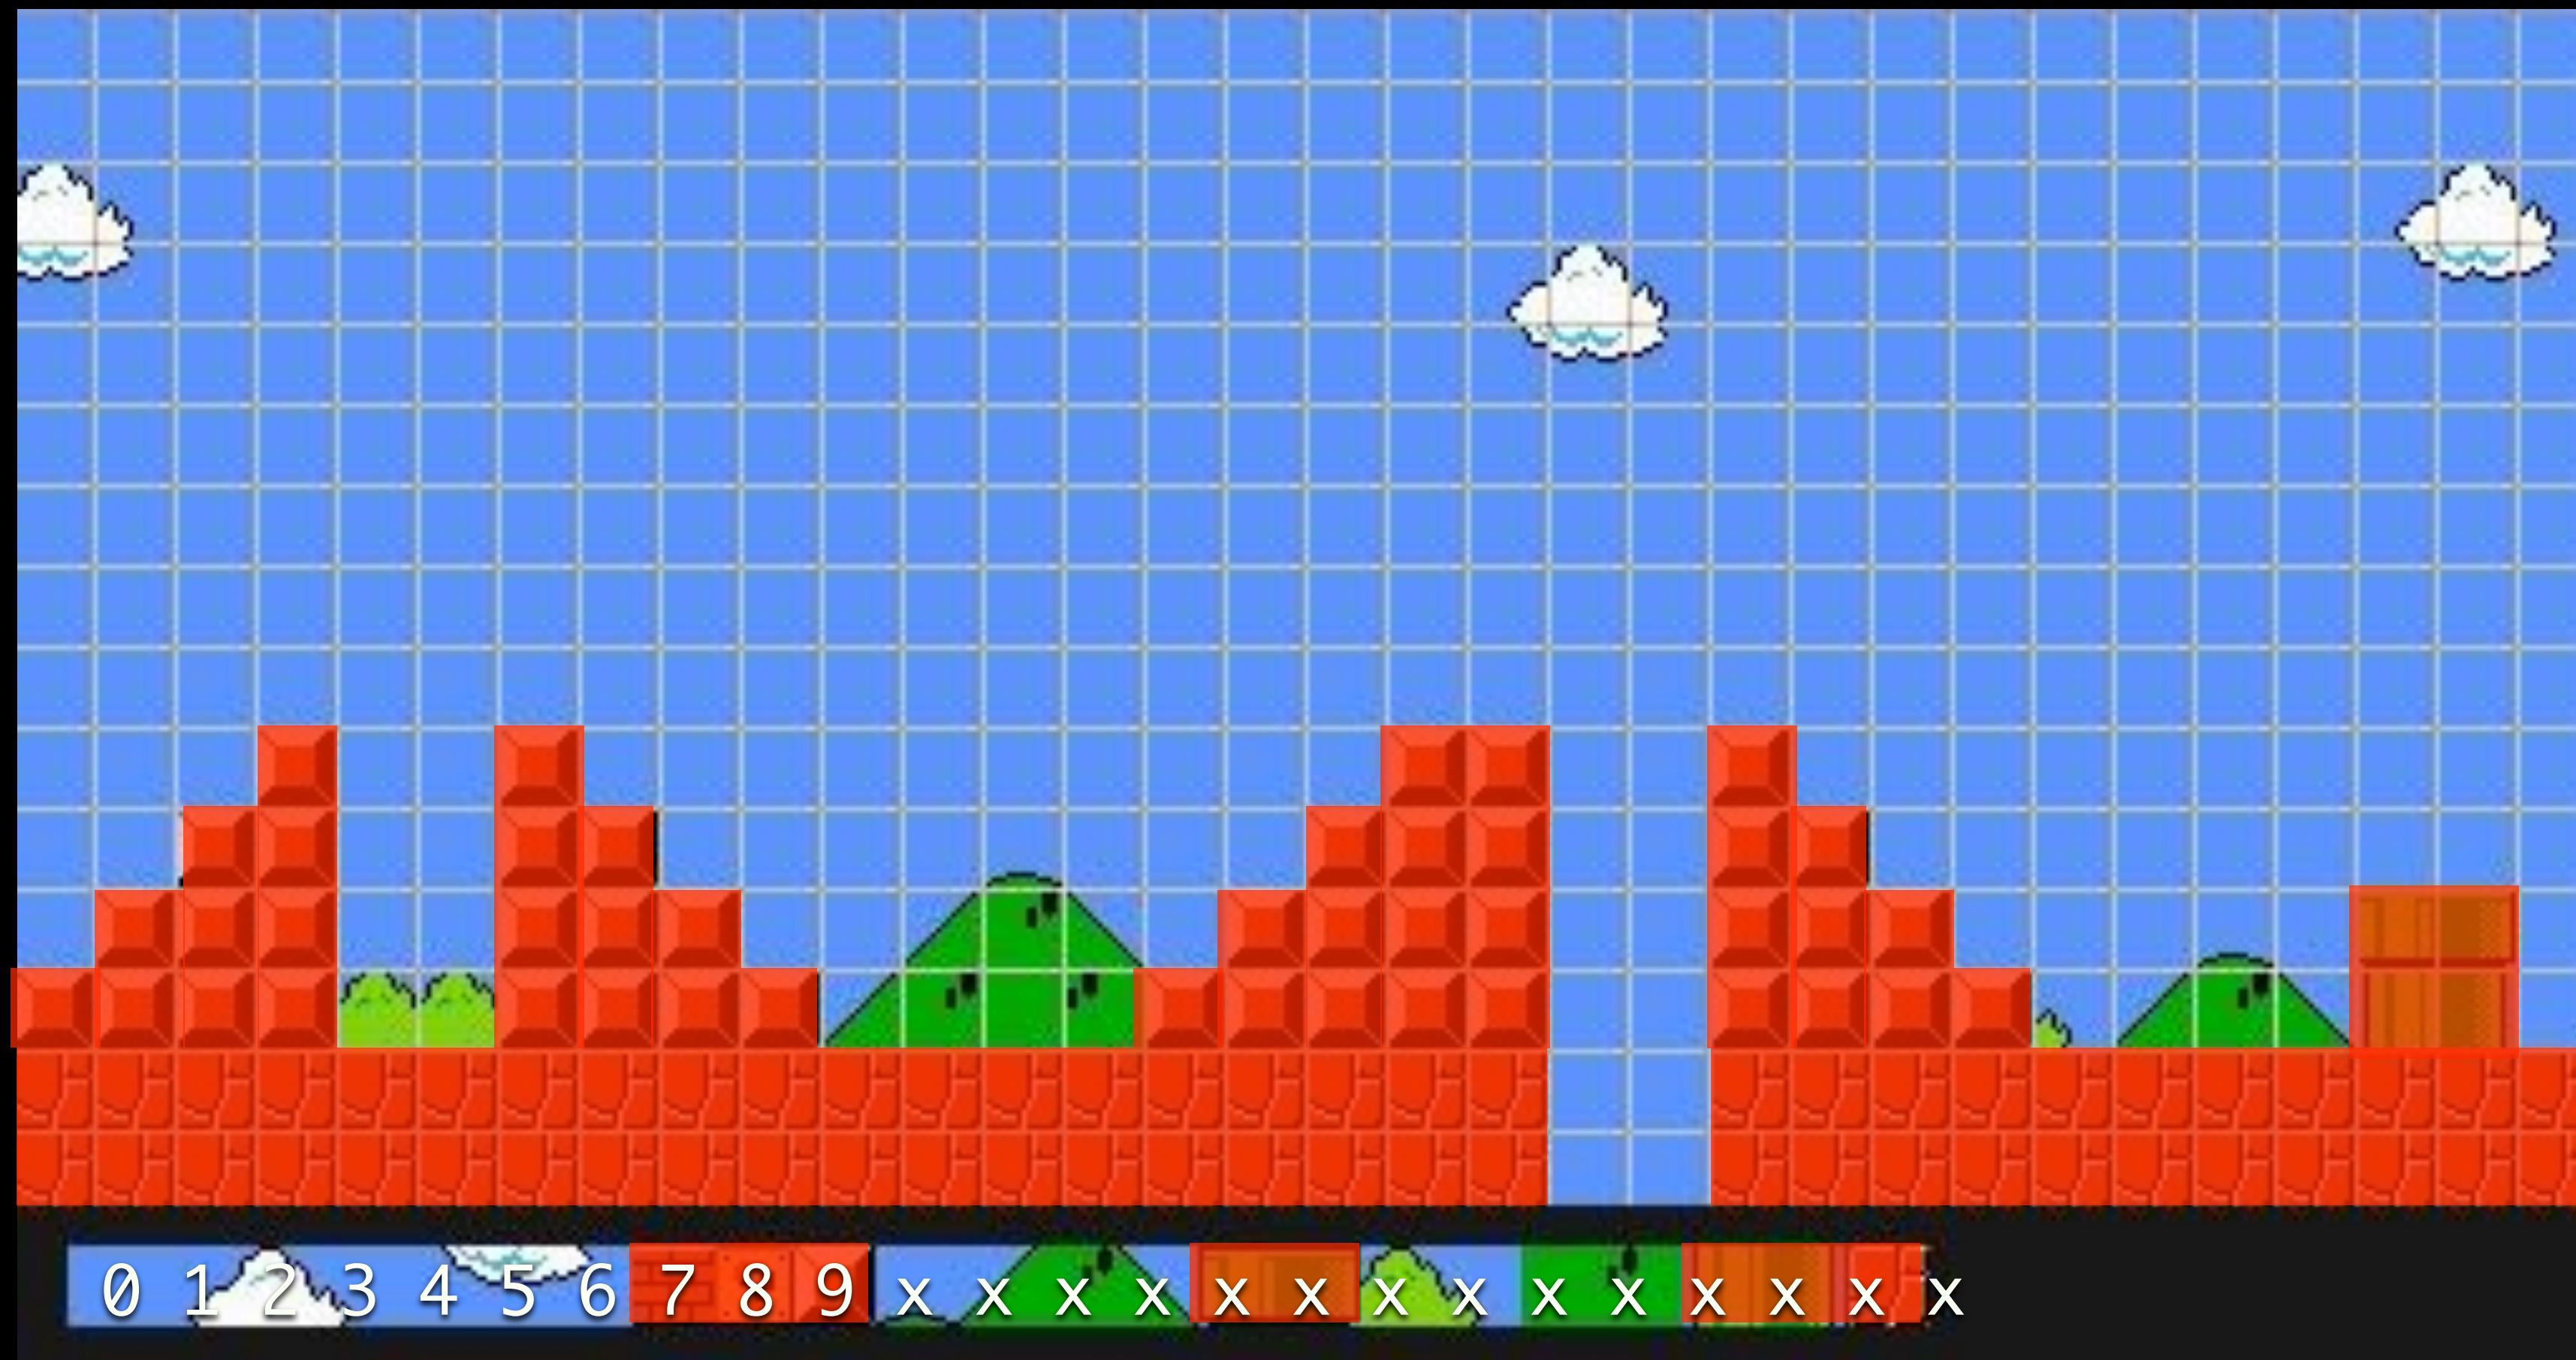

solids = 7,8,9,14,15,20,21,22



1






1

4

4

\$0



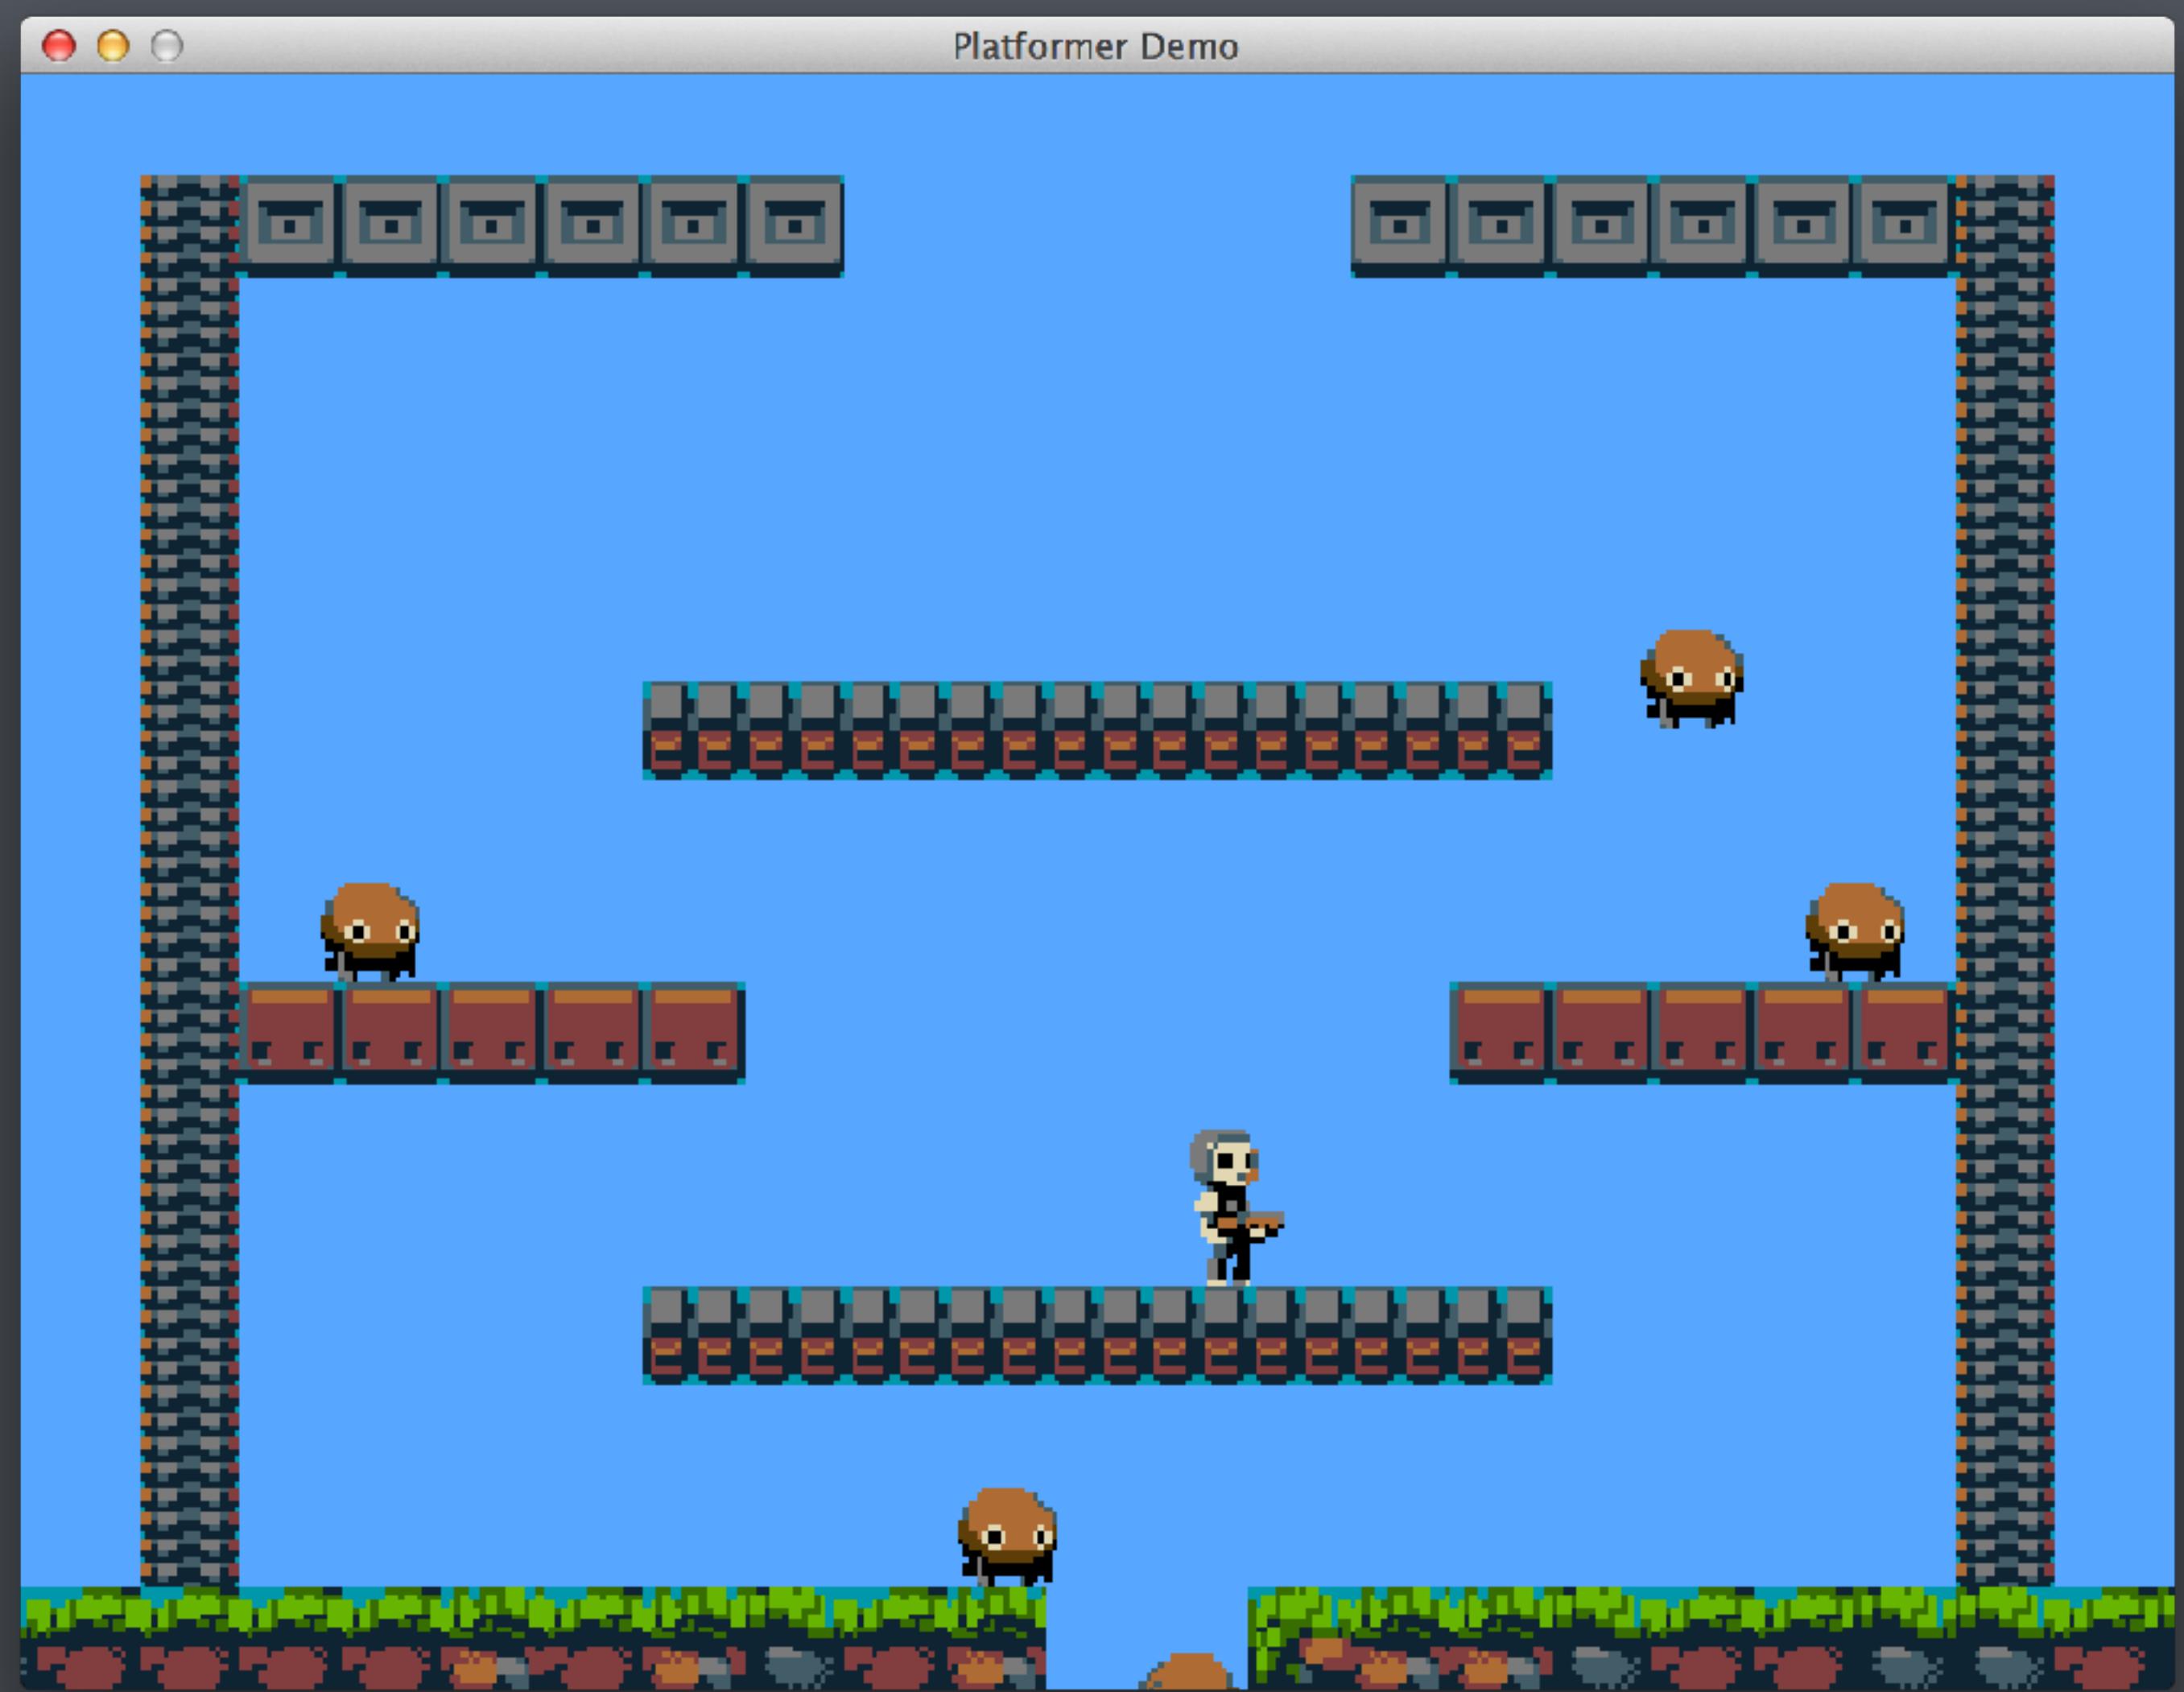

# Defining a tile map level



# Storing level data as a 2-dimensional array

```
unsigned char levelData[LEVEL_HEIGHT][LEVEL_WIDTH];
```



```
{0,20,4,4,4,4,4,4,0,0,0,0,0,0,4,4,4,4,4,4,4,20,0};
```

```
#define LEVEL_HEIGHT 16
#define LEVEL_WIDTH 22

unsigned char level1Data[LEVEL_HEIGHT][LEVEL_WIDTH] =
{
    {11,11,11,11,11,11,11,11,11,11,11,11,11,11,11,11,11,11,11,11,11,11},  

    {0,20,4,4,4,4,4,4,0,0,0,0,0,0,4,4,4,4,4,4,4,20,0},  

    {0,20,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,20,0},  

    {0,20,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,20,0},  

    {0,20,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,20,0},  

    {0,20,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,20,0},  

    {0,20,0,0,0,0,0,6,6,6,6,6,6,6,0,0,0,0,0,0,0,20,0},  

    {0,20,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,20,0},  

    {0,20,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,20,0},  

    {0,20,6,6,6,6,6,0,0,0,0,0,0,0,0,6,6,6,6,6,6,20,0},  

    {0,20,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,20,0},  

    {0,20,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,20,0},  

    {0,20,0,0,0,0,0,6,6,6,6,6,6,6,6,0,0,0,0,0,0,20,0},  

    {0,20,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,20,0},  

    {0,20,125,118,0,0,116,0,0,0,0,0,0,0,0,0,0,0,0,117,0,127,20,0},  

    {2,2,2,2,2,2,2,2,2,3,0,0,1,2,2,2,2,2,2,2,2,2,2},  


    {32,33,33,34,32,33,33,34,33,35,100,101,35,32,33,32,33,32,33,33}
};
```

};

```
void buildLevel() {
    memcpy(levelData, level1Data, LEVEL_HEIGHT*LEVEL_WIDTH);
}
```

# Rendering a tile map level

Need to render the entire tilemap as one vertex array

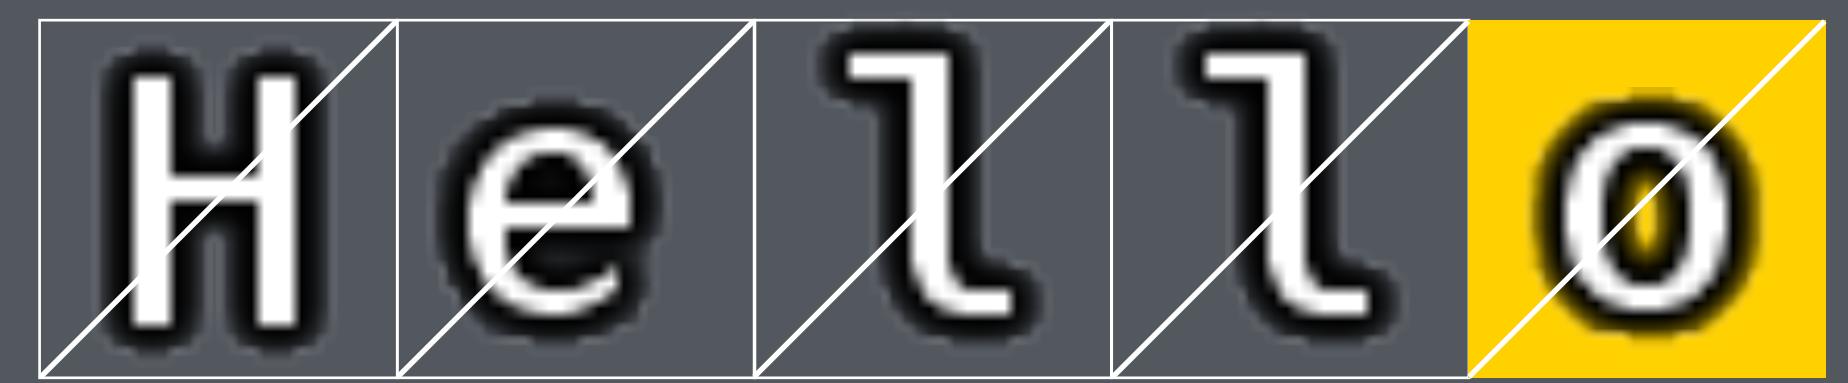

Hello

Go through the tiles **line by line** and **add vertices to a single array**.  
(Keep in mind that our **Y axis** points **upwards**, while tile **indexes count downwards**)

```
std::vector<float> vertexData;
std::vector<float> texCoordData;

for(int y=0; y < LEVEL_HEIGHT; y++) {
    for(int x=0; x < LEVEL_WIDTH; x++) {

        float u = (float)((int)levelData[y][x]) % SPRITE_COUNT_X / (float) SPRITE_COUNT_X;
        float v = (float)((int)levelData[y][x]) / SPRITE_COUNT_X / (float) SPRITE_COUNT_Y;

        float spriteWidth = 1.0f/(float)SPRITE_COUNT_X;
        float spriteHeight = 1.0f/(float)SPRITE_COUNT_Y;

        vertexData.insert(vertexData.end(), {
            TILE_SIZE * x, -TILE_SIZE * y,
            TILE_SIZE * x, (-TILE_SIZE * y)-TILE_SIZE,
            (TILE_SIZE * x)+TILE_SIZE, (-TILE_SIZE * y)-TILE_SIZE,
            TILE_SIZE * x, -TILE_SIZE * y,
            (TILE_SIZE * x)+TILE_SIZE, (-TILE_SIZE * y)-TILE_SIZE,
            (TILE_SIZE * x)+TILE_SIZE, -TILE_SIZE * y
        });

        texCoordData.insert(texCoordData.end(), {
            u, v,
            u, v+(spriteHeight),
            u+spriteWidth, v+(spriteHeight),
            u, v,
            u+spriteWidth, v+(spriteHeight),
            u+spriteWidth, v
        });
    }
}
```


# We can optimize by not drawing empty grid tiles at all

```
for(int y=0; y < LEVEL_HEIGHT; y++) {  
    for(int x=0; x < LEVEL_WIDTH; x++) {  
  
        if(levelData[y][x] != 0) {  
            // add vertices  
        }  
    }  
}
```

# Colliding with a tilemap

Separate axis movement again!


First the Y axis...

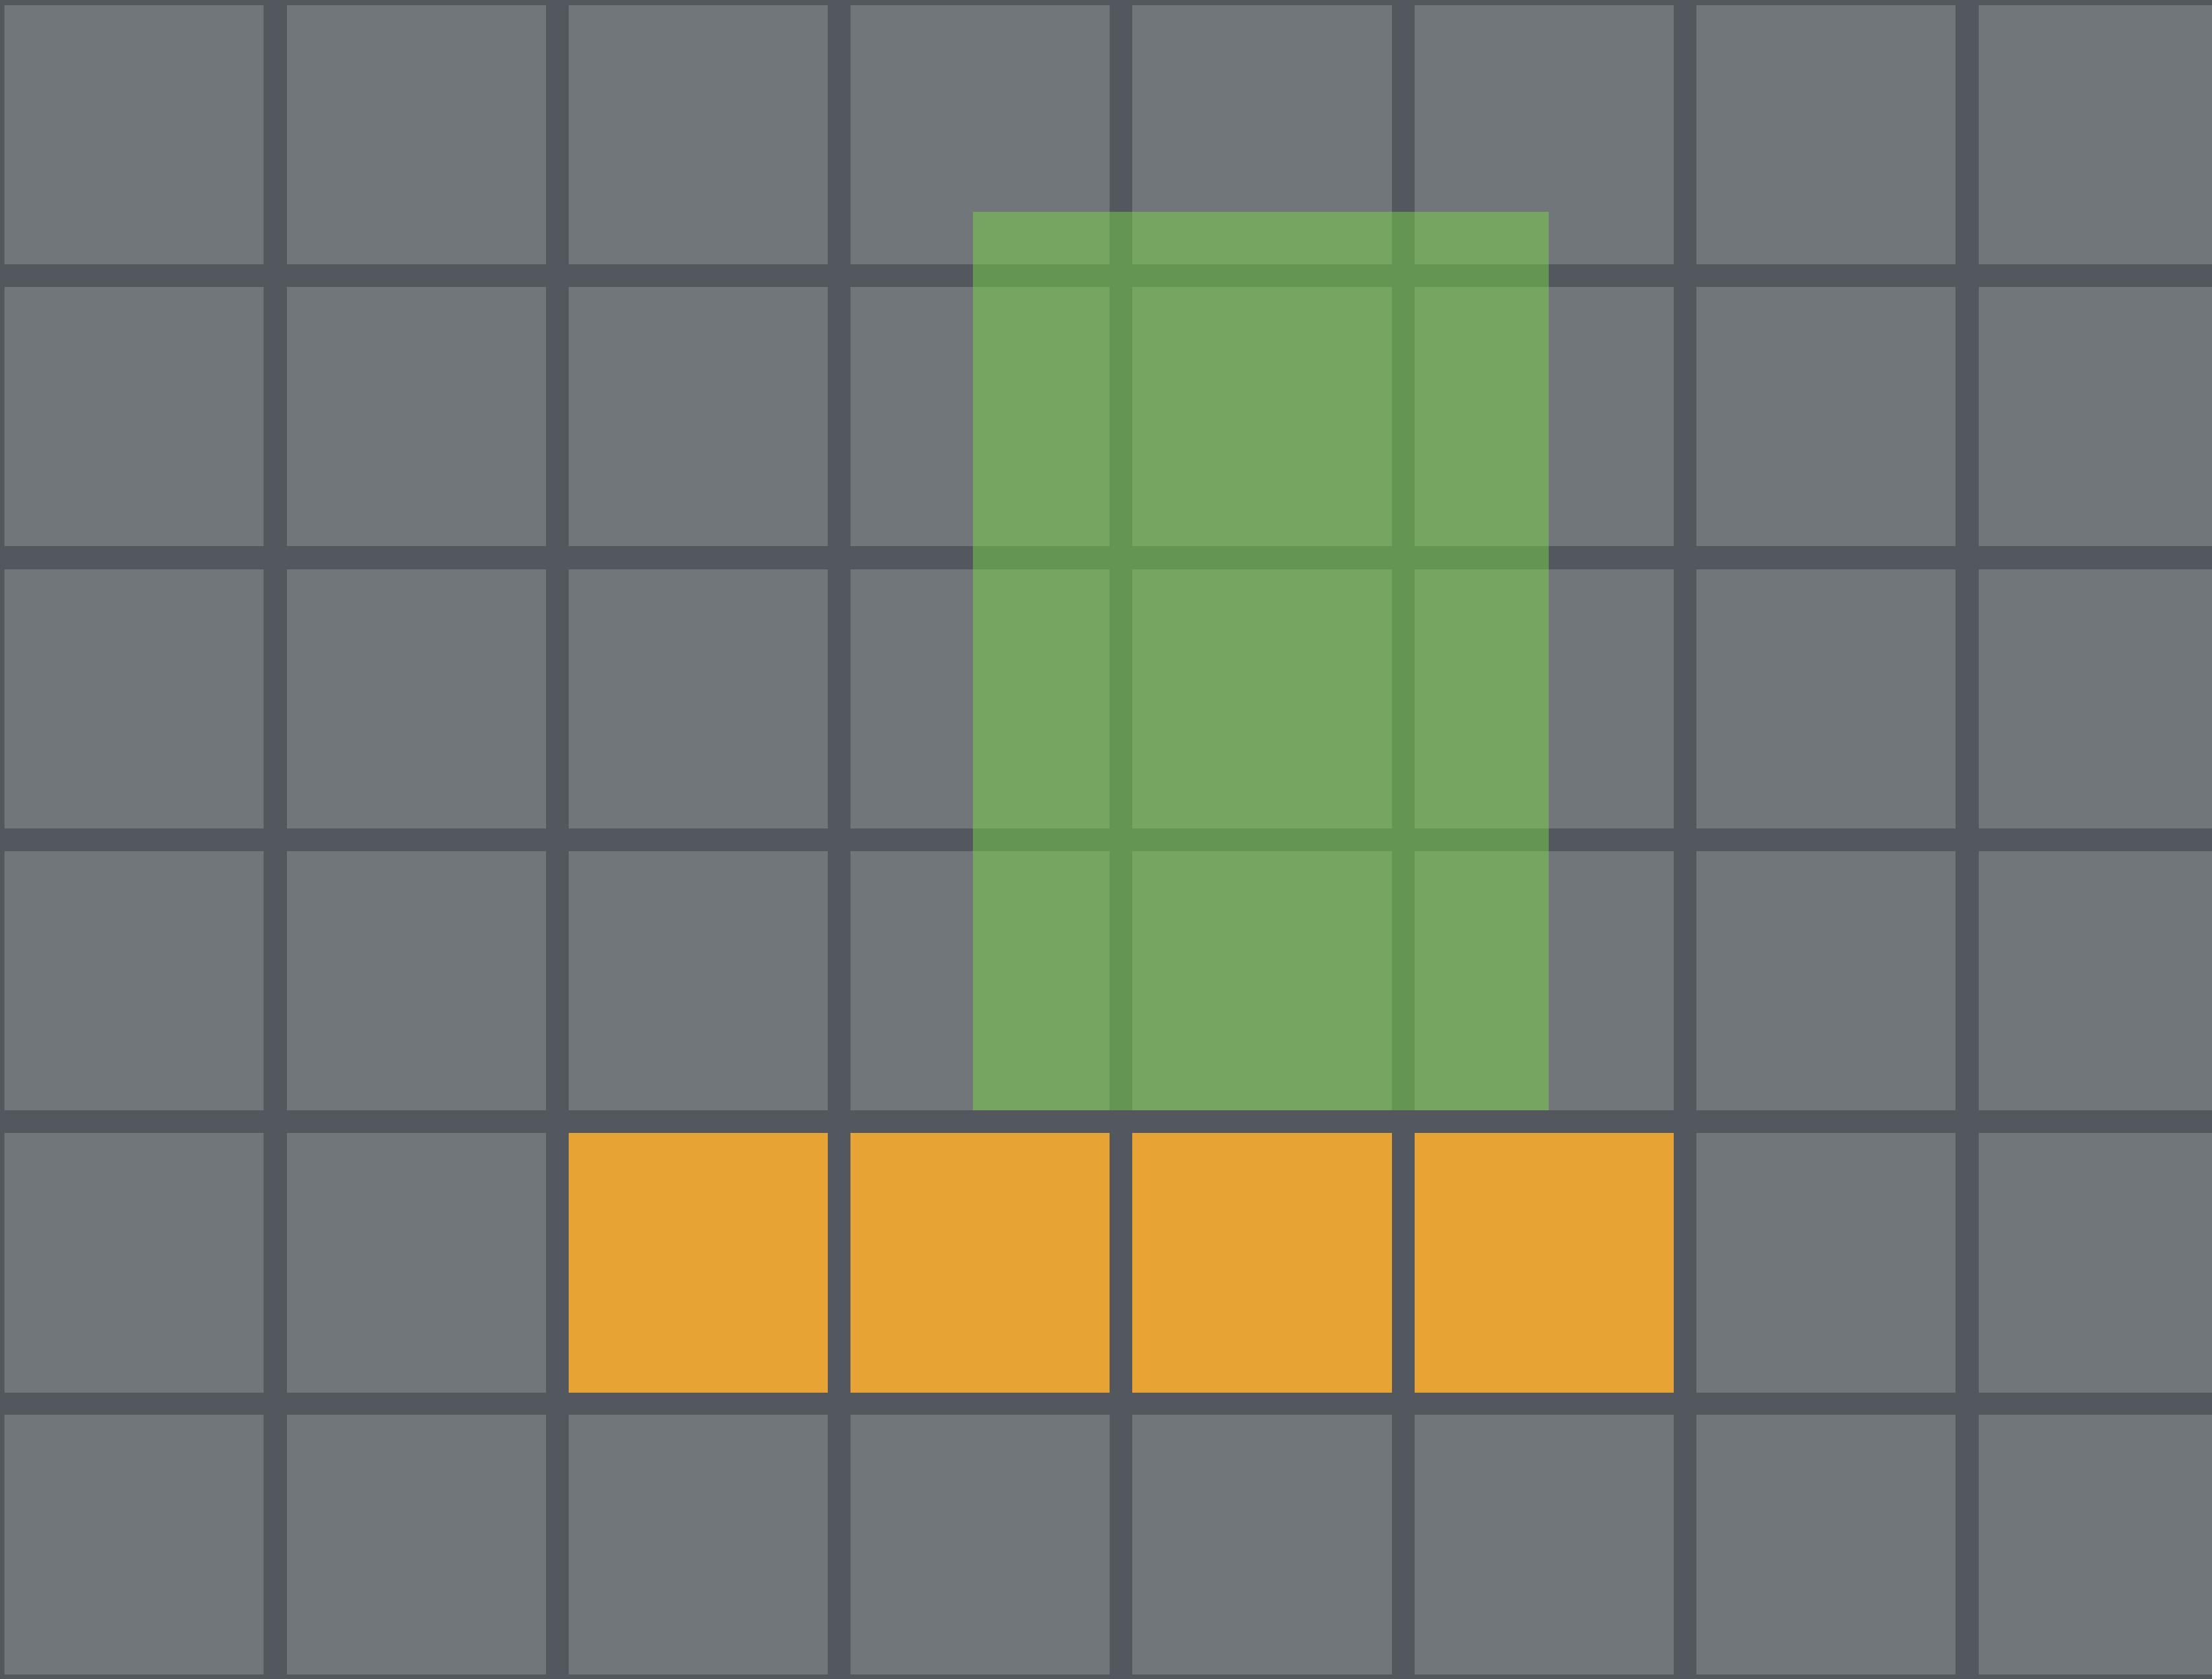


Convert our entity position  
to the grid coordinates and check  
if that tile is solid.

# What is a solid tile?

It's up to you!  
Define the tile indexes that are considered solid!

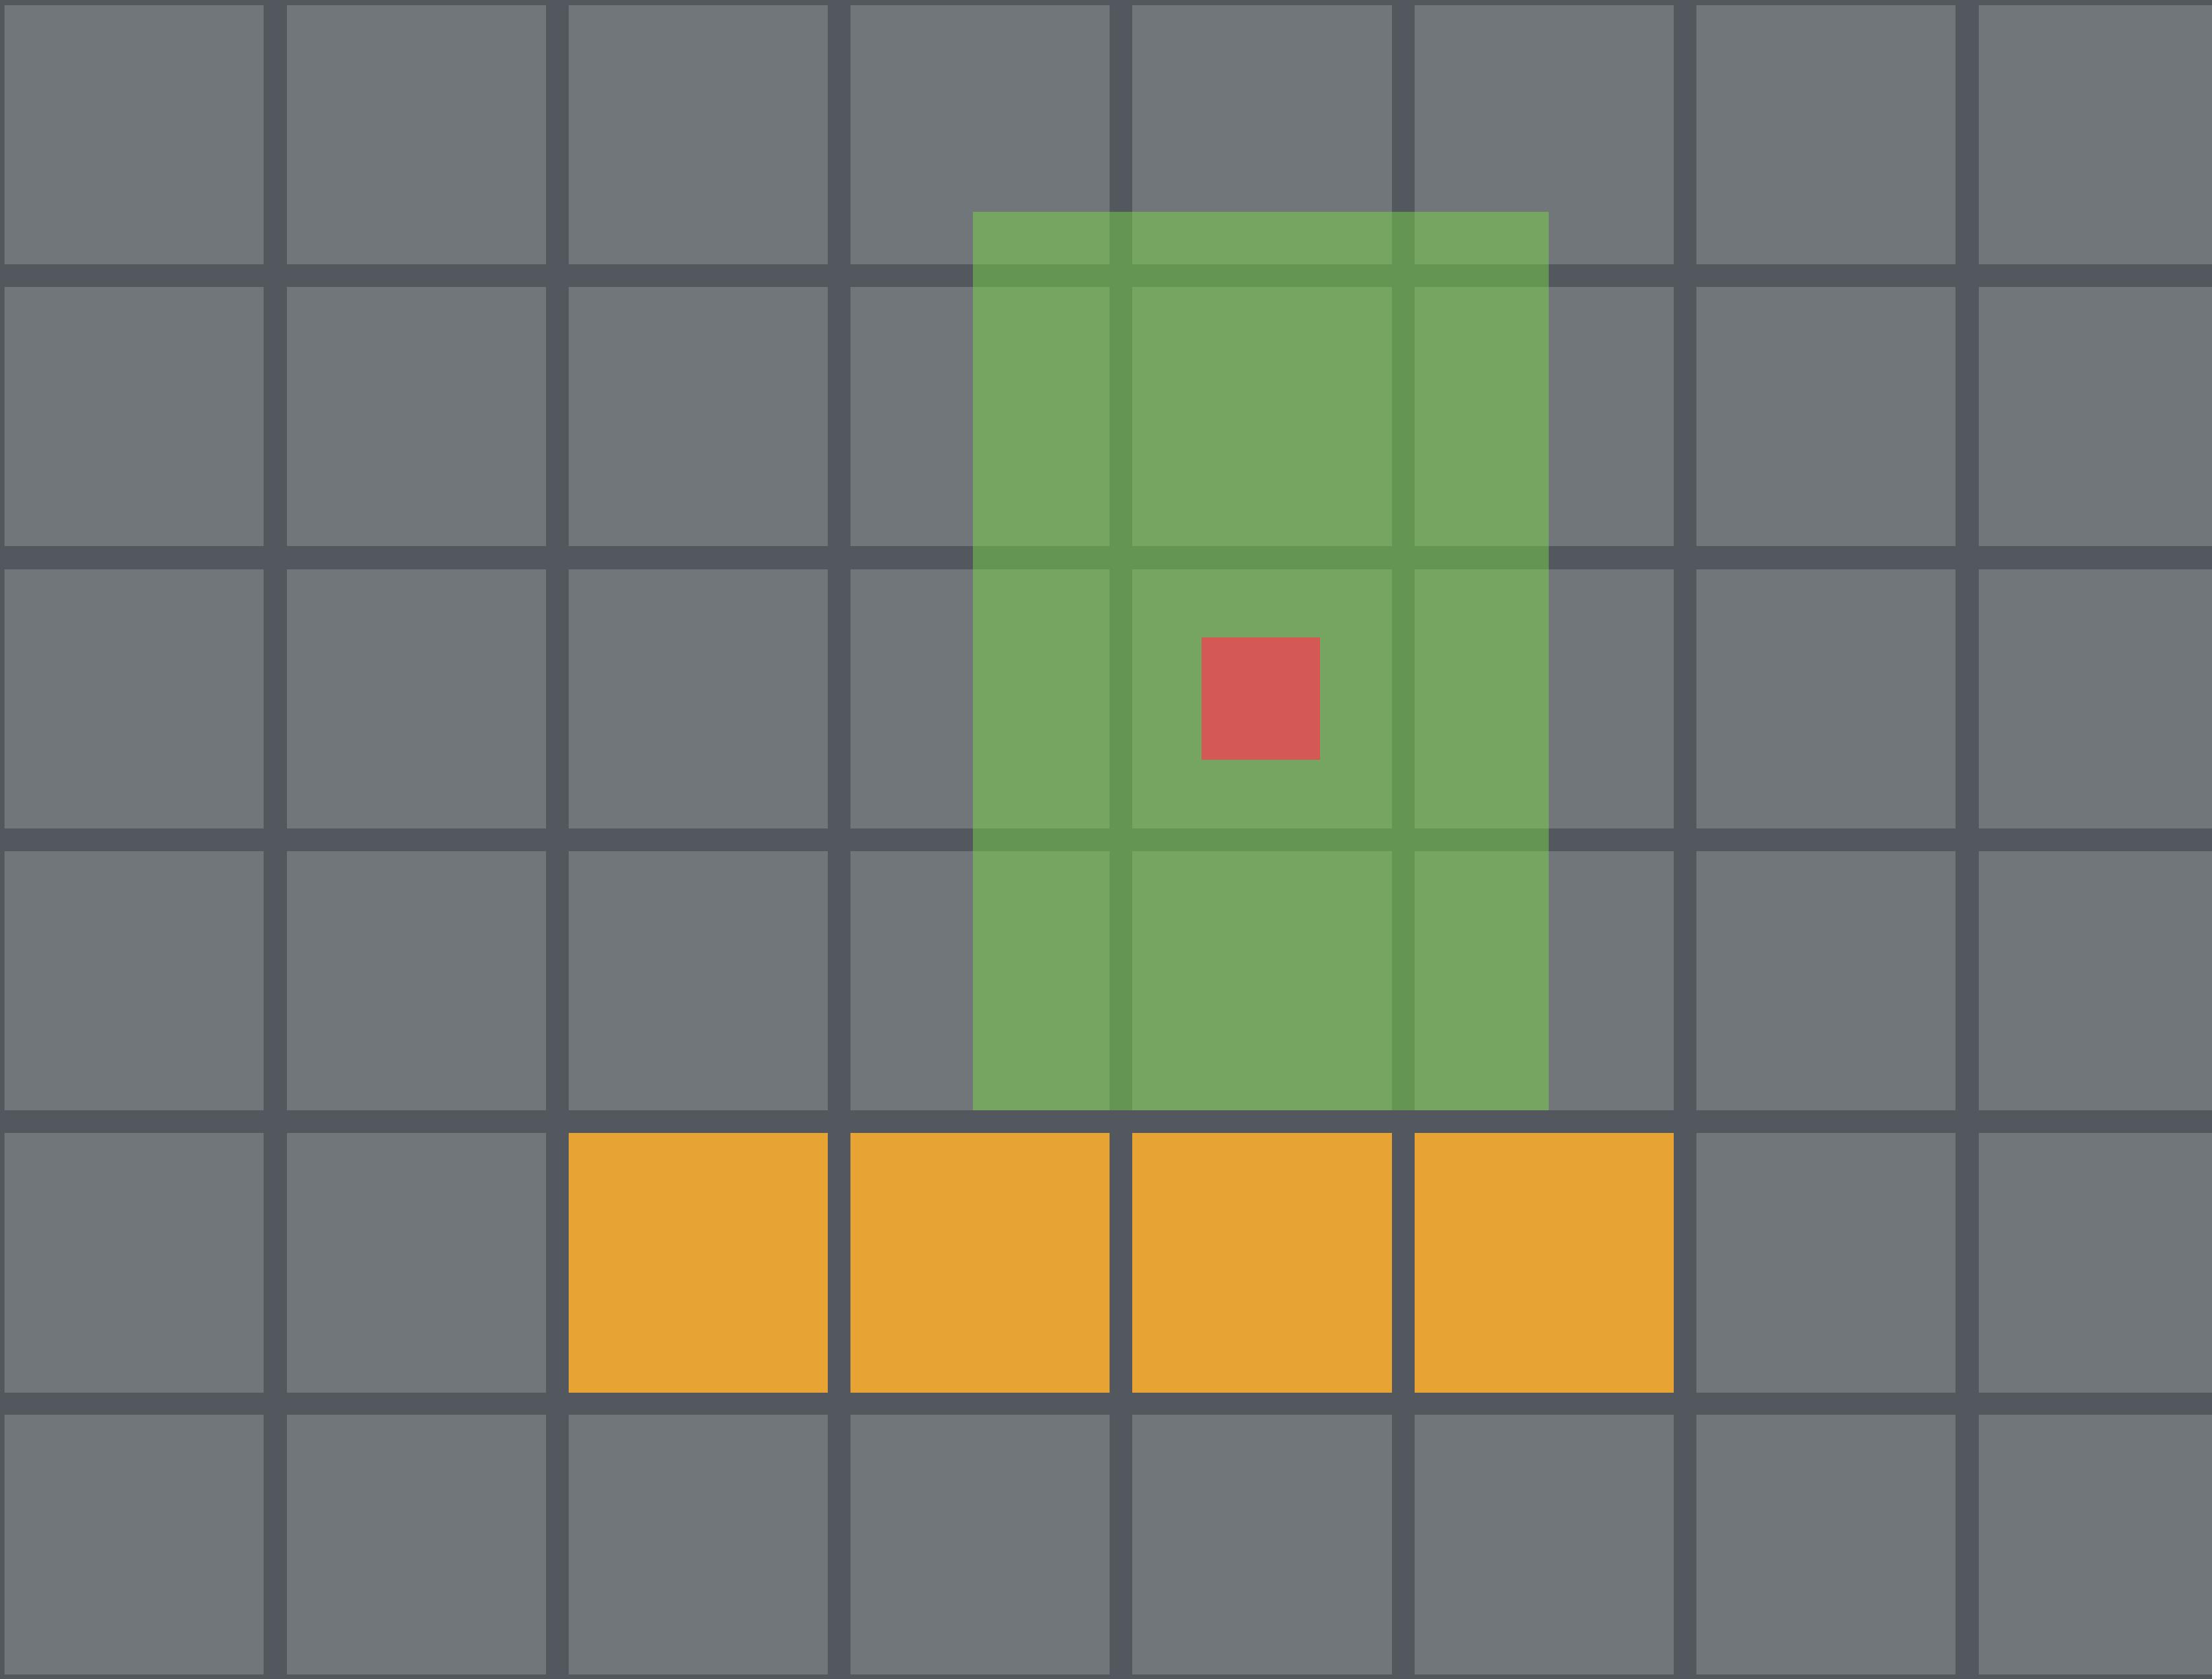

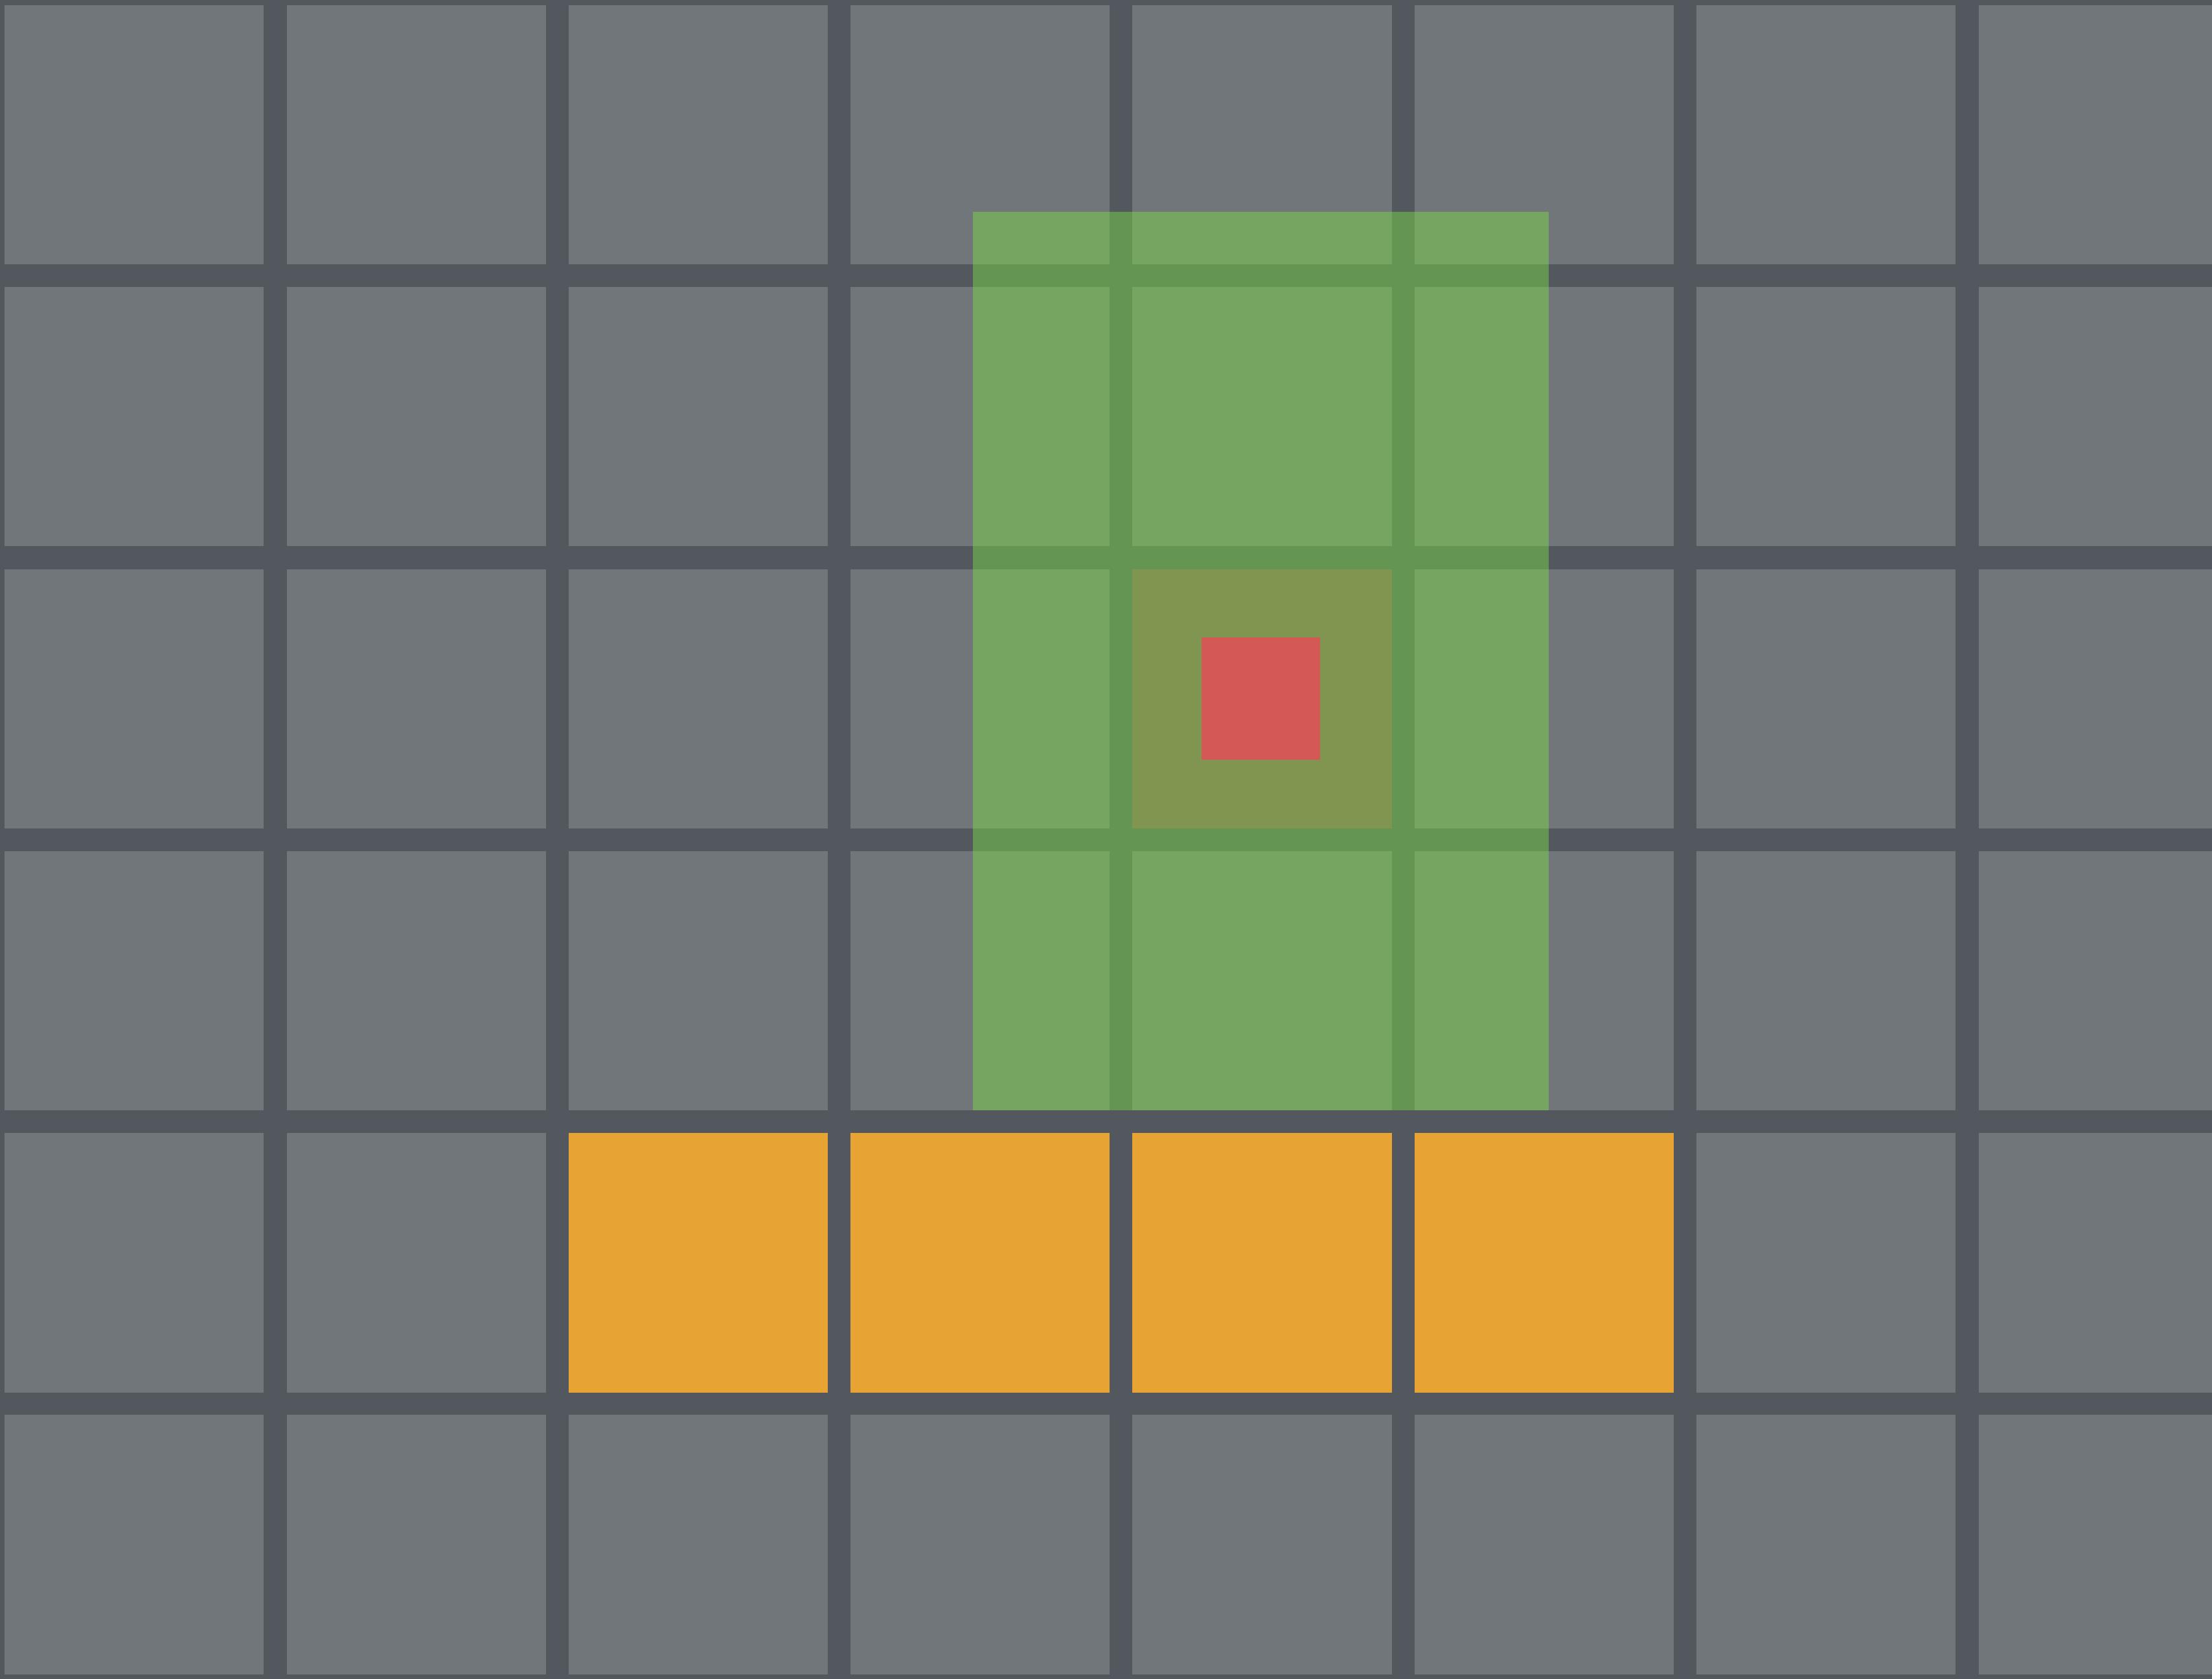



# Divide your unit coordinates by the tile size and invert Y.

```
void worldToTileCoordinates(float worldX, float worldY, int *gridX, int *gridY) {  
    *gridX = (int)(worldX / TILE_SIZE);  
    *gridY = (int)(-worldY / TILE_SIZE);  
}
```

Make sure that your tile coordinates  
are not negative or larger than your map!

We don't want to collide using the entity's center, so check the point at the bottom (-half height).

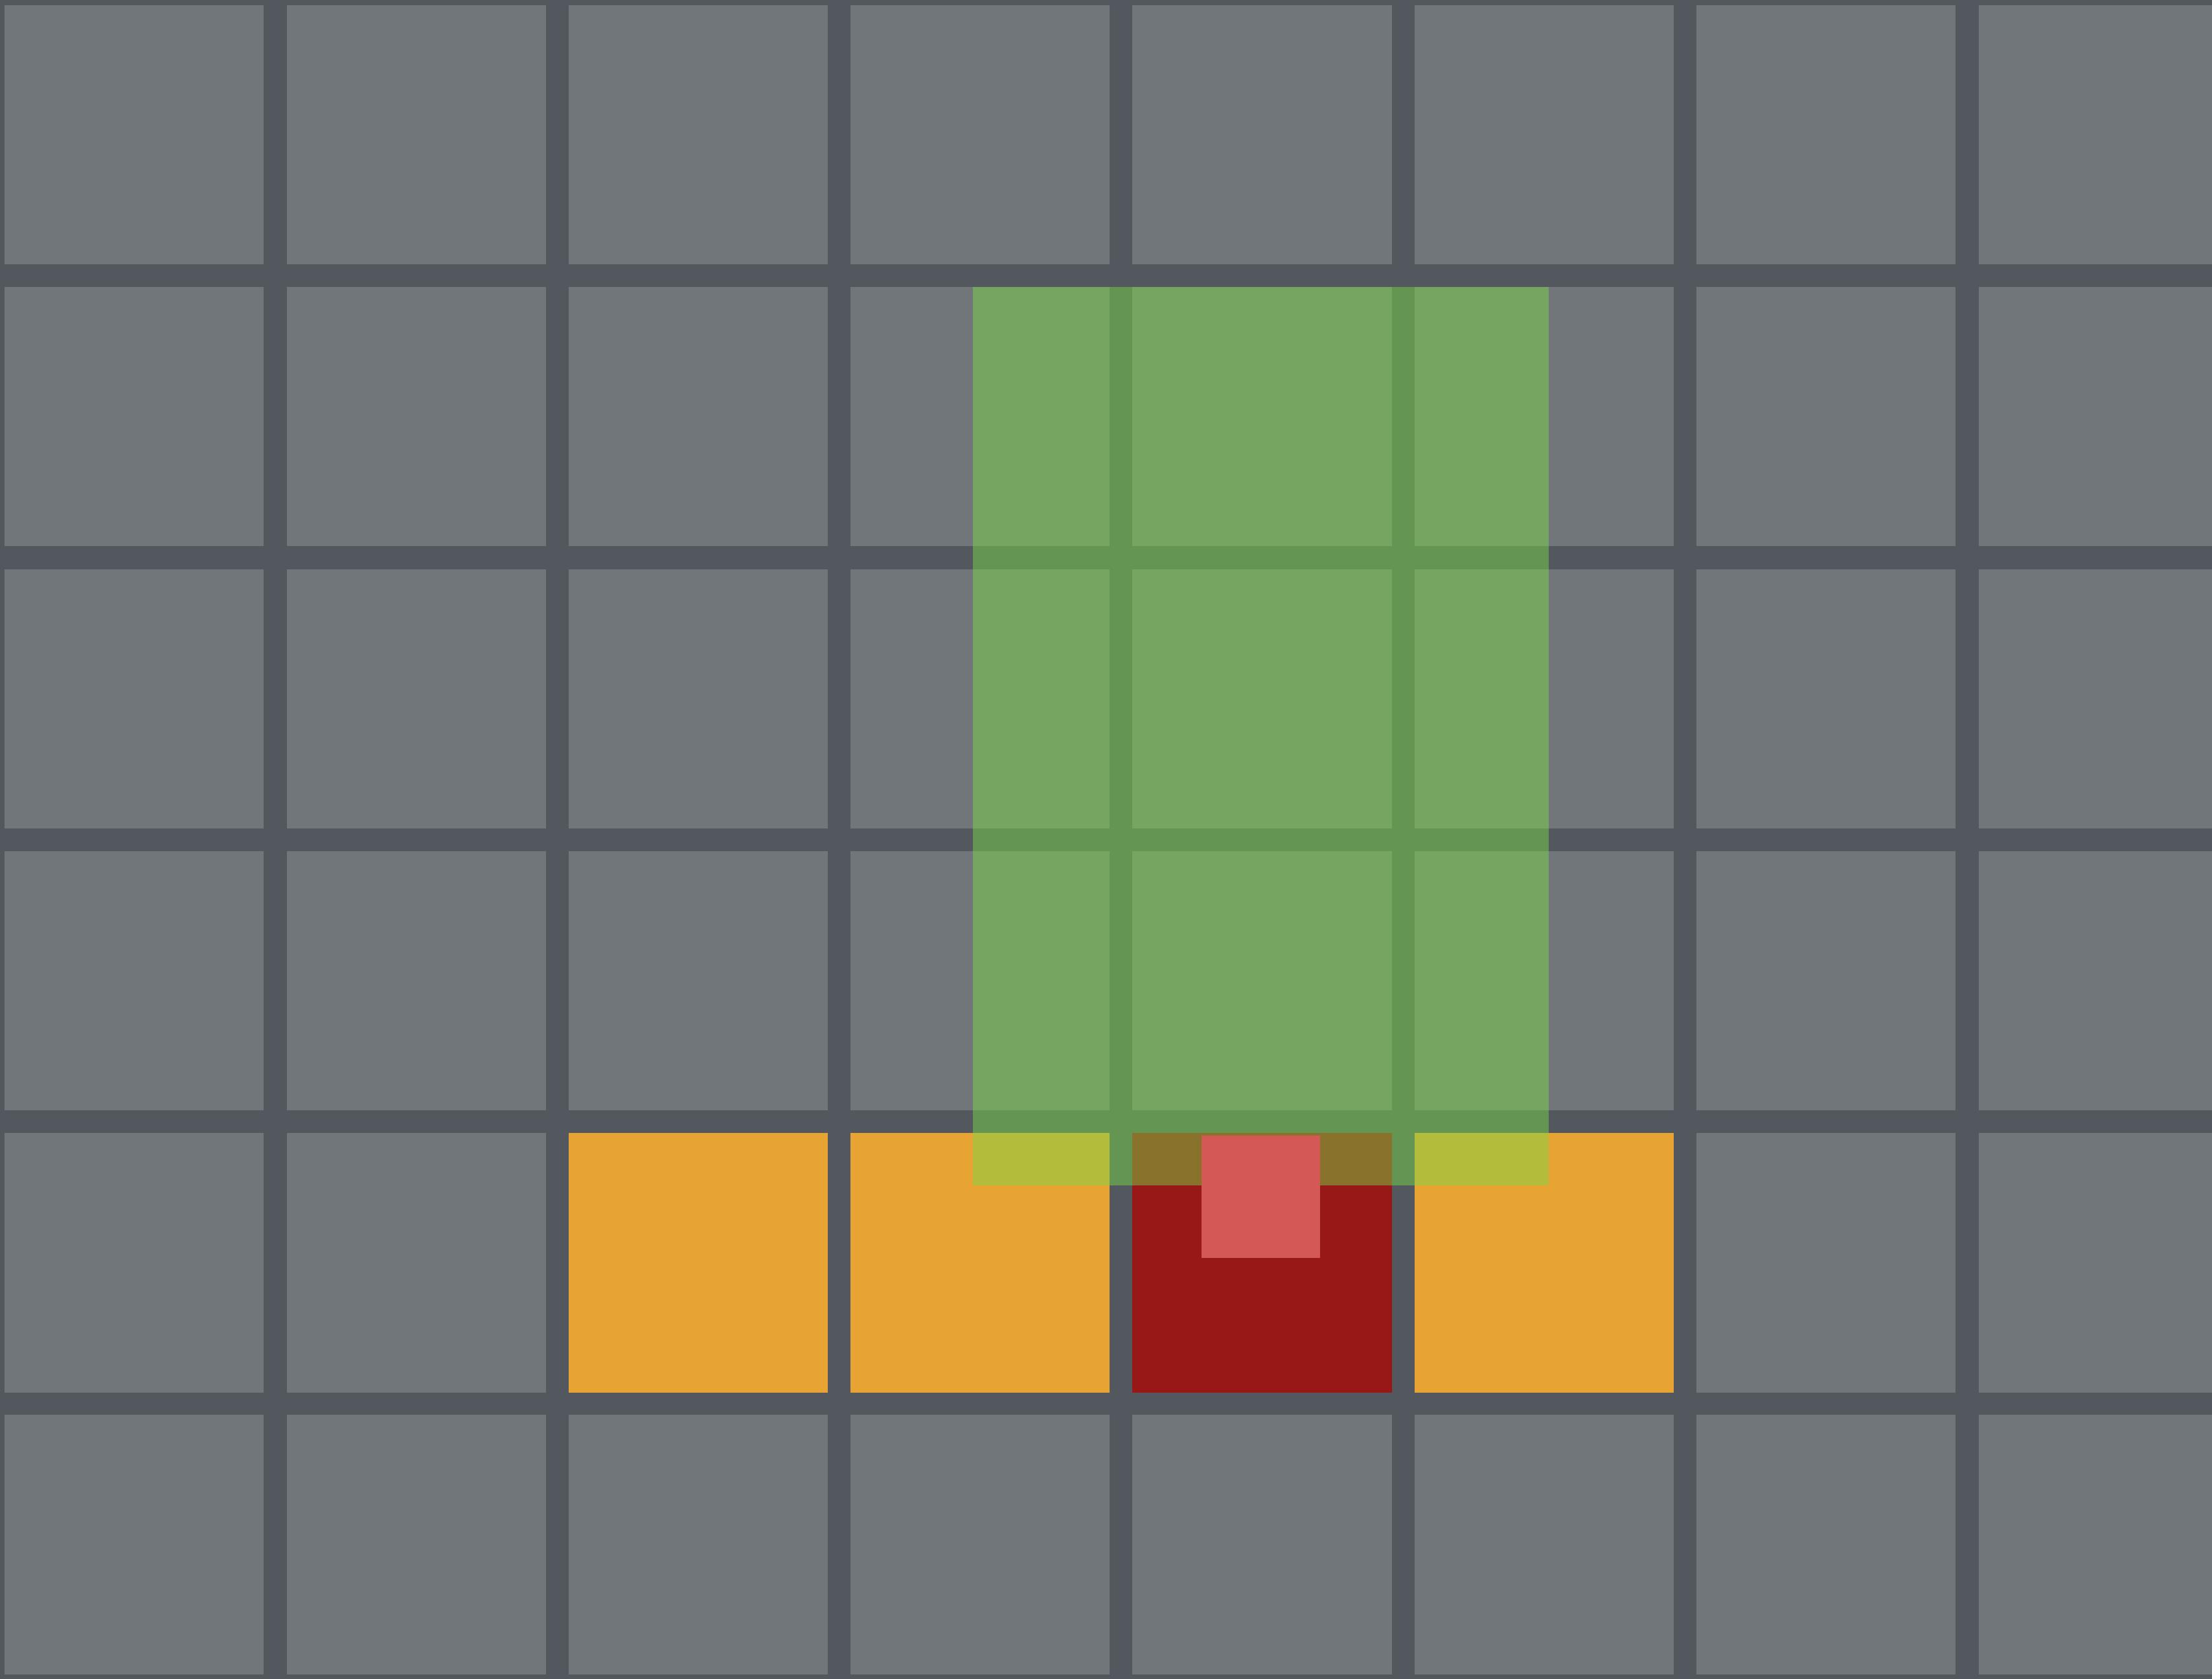

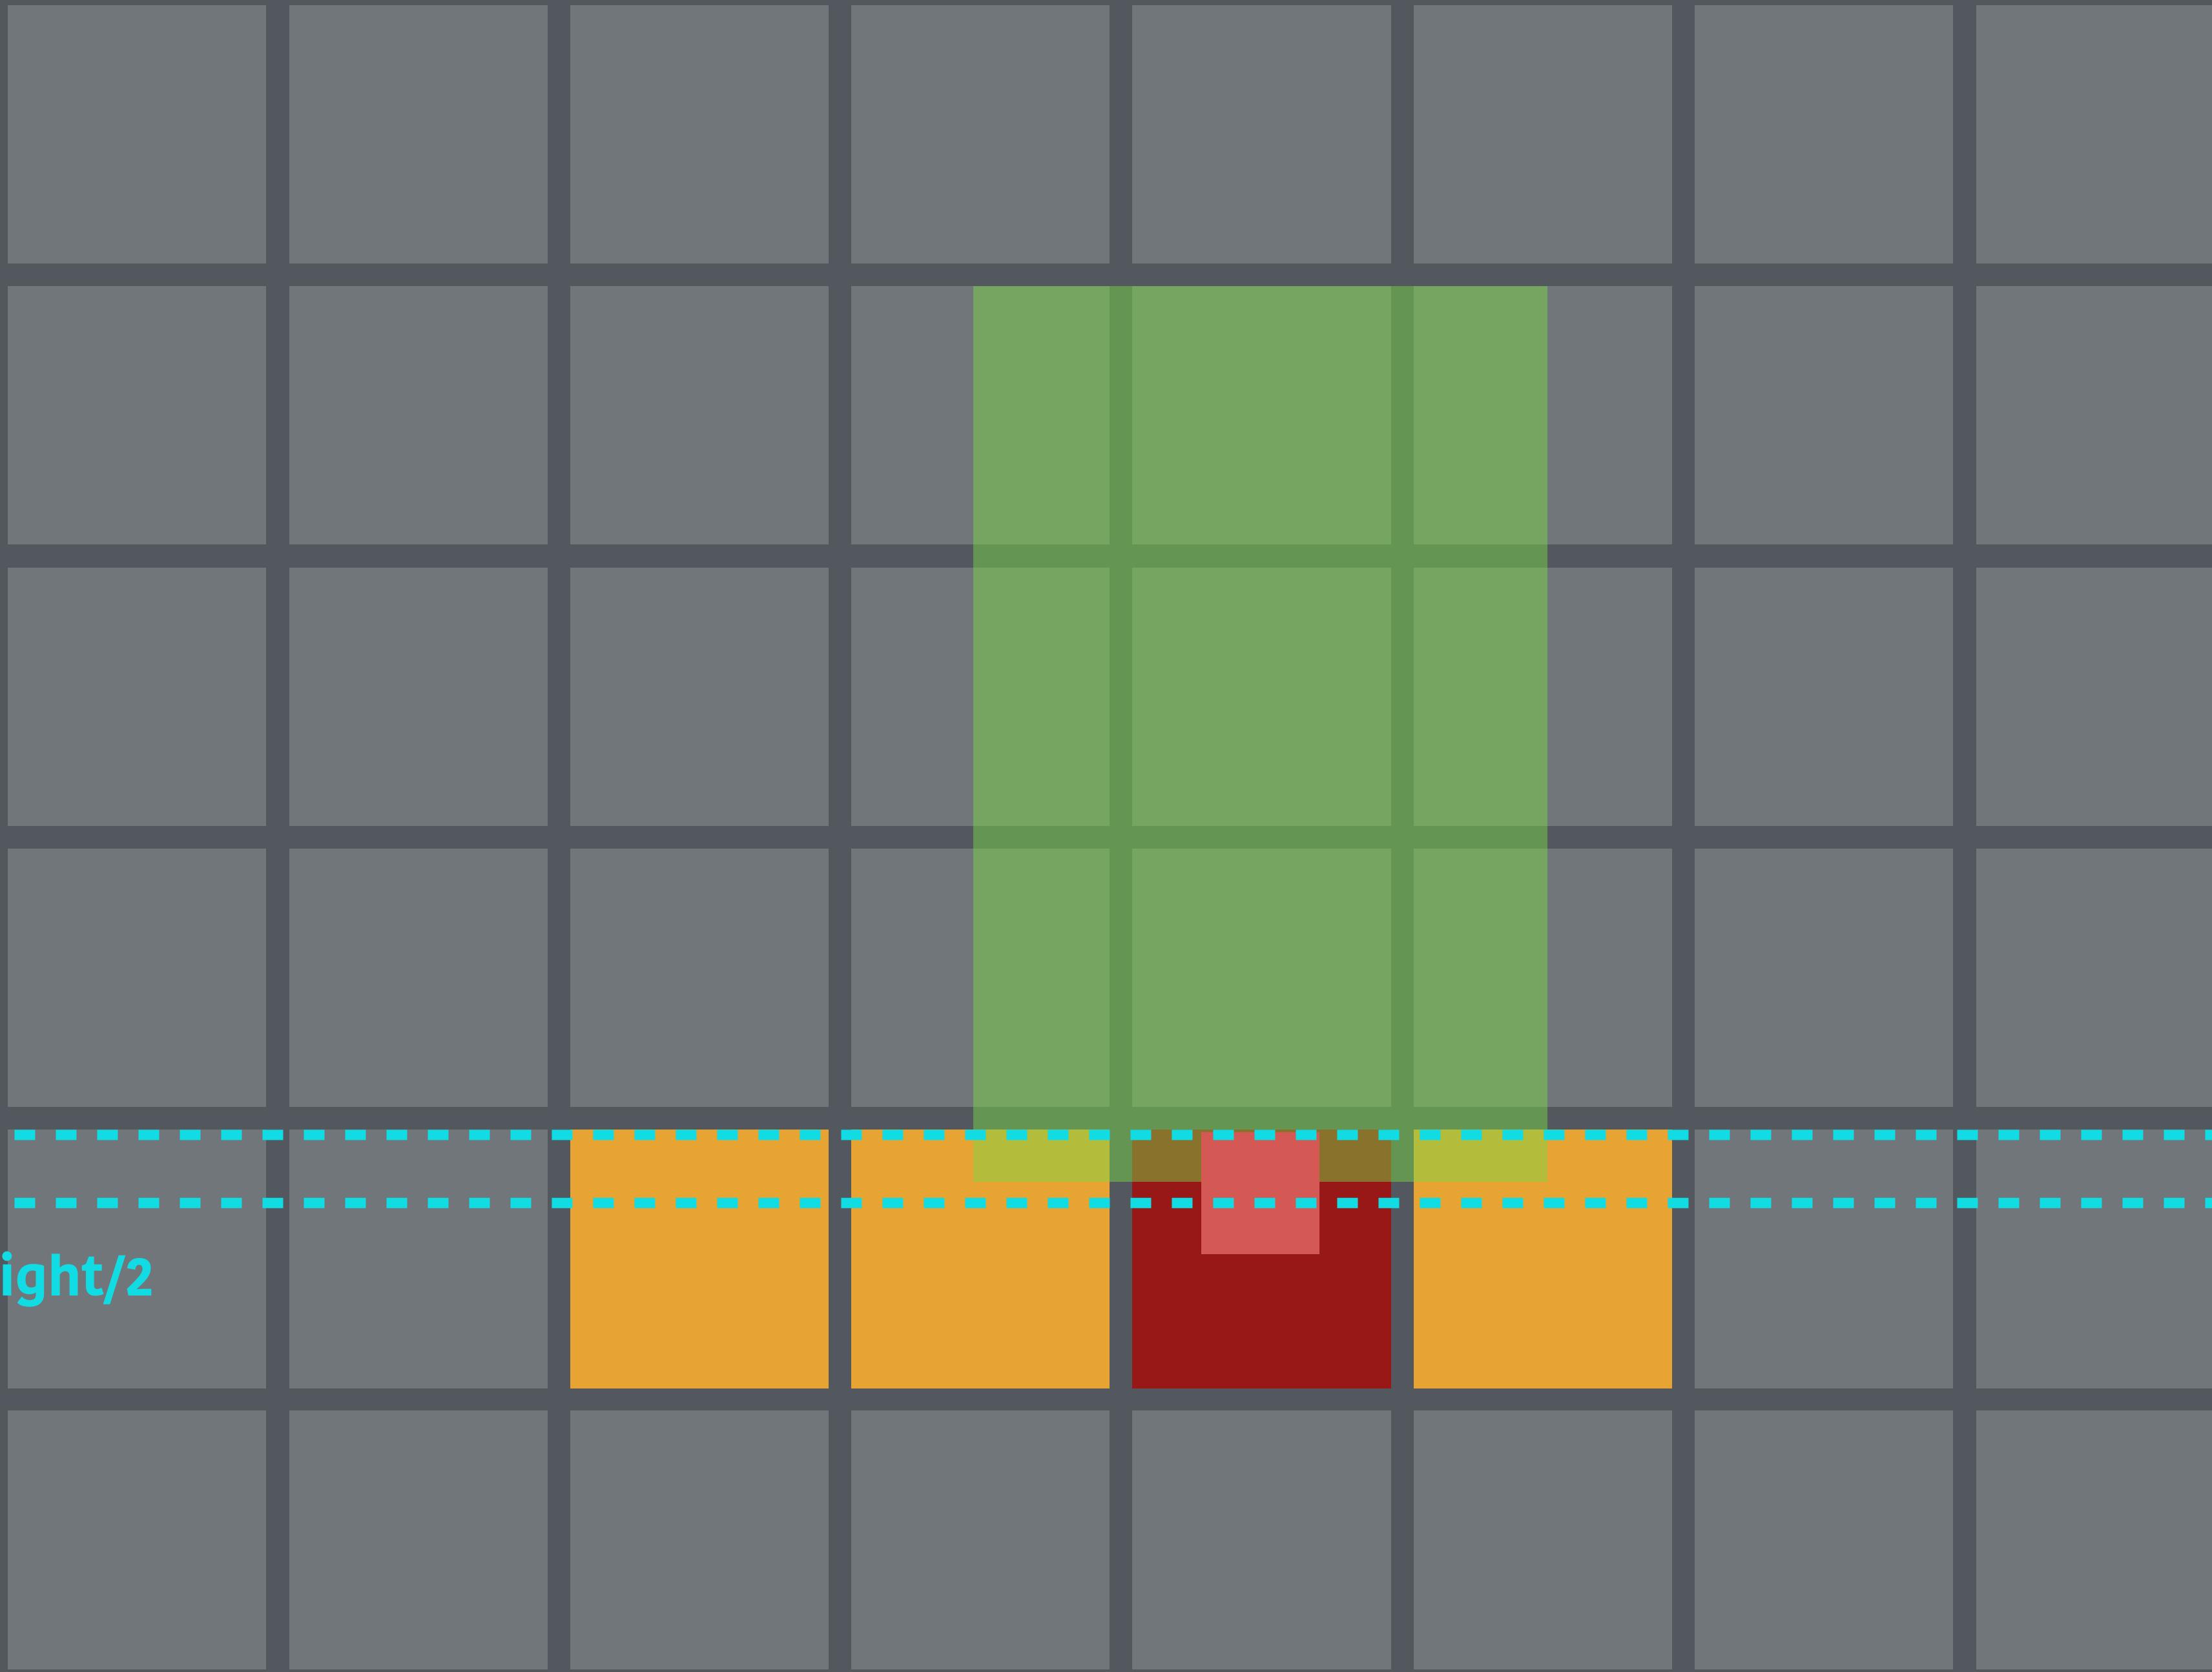

$-TILE\_SIZE * tile\_y$


-----

-----


$entity.y - entity.height/2$


If the tile is solid, adjust our Y-coordinate up by the difference between the point we are testing and the top of the tile (plus a tiny amount).

Don't forget to reset velocity to 0 and set  
your collision flags!

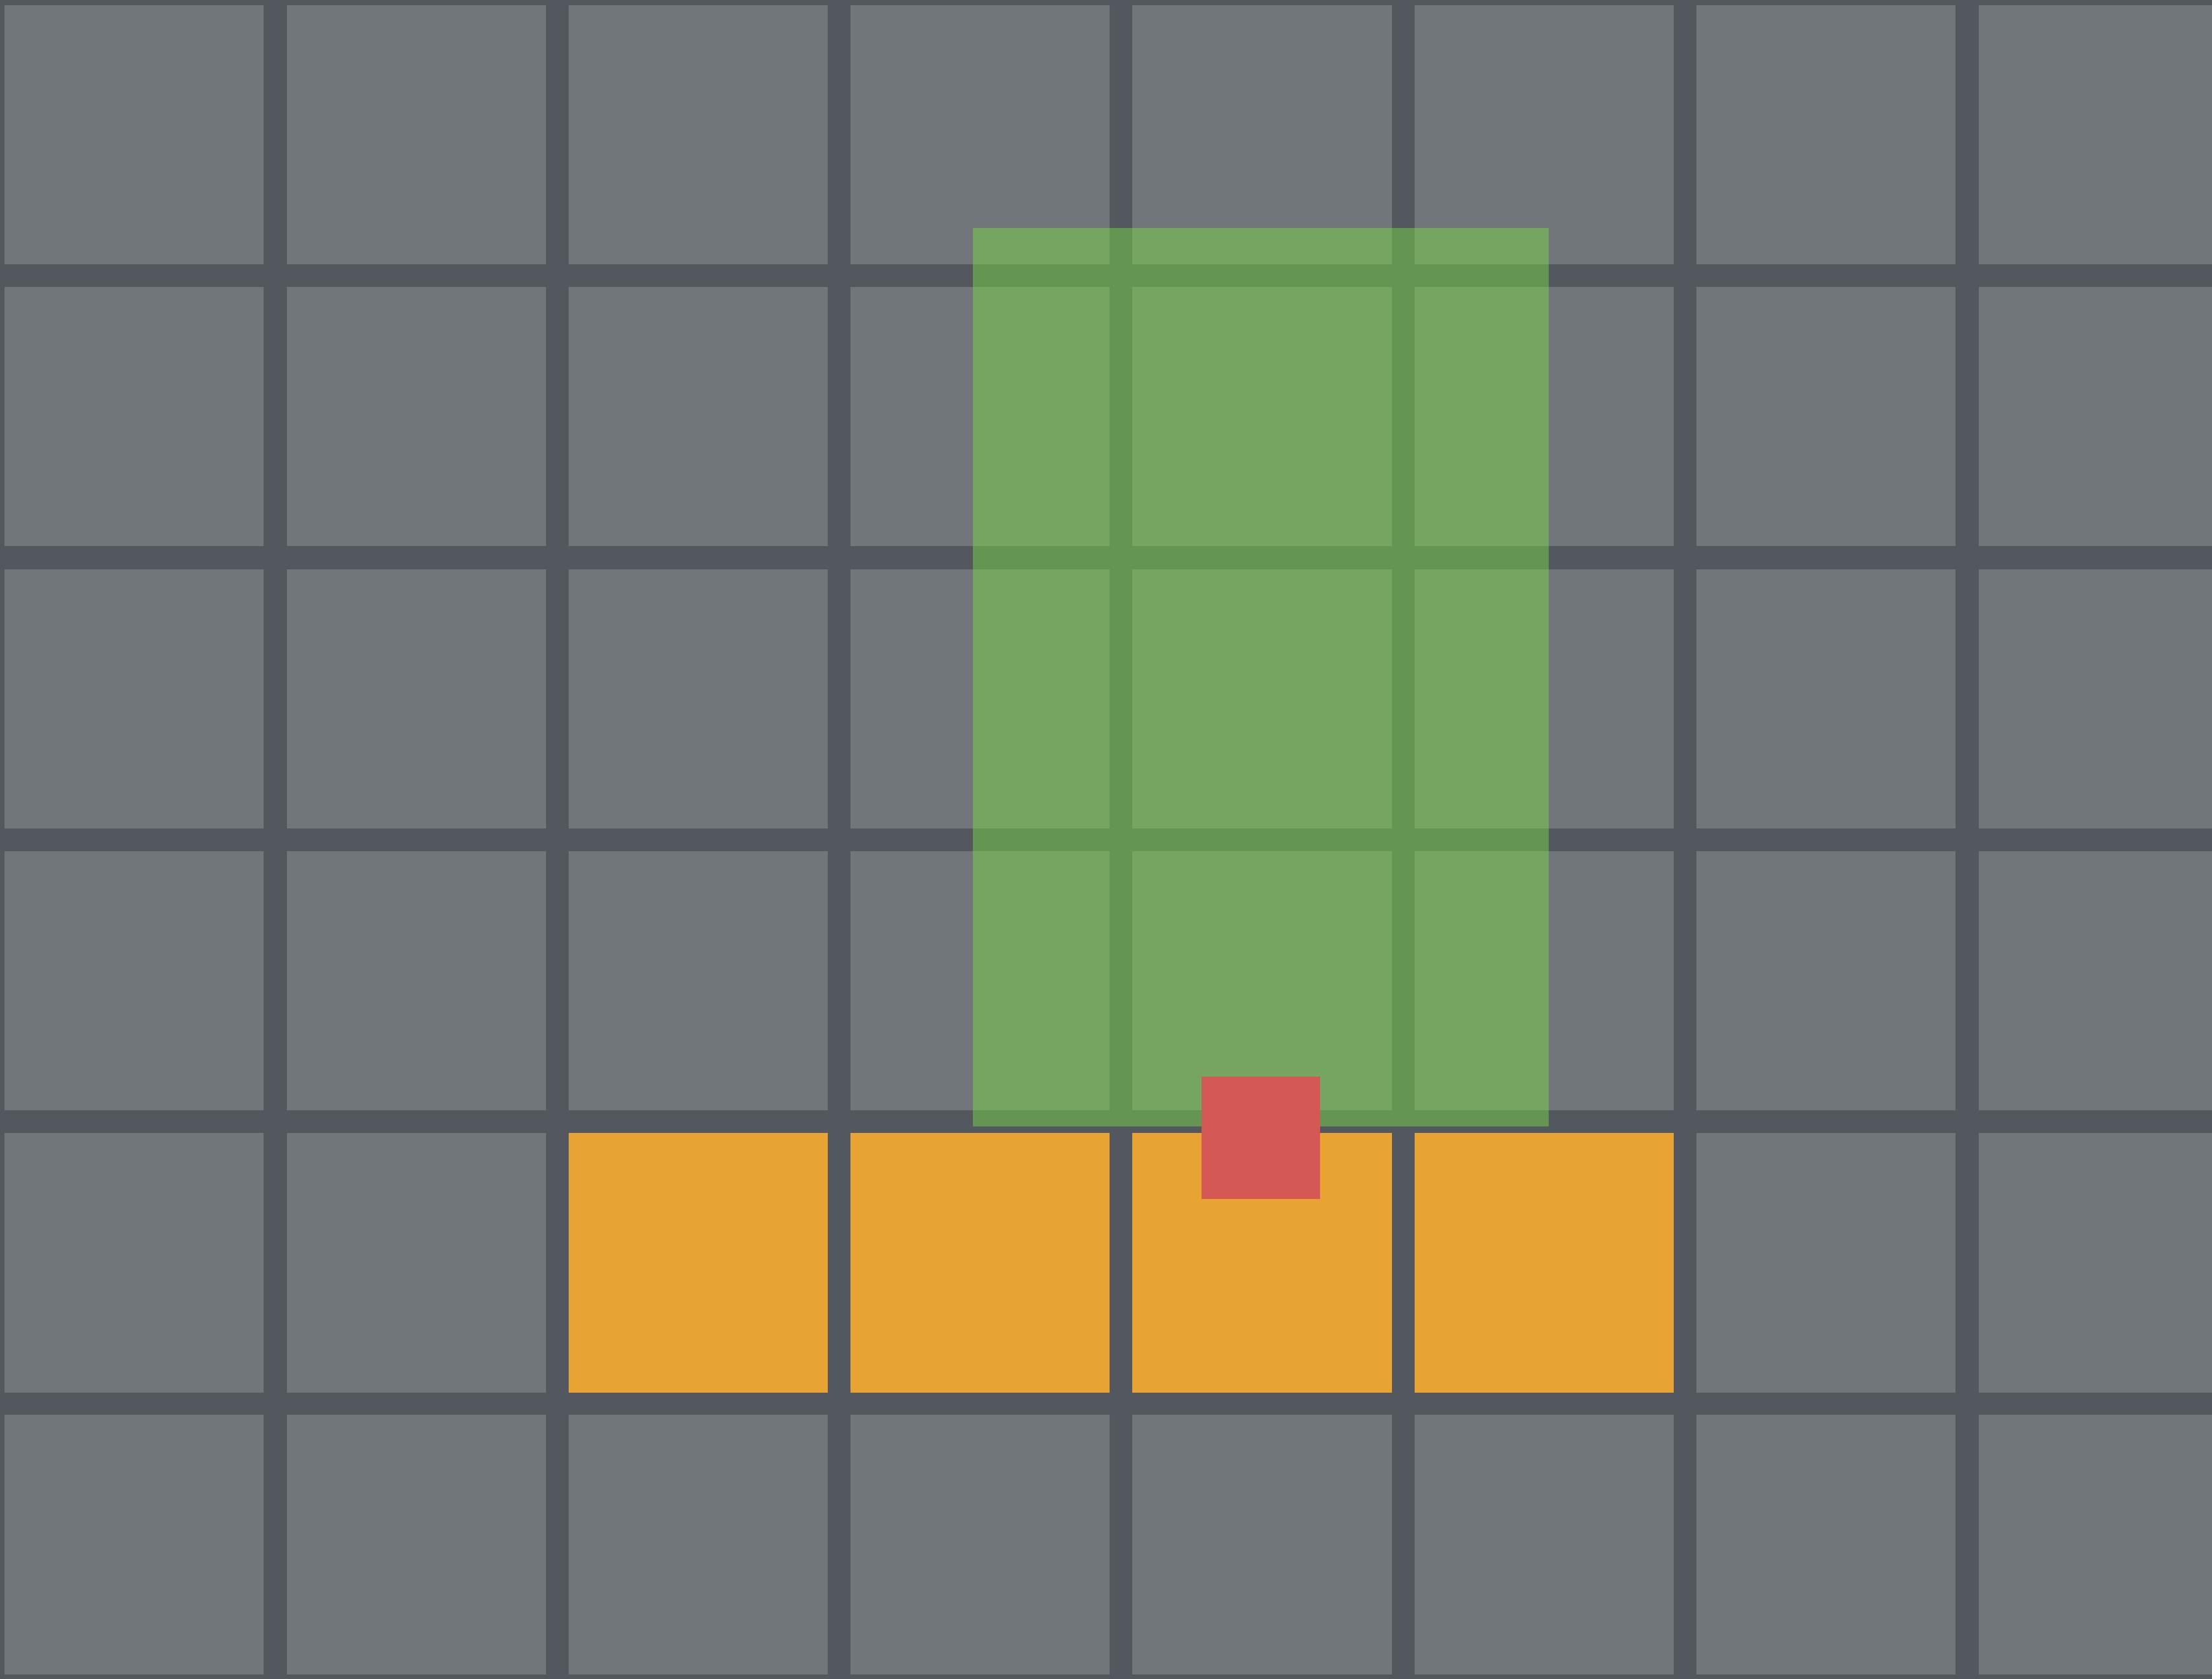


Now, check the point at the top...

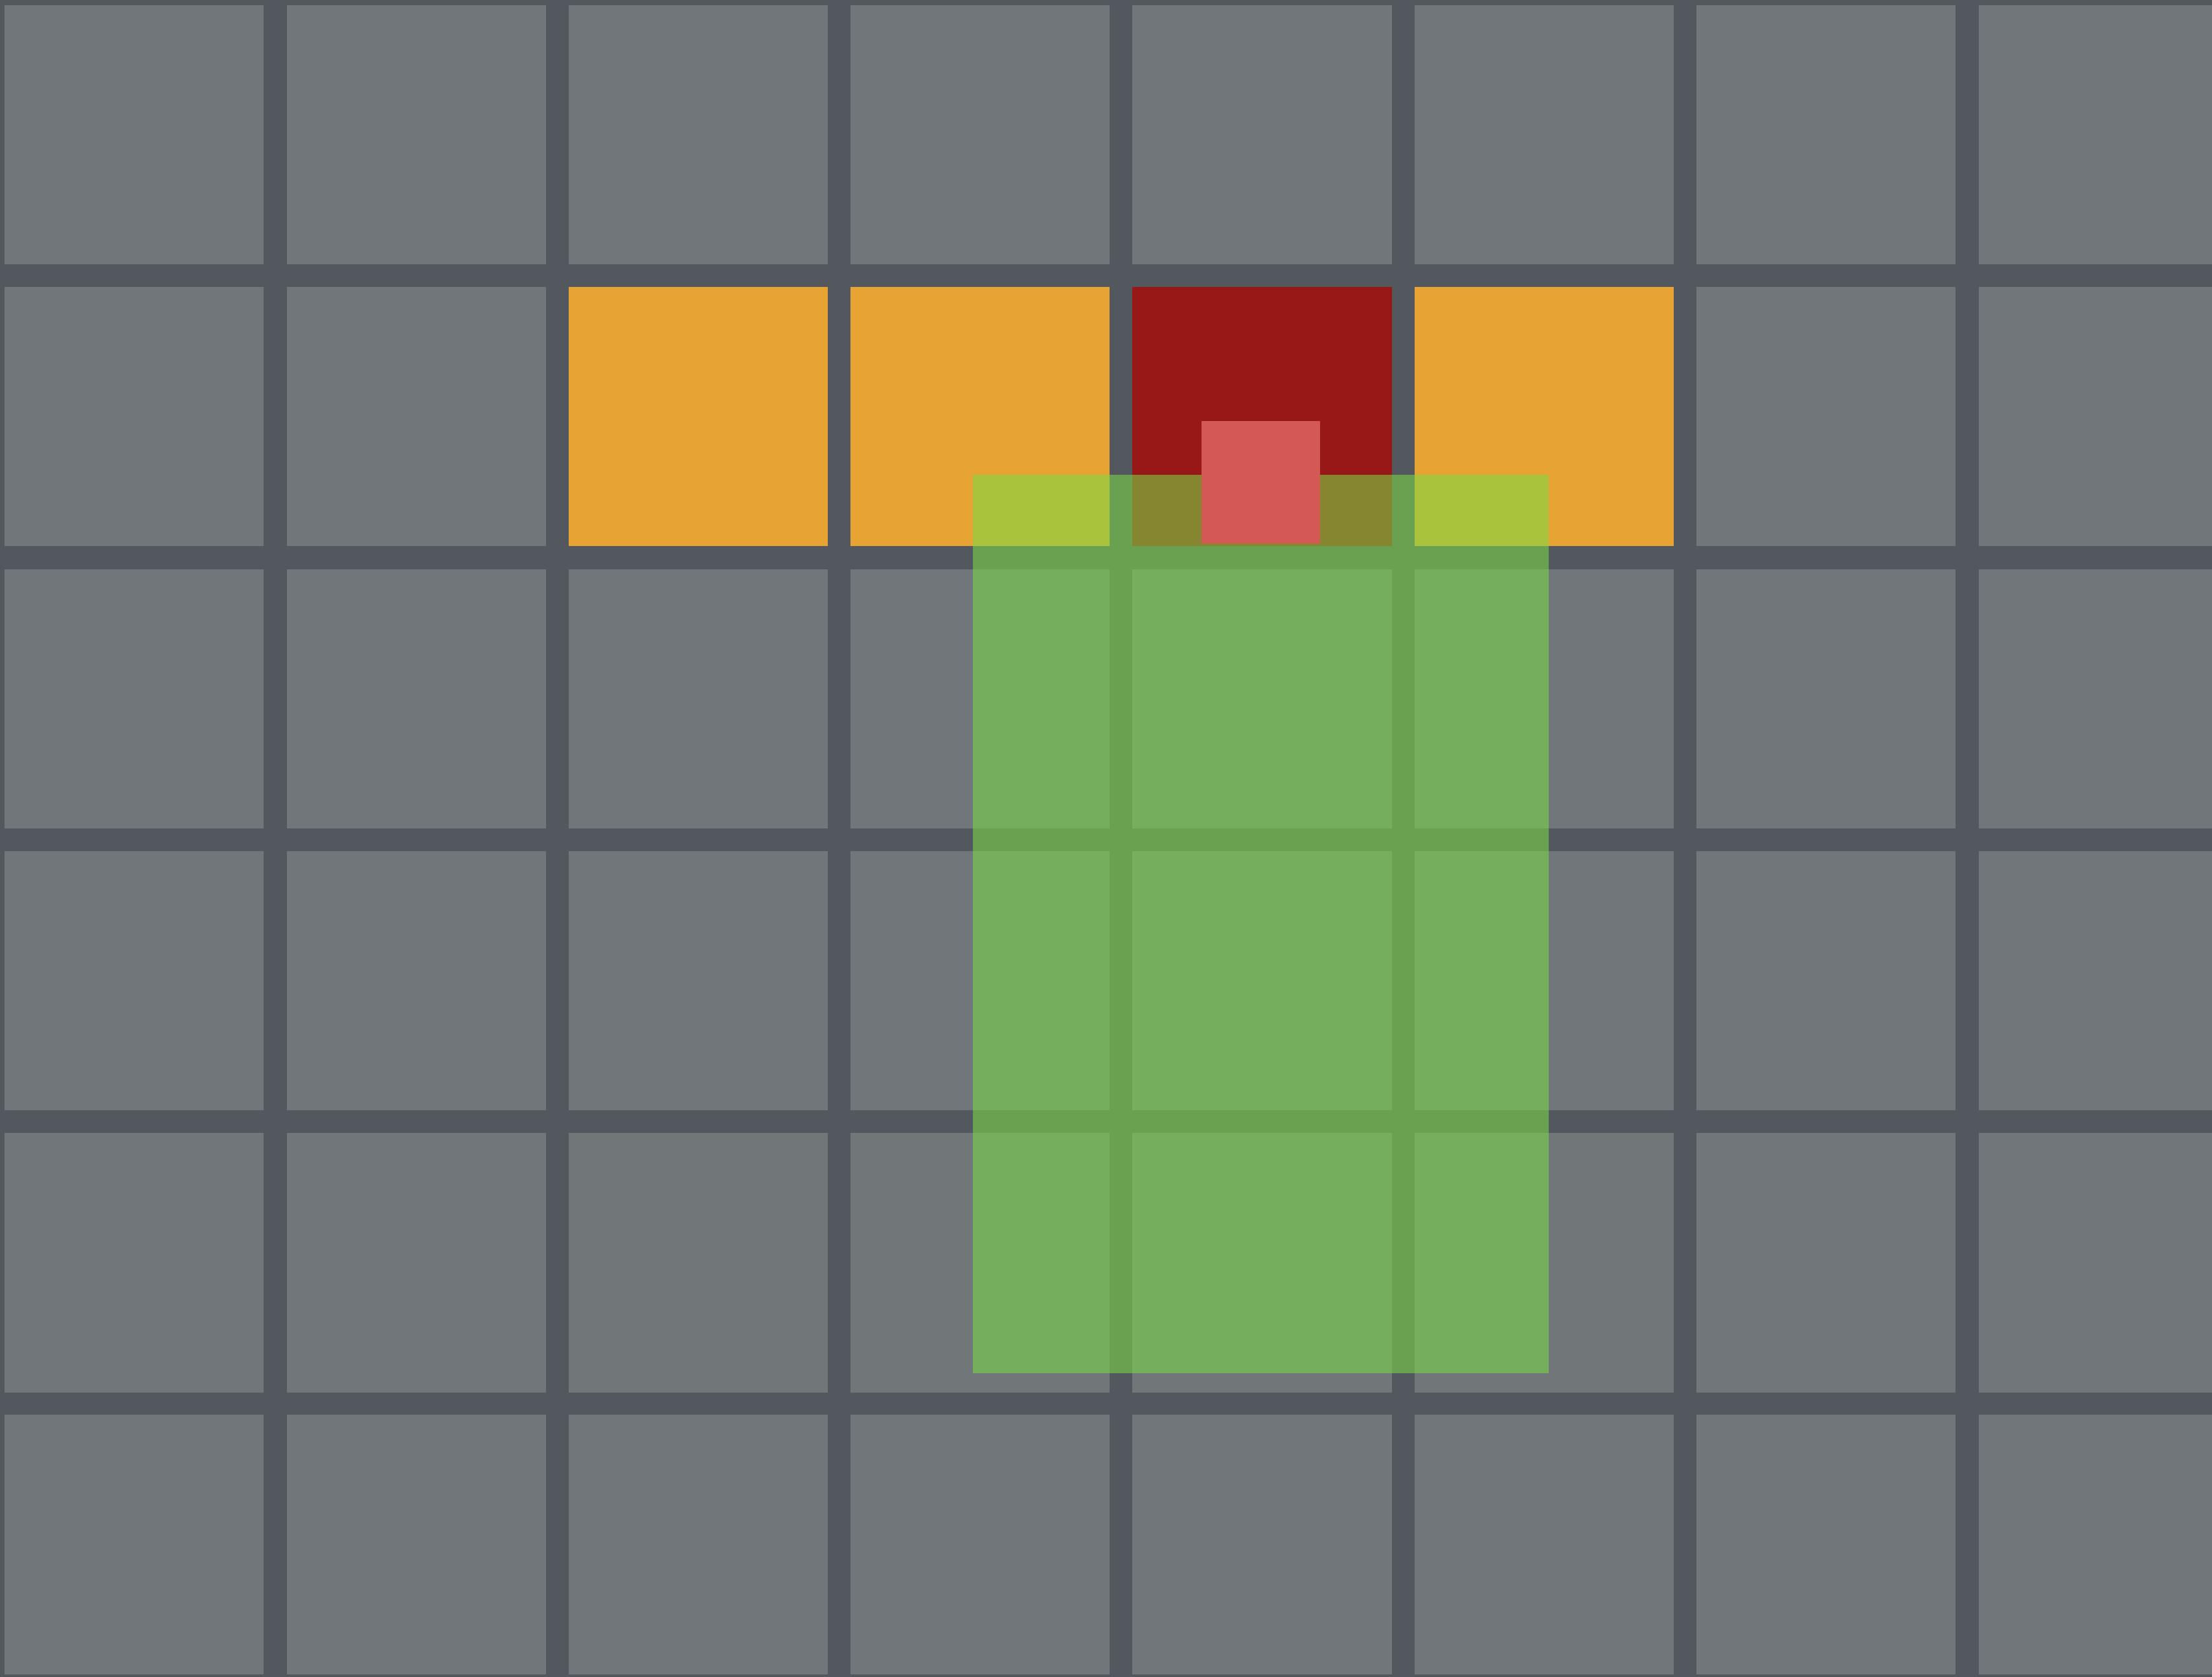

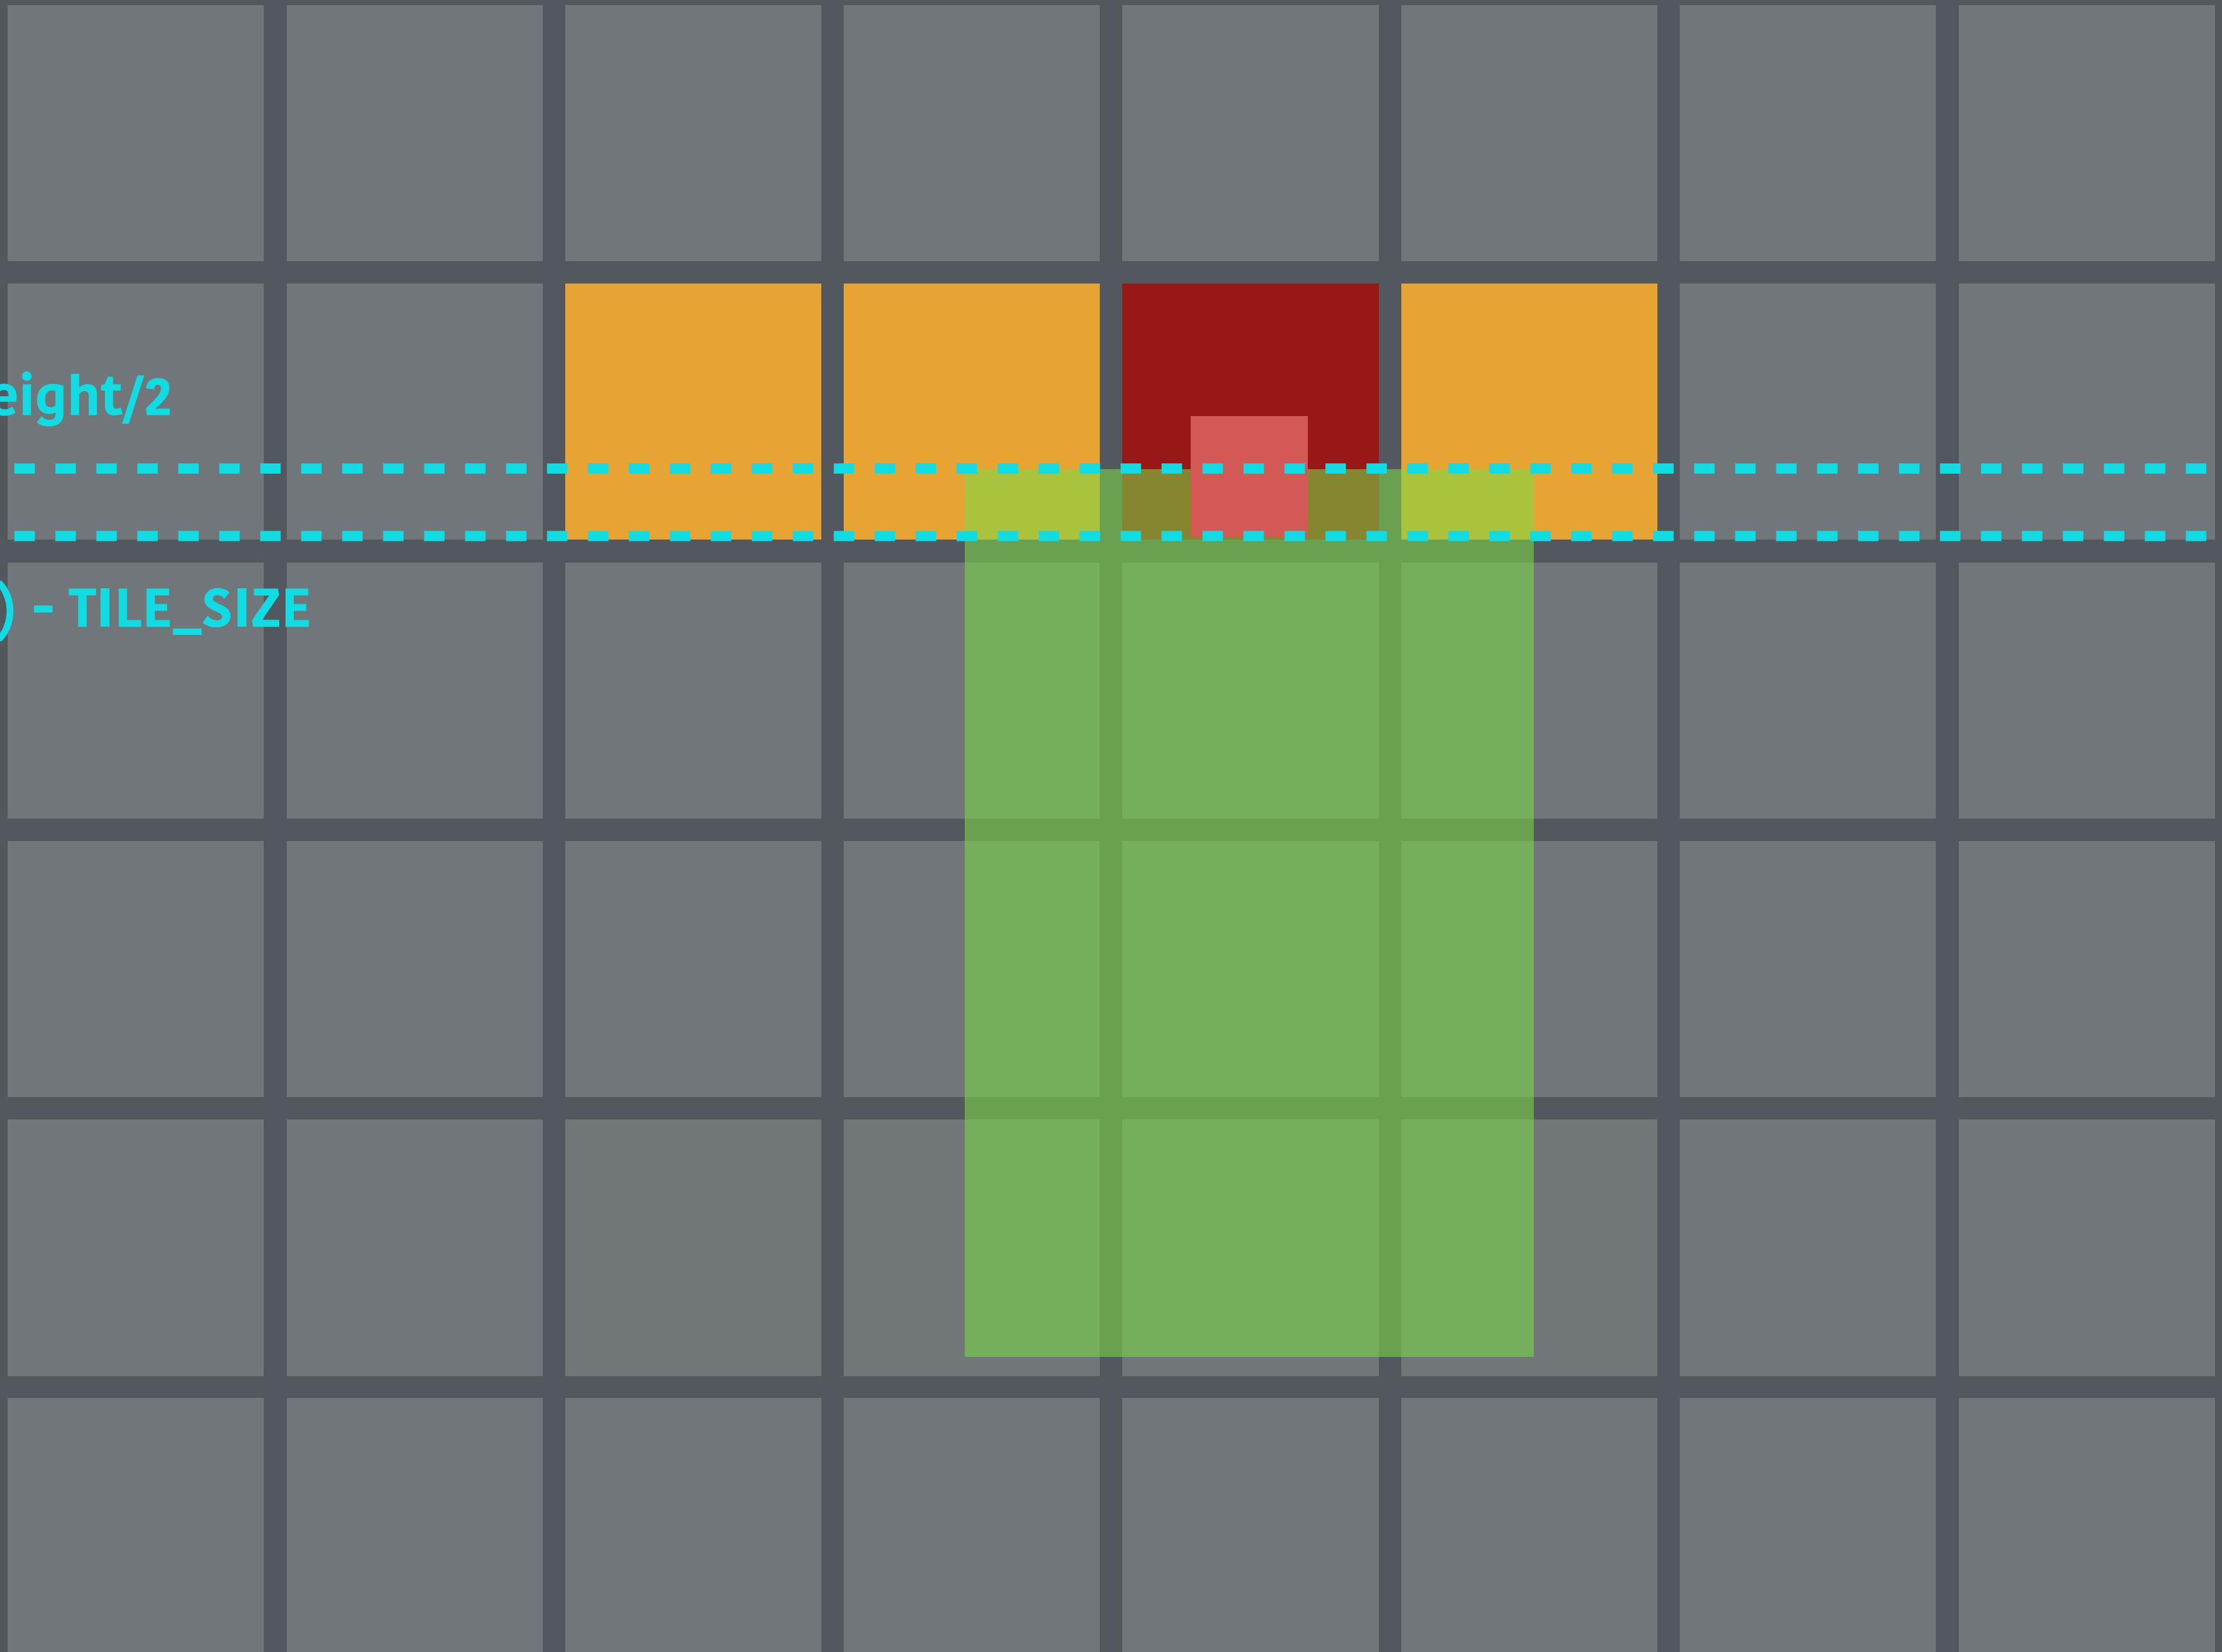


If the tile is solid, adjust our Y-coordinate down by the difference between the point we are testing and the bottom of the tile (plus a tiny amount).

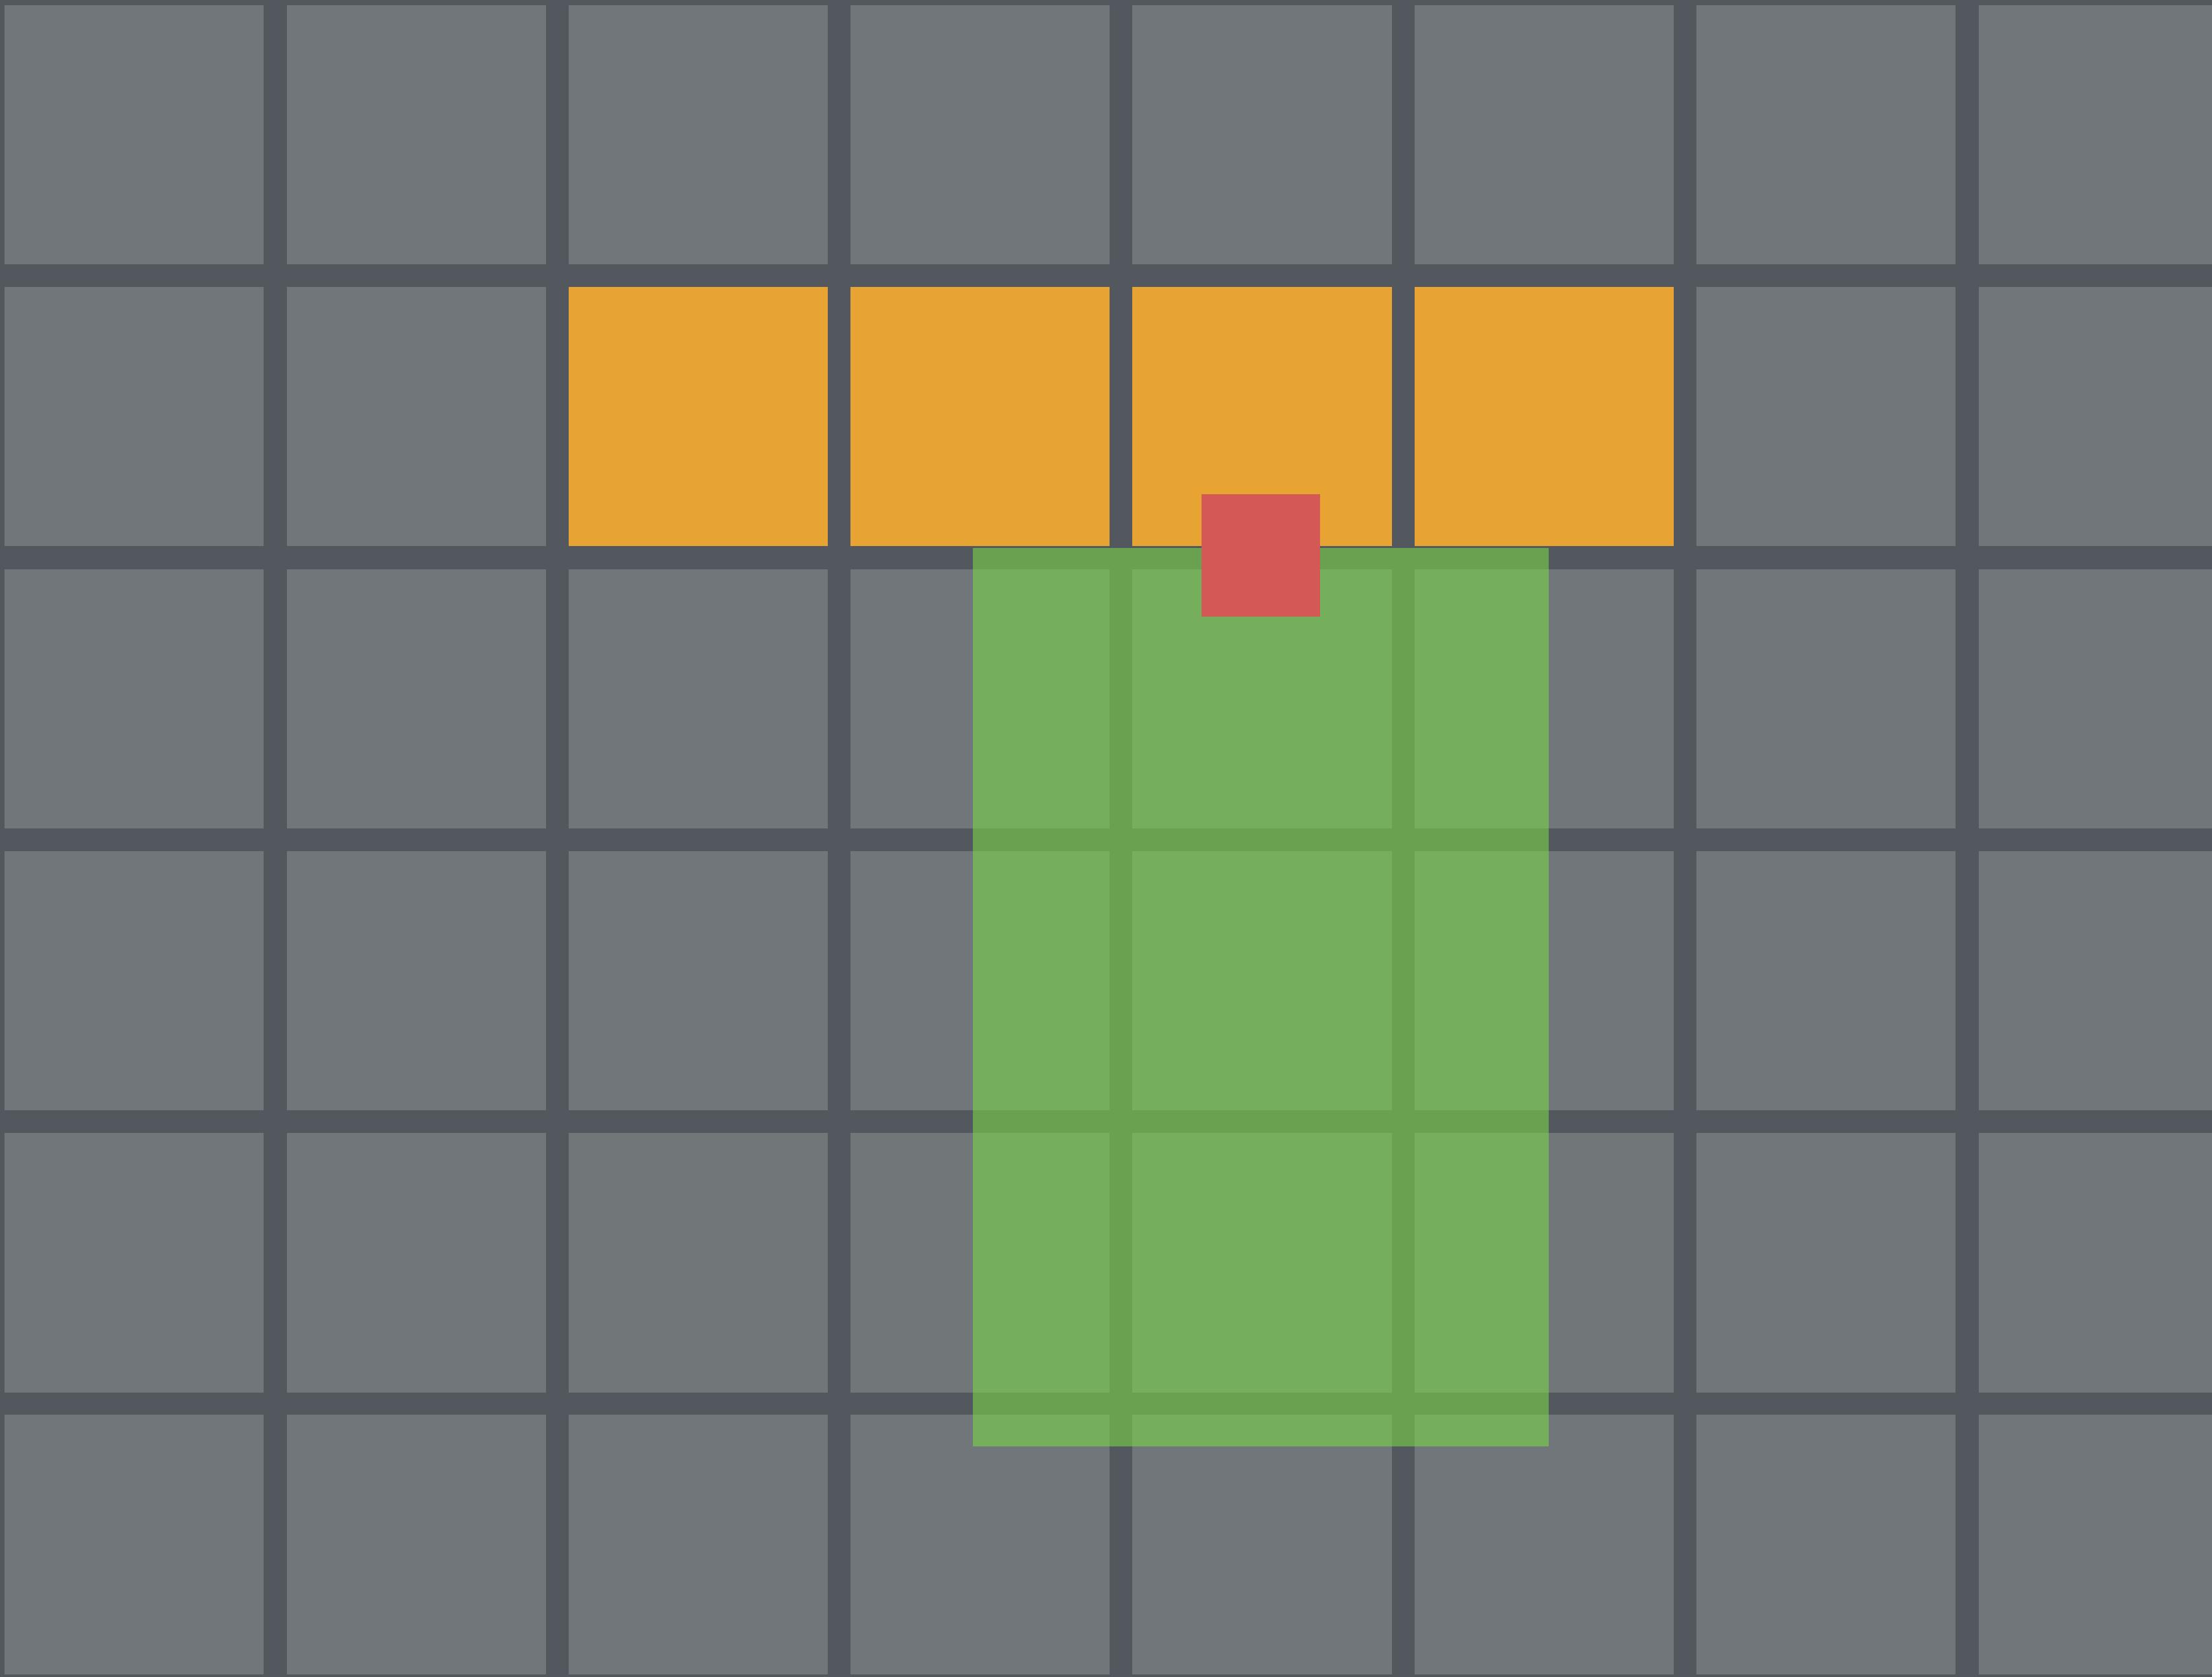

Now the X axis...


On the left...

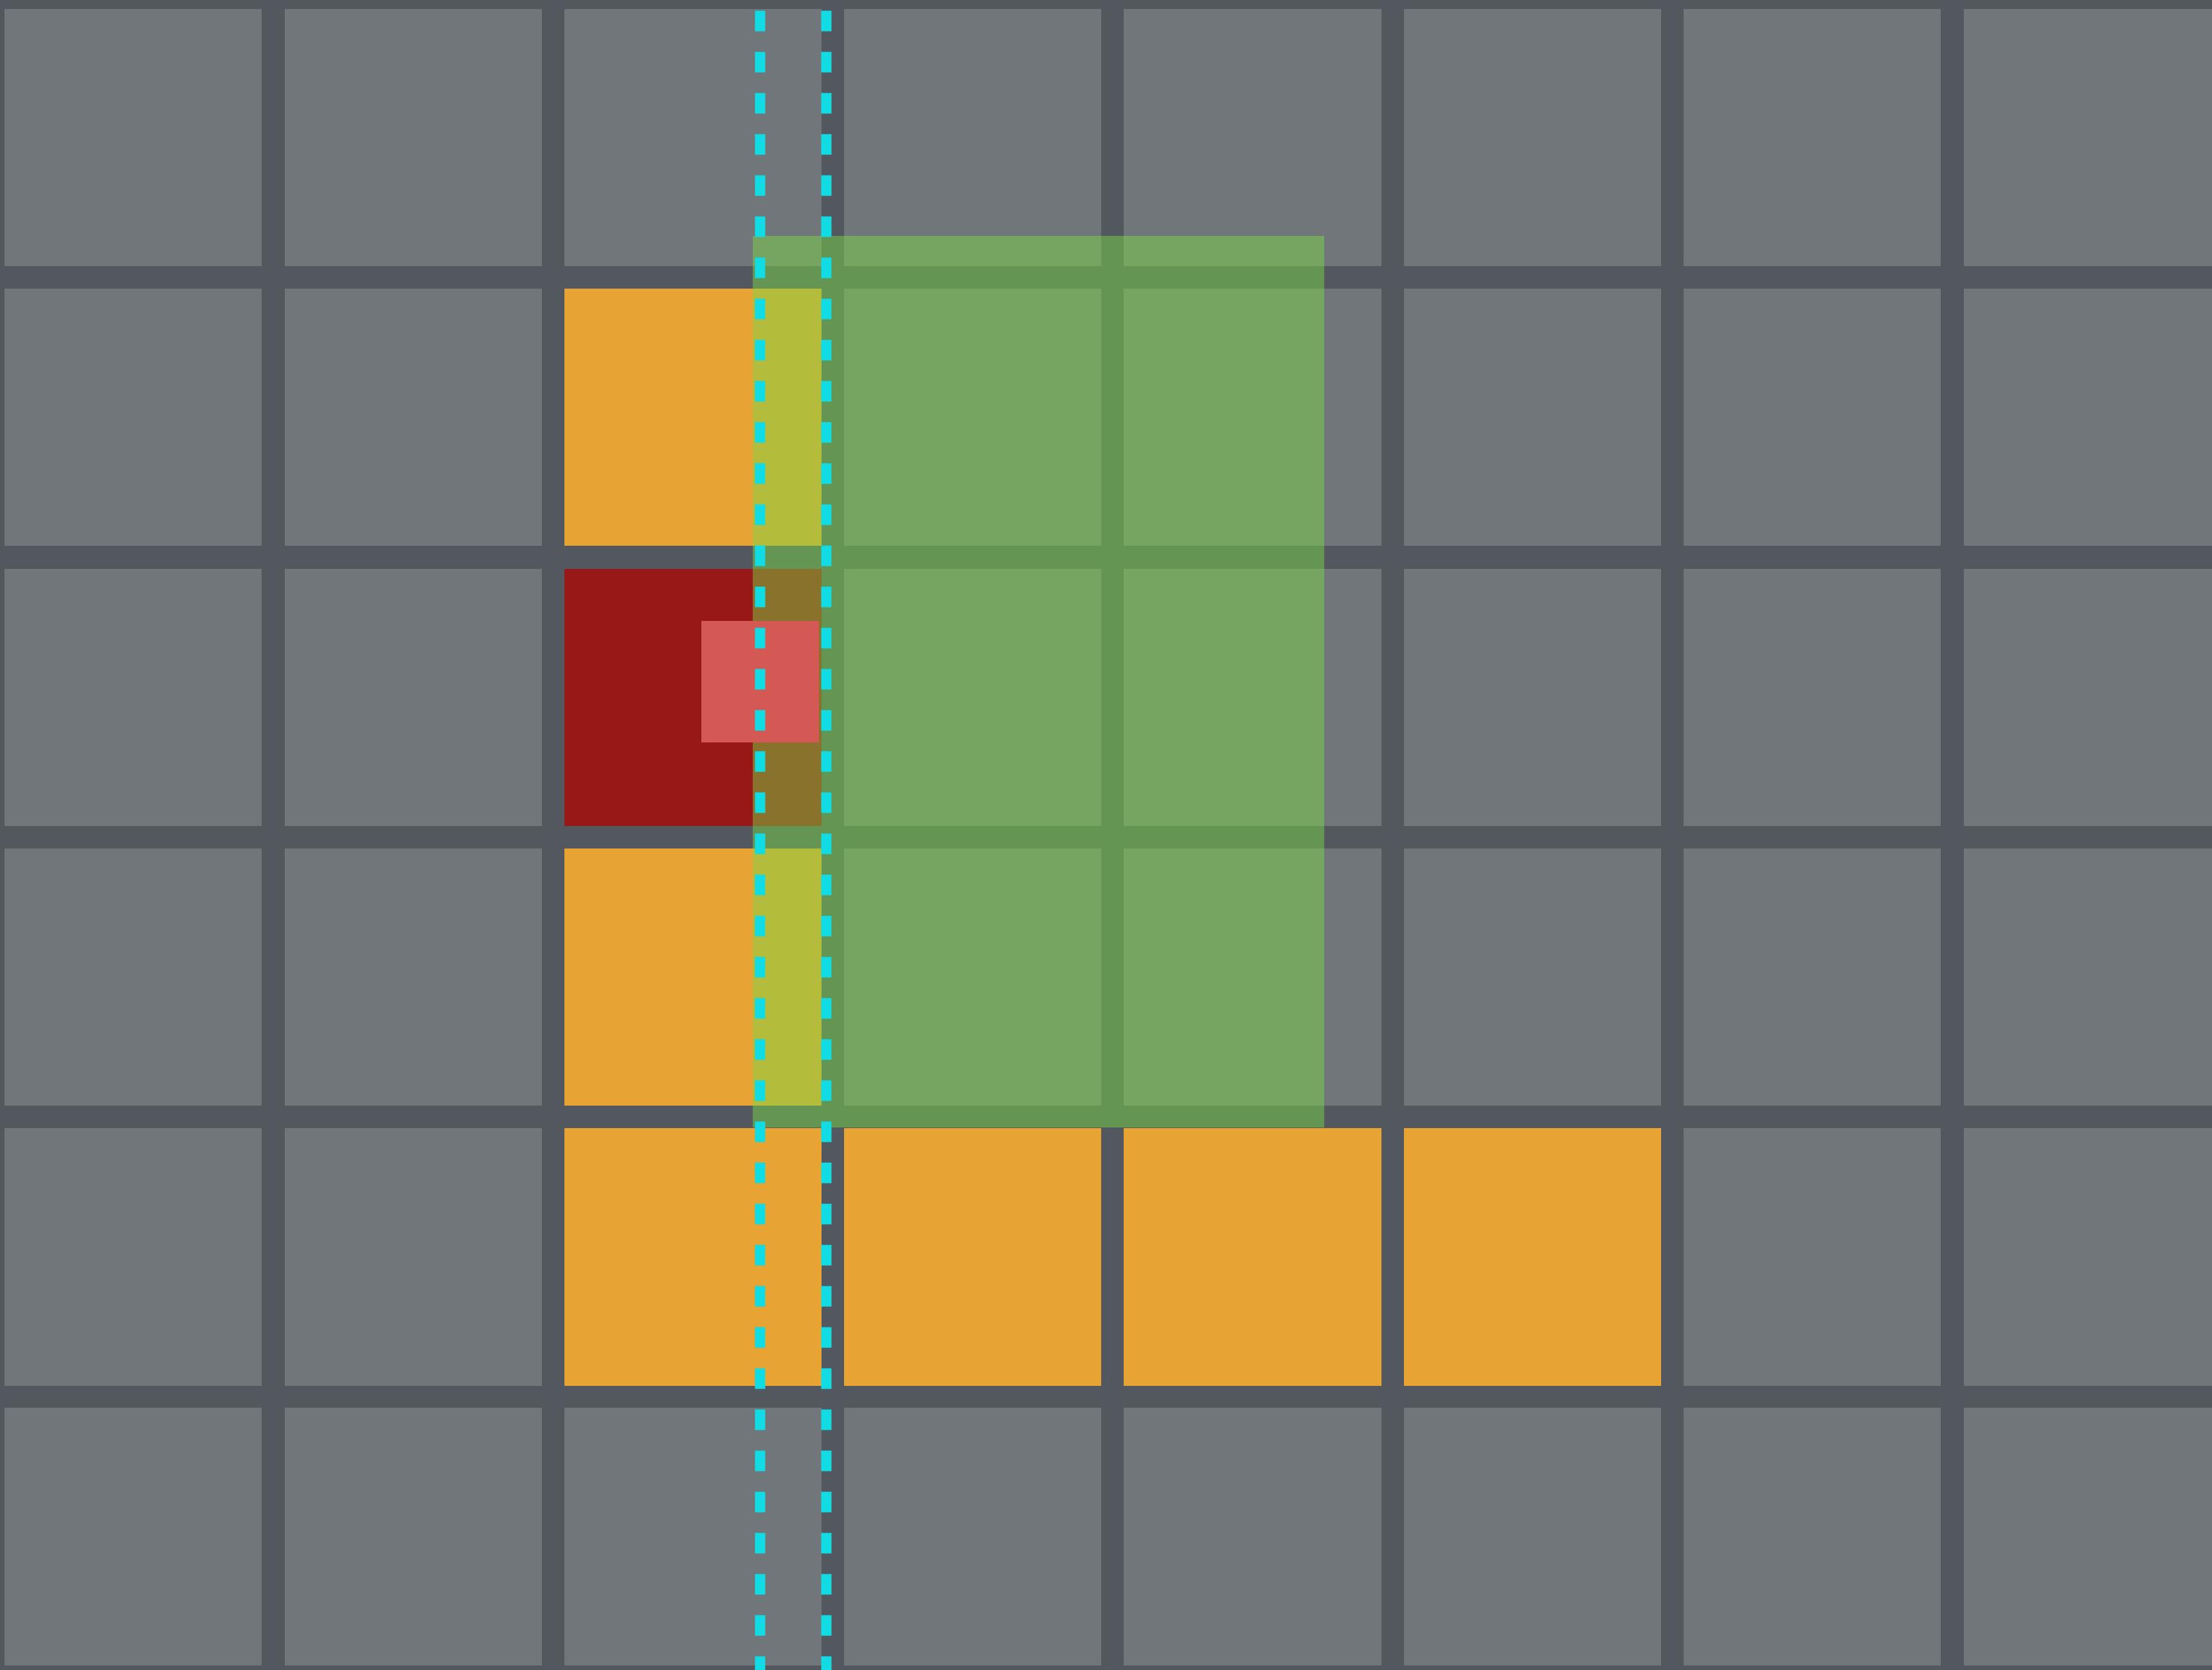


# entity.x - entity.width/2

**(TILE\_SIZE \* tile\_x) + TILE\_SIZE**

If the tile is solid, adjust our X-coordinate right by the difference between the point we are testing and the right of the tile (plus a tiny amount).

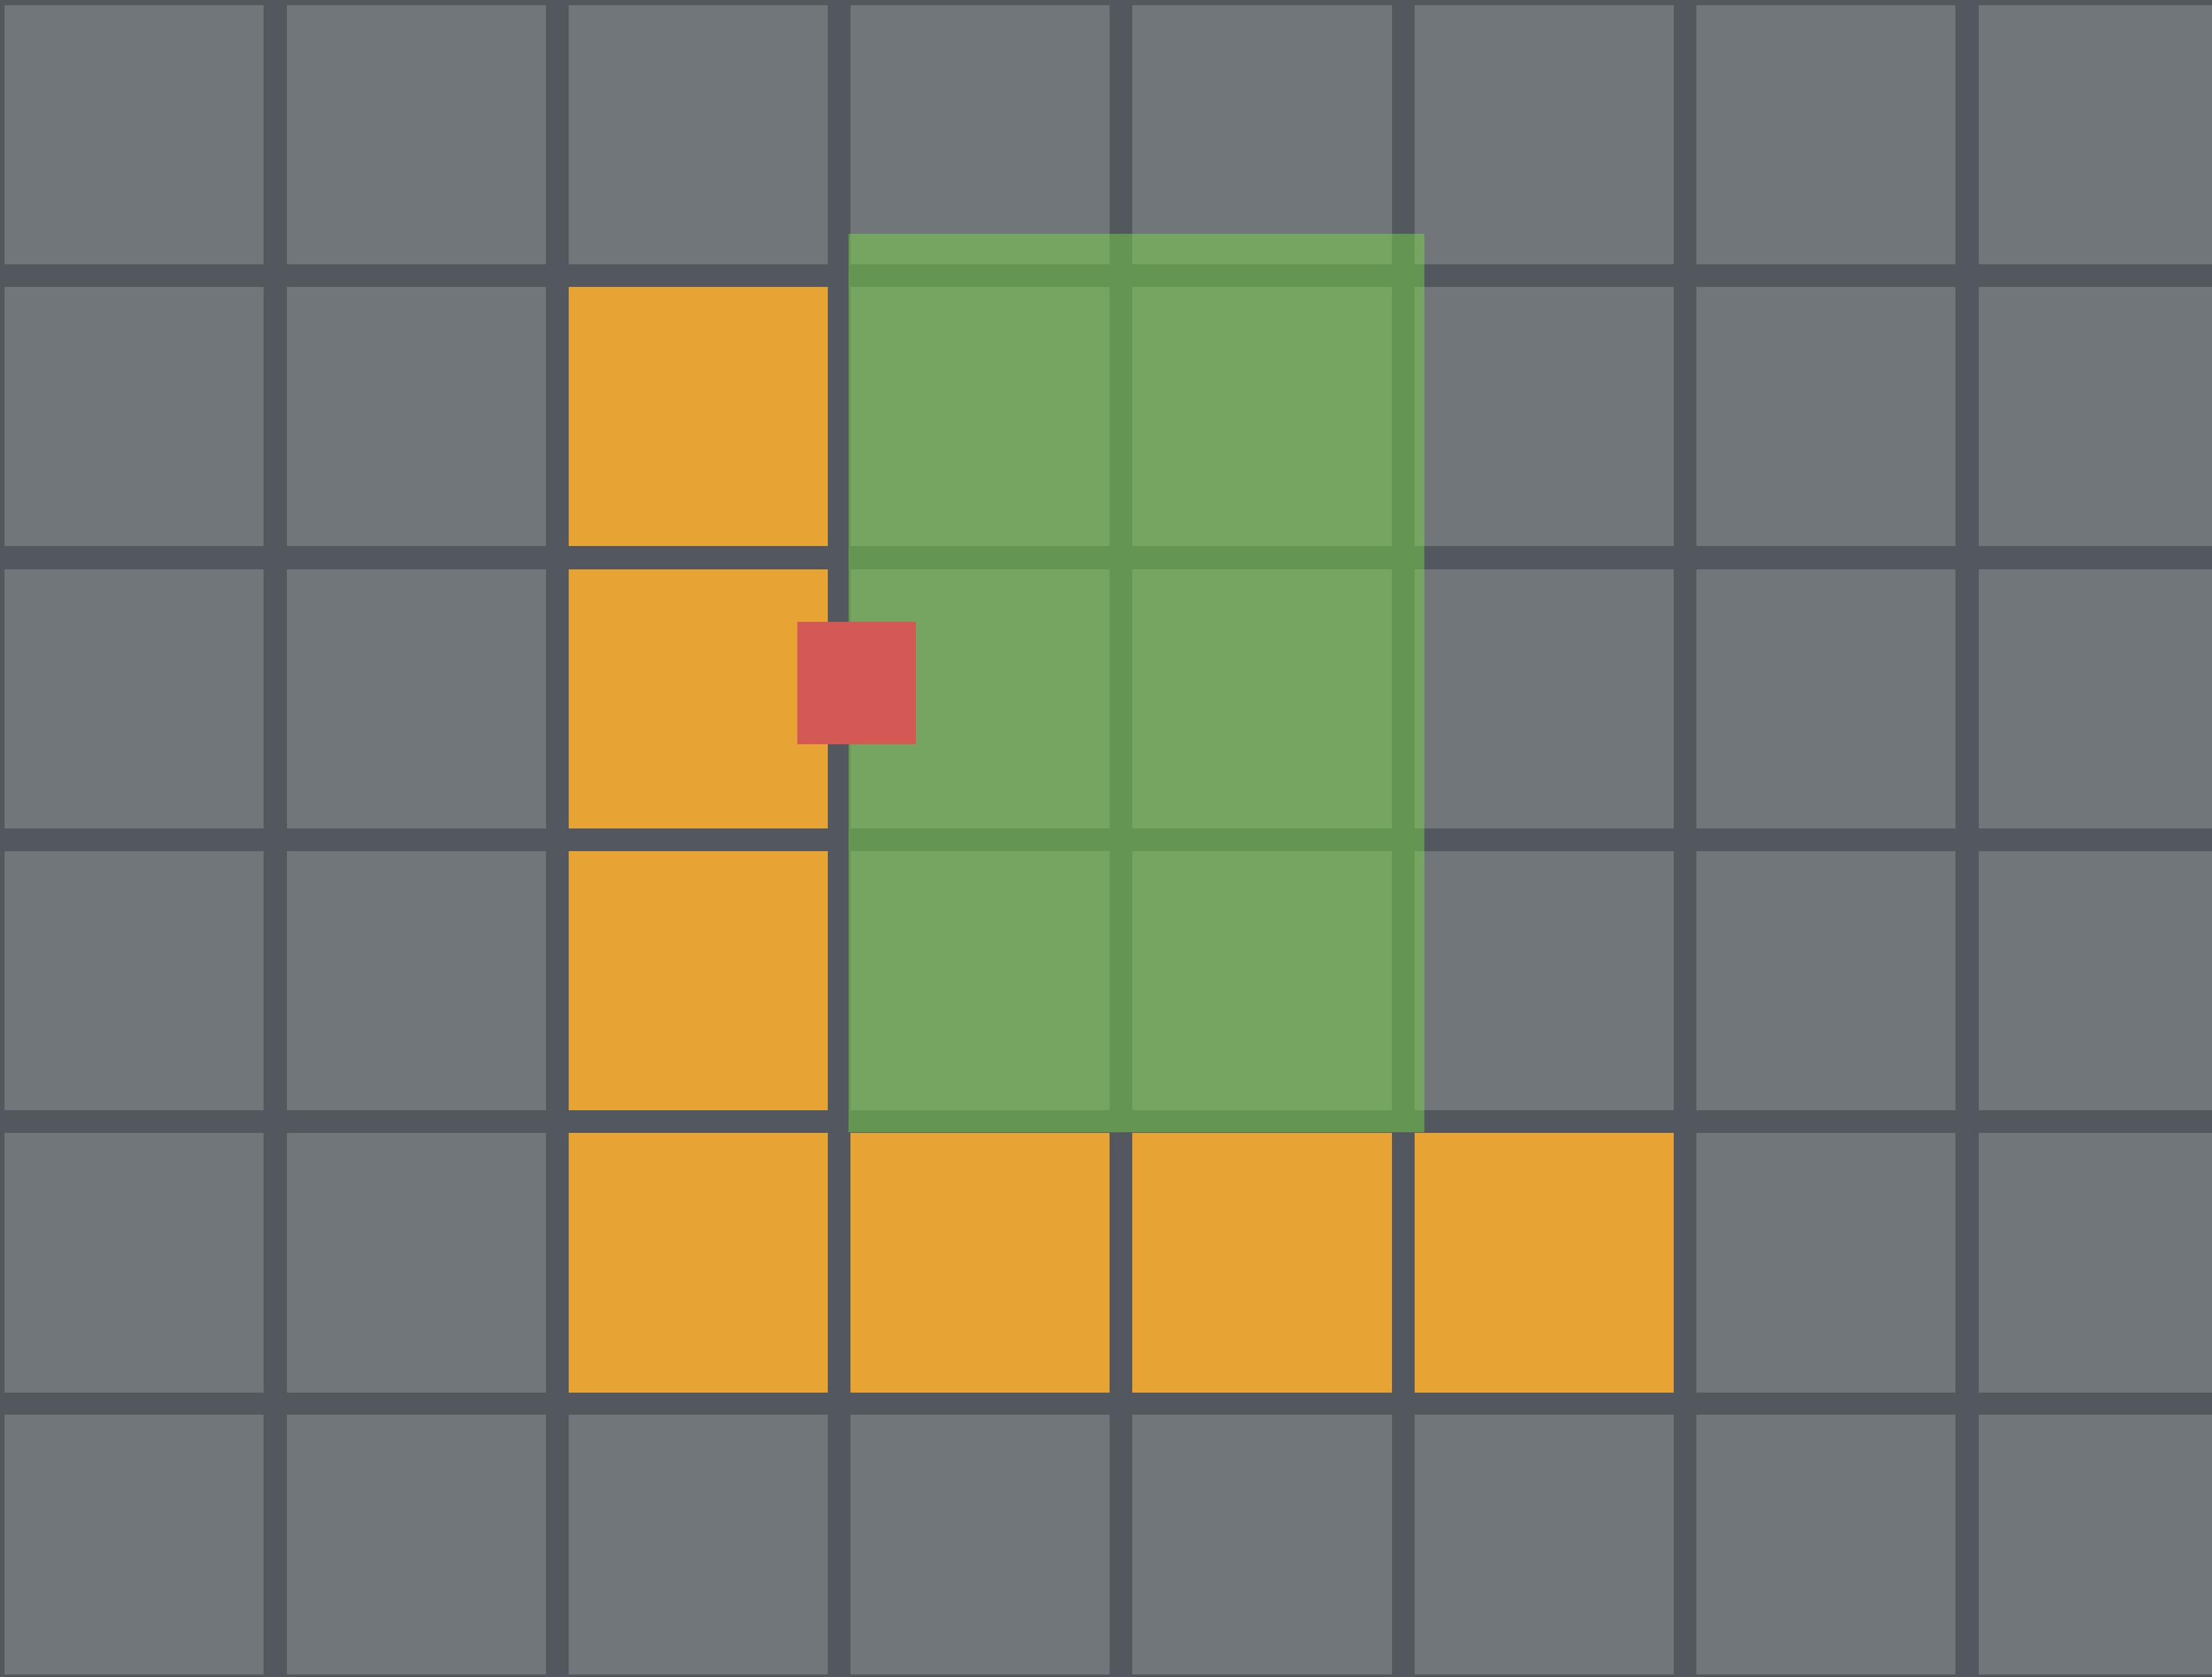


Now finally on the right...

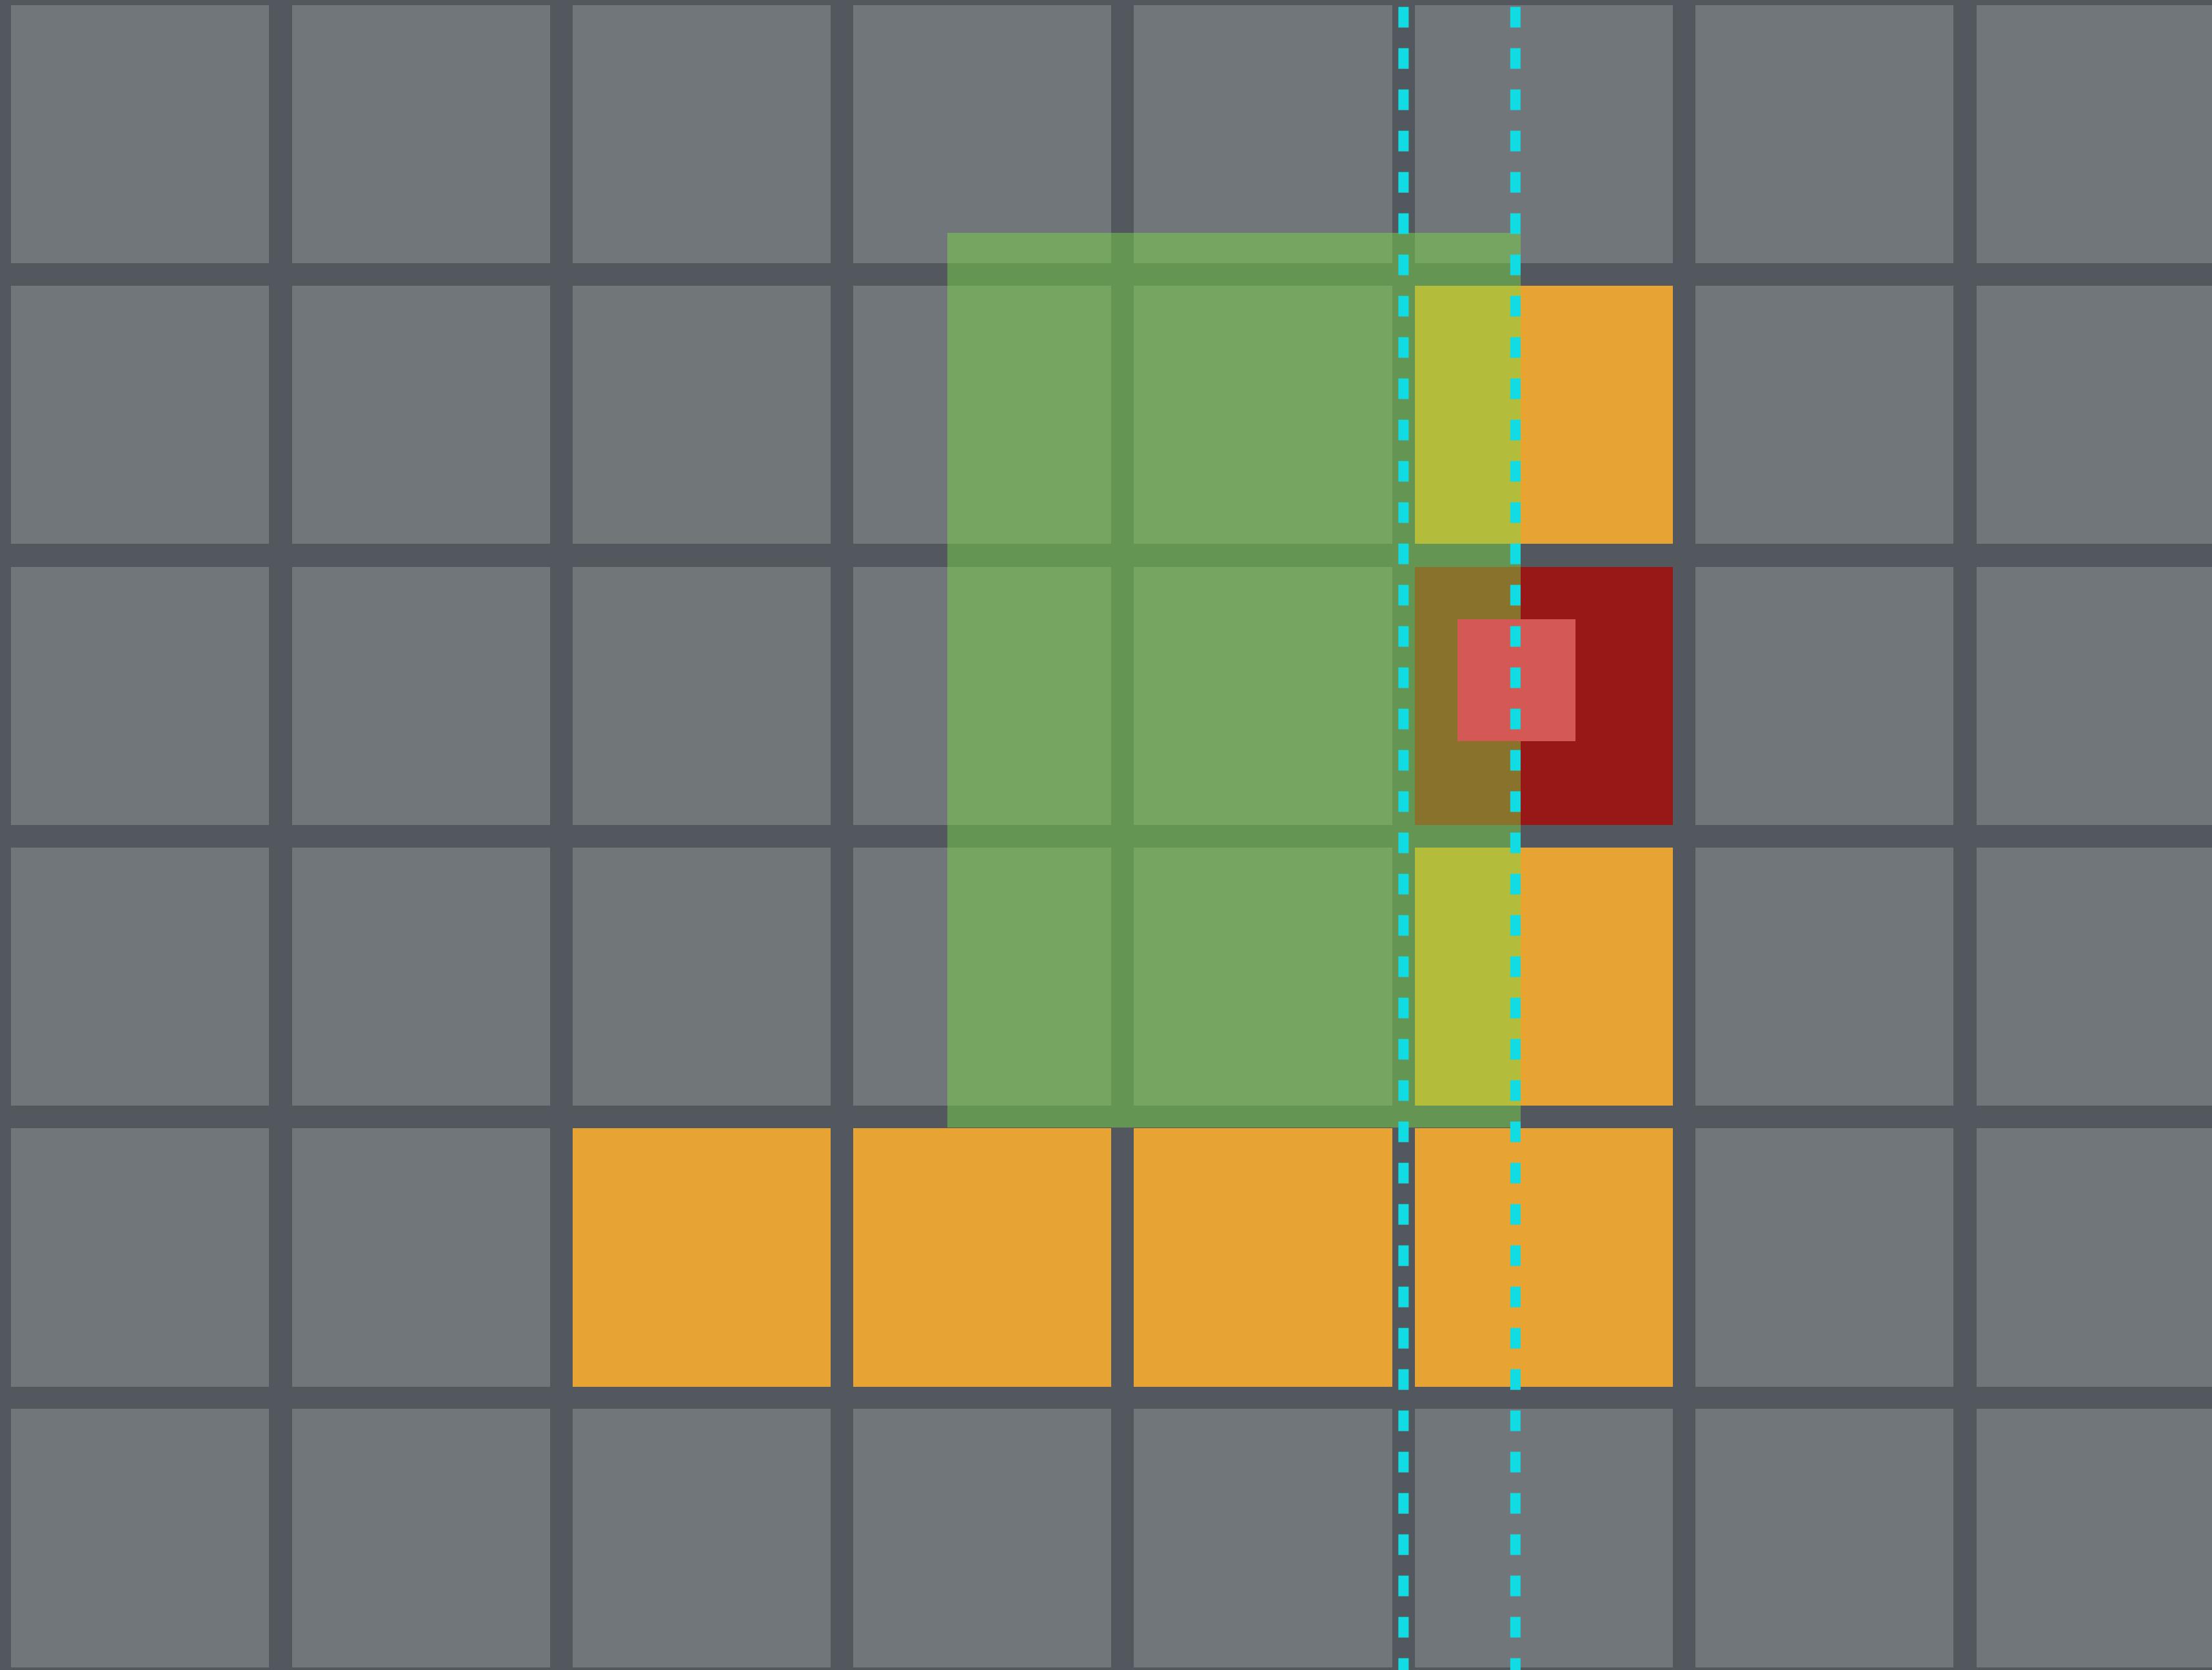


$(\text{TILE\_SIZE} * \text{tile\_x})$


$\text{entity.x} + \text{entity.width}/2$

If the tile is solid, adjust our X-coordinate left by the difference between the point we are testing and the left of the tile (plus a tiny amount).

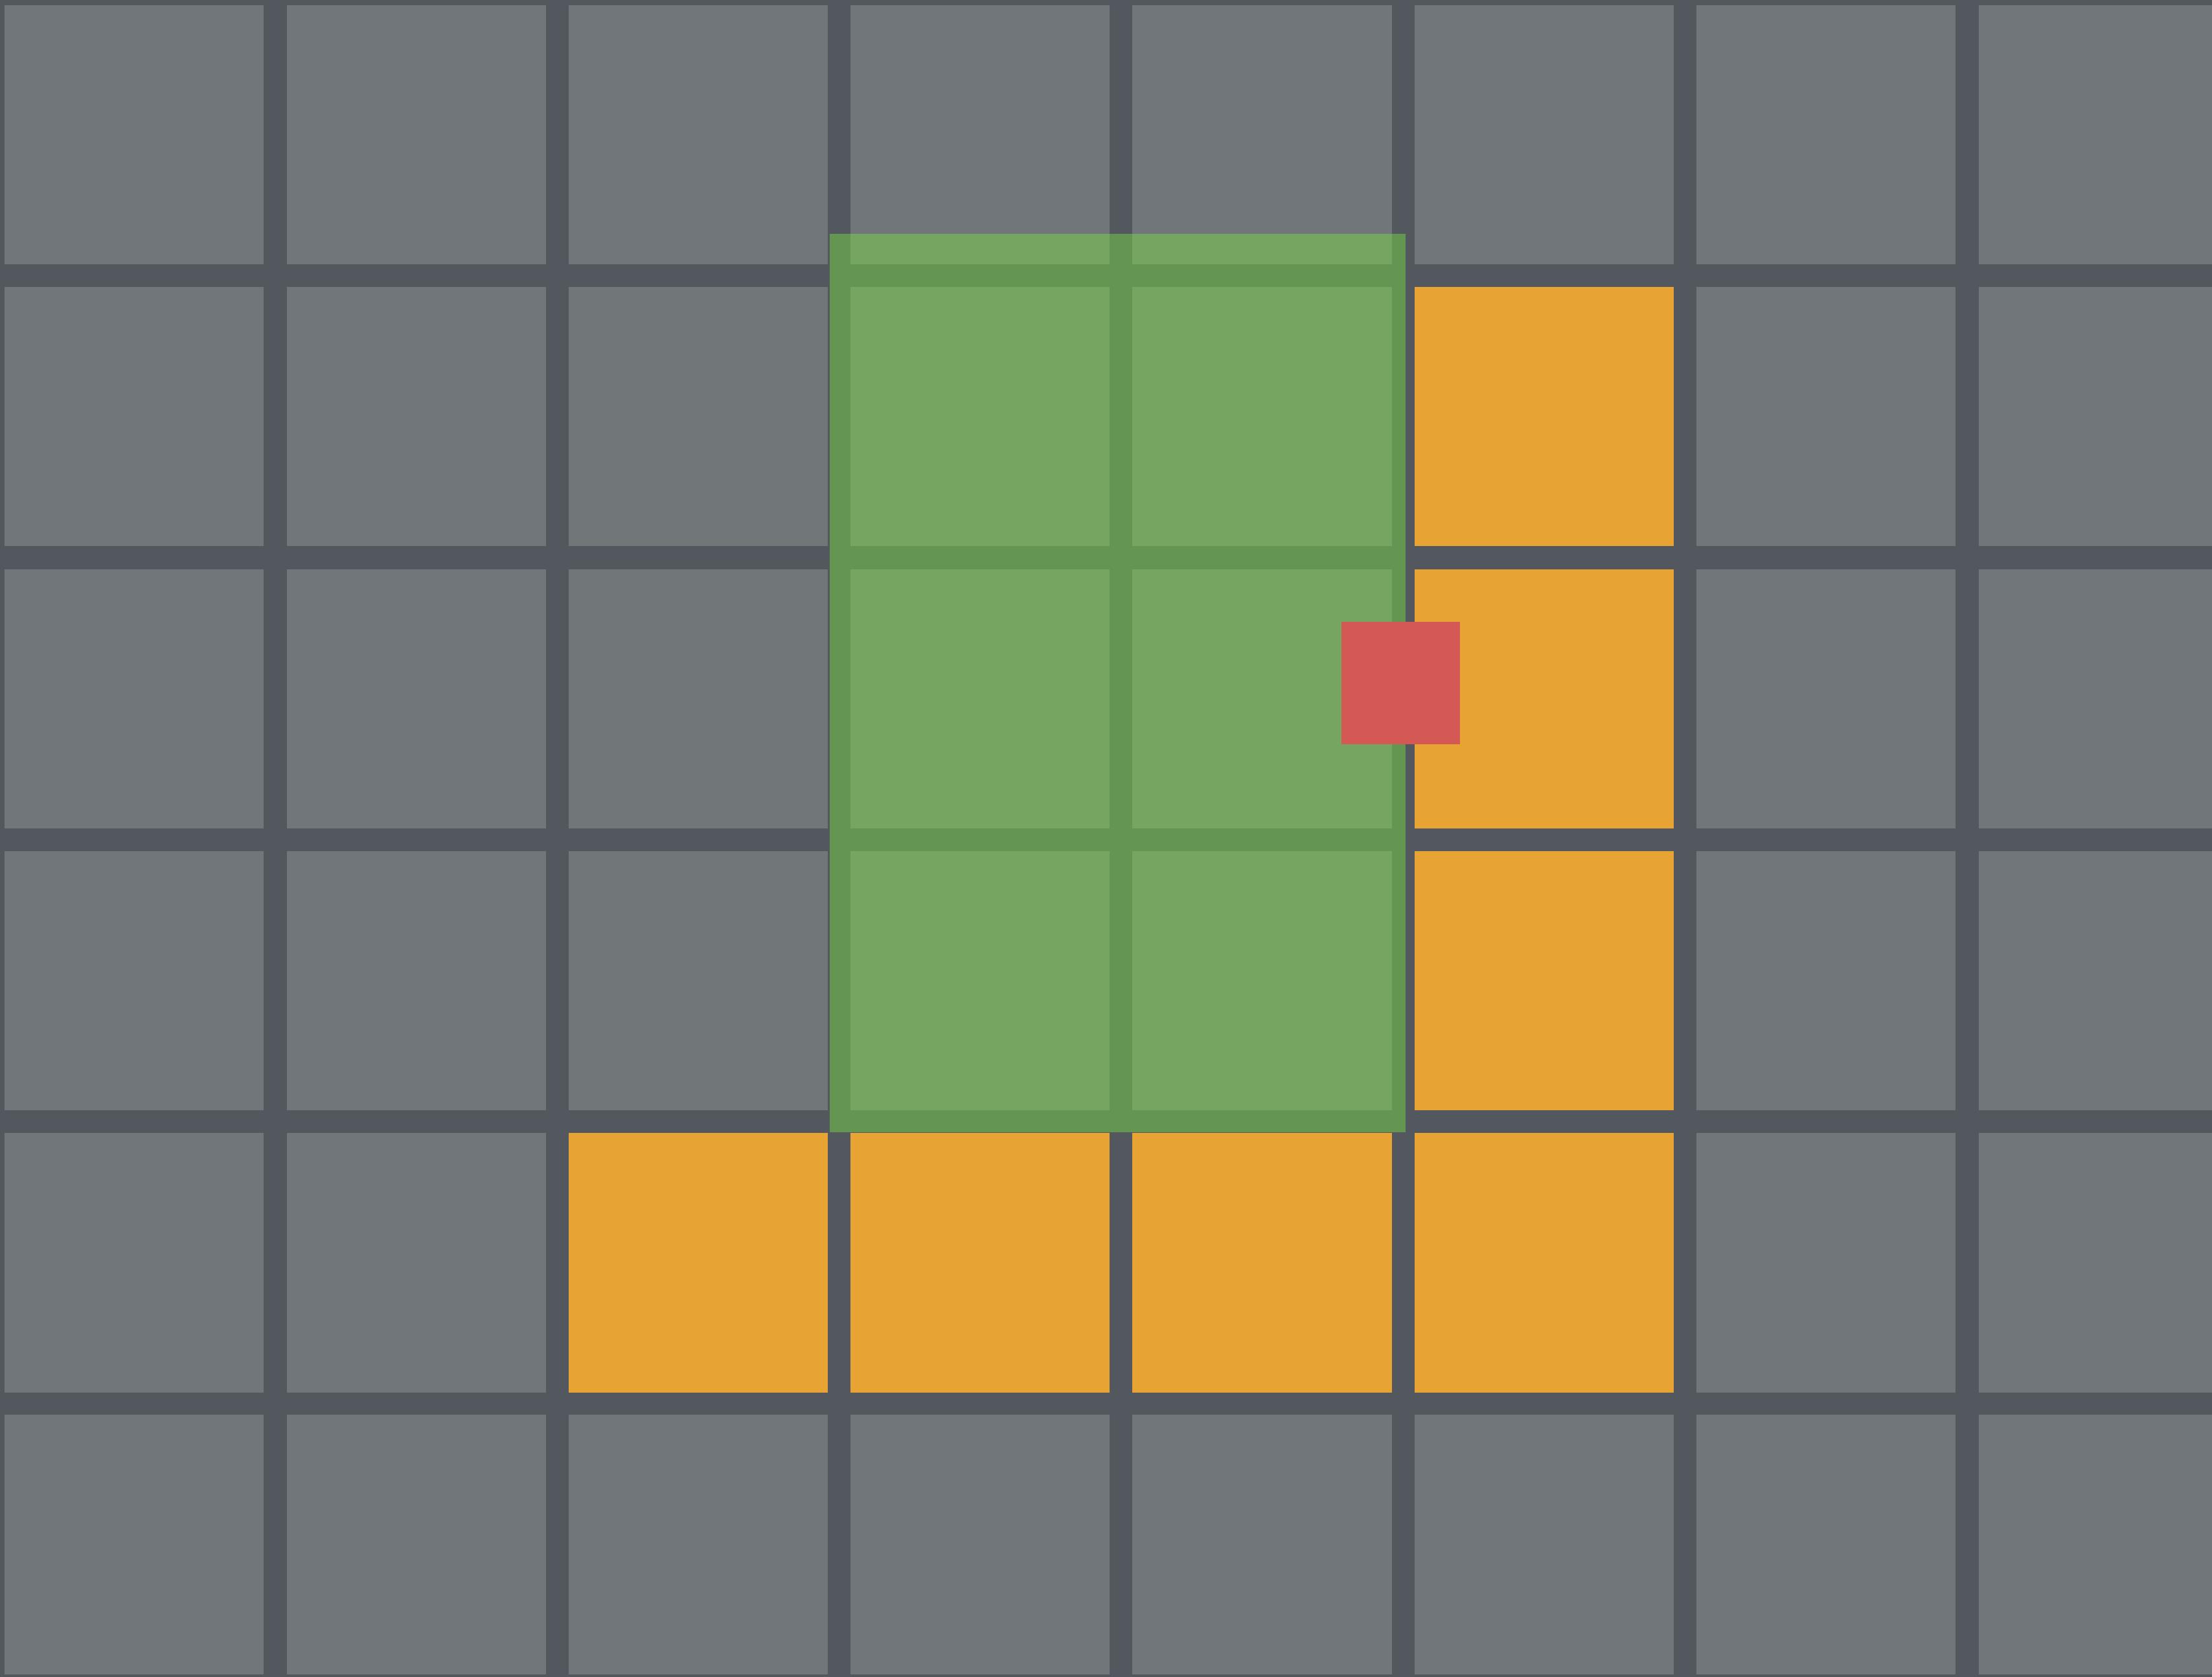

You may test additional points along the sprite  
if it is larger than a tile.

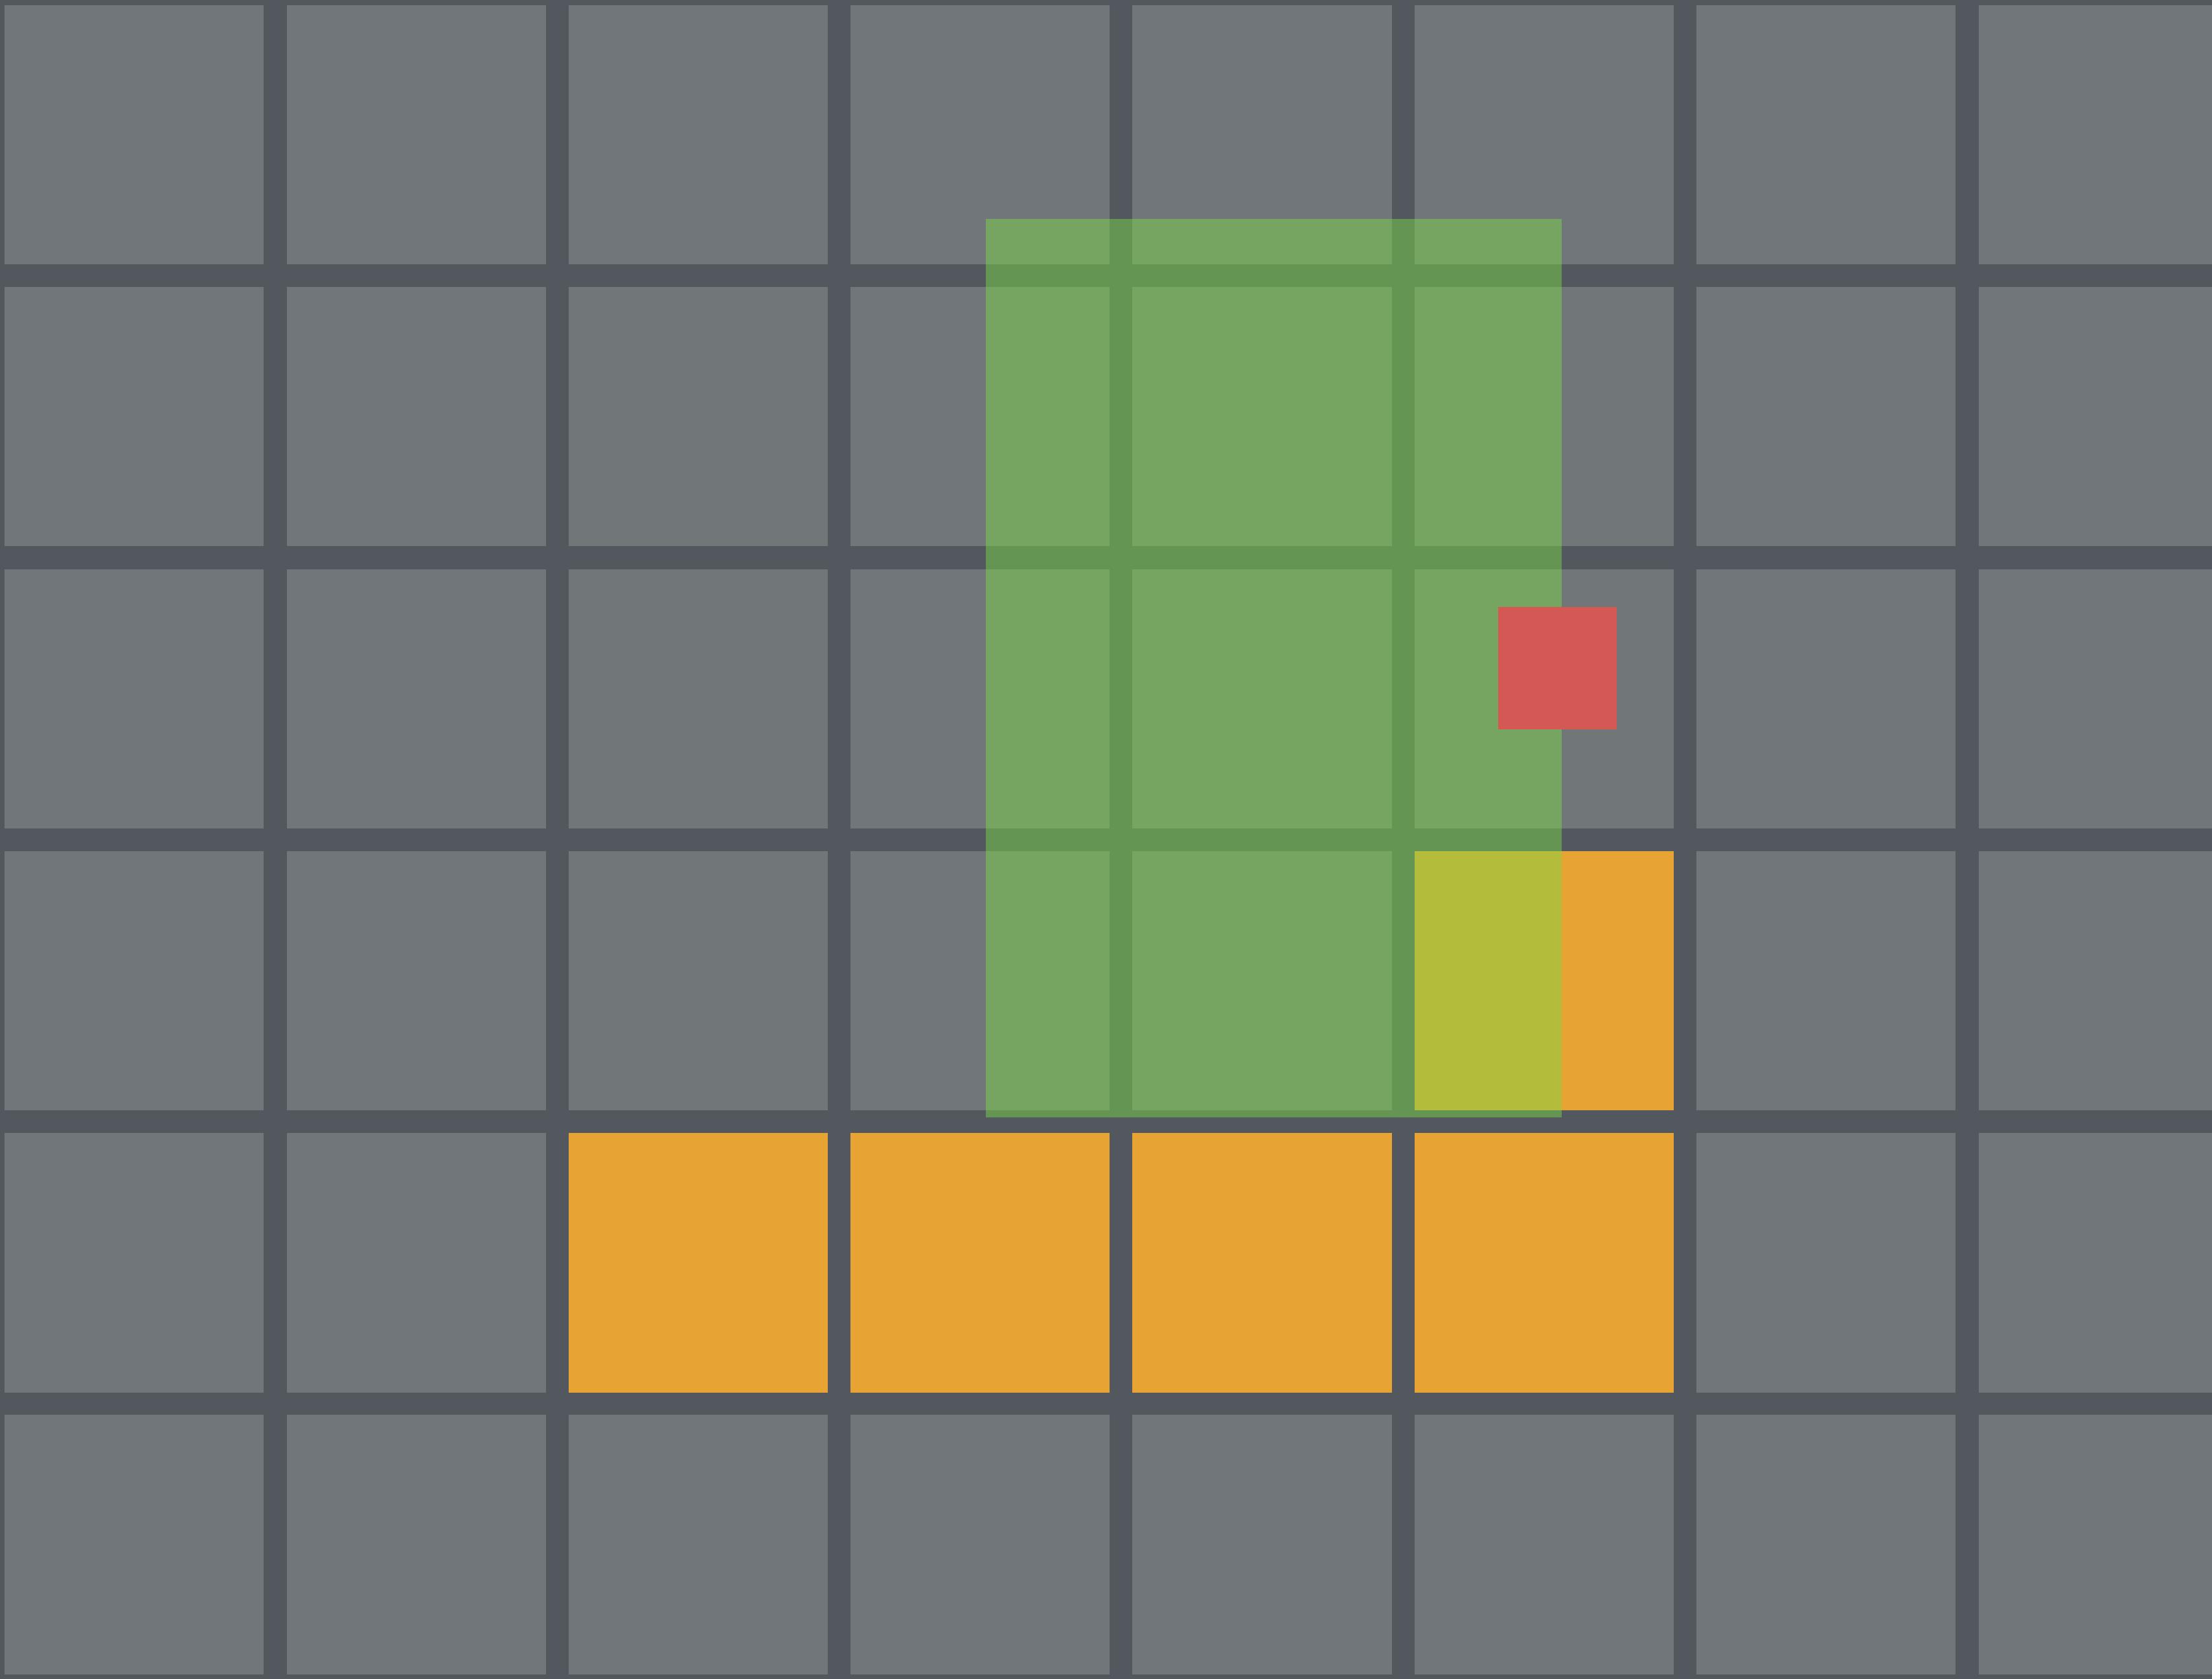


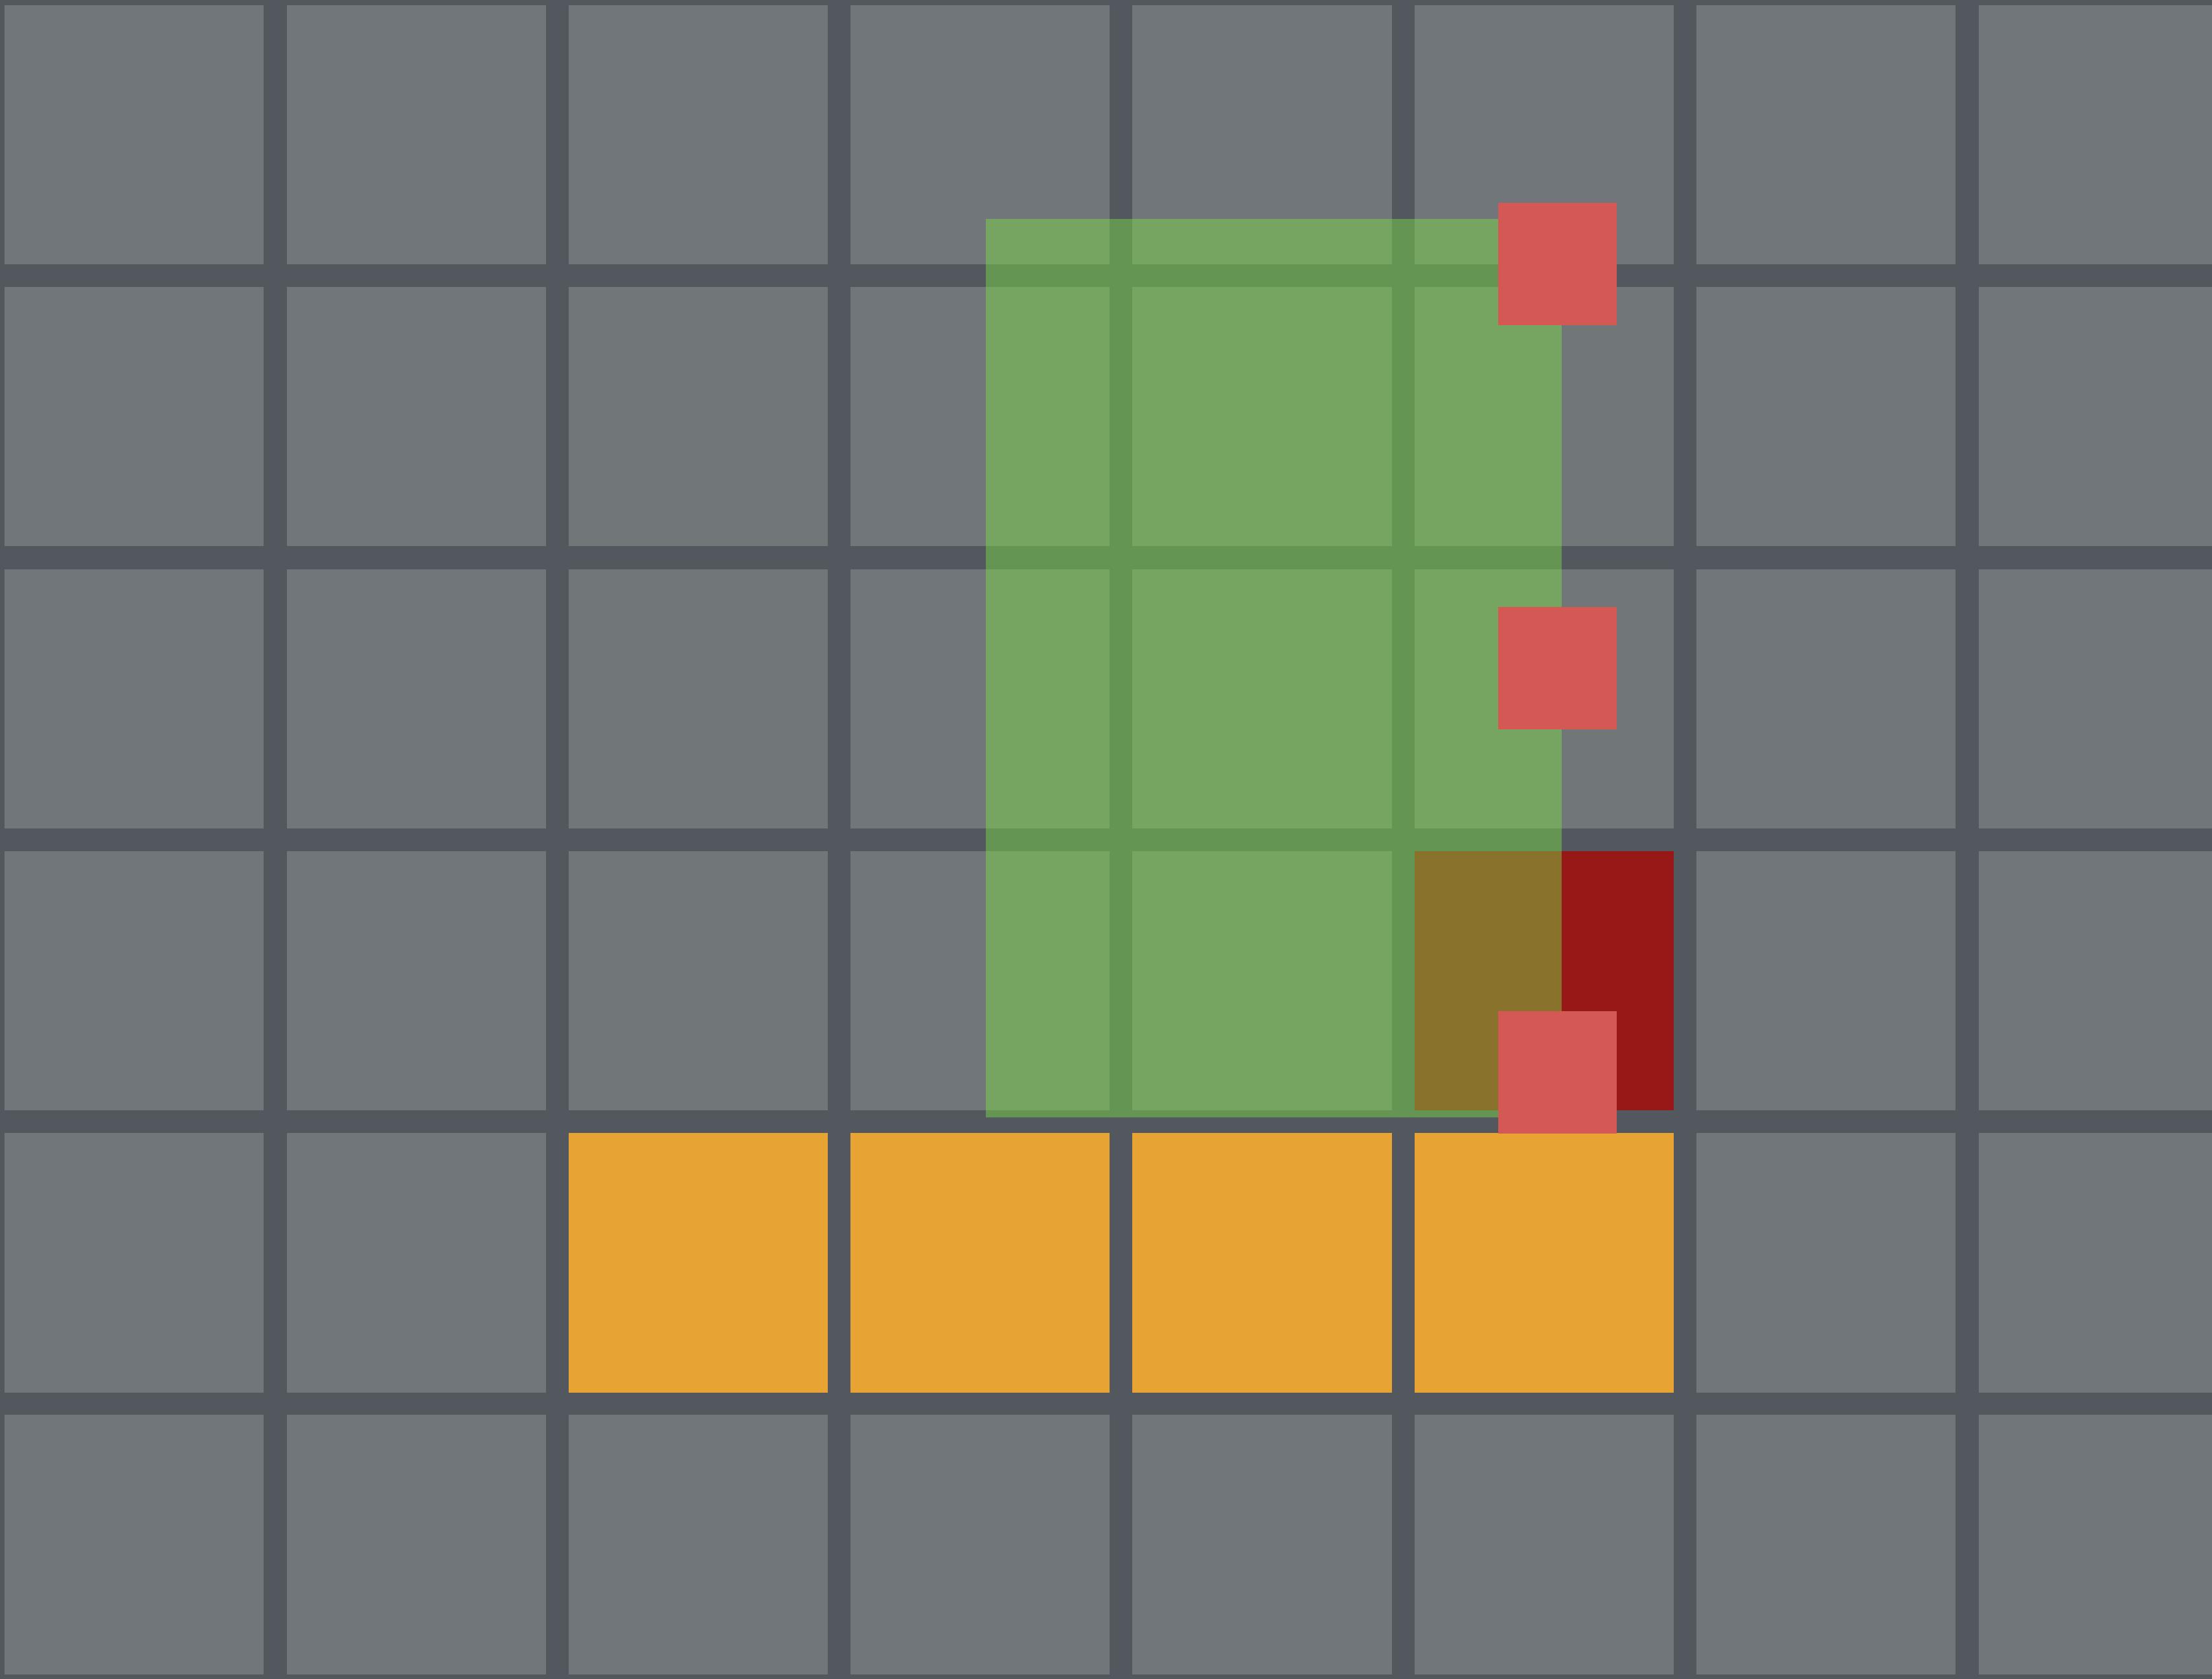


# Scrolling

# What is scrolling?

We need to translate everything so  
that the player is in the center of the screen.

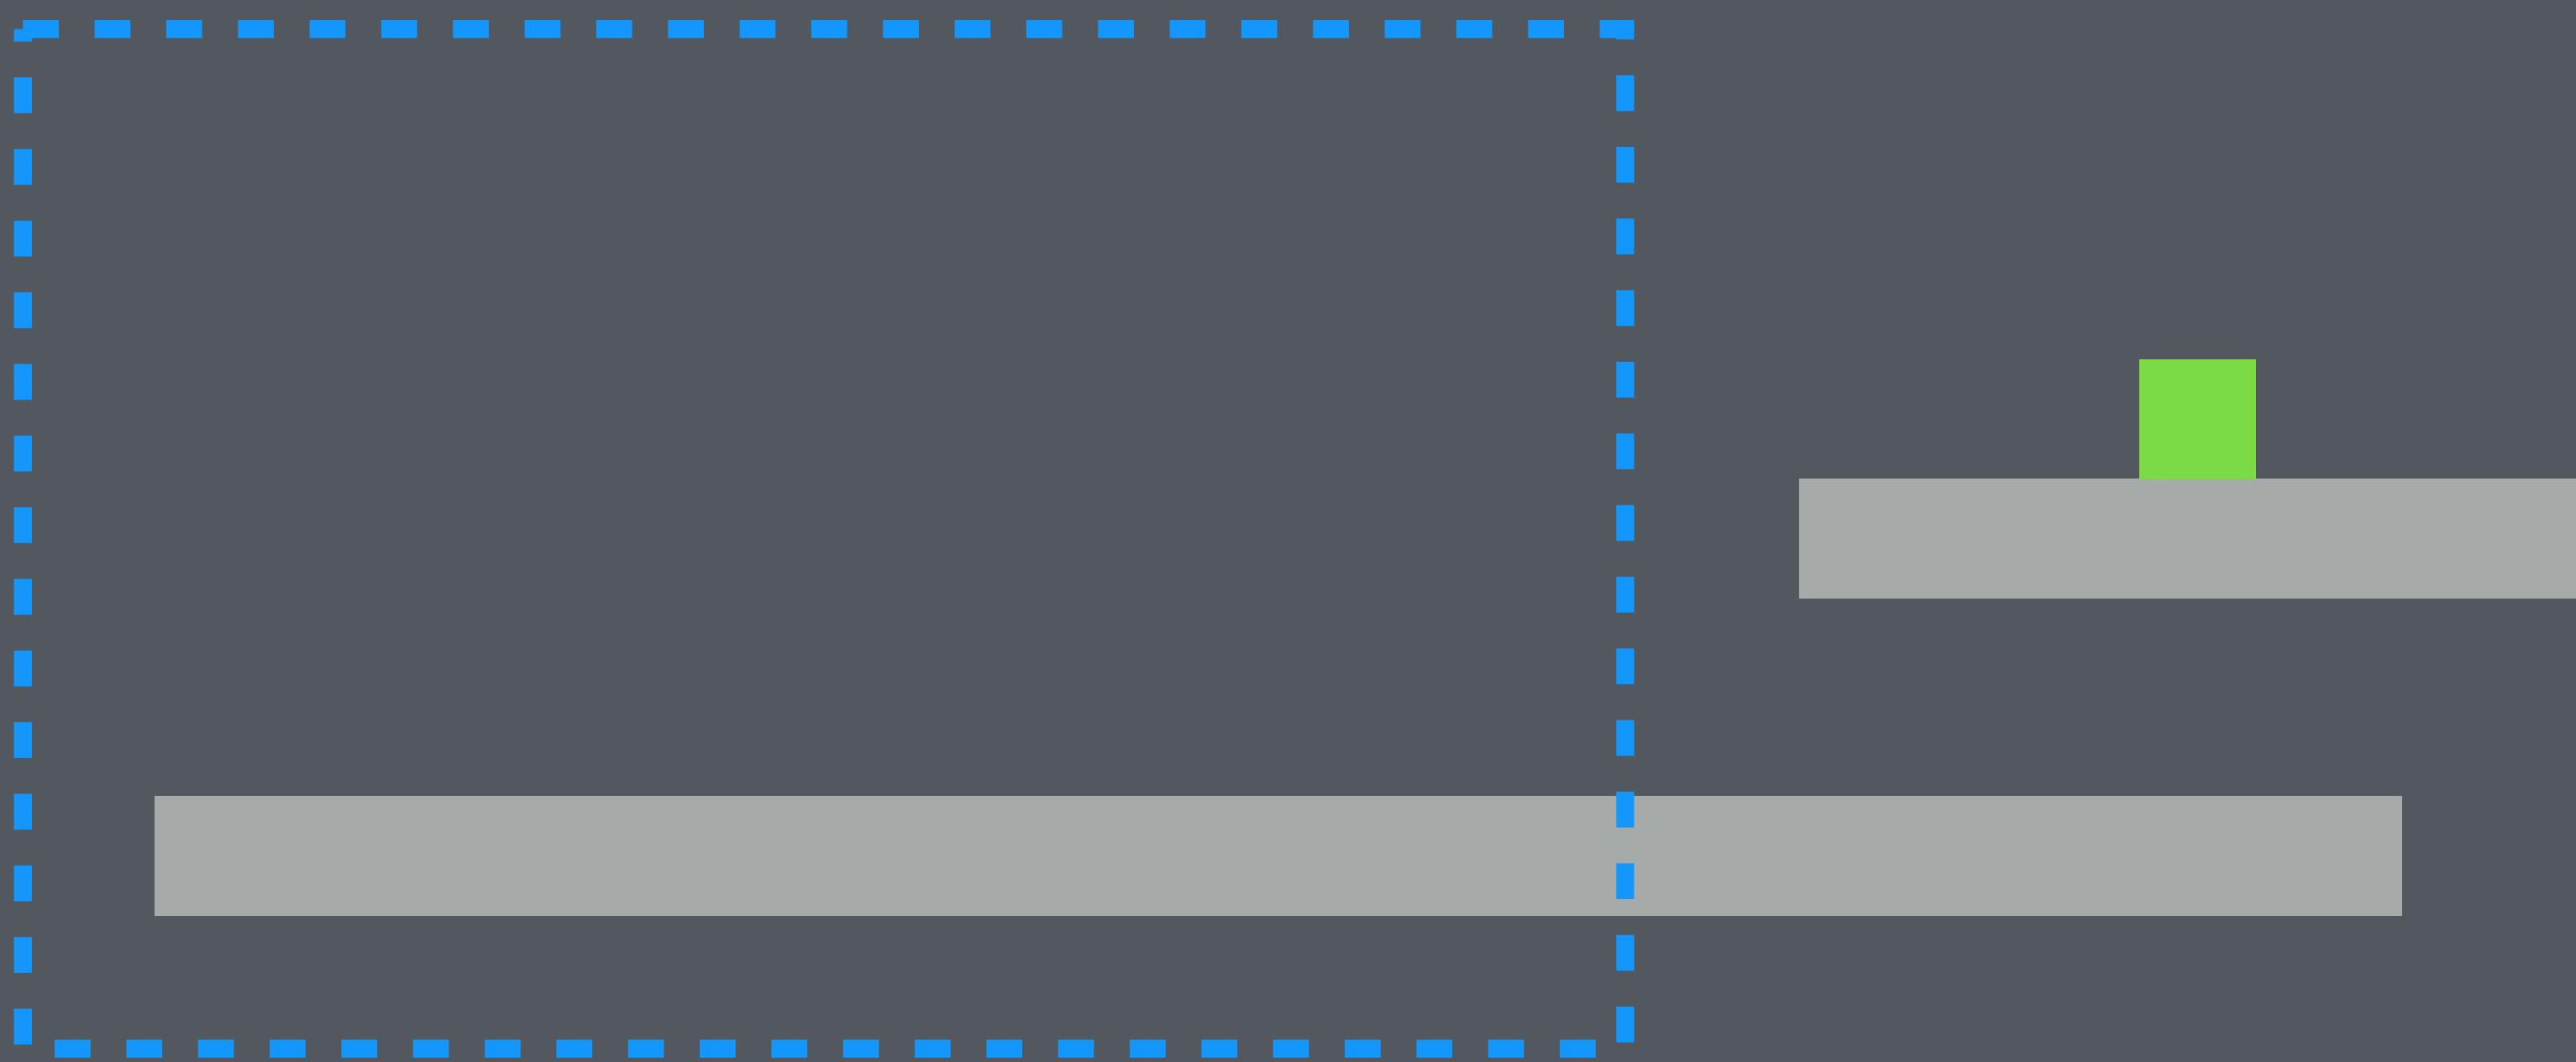

We need to translate everything so  
that the player is in the center of the screen.

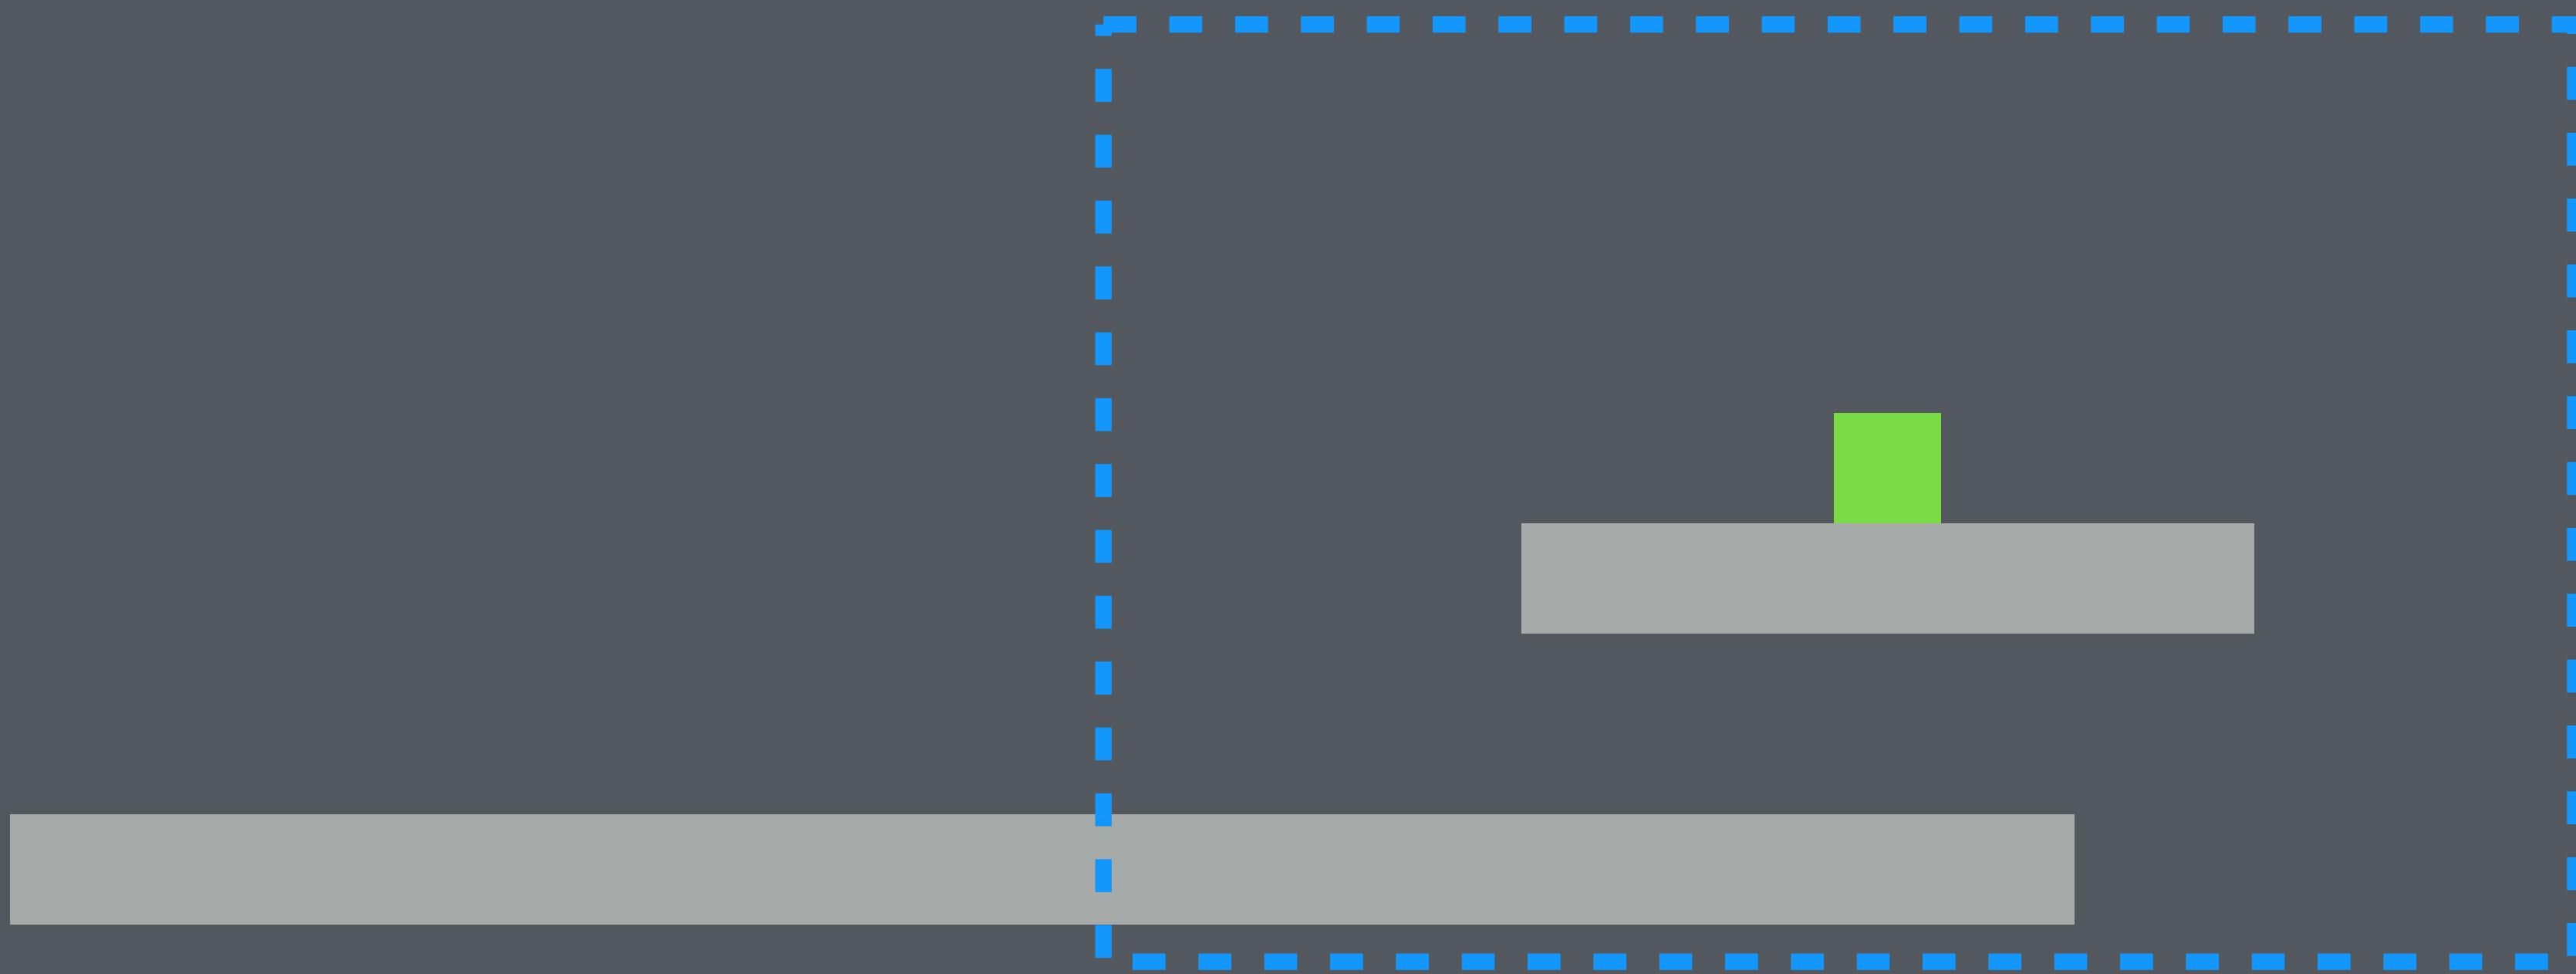

# The view matrix!

Translate the view matrix by the inverse  
of the player's position!  
(or whatever you want to center on)!