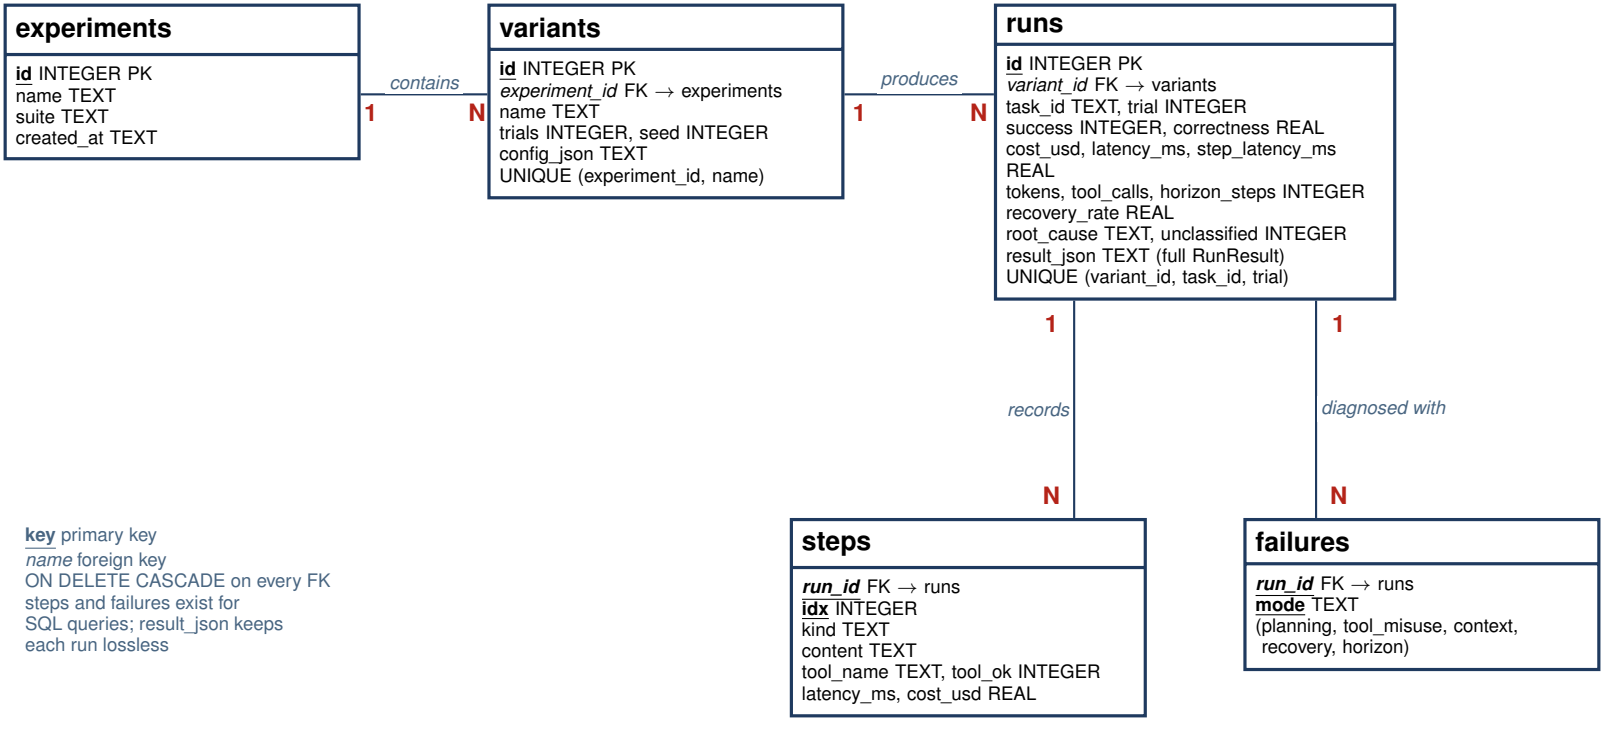
experiments
id INTEGER PK
name TEXT
suite TEXT
created_at TEXT
contains
1
N
variants
id INTEGER PK
experiment_id FK → experiments
name TEXT
trials INTEGER, seed INTEGER
config_json TEXT
UNIQUE (experiment_id, name)
produces
1
N
runs
id INTEGER PK
variant_id FK → variants
task_id TEXT, trial INTEGER
success INTEGER, correctness REAL
cost_usd, latency_ms, step_latency_ms
REAL
tokens, tool_calls, horizon_steps INTEGER
recovery_rate REAL
root_cause TEXT, unclassified INTEGER
result_json TEXT (full RunResult)
UNIQUE (variant_id, task_id, trial)
1
records
N
1
diagnosed with
N
steps
run_id FK → runs
idx INTEGER
kind TEXT
content TEXT
tool_name TEXT, tool_ok INTEGER
latency_ms, cost_usd REAL
failures
run_id FK → runs
mode TEXT
(planning, tool_misuse, context,
recovery, horizon)
key primary key
name foreign key
ON DELETE CASCADE on every FK
steps and failures exist for
SQL queries; result_json keeps
each run lossless