
## ER DIAGRAM

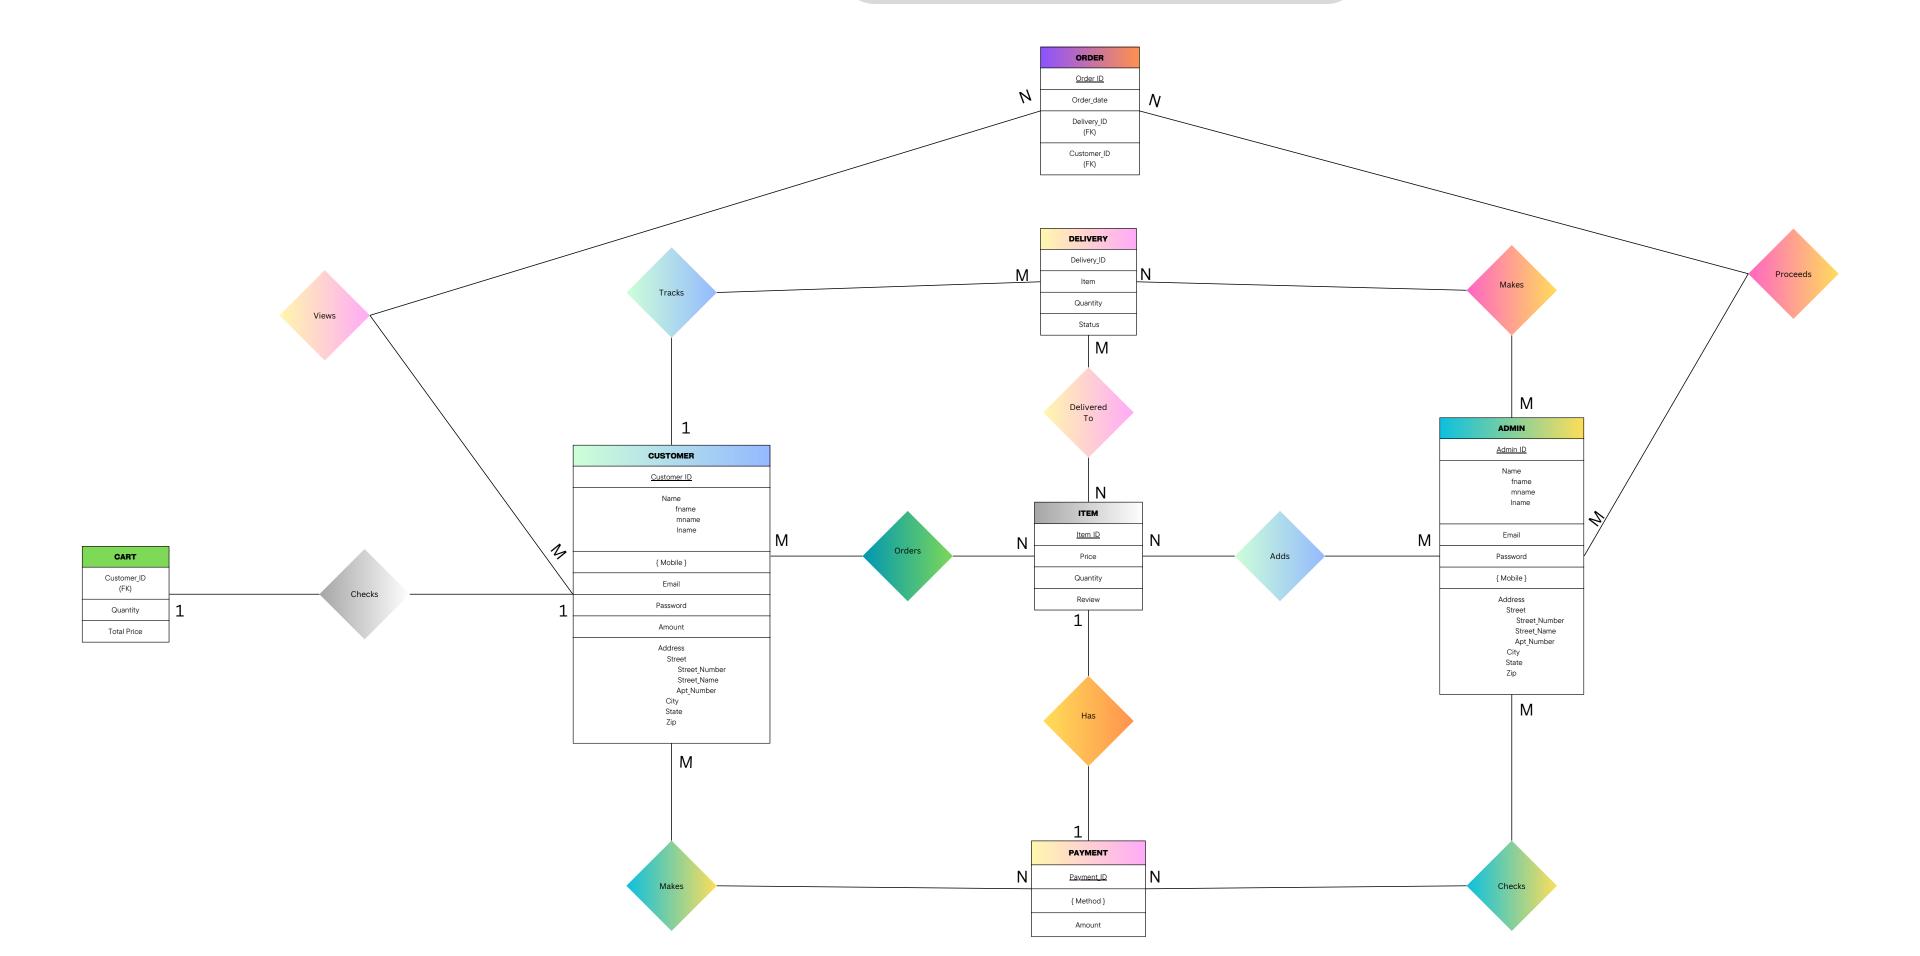

## Relational Model

- 1) Customer ( <u>Customer\_ID</u>, fname, mname, lname, Email, Password, Amount, Street\_no, Street\_name, Apt\_No, City, Zip, State )
  - 2) Admin ( <u>Admin\_ID</u>, fname, mname, lname, Email, Password, Street\_no, Street\_name, Apt\_No, City, Zip, State
    - 3) Customer\_Mobile ( <u>Customer\_ID [FK]</u>, <u>Mobile</u> )
      - 4) Admin\_Mobile ( <u>Admin\_ID [FK]</u>, <u>Mobile</u> )
        - 5) Payment ( <u>Payment ID</u>, Amount )

- 6) Payment\_Method( <a href="Payment\_ID">Payment\_ID</a> [FK], <a href="Method">Method</a> )
- 7) Item( <a href="Item">Item</a> <a href="Item">Item</
- 8) Delivery( <u>Delivery ID</u>, Item, Quantity, Status )
- 9) Order( <u>Order\_ID</u>, Date, <u>Delivery\_ID [FK]</u>, <u>Customer\_ID [FK]</u>)
- 10) Cart( <u>Customer ID [FK]</u>, Total Price, Total Items\_)