
1. How a student reaches PrepAtlas

The browser is the window. The router is the road junction. The Pi is the small computer serving the app.

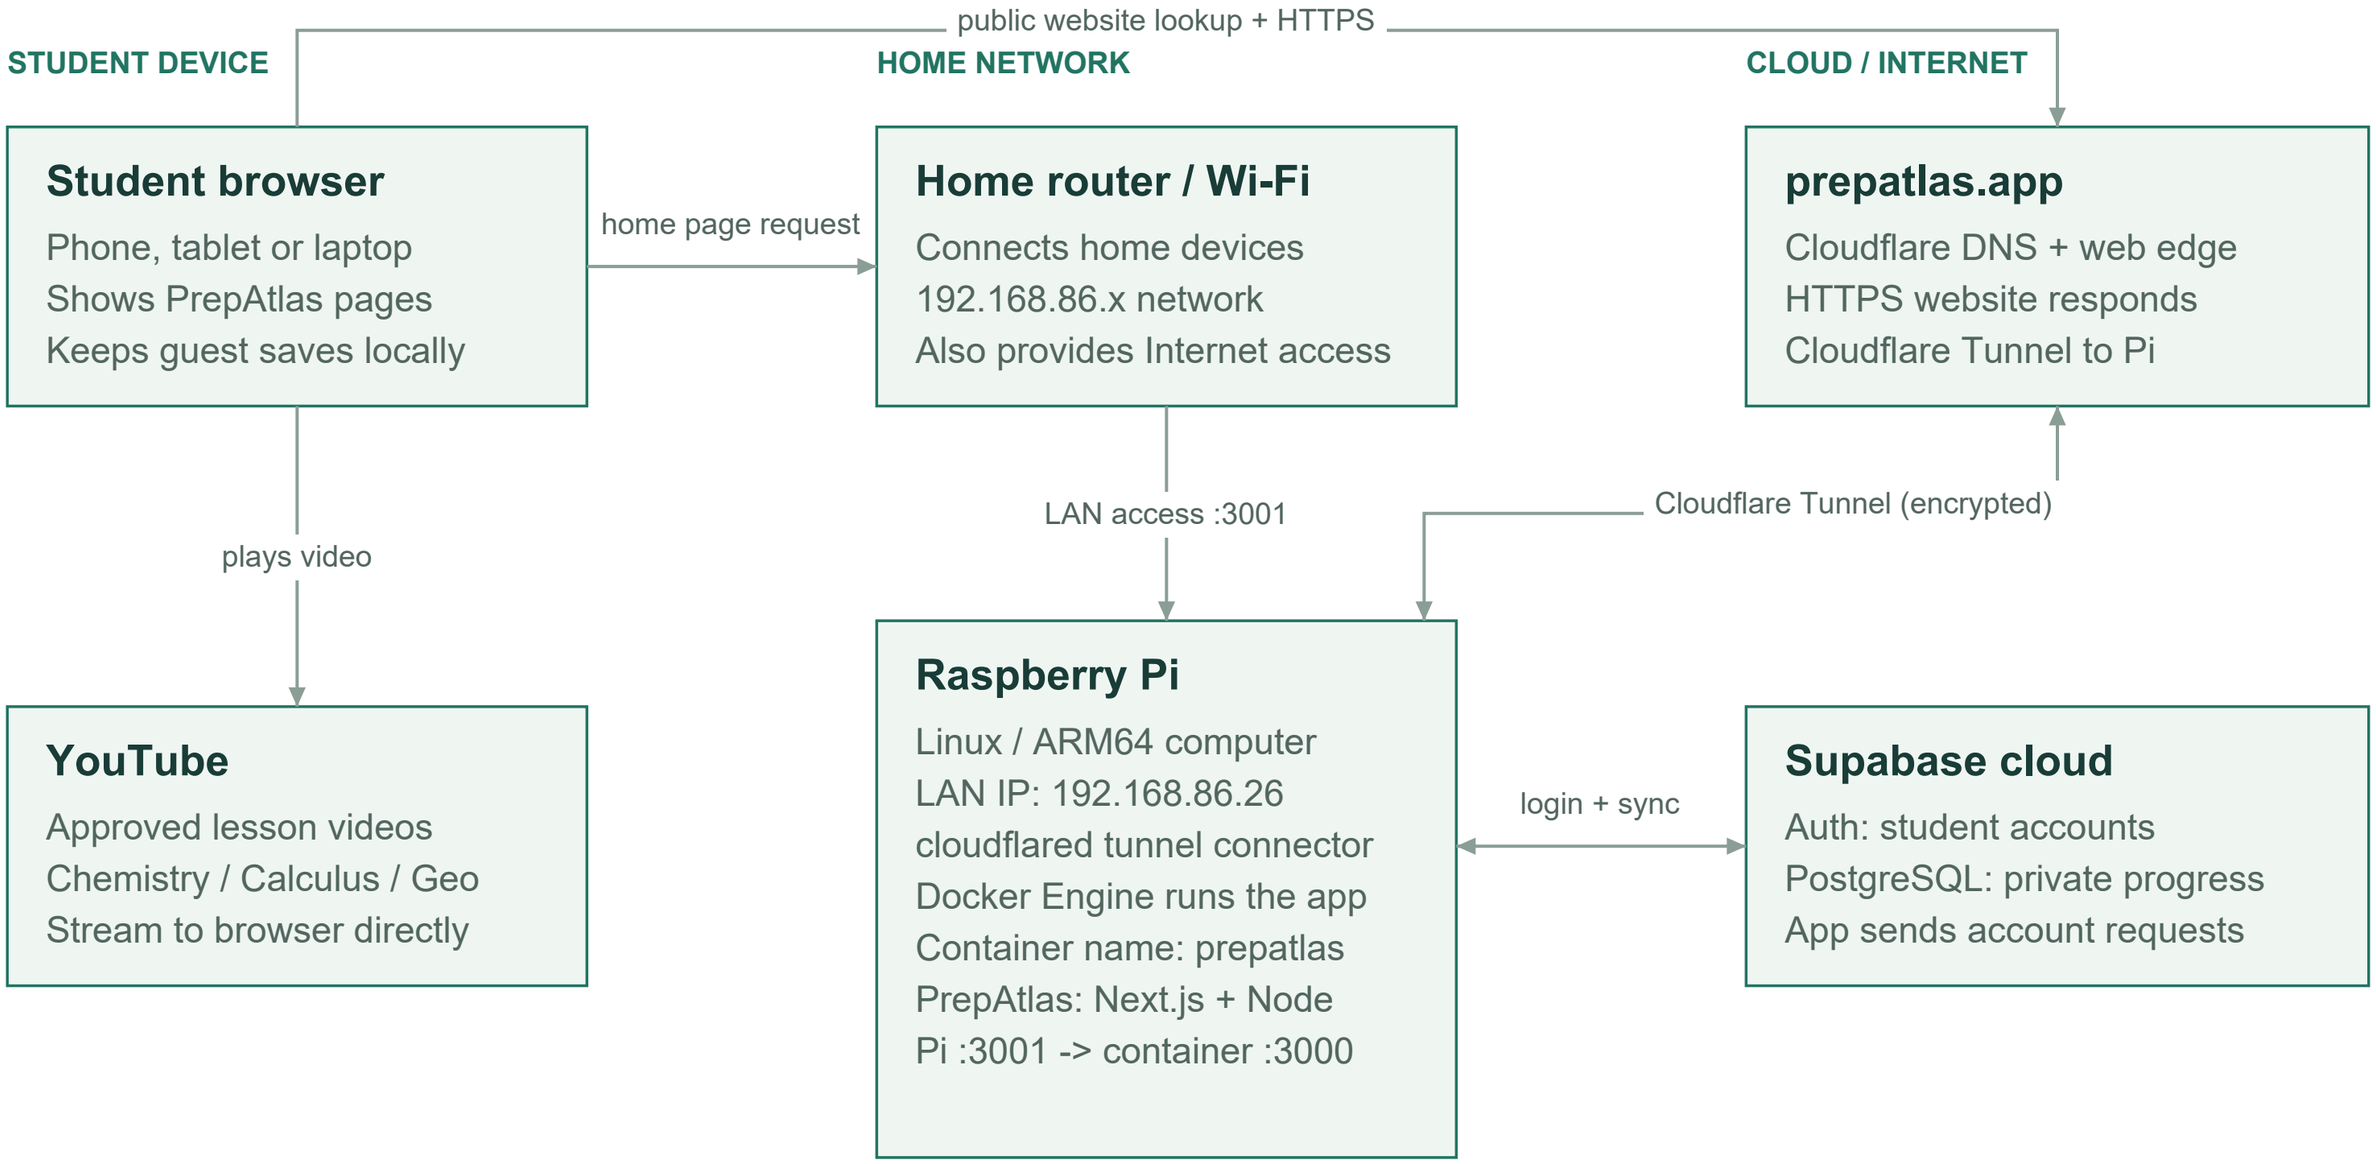


Solid line: implemented / observed / owner-reported. Dashed line: unverified, proposed or disabled.

Cloudflare Tunnel to the Pi is owner-confirmed. The Pi connector opens the connection; website traffic travels both ways.
The tunnel crosses the home router using an outbound connection. Opening an inbound router port is not required.

2. How we build, save and update the app

GitHub keeps the code backup. Docker packs the app. RepoFlow stores the package. The Pi downloads it.

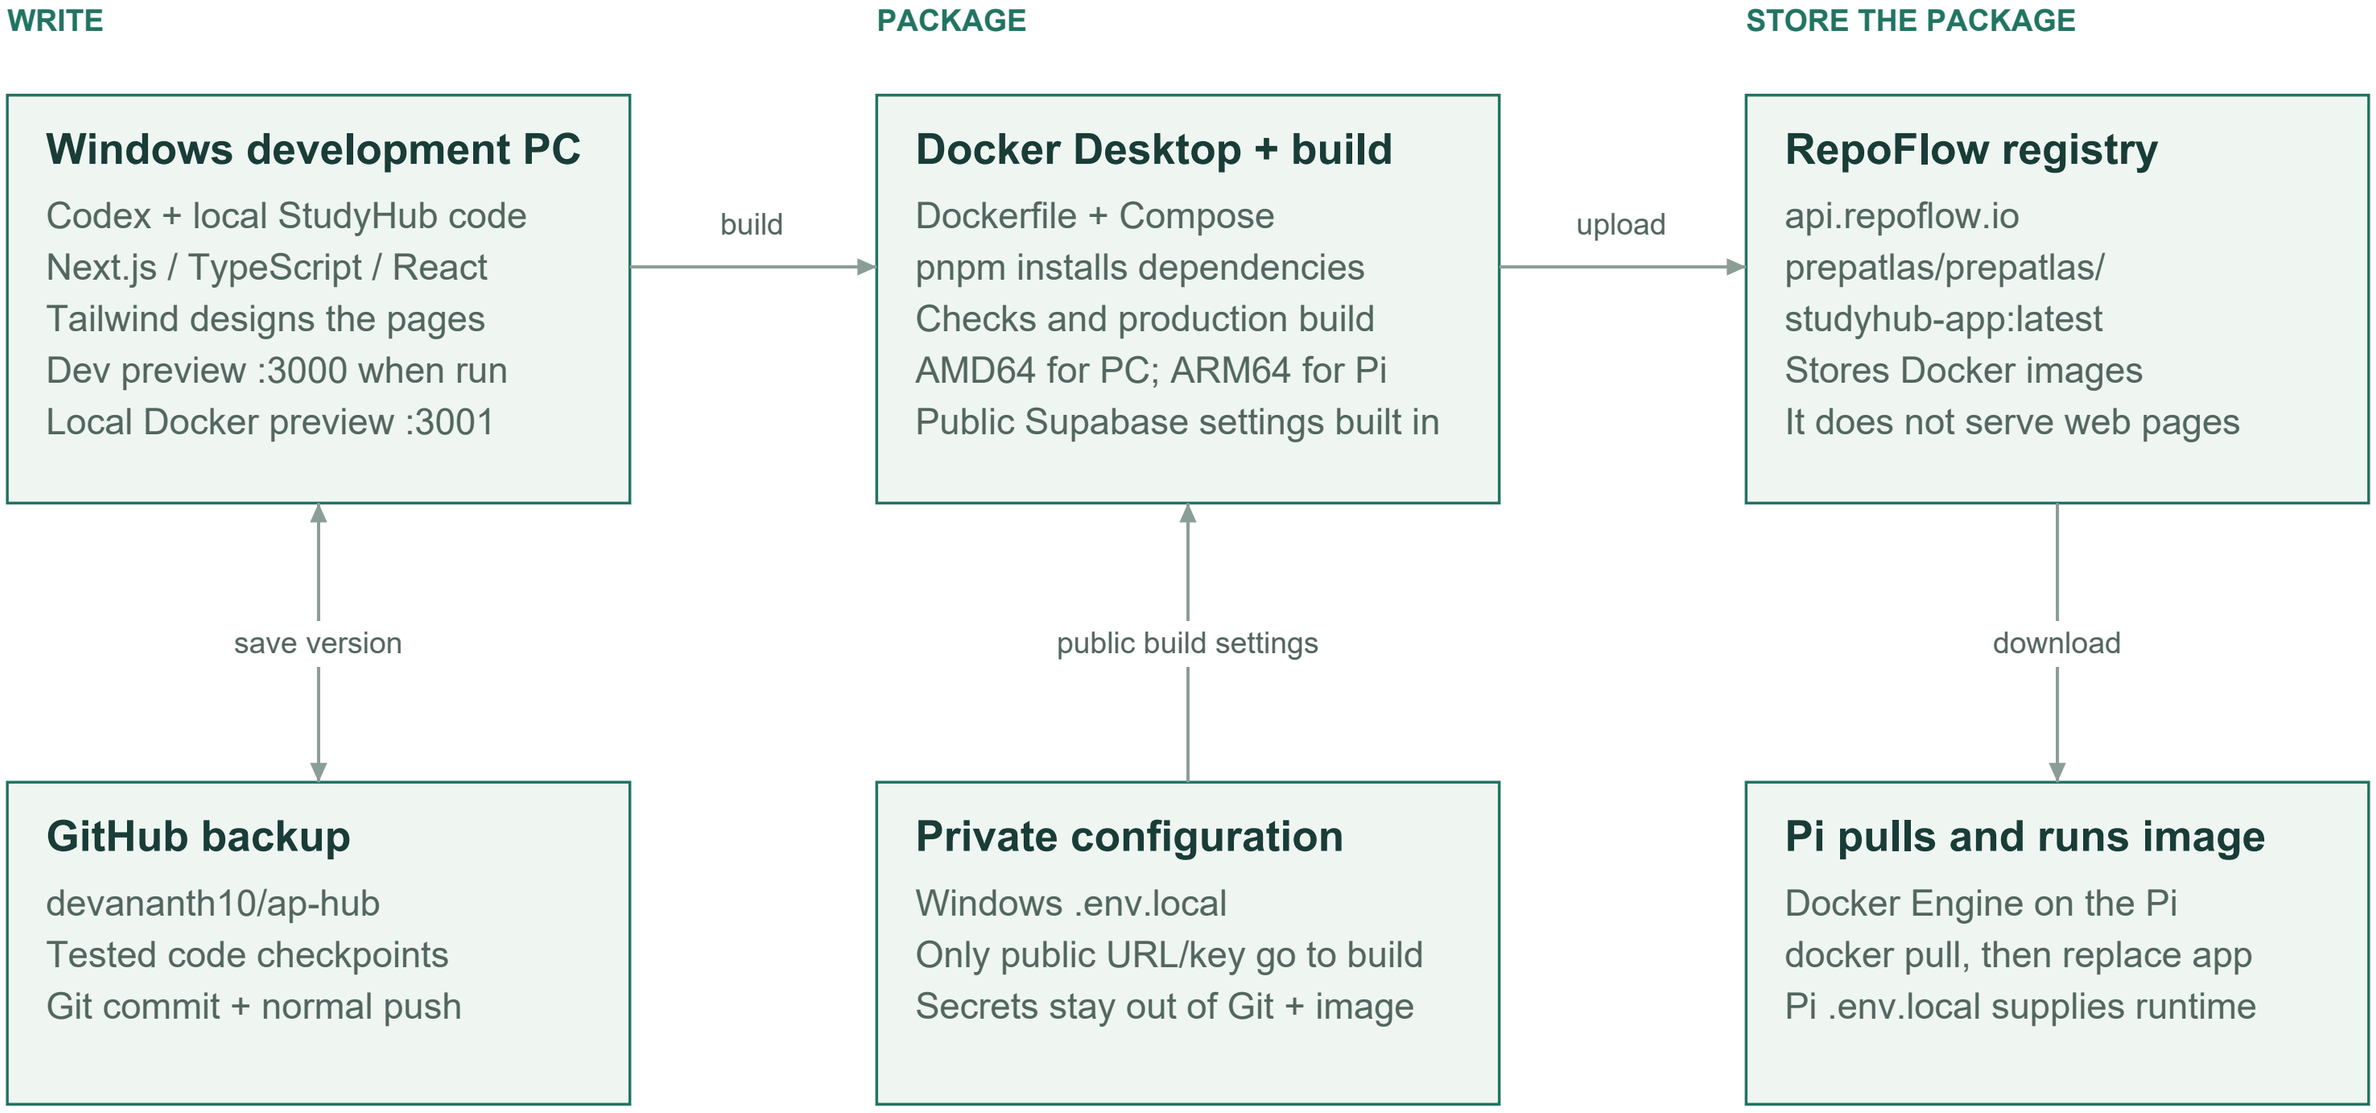


Updating a container does not delete its named data volume. No automatic GitHub-to-Pi deployment is configured.

The registry contains the packaged app, while GitHub contains its source history. These are different jobs.

Only public Supabase configuration is included in an image. Account/server secrets are supplied separately at runtime.

3. Where pages, videos and student data live

Three storage places have different jobs: the browser, the Pi disk, and the Supabase database.

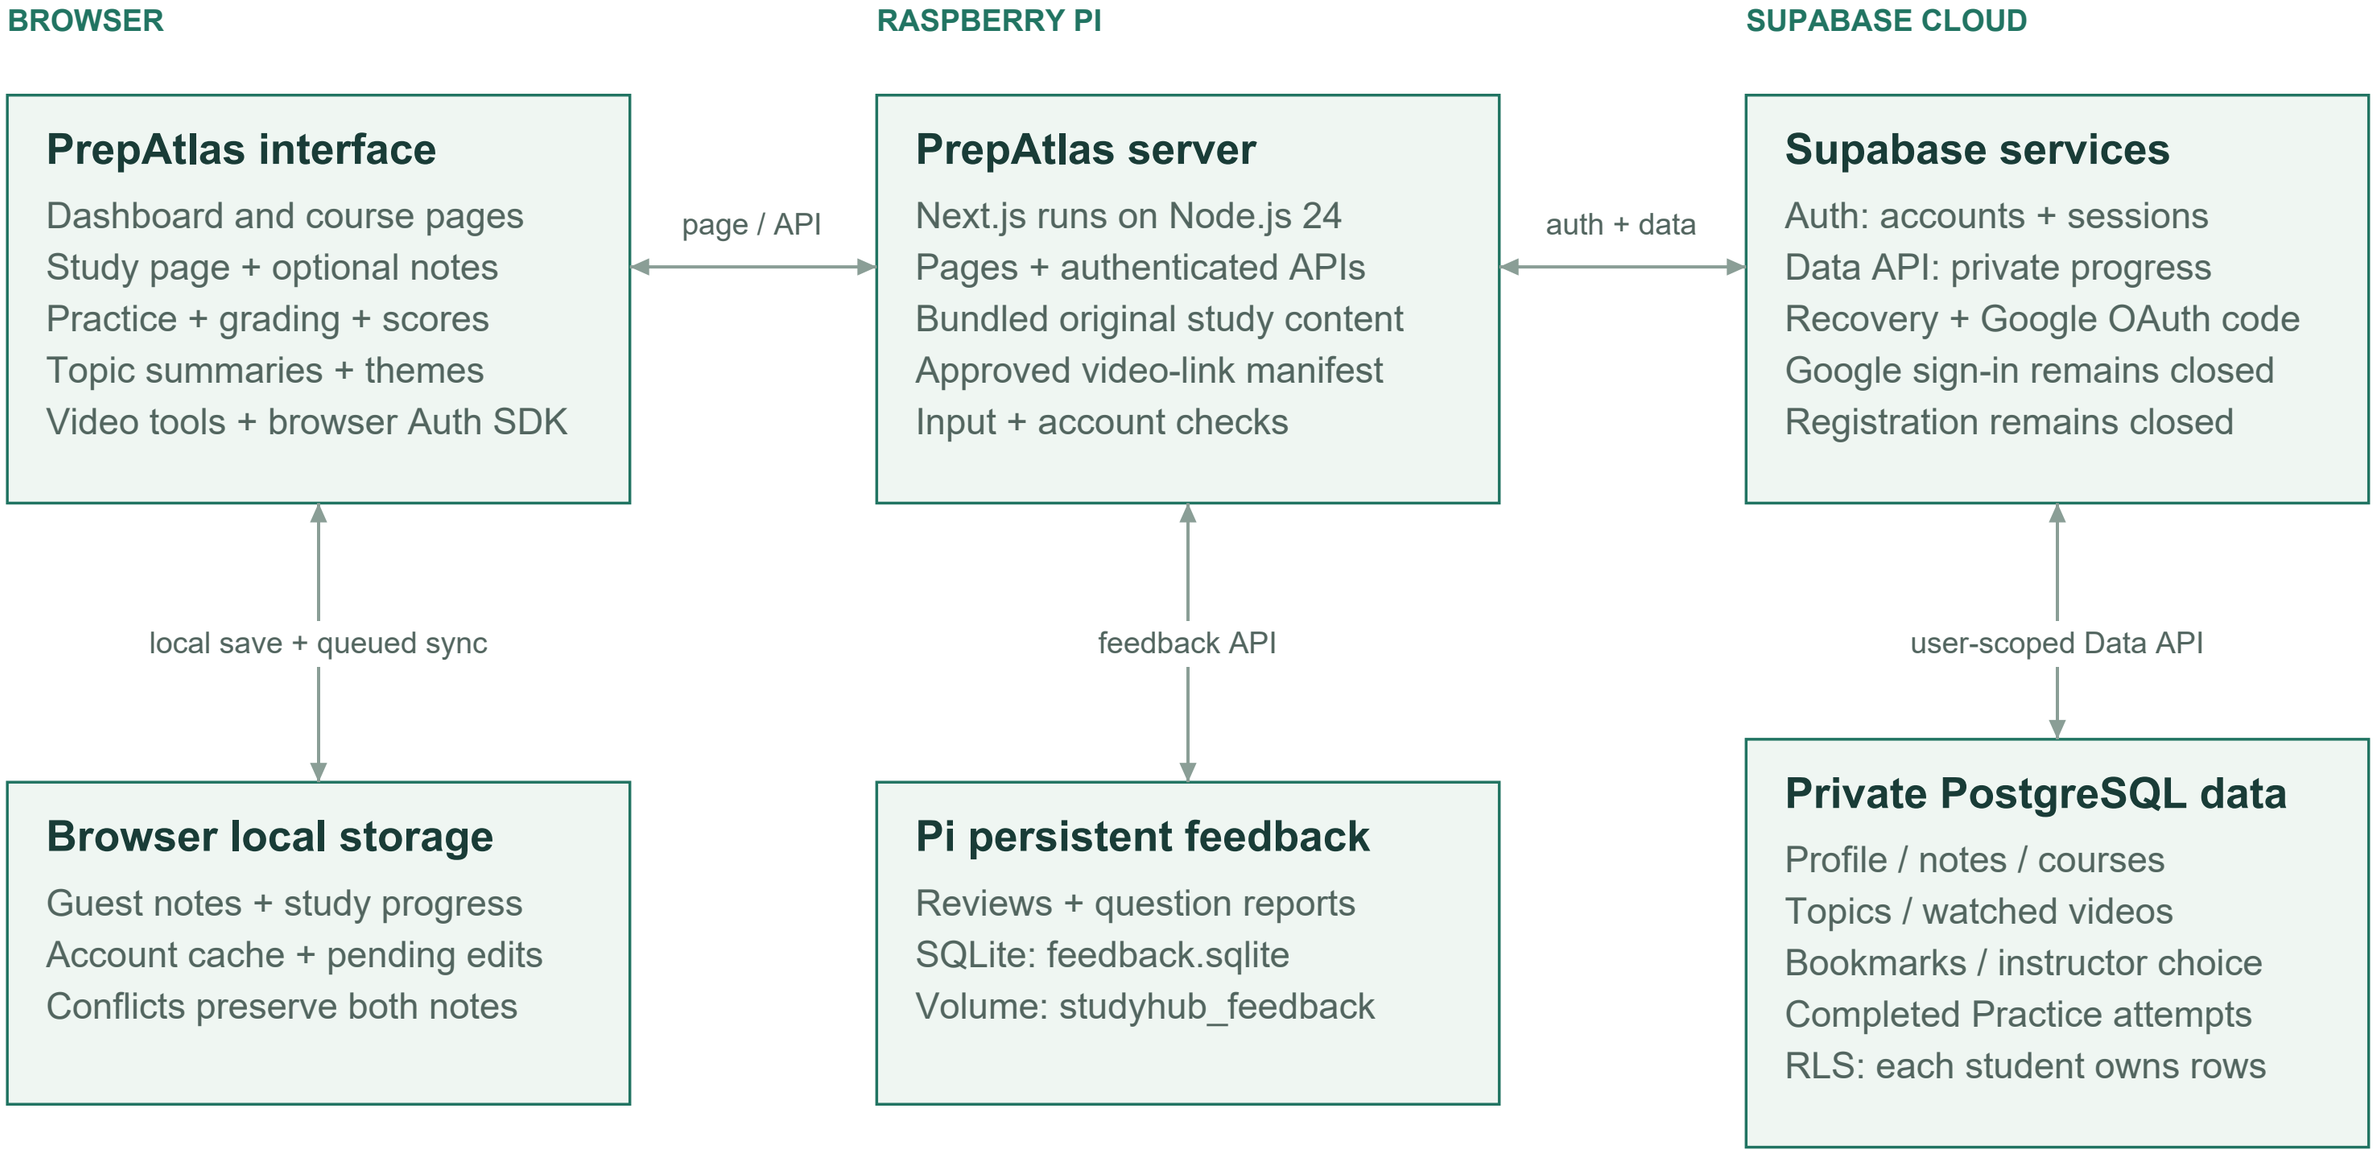


Inside the app image: 2,640 original MCQs + 240 summaries + 319 approved video links. Video files stay on YouTube.


Browser Auth SDK also refreshes sessions directly with Supabase. Server sync uses RLS, revision checks and stable attempt IDs.
Guest data is device/browser-specific. Import requires a choice. Unfinished Practice answers remain session-only. No paid AI API.

4. How PuTTY lets us control the Pi

PuTTY is the remote control. SSH is its encrypted connection. A browser is how a student uses the app.

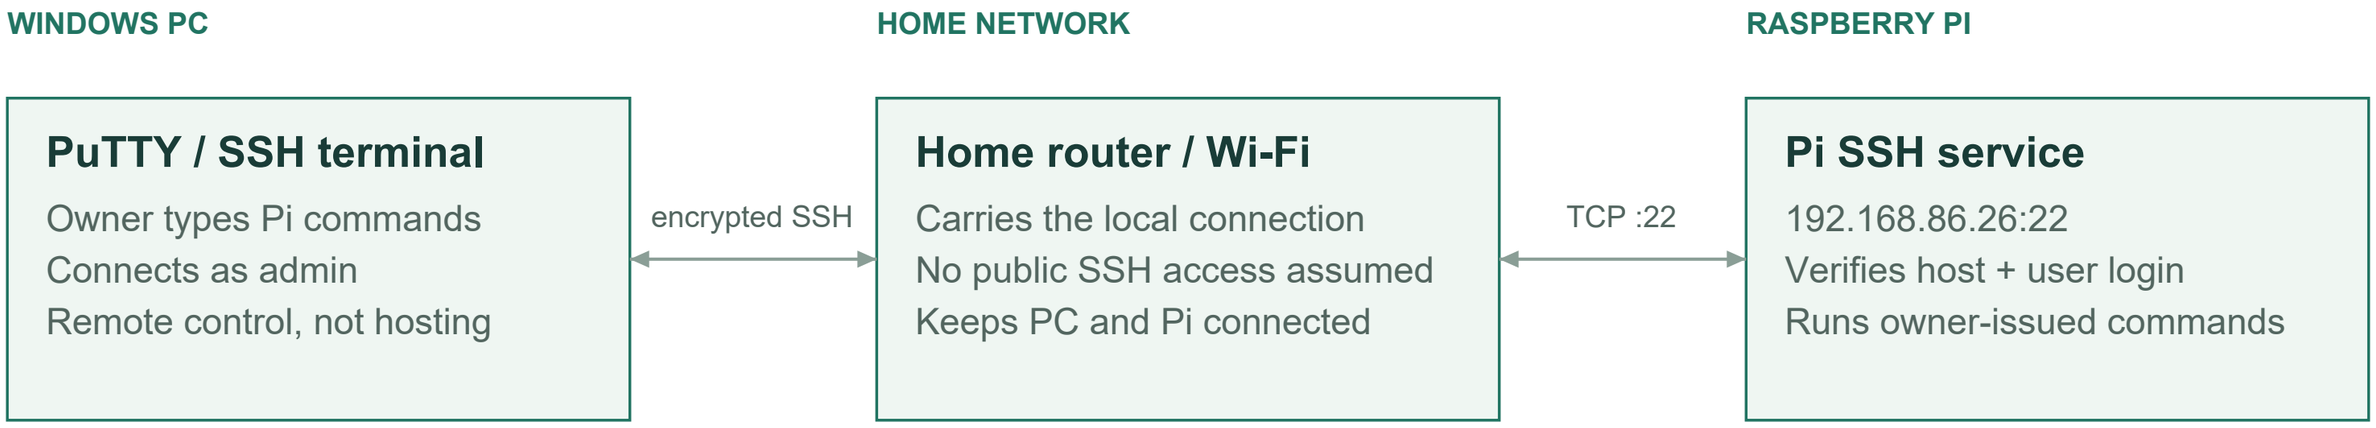

Cloudflare Tunnel serves the public website. The optional SSH tunnel below is a separate private-login test path.

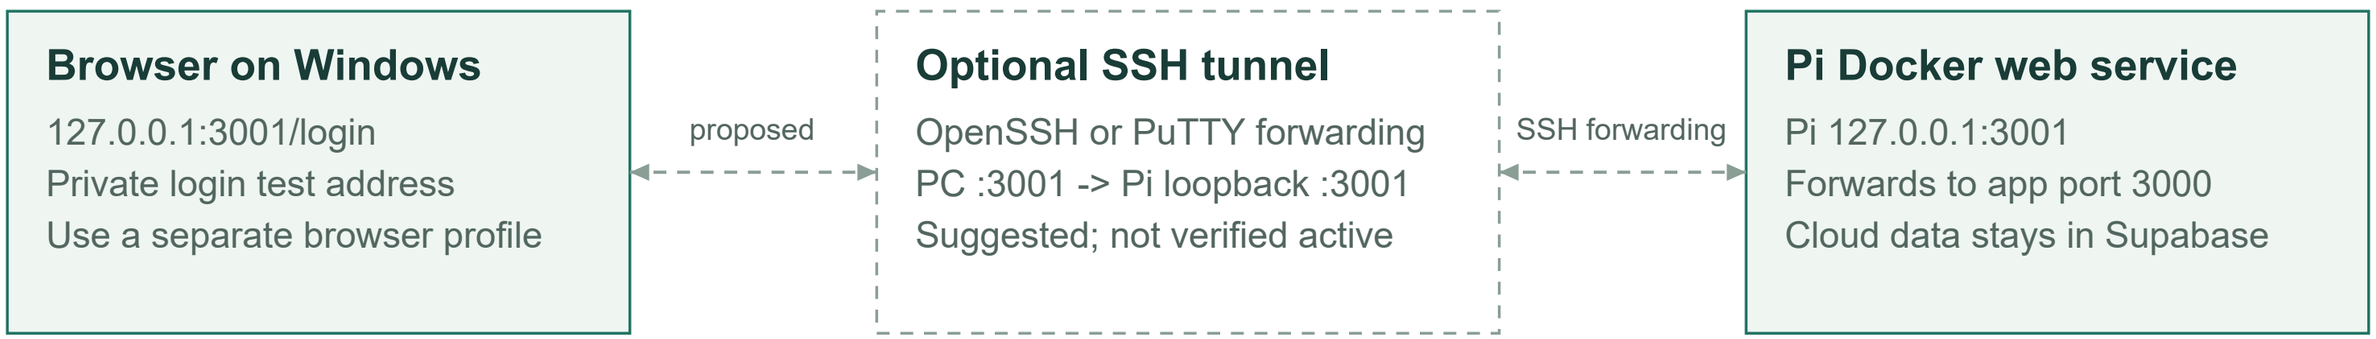

PuTTY itself is not needed to serve pages. The Pi and Docker keep the app running after the terminal disconnects.

Cloudflare Tunnel is owner-confirmed. The suggested SSH tunnel is separate and is not verified active.
Public HTTPS works; successful domain login, exact origin settings and end-to-end cloud sync were not tested here.