

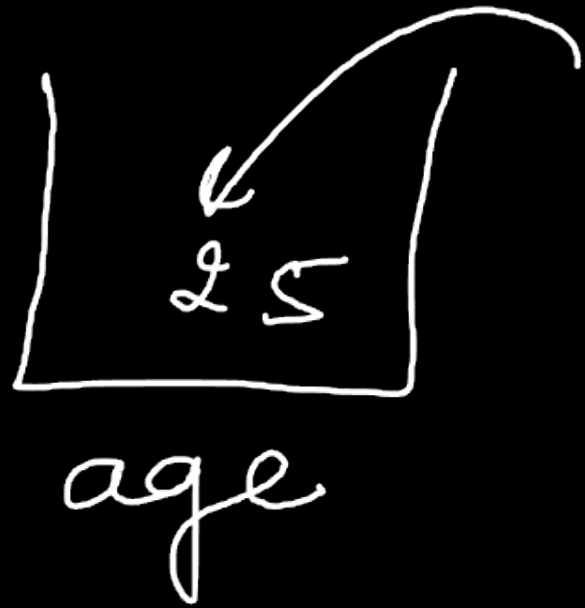


Variables

⇒ named storage location
in the memory

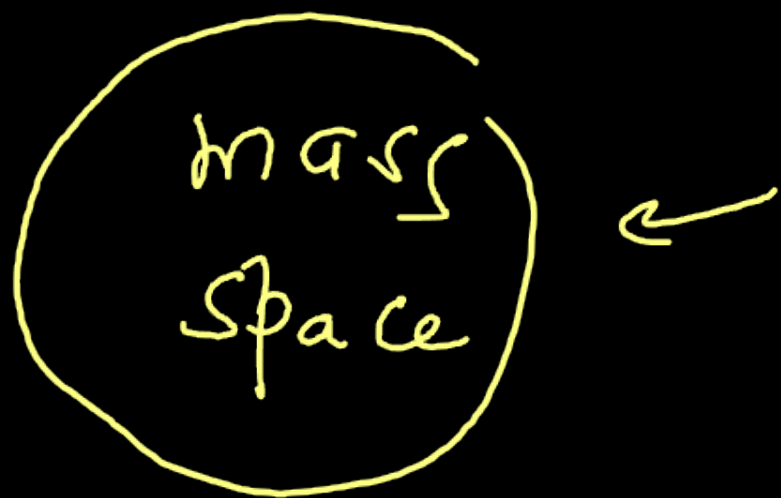

age = 25 ;
↓ ↓
value

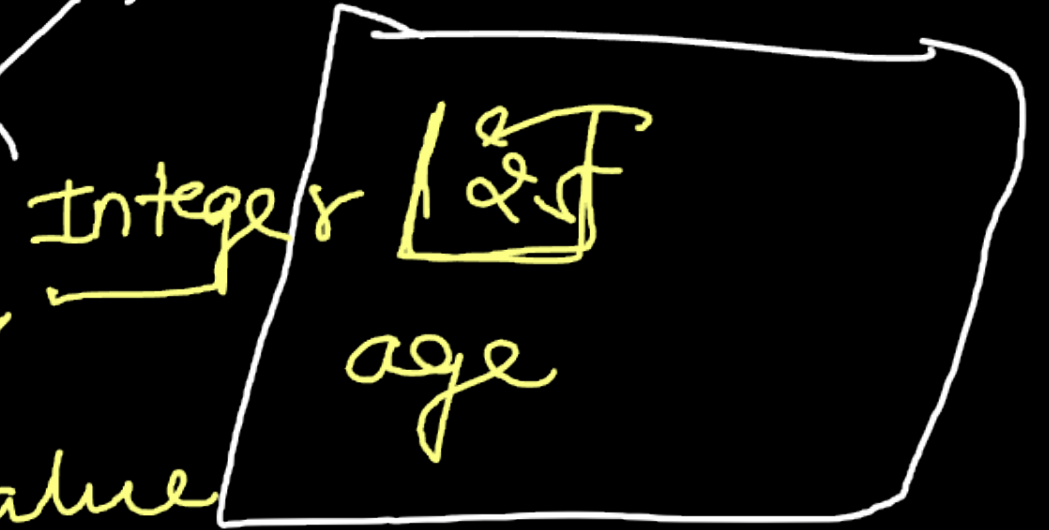

Declaration

⇒ `int age;`

Initialization

⇒ `age = 25;`


`int age = 25;`
└────────┘ └────────┘

Updation

`int num;` → Declaration

`num = 18;` → Initialization

`num = 26;` → Updation

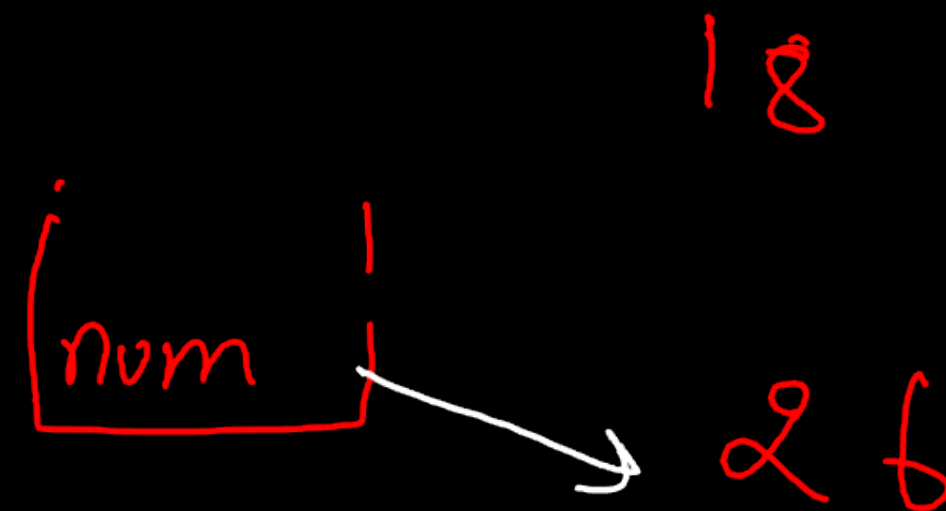

```
1  class Hello{
2      public static void main(String[] args){
3          //Declare a variable
4          int age;
5
6          //initialization
7          age=26;
8          System.out.println("The initial value is: " + age);
9
10         //updation
11         age=34;
12         System.out.println("The updated value is: " + age);
13     }
14 }
15 }
```

The initial value is: 26

The updated value is: 34

```
1  class Hello{
2      public static void main(String[] args){
3          //Naming of Variable
4          // 1)"A-Z","a-z","_","$"
5          // int Age=67;
6          // System.out.println(Age);
7          // int $Age=76;
8          // System.out.println($Age);
9
10         // 2)Can not start with a digit(0 to 9)
11         //   int 9Age=76;
12         //   System.out.println(9Age);-error;
13
14         // 3)once you have provided the first character then you can
15         // use digits also to name your Variable.
16         // int A9age=45;
17         // System.out.println(A9age);
18
19         // 4)you can not use the java reserved keywords to name your
20         // Variable.
21         //   int int=45;
22         //   System.out.println(int);
23
24         // 5) variable names are case-sensitive , myage!=MYAge
25         // apple not equal to Apple  not equal to AppLE
26
27         // 6)Use camel case for naming your variable
28         // camel case- my marks- myMarks
29         // int myAge=67;
30         // System.out.println(myAge);
31         // int myage=67;
32         // System.out.println(myage);
33     }
34 }
35
36 }
```

67
67

Thank You

