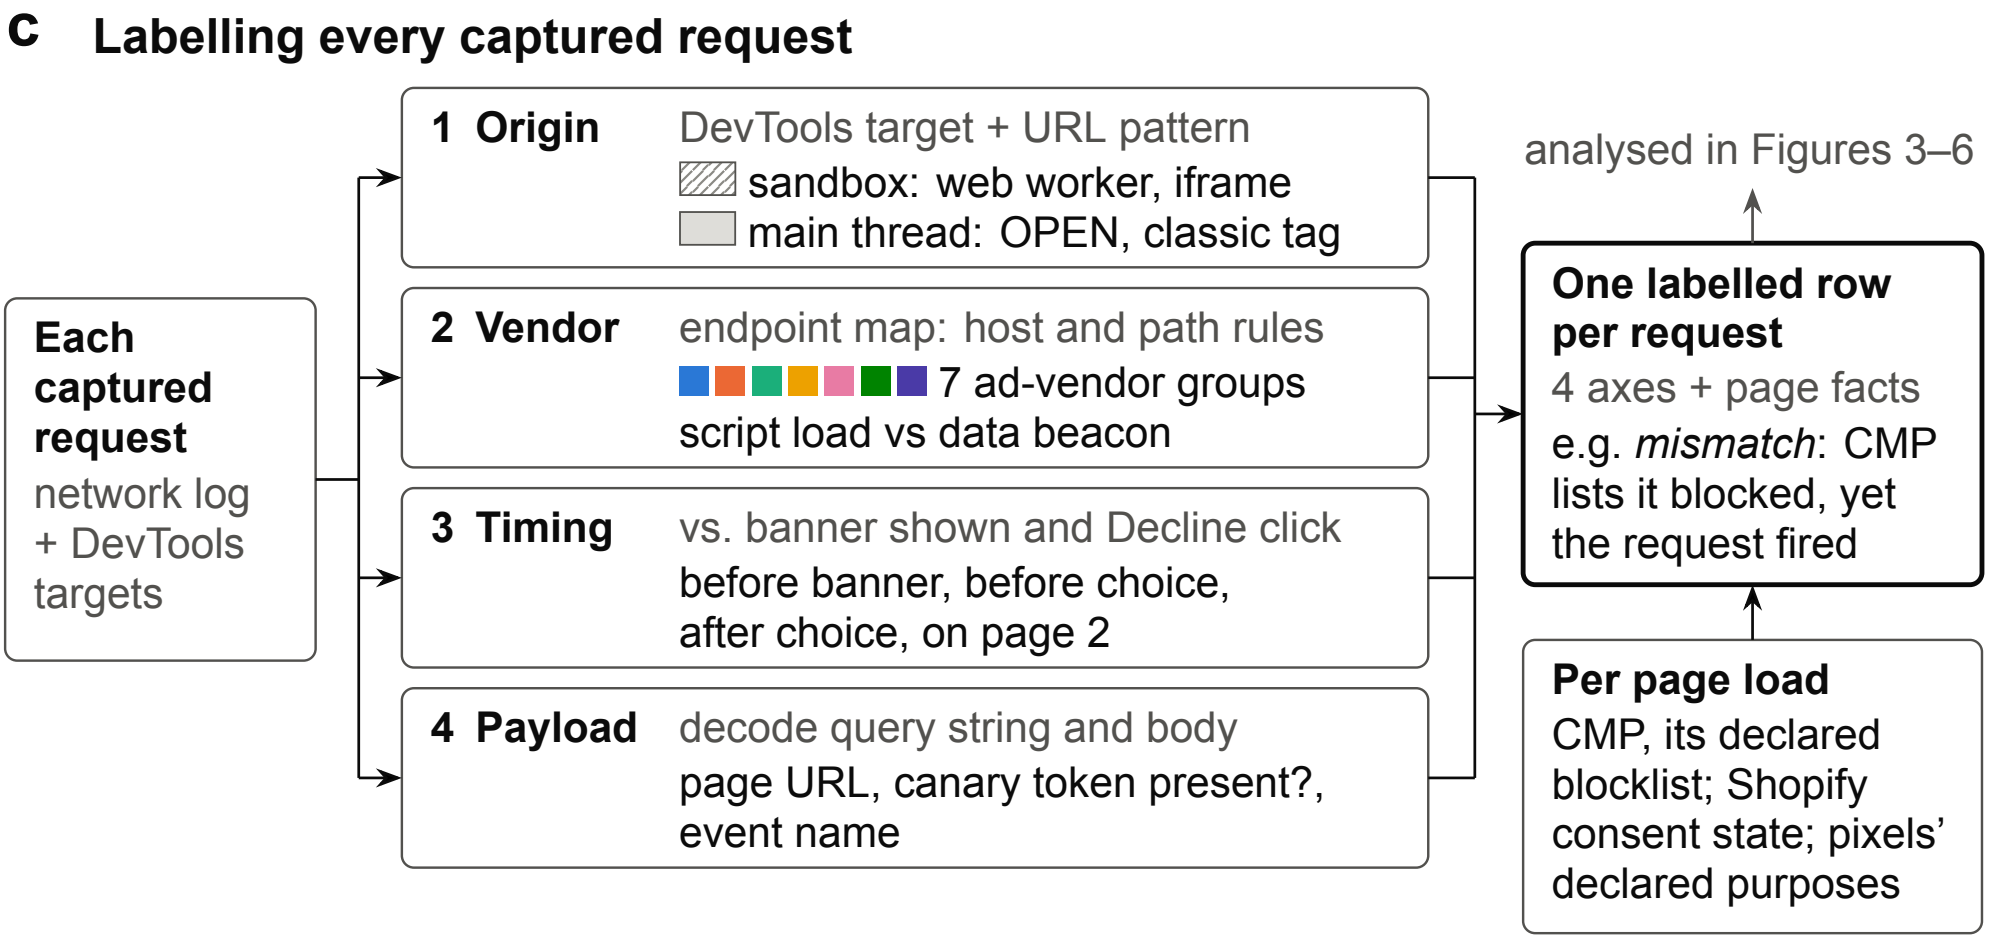
C
Labelling every captured request
Each captured request
network log + DevTools targets
1 Origin
DevTools target + URL pattern
sandbox: web worker, iframe
main thread: OPEN, classic tag
2 Vendor
endpoint map: host and path rules
7 ad-vendor groups
script load vs data beacon
3 Timing
vs. banner shown and Decline click
before banner, before choice, after choice, on page 2
4 Payload
decode query string and body
page URL, canary token present?, event name
One labelled row per request
4 axes + page facts
e.g. mismatch: CMP lists it blocked, yet the request fired
analysed in Figures 3–6
Per page load
CMP, its declared blocklist; Shopify consent state; pixels' declared purposes