


Configurar login do Google - EduAppGT PRO

Data de criação : 27 de setembro de 16


Para começar a usar o Login do Google, siga as instruções.

* Vá para <https://console.developers.google.com> e crie uma conta.


* Clique em Projeto e Criar Projeto

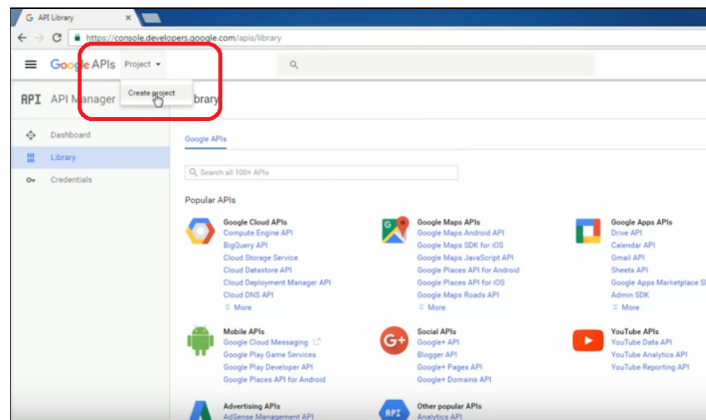


* Defina o nome do projeto e clique no botão Criar

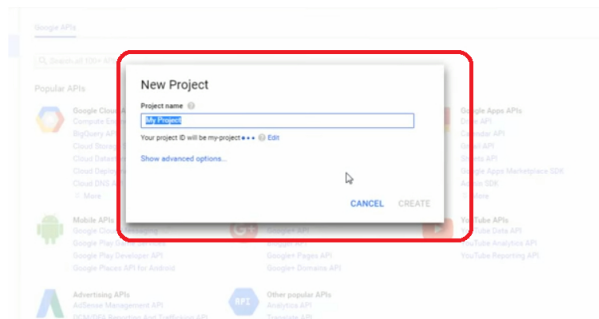


* Vá para Credenciais

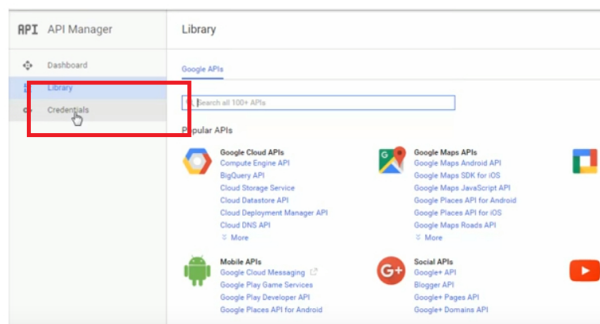


* Clique em Criar Credenciais e Selecionar ID do Cliente OAuth

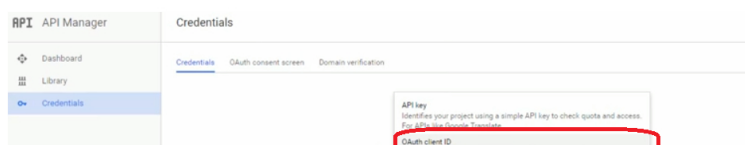


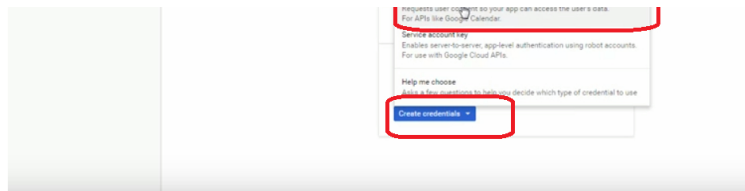


* Agora clique no botão Configurar tela de consentimento.

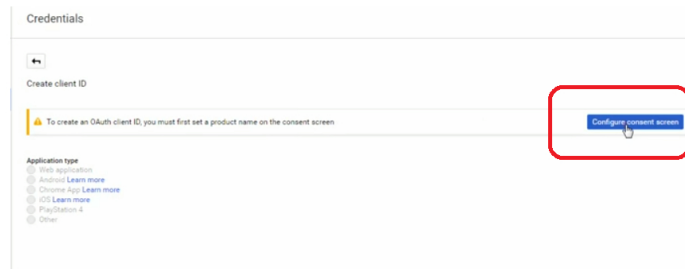


* Configure as informações e pressione o botão Salvar.

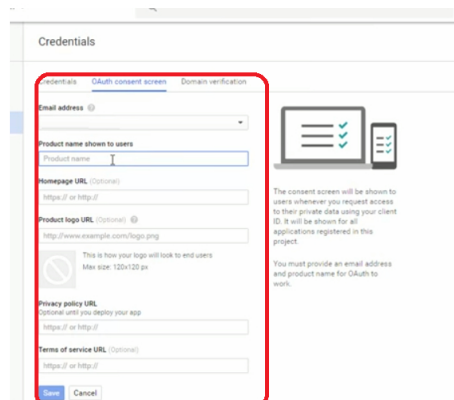

* Agora clique em Web Application.

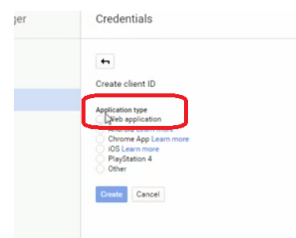

* Agora vá para as configurações do sistema eduappgt e copie o URL do Google Sync e o URL de login do Google, cole os URIs de redirecionamento autorizados e salve as alterações

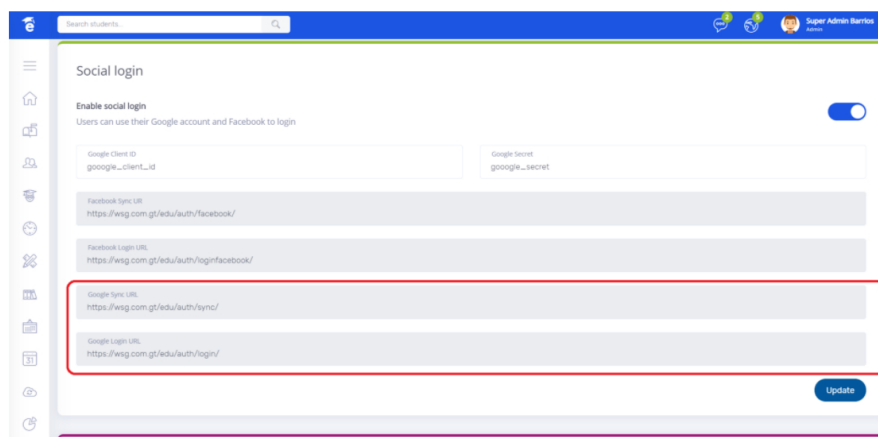

Credentials

Create client ID

Application type

- ☒ Web application
- ☐ Android Learn more
- ☐ Chrome App Learn more
- ☐ iOS Learn more
- ☐ PlayStation 4
- ☐ Other

Name

Web client 1

Redirect URIs

Enter JavaScript origins, redirect URIs, or both

Authorized JavaScript origins

For use with requests from a browser. This is the origin URI of the client application. It can't contain a wildcard (http://example.com) or a path (http://example.com/subdir); you're using a nonstandard port, you must include it in the origin URI.

http://www.example.com

Authorized redirect URIs

For use with requests from a web server. This is the path in your application that users are redirected to after they have authorized the application. The path must be absolute and use the https protocol. Cannot contain URL fragments or relative paths. Cannot be a public IP address.

http://www.example.com/oauth2/callback

Create Cancel

* Now go to eduappgt system settings and copy Google Sync URL & Google Login URL and paste on Authorized redirect URIs.

* Now copy Client ID and Client Secret and paste on EduAppGT PRO System Settings.

Credentials

Create client ID

OAuth 2.0 client ID

Name

Web client 1

Authorized JavaScript origins

For use with requests from a browser. This is the origin URI of the client application. It can't contain a wildcard (http://example.com) or a path (http://example.com/subdir); you're using a nonstandard port, you must include it in the origin URI.

http://www.example.com

Authorized redirect URIs

For use with requests from a web server. This is the path in your application that users are redirected to after they have authorized the application. The path must be absolute and use the https protocol. Cannot contain URL fragments or relative paths. Cannot be a public IP address.

http://www.example.com/oauth2/callback

Create Cancel

Social login

Enable social login

Have you ever used a Google account and Facebook to login?

Google Client ID

google_client_id

Google Secret

google_secret

Facebook Sync URL

https://www.facebook.com/eduappgt/

Facebook Login URL

https://www.facebook.com/eduappgt/login

Google Sync URL

https://www.google.com/eduappgt/sync/

Google Login URL

https://www.google.com/eduappgt/login/

Parabéns! Você aprendeu a configurar o login do Google.