

Next steps need to update the openjp2 library.

```
ls *.c
bio.c  function_list.c  jp2.c    opj_clock.c  sparse_array.c  tgt.c
cio.c  image.c             mct.c    opj_malloc.c  t1.c            thread.c
dwt.c  invert.c            mqc.c    pi.c          t2.c
event.c j2k.c              openjpeg.c rd-wr-ops.c  tcd.c
```

```
modified: dwt.c
modified: dwt.h
modified: j2k.c
modified: j2k.h
modified: jp2.c
modified: jp2.h
modified: mct.c
modified: mct.h
modified: mqc.c
modified: mqc.h
modified: openjpeg.c
modified: openjpeg.h
modified: pi.c
modified: t1.c
modified: t1.h
modified: t2.c
modified: t2.h
modified: tcd.c
modified: tcd.h
```

pi5-80

```
git clone https://github.com/develone/dwtlift-pi.git
```

```
cd dwtlift-pi/src/
```

```
./compile_pi.sh
```

```
../pi-myTTEncoder/
```

```
./libbuild.sh
```

```
gcc -g myTTEncoder.c -L. -ldwtlift -lm -o myTTEncoder
./myTTEncoder
```

```
cp test.j2k ../pi-myTTDecoder/
```

```
cd ../pi-myTTDecoder/
```

```
./libbuild.sh
```

```
gcc -Wall -Werror -g myTTDecoder.c -L. -ldwtlift -lm -o myTTDecoder
./myTTDecoder
```

octave

rgb

```
git clone https://github.com/develone/dwtlift-pi.git
```

```
cd dwtlift-pi
```

```
gitk &
```


```
cd src/
```

```
./compile_pi.sh  
cd ../pi-myTTDecoder/
```

```
./libbuild.sh
```


```
gcc -Wall -Werror -g myTTDecoder.c -L. -ldwtlift -lm -o myTTDecoder  
./myTTDecoder
```

```
octave rgb.m now 06/07/26
```

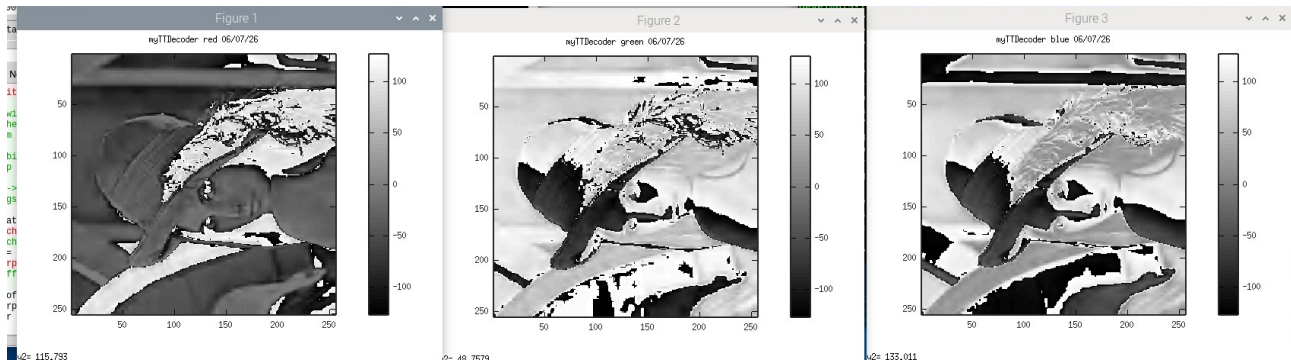

```
git diff ../pi-myTTEncoder/myTTEncoder.c  
diff --git a/pi-myTTEncoder/myTTEncoder.c b/pi-myTTEncoder/myTTEncoder.c  
index 9fb9e55..499eb29 100644  
--- a/pi-myTTEncoder/myTTEncoder.c  
+++ b/pi-myTTEncoder/myTTEncoder.c  
@@ -123,7 +123,7 @@ typedef struct {  
    char *bufferptr;  
    //printf("bufferptr 0x%x *bufferptr 0x%x \n",bufferptr,*bufferptr);  
    int n,loop;  
-    char fname[] = "lena_rgb_256.bmp";  
+    char fname[] = "lena_rgb_2048.bmp";  
    /*bufferptr = buffer;  
    //printf("0x%x *bufferptr\n",bufferptr);  
    //printf("fname = %s \n",fname);
```

```
git diff myTTDecoder.c  
diff --git a/pi-myTTDecoder/myTTDecoder.c b/pi-myTTDecoder/myTTDecoder.c  
index 09b8aa8..9148dd6 100644  
--- a/pi-myTTDecoder/myTTDecoder.c  
+++ b/pi-myTTDecoder/myTTDecoder.c  
@@ -95,8 +95,8 @@ printf("CR = %d flg = %d bp = %d imgsz = %d \n",CR, flg, bp, imgsz);  
*/  
da_x0 = 0;  
da_y0 = 0;  
-da_x1 = 256;  
-da_y1 = 256;  
+da_x1 = 2048;  
+da_y1 = 2048;  
  
printf("da_x0 = %d da_y0 = %d da_x1 = %d da_y1 = %d\n",da_x0, da_y0, da_x1, da_y1);
```

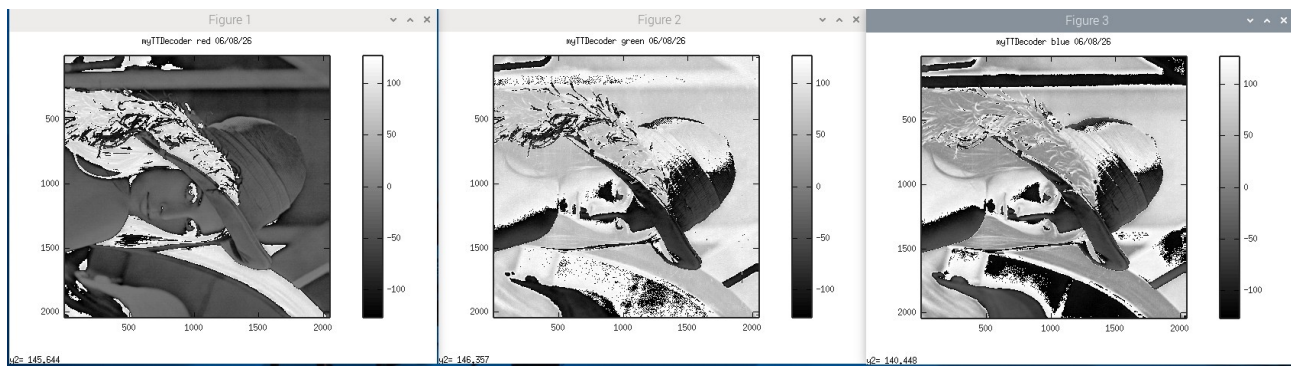

XX