

*****Default*****

**lift_config in Pascal
bitmap to j2k
05/27/26**

*****Default*****

uliftbitmap.pas

```
{$linklib dwtlift}  
{$linklib libm}  
unit uLiftBitmap;
```

```
    if(ENCODE=1) then  
lift_config(DECOMP,ENCODE,COMP1,COMP2,COMP3,COMP4,IBPP,Size,HImage,WImage,Bu  
ffer);  
    //if  
GraphicsWindowDrawImage(Handle,X,Y,Buffer,BitMapInfoHeader.Width,BitMapInfoHeader.Heig  
ht,Format) <> ERROR_SUCCESS then Exit;  
    Result:=True;  
    finally
```

uBufferToC.pas
unit uBufferToC;

```
{$linklib dwtlift}
```

```
interface  
procedure lift_config(decom: word; enc:word; TCP_DISTORATIO:word;FILTER:word;  
COMPRESSION_RATIO : word; FLG : word; ii: word; ss,him: LongWord; wim: LongWord;var  
tmpbuf: Pointer); cdecl; external 'libdwtlift' name 'lift_config';  
implementation  
end.
```

```
2026-05-09 16:10:36      196730 MyBitmap.bmp  
2026-05-09 16:10:36      196730 lena_rgb_256.bmp
```

lena_rgb_64.bmp in MyBitmap.bmp
256com in testfile


```
devel@pi5-70:~/openjpeg/build/bin $ tftp 192.168.12.160  
tftp> binary  
tftp> trace on  
Packet tracing on.  
tftp> get testfile  
sent RRQ <file=testfile, mode=octet>  
received DATA <block=1, 24 bytes>  
tftp> get 256com
```

```
sent RRQ <file=256com, mode=octet>
received DATA <block=1, 24 bytes>
tftp> quit
devel@pi5-70:~/openjpeg/build/bin $ od -x testfile
00000000 0019 0000 0001 0000 0000 0000 0000 0000
00000020 0100 0000 0100 0000
00000030
devel@pi5-70:~/openjpeg/build/bin $ od -x 256com
00000000 0019 0000 0001 0000 0000 0000 0000 0000
00000020 0100 0000 0100 0000
00000030
```

```
cd openjpeg/build/bin/
mv test.j2k test.j2k.old
devel@pi5-70:~/openjpeg/build/bin $ tftp 192.168.12.160
tftp> binary
tftp> trace on
Packet tracing on.
tftp> get test.j2k
sent RRQ <file=test.j2k, mode=octet>
received DATA <block=1, 512 bytes>
sent ACK <block=1>
received DATA <block=2, 512 bytes>
sent ACK <block=2>
received DATA <block=3, 512 bytes>
sent ACK <block=3>
received DATA <block=4, 512 bytes>
sent ACK <block=4>
received DATA <block=5, 512 bytes>
sent ACK <block=5>
received DATA <block=6, 512 bytes>
sent ACK <block=6>
received DATA <block=7, 512 bytes>
sent ACK <block=7>
received DATA <block=8, 512 bytes>
sent ACK <block=8>
received DATA <block=9, 512 bytes>
sent ACK <block=9>
received DATA <block=10, 512 bytes>
sent ACK <block=10>
received DATA <block=11, 512 bytes>
sent ACK <block=11>
received DATA <block=12, 512 bytes>
sent ACK <block=12>
received DATA <block=13, 512 bytes>
sent ACK <block=13>
received DATA <block=14, 512 bytes>
sent ACK <block=14>
received DATA <block=15, 512 bytes>
sent ACK <block=15>
received DATA <block=16, 168 bytes>
```

```
tftp> quit
```

```
./opj_decompress -i test.j2k -o 052726_256.png
```

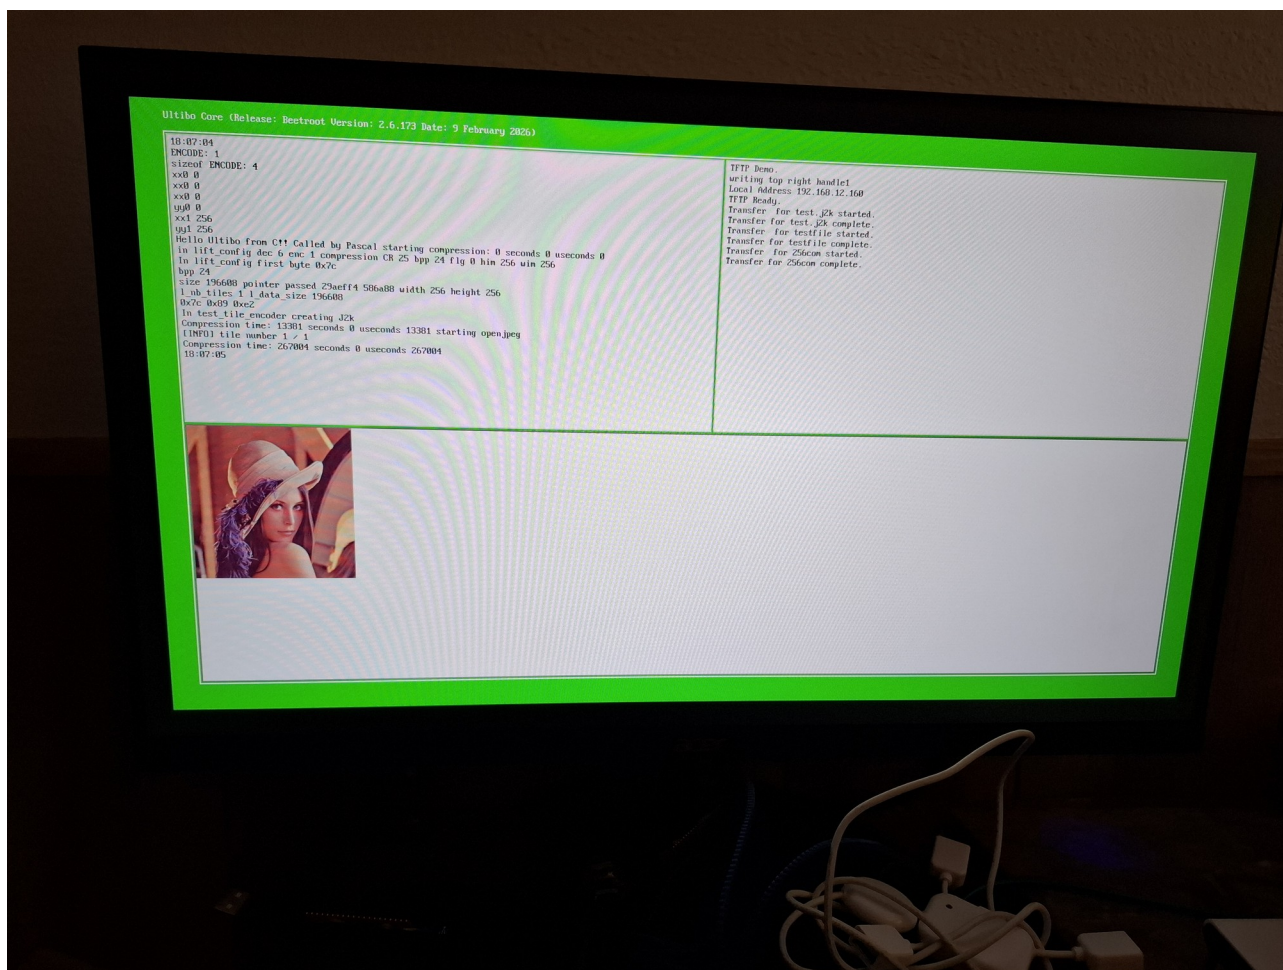

052726_256.png



