

\*\*\*\*\*DRAFT\*\*\*\*\*

## ***Testing C code with Ultibo Bare Metal, Ultibo TFTP and Ultibo Bitmaps***

**01/24/17**

Goal: This is hopes of improving the speed of computing the JPEG2000. The RPi2B or RPi3B will run Ultibo Bare Metal.

To transfer images over an Ethernet connection to a RPi2B or RPi3B.

Perform the JPEG 2000 lifting step which is the firts step in the JPEG2000.

The C code that performs the DWT Lifting Step runs on x86\_64 6 core is considerably faster.

```
time ./liftmain lena_rgb_512.png
```

```
real    0m0.090s
user    0m0.043s
sys     0m0.009s
```

The C code that performs the DWT Lifting Step runs on the x86\_64 dual core and RPi3B is approximately the same.

On x86\_64 dual core

```
time ./liftmain lena_rgb_512.png
```

```
real    0m0.356s
user    0m0.209s
sys     0m0.040s
```

On a RPi3B

```
./time ./liftmain lena_rgb_512.png
```

```
real    0m0.380s
user    0m0.230s
sys     0m0.010s
```

Status: Topleft is where the C routine is **being** called. Bottomleft is a 512 x 512 bitmap

In the file test.c the contents of lifing.c

In the topright is the tftp process.

```
# ultibo-tftp
```

A reasonably quick method of transferring files in an Ultibo project.

It uses Trival FTP based on RFC 1350

Approx upload times around 16 secs for kernel7.img of approx 2.2 MB

```
tftp 192.168.1.185
```

```
tftp> binary
```

```
tftp> put grn-out.32t
```

Sent 1048576 bytes in 4.0 seconds

```
tftp> get grn-out.32t xx
Received 1048580 bytes in 4.0 seconds
tftp> quit
```

<https://github.com/pjde/ultibo-tftp.git>

```
extern void  singlelift(int rb, int w, int * const ibuf, int * const obuf);
extern void  ilift(int rb, int w, int * const ibuf, int * const obuf);
extern void  lifting(int w, int *ibuf, int *tmpbuf);
```

This is needed to add the fpc compiler to the PATH.

```
export PATH=/home/pi/ultibo/core/fpc/bin:$PATH
echo $PATH
/
home/pi/ultibo/core/fpc/bin:/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin:/usr/local/games:/u
sr/games
```

```
arm-none-eabi-gcc -O2 -mabi=aapcs -marm -march=armv7-a -mfpv3-d16 -mfloat-abi=hard -c
test.c
```

```
arm-none-eabi-ar rcs libtest.a test.o
```

```
fpc -vi -B -Tultibo -Parm -CpARMV7A -WpRPI2B @/home/pi/ultibo/core/fpc/bin/rpi2.cfg -O2
LibCTestRPI2.lpr
```

```
./build_liftmain.sh compiles lifting.c & liftmain.c --> liftmain
```

```
iftmain lena_rgb_512.png
red-out.32t
```

```
line 101 lifting.c      const int      LVLS = 1; performs 1 level forward DWT
```

```
lines 230-246 in lifting.c when commented does not perform the inverse DWT.
```


```
/*
    for(lvl=(LVLS-1); lvl>=0; lvl--) {
        int      offset;

        w <= 1;


        if (lvl)
            offset = ov[lvl-1];
        else
            offset = 0;
        ip = &ibuf[offset];
        tp = &tmpbuf[offset];

        ilift(rb, w, ip, tp);
```


```
    ilift(rb, w, tp, ip);  
}  
*/
```

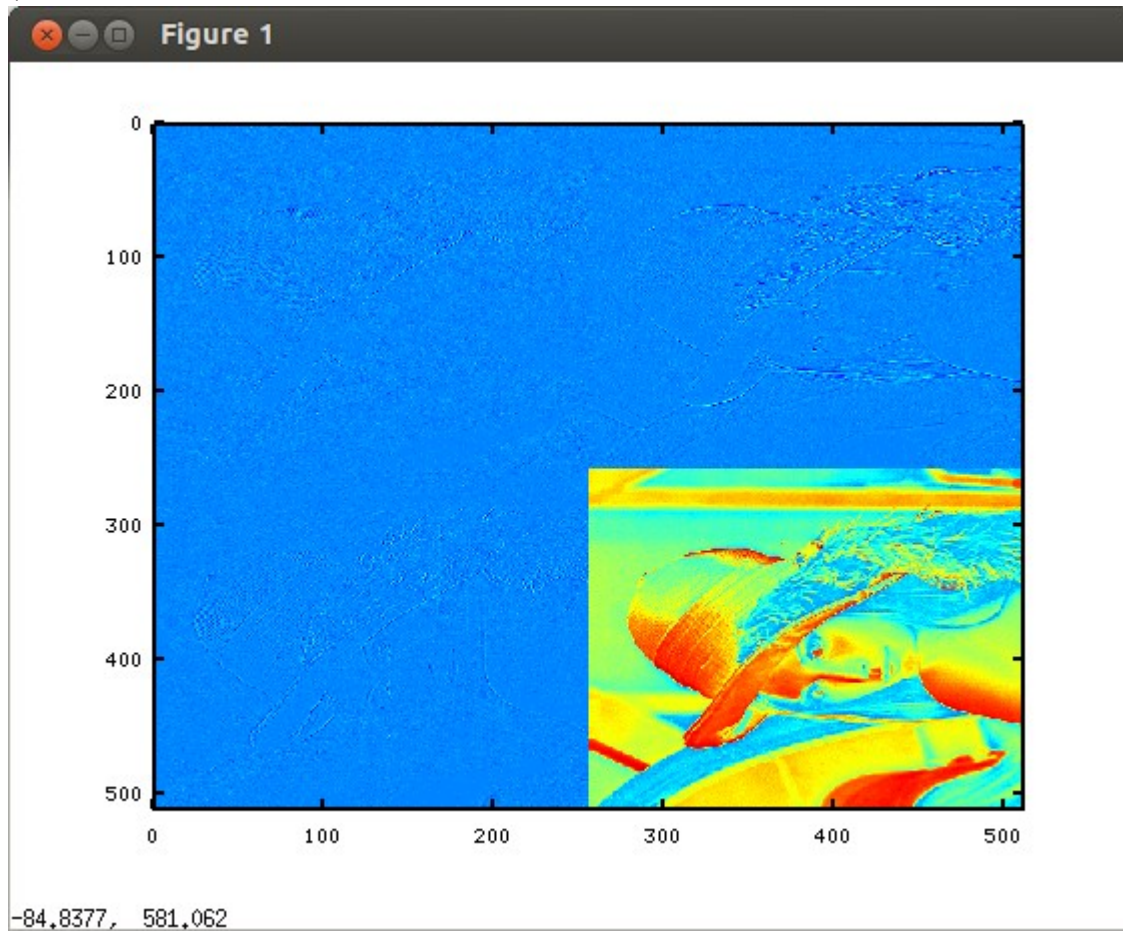


The image above is 1 level forward DWT red subband  
The file red-out.32t

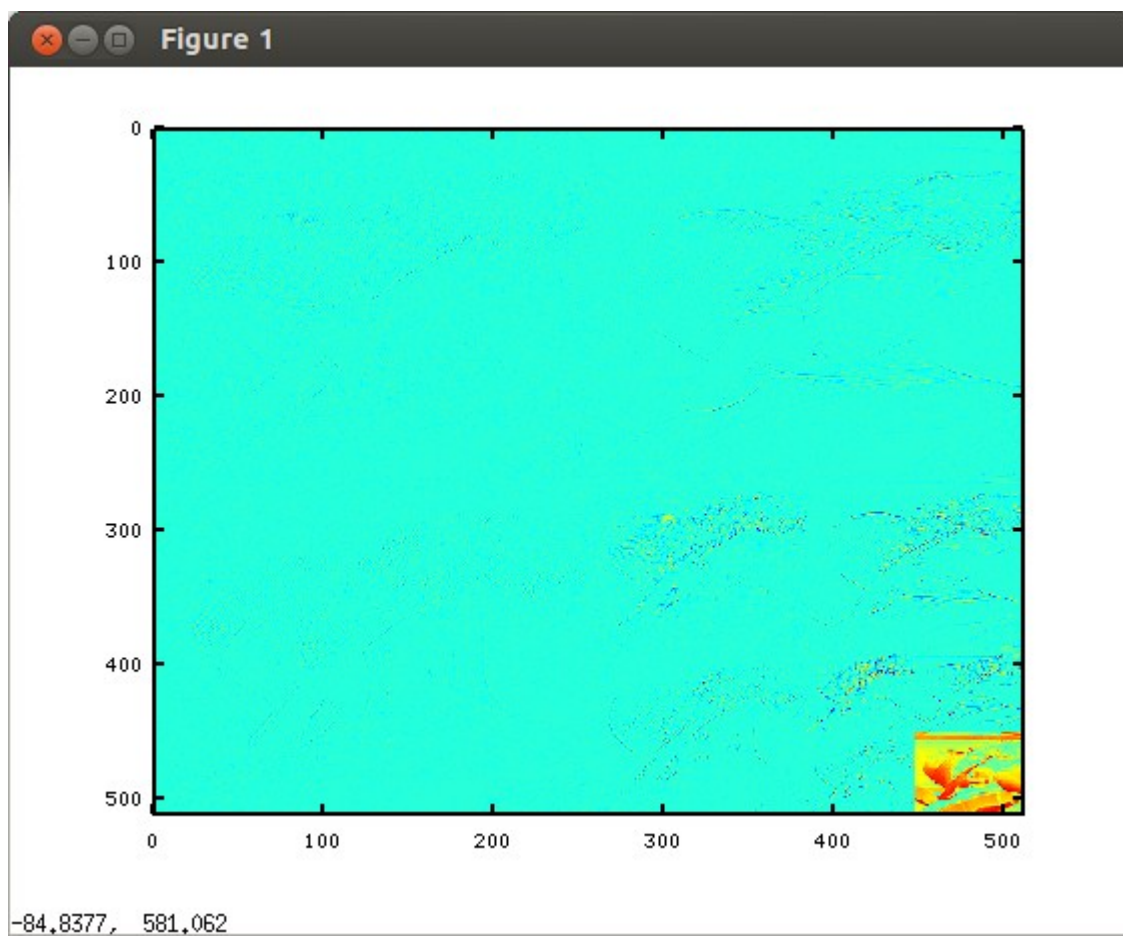

The image above is 3 levels forward DWT red subband  
The file red-out.32t

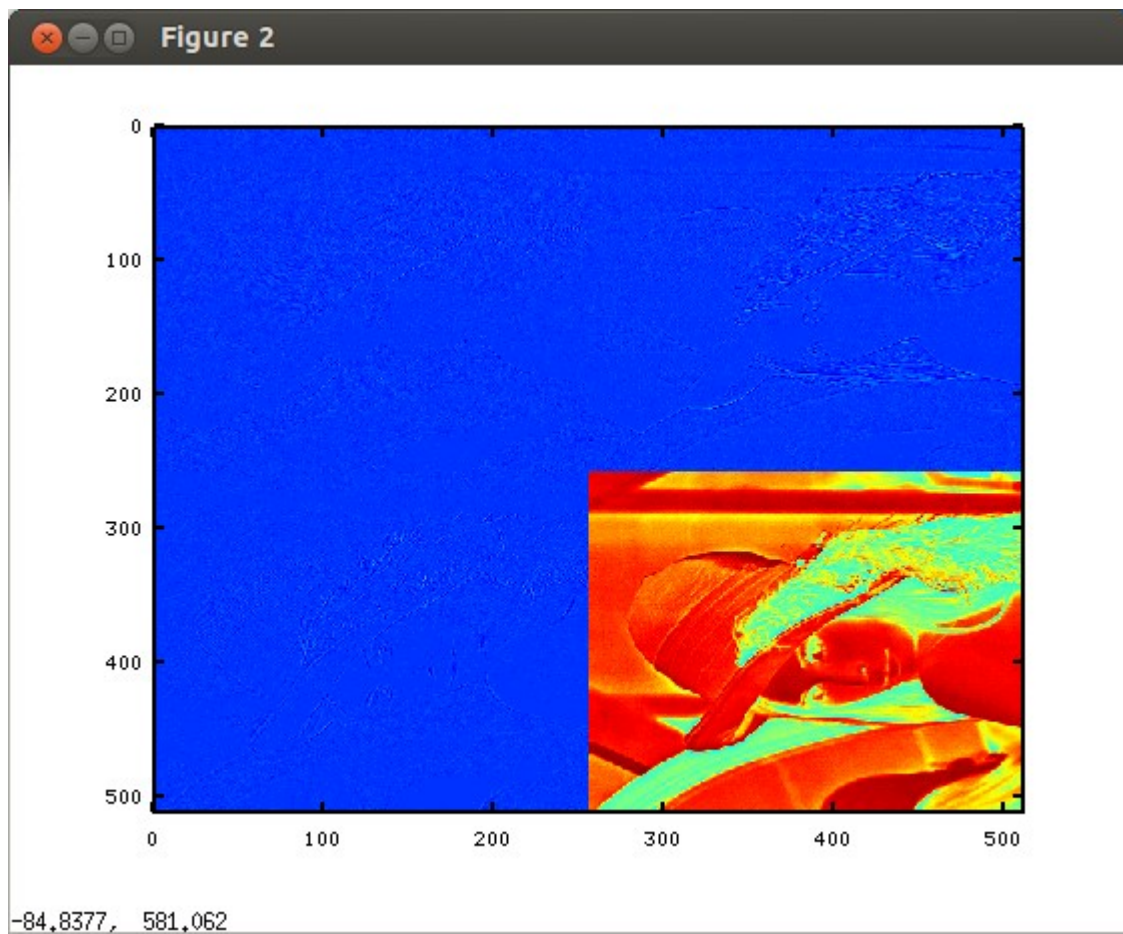


The image above is 1 level forward DWT grn subband  
The file grn-out.32t

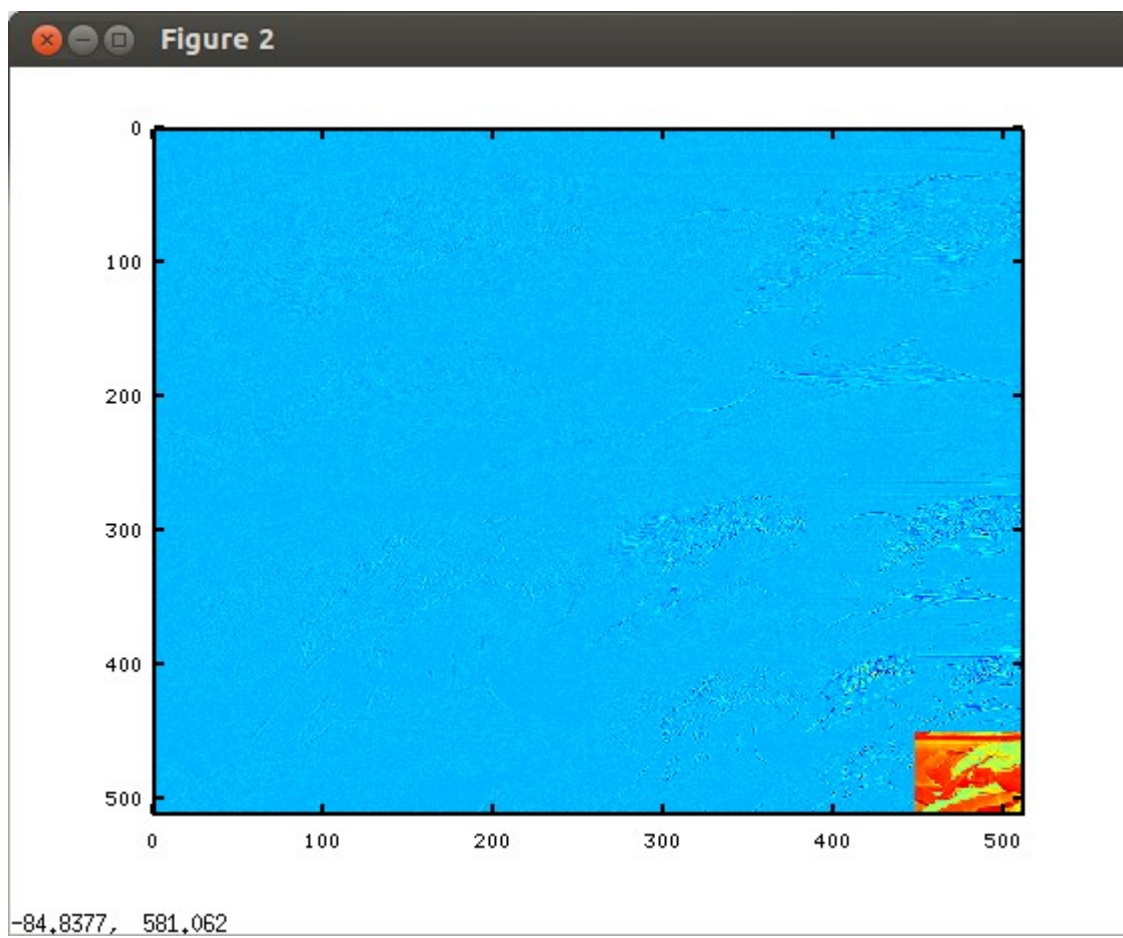


The image above is 3 levels forward DWT grn subband  
The file grn-out.32t



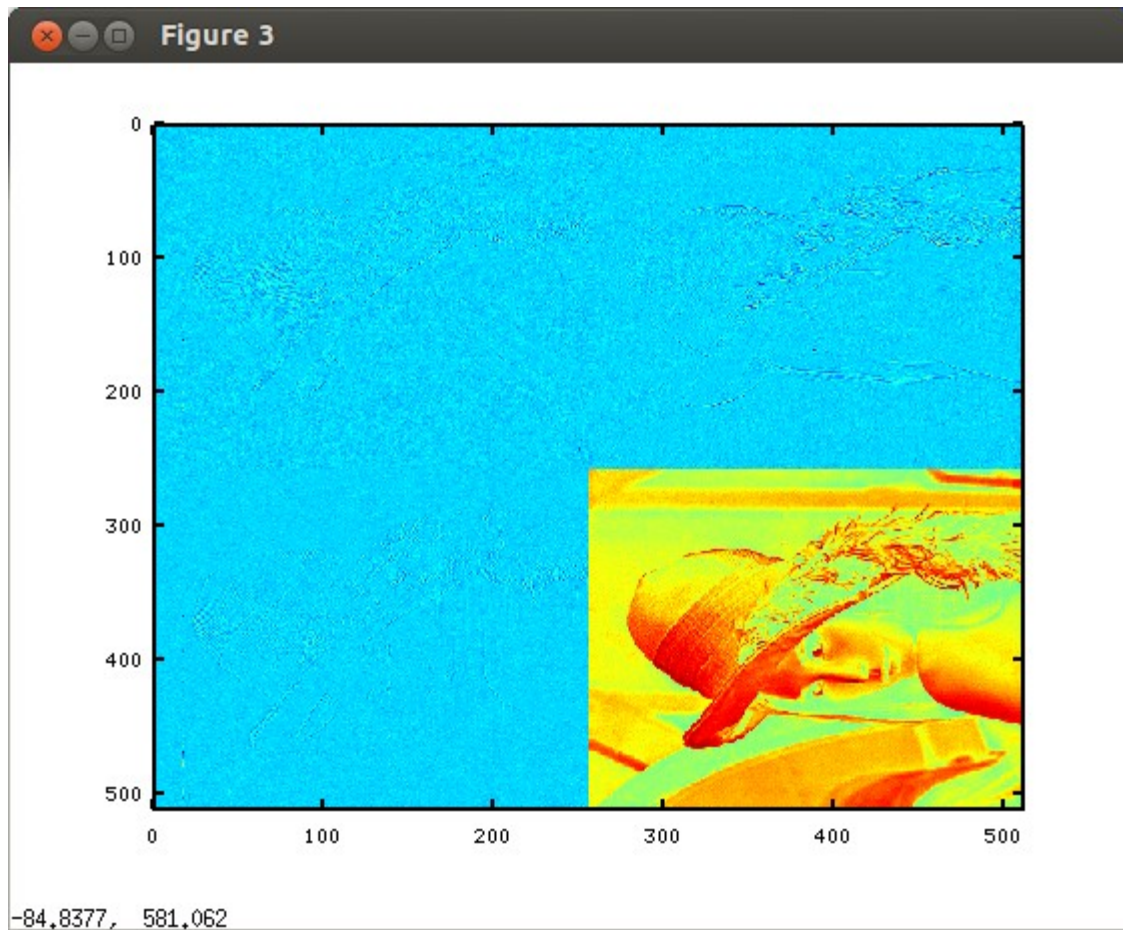


The image above is 1 level forward DWT blu subband  
The file blu-out.32t

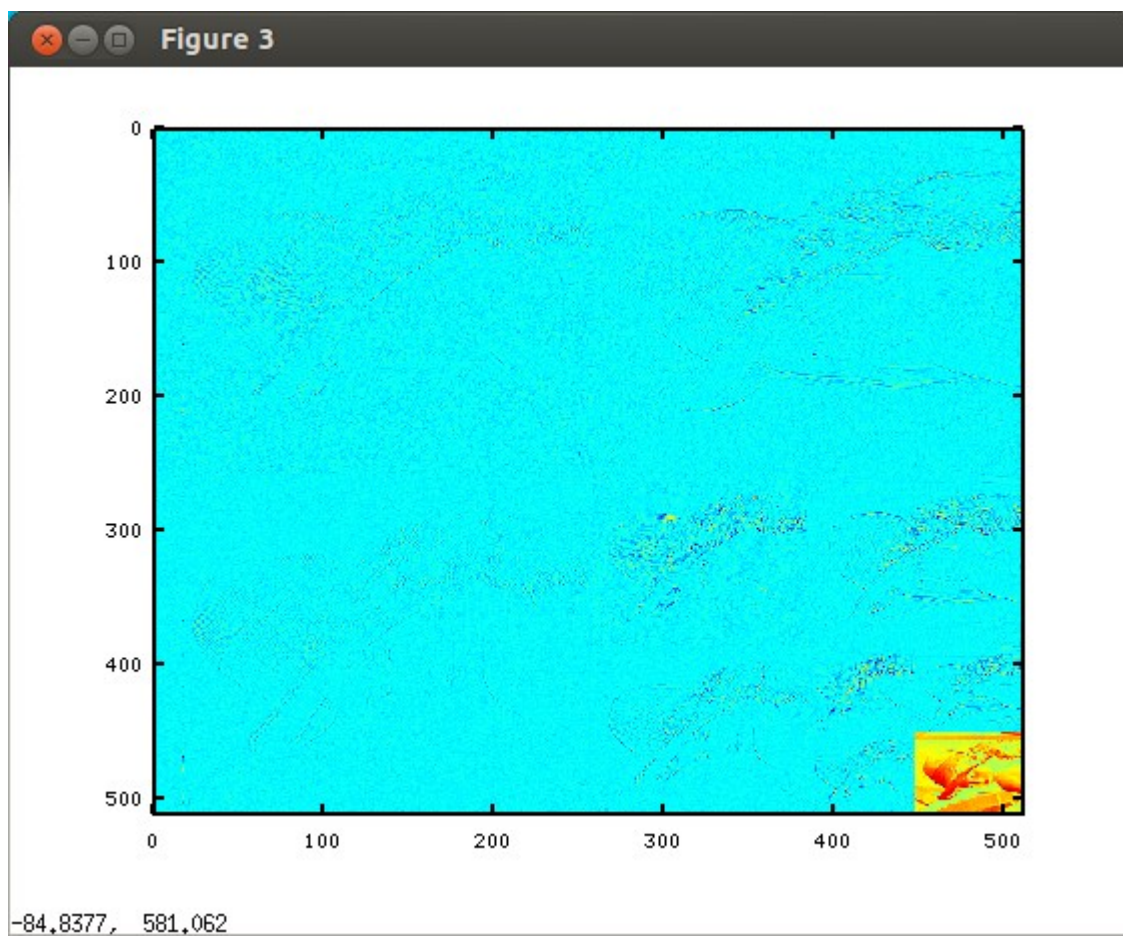

The image above is 3 levels forward DWT blu subband  
The file blu-out.32t



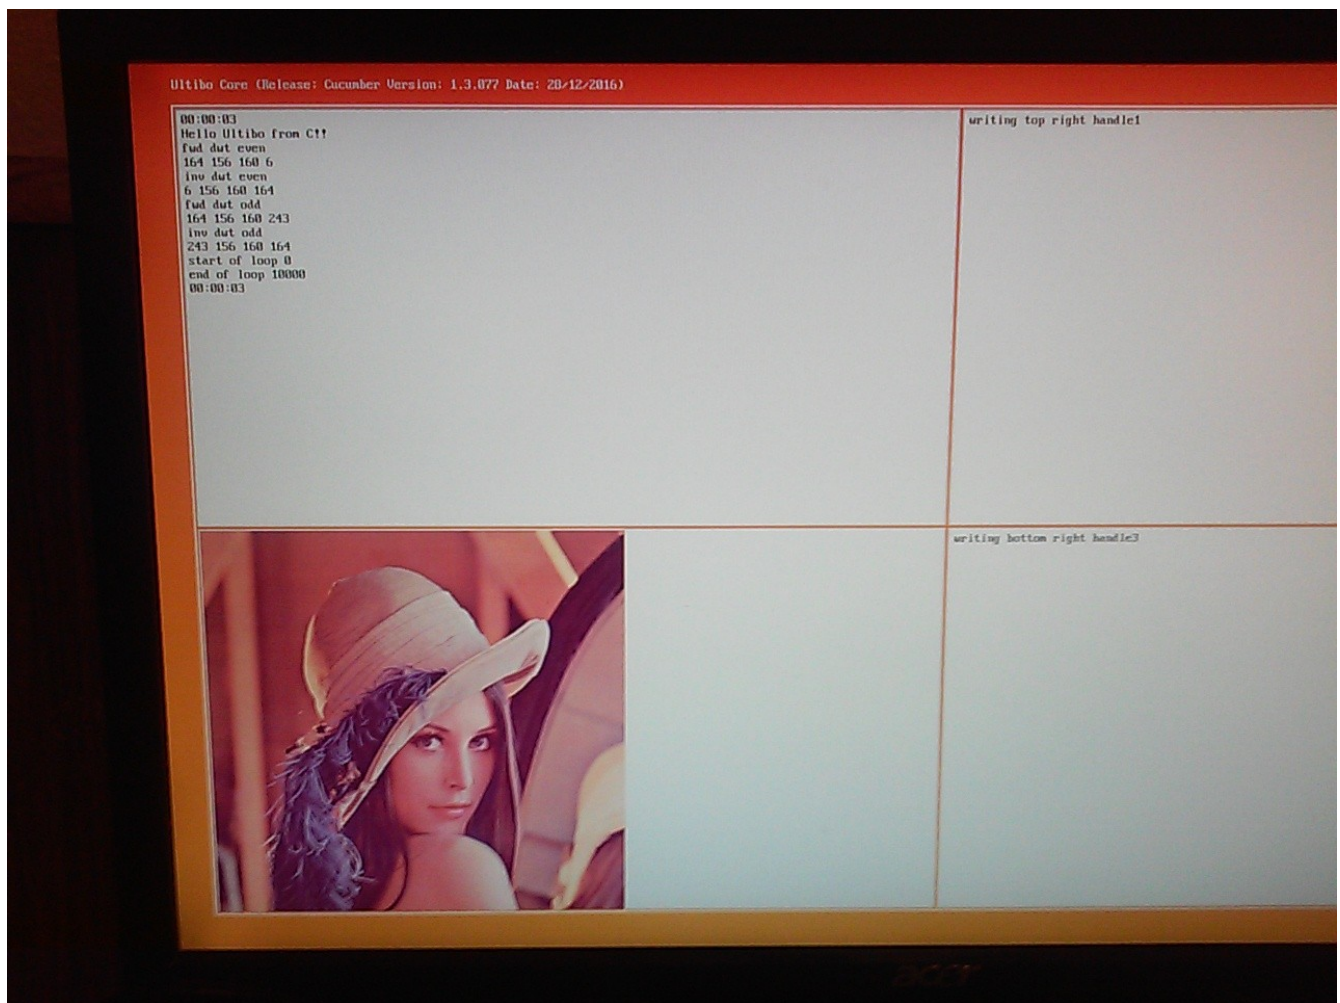

The above image is the running on RPi3B as compiled for RPi2B on 01/23/17.

15:42:26  
Hello HTTBo from C11  
Full dat even  
154 156 158 6  
line dat even  
6 156 158 154  
Full dat odd  
154 156 158 243  
line dat odd  
243 156 158 154  
start of loop 0  
end of loop 10000  
15:42:26

writing top right handle1  
Local Address 192.168.1.105  
HTTP Ready  
Transfer for "grow-out.321" started.  
Transfer for grow-out.321 complete.  
Transfer for grow-out.321 started.  
Transfer for grow-out.321 complete.



writing bottom right handle2