

COMPLETE VISUAL GUIDE

Build Your App on Replit

A step-by-step beginner's guide — manual coding, no AI

Real screenshots with annotated arrows

Every Replit button and panel explained

Deploy your app live to the internet

Full code for a landing page, signup & login

Keyboard shortcuts cheat sheet

Common errors and exactly how to fix them

CONTENTS

01	Create Your Replit Account	3
02	The Replit Interface — Every Panel	5
03	Write Your First HTML / CSS / JS	8
04	Install Packages (npm & pip)	11
05	Build a Full Website (Landing Page + Login + Signup)	13
06	React — Build a Modern Web App	18
07	Environment Variables & Secrets	21
08	Deploy Your App Live	23
09	Keyboard Shortcuts Cheat Sheet	25
10	Common Errors & Fixes	27

Create Your Replit Account


Sign up, log in, and create your first project — with screenshots

STEP 1 — Go to replit.com and click "Create account"

Open any browser (Chrome, Firefox, Safari, Edge — any browser works) and type this address in the address bar at the top:

<https://replit.com>

You will see the Replit homepage below. Look at the TOP RIGHT CORNER of the page:

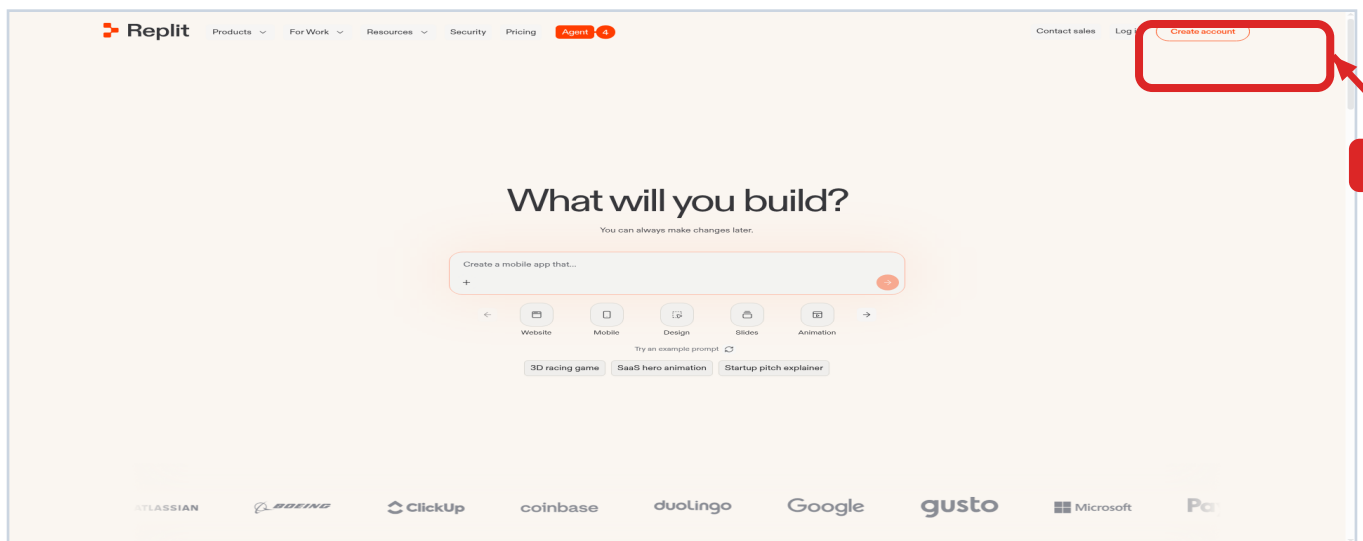

"Create account" is the button in the top-right corner. You can also click "Log in" if you already have an account.

STEP 2 — Fill in the signup form

After clicking "Create account" you will see a signup form. Here is exactly what to do:

replit.com/signup

Create your Replit account

G Continue with Google

Continue with GitHub

or

Email address

Password

Create account

Choose one of these options:

\$` Click "Continue with Google" — easiest, no new password needed.

\$a Type your email address and a password, then click "Create account".

STEP 3 — Confirm your email

1

Check your inbox

Replit sends you an email with a confirmation link. Open your email app (Gmail, Outlook, etc.).

2

Click the link

Click the blue confirmation link inside the email. This takes you back to Replit.

3

Choose the free plan

When asked about a plan, click "Start for free" or "Continue with Free". You do NOT need to pay to start building.

The Replit Interface

Every panel, button, and icon — exactly where to click

The Replit Editor — Full Layout

When you open a project in Replit, you see the editor. It is divided into 4 main areas. Study this diagram carefully — every arrow points to a real element:

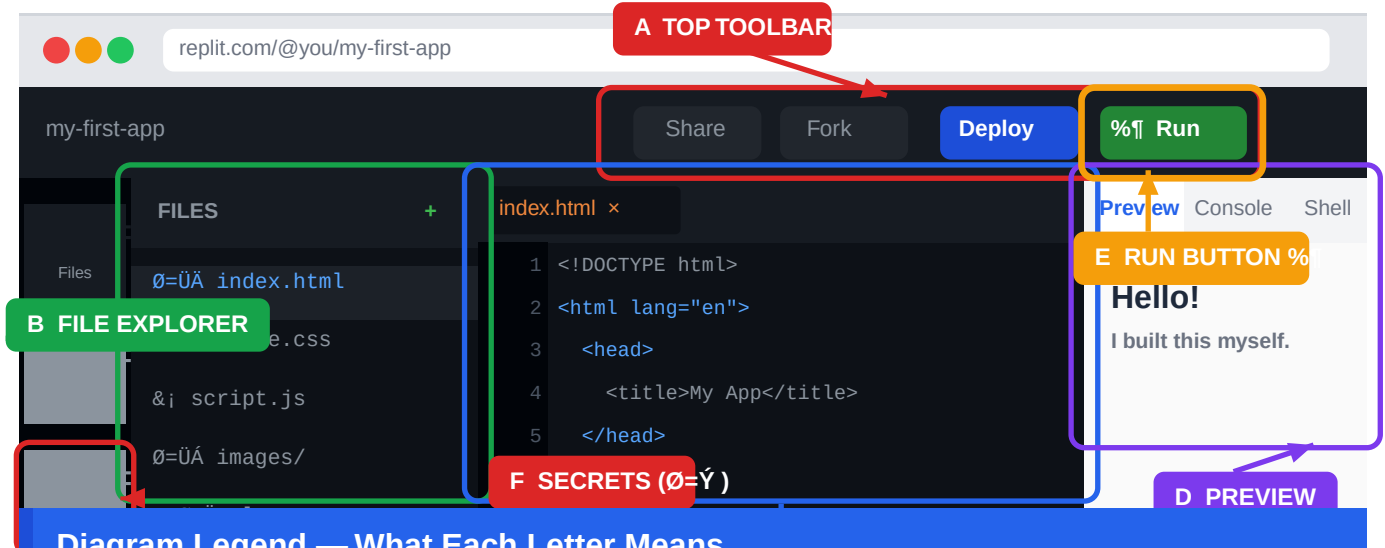


Diagram Legend — What Each Letter Means


- A Top Toolbar**
Contains the % ↵ Run button, Deploy, Fork, and Share. Use % ↵ Run to start your app every time you want to test it.
- B File Explorer**
Shows all your project files. Click any file to open it. Click + to create a new file or folder.
- C Code Editor**
Where you TYPE your code. Click inside and start writing. Has line numbers on the left.
- D Preview / Console / Shell**
THREE tabs: Preview = see your running app. Console = see printed output and errors. Shell = type commands.
- E Run Button % ↵**
Click this (or press Ctrl + Enter) to RUN your project and see the result in the Preview tab.
- F Secrets ø=Ý**
Store passwords and API keys safely here — never put them in your code files.

Write Your First HTML Page

Type your first code manually — every line explained


STEP 1 — Create a new project (Repl)


Go to your Replit dashboard (click the Replit logo top-left). Then:

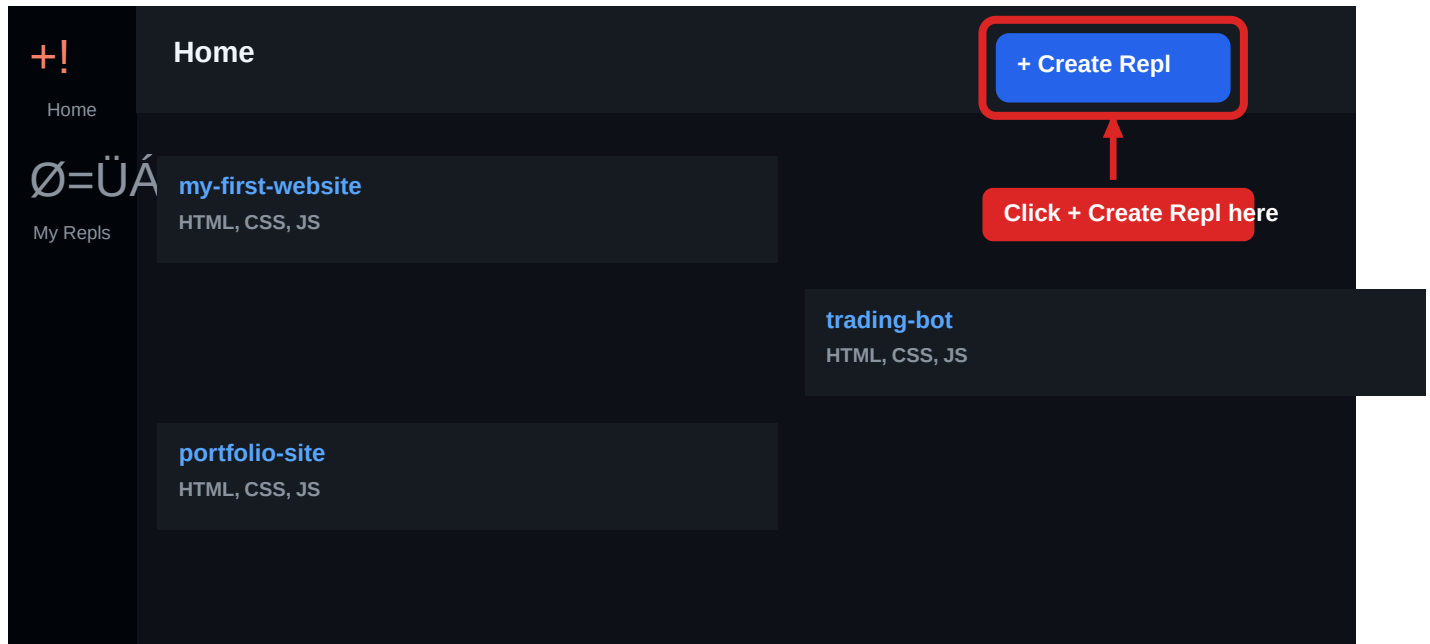

STEP 2 — Choose your template

A dialog box appears. Here is what it looks like and what to click:

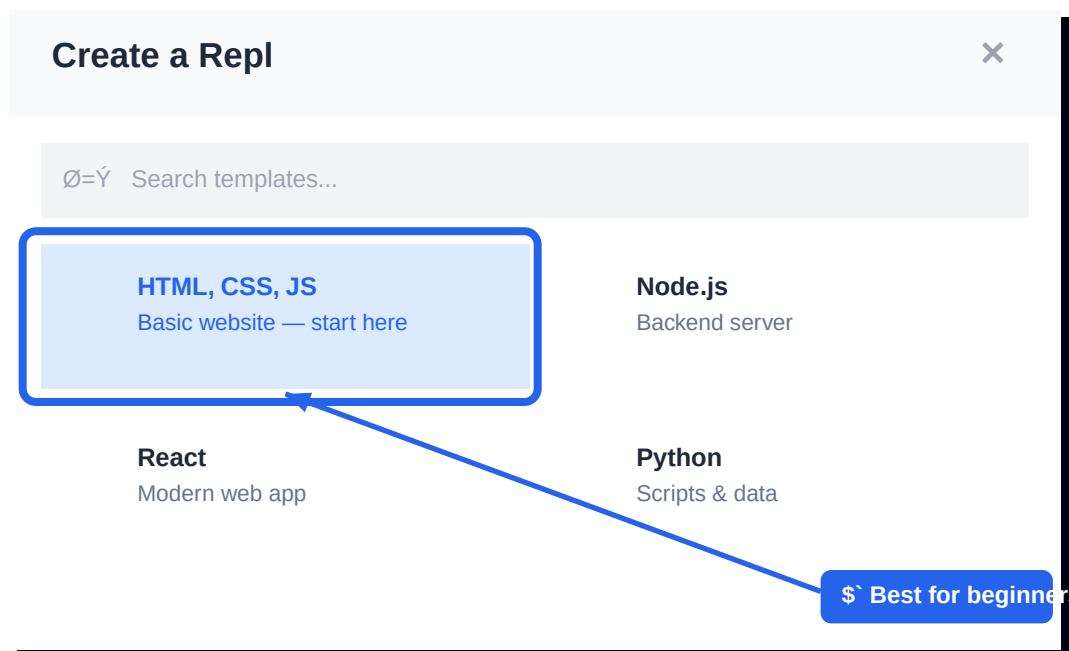



For your first project, choose "HTML, CSS, JS". It gives you a simple webpage — the best place to start. Later you can try React or Node.js.

STEP 3 — Name your project and create it

1

Type a project name

In the "Title" field at the bottom of the dialog, type a short name with no spaces — use hyphens instead. Example: my-first-app or portfolio-site

2

Click "Create Repl"

The blue button at the bottom. Replit will set up your project in about 5 seconds and then open the editor automatically.

Open index.html and start typing

In the File Explorer on the left, click "index.html" to open it. It may already have some starter code. SELECT ALL of it (Ctrl + A) and DELETE it. Then type this from scratch:

```
1 <!DOCTYPE html>
2 <html lang="en">
3   <head>
4     <meta charset="UTF-8" />
5     <meta name="viewport" content="width=device-width, initial-scale=1.0" />
6     <title>My First App</title>
7     <link rel="stylesheet" href="style.css" />
8   </head>
9   <body>
10    <h1>Hello, World!</h1>
11    <p>This is my first app. I built it myself.</p>
12    <button id="myBtn">Click me</button>
13    <script src="script.js"></script>
14  </body>
15 </html>
```

HTML



After typing each line, press Ctrl + S to save. Then click %R Run. You should see "Hello, World!" in the Preview tab on the right.

Create style.css — add colours and styling

In the File Explorer, click the "+" icon !' New File !' type "style.css" !' press Enter. Then type:

CSS

```
1  /* This file controls how your page looks */
2  body {
3    font-family: Arial, sans-serif;
4    background-color: #0f172a;
5    color: #f1f5f9;
6    text-align: center;
7    padding: 60px 20px;
8  }
9
10 h1 {
11   font-size: 2.5rem;
12   color: #3b82f6;
13   margin-bottom: 16px;
14 }
15
16 p {
17   font-size: 1.1rem;
18   color: #94a3b8;
19 }
20
21 #myBtn {
22   background: #3b82f6;
23   color: white;
24   border: none;
25   padding: 12px 28px;
26   font-size: 1rem;
27   border-radius: 8px;
28   cursor: pointer;
29   margin-top: 20px;
30 }
31
32 #myBtn:hover {
33   background: #2563eb;
34 }
```

Create script.js — add interactivity

Click "+" ! New File ! type "script.js" ! press Enter. Then type:

JavaScript

```
1  // Get a reference to the button
2  const btn = document.getElementById('myBtn');
3
4  // When the button is clicked, run this code
5  btn.addEventListener('click', function () {
6    alert('You clicked the button! Great job!');
7  });
```

- Save all files (Ctrl + S on each), then click %¶ Run. Your preview should show a dark page with a blue heading, a description, and a clickable blue button.

Part A — The Landing Page (Home page)

A landing page is the first page visitors see. It has a navigation bar, a hero section (big headline), features, and a footer. Here is the complete code:

index.html — Complete Landing Page Structure

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8" />
5   <meta name="viewport" content="width=device-width" />
6   <title>MyApp – Build Your Future</title>
7   <link rel="stylesheet" href="style.css" />
8 </head>
9 <body>
10
11 <!-- NAVIGATION BAR -->
12 <nav class="navbar">
13   <div class="nav-logo">MyApp</div>
14   <ul class="nav-links">
15     <li><a href="#">Home</a></li>
16     <li><a href="#">Features</a></li>
17     <li><a href="#">Pricing</a></li>
18   </ul>
19   <div class="nav-buttons">
20     <a href="login.html" class="btn-outline">Log in</a>
21     <a href="signup.html" class="btn-primary">Sign up free</a>
22   </div>
23 </nav>
24
25 <!-- HERO SECTION -->
26 <section class="hero">
27   <h1>Build something <span class="highlight">amazing</span></h1>
28   <p>The simplest way to create, share, and deploy your app.</p>
29   <a href="signup.html" class="btn-primary btn-large">Get started – it's free</a>
30 </section>
31
32 <!-- FEATURES SECTION -->
33 <section class="features">
34   <div class="feature-card">
35     <div class="feature-icon">🚀</div>
36     <h3>Fast</h3>
37     <p>Deploy in seconds, not days.</p>
38   </div>
39   <div class="feature-card">
40     <div class="feature-icon">🔒</div>
41     <h3>Secure</h3>
42     <p>Your data is always safe.</p>
43   </div>
44   <div class="feature-card">
45     <div class="feature-icon">👤</div>
46     <h3>Simple</h3>
47     <p>Anyone can use it, no experience needed.</p>
48   </div>
49 </section>
50
51 <!-- FOOTER -->
52 <footer>
53   <p>© 2025 MyApp. Built on Replit.</p>
54 </footer>
55
```


<script src="script.js"></script>


```
1  /* % % Reset & base % % % % % % % % % % % % % % % % % % % % % % % */
2  * { margin: 0; padding: 0; box-sizing: border-box; }
3  body { font-family: Arial, sans-serif; background: #fff; color: #1e293b; }
4  a { text-decoration: none; }
5
6  /* % % Buttons % % % % % % % % % % % % % % % % % % % % % % % % */
7  .btn-primary {
8      background: #3b82f6; color: white; padding: 10px 22px;
9      border-radius: 8px; font-weight: bold; border: none; cursor: pointer;
10 }
11 .btn-outline {
12     border: 2px solid #3b82f6; color: #3b82f6; padding: 8px 20px;
13     border-radius: 8px; font-weight: bold;
14 }
15 .btn-large { padding: 16px 36px; font-size: 1.1rem; }
16
17 /* % % Navbar % % % % % % % % % % % % % % % % % % % % % % % % */
18 .navbar {
19     display: flex; align-items: center; justify-content: space-between;
20     padding: 18px 60px; border-bottom: 1px solid #e2e8f0;
21     position: sticky; top: 0; background: white; z-index: 100;
22 }
23 .nav-logo { font-size: 1.4rem; font-weight: 900; color: #3b82f6; }
24 .nav-links { display: flex; gap: 32px; list-style: none; }
25 .nav-links a { color: #475569; font-size: 0.95rem; }
26 .nav-links a:hover { color: #3b82f6; }
27 .nav-buttons { display: flex; gap: 12px; align-items: center; }
28
29 /* % % Hero % % % % % % % % % % % % % % % % % % % % % % % % */
30 .hero {
31     text-align: center; padding: 100px 20px 80px;
32     background: linear-gradient(135deg, #eff6ff 0%, #f8fafc 100%);
33 }
34 .hero h1 { font-size: 3rem; font-weight: 900; color: #0f172a; }
35 .highlight { color: #3b82f6; }
36 .hero p { font-size: 1.2rem; color: #64748b; margin: 20px 0 36px; }
37
38 /* % % Features % % % % % % % % % % % % % % % % % % % % % % % % */
39 .features {
40     display: flex; gap: 24px; justify-content: center;
41     padding: 80px 60px; flex-wrap: wrap;
42 }
43 .feature-card {
44     background: #f8fafc; border: 1px solid #e2e8f0;
45     border-radius: 16px; padding: 36px 28px; width: 240px; text-align: center;
46 }
47 .feature-icon { font-size: 2.5rem; margin-bottom: 16px; }
48 .feature-card h3 { font-size: 1.2rem; margin-bottom: 8px; color: #0f172a; }
49 .feature-card p { color: #64748b; font-size: 0.95rem; }
50
51 /* % % Footer % % % % % % % % % % % % % % % % % % % % % % % % */
52 footer {
53     text-align: center; padding: 40px; background: #f1f5f9;
54     color: #94a3b8; font-size: 0.9rem;
55 }
```

signup.html — Complete Signup Page

HTML

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8" />
5   <title>Sign up – MyApp</title>
6   <link rel="stylesheet" href="style.css" />
7   <link rel="stylesheet" href="auth.css" />
8 </head>
9 <body>
10  <div class="auth-container">
11    <div class="auth-card">
12      <div class="auth-logo">MyApp</div>
13      <h2>Create your account</h2>
14      <p class="auth-sub">Join thousands of builders today</p>
15
16      <form id="signupForm" class="auth-form">
17        <div class="form-group">
18          <label for="name">Full name</label>
19          <input type="text" id="name" placeholder="Charlie Johnson" required />
20        </div>
21        <div class="form-group">
22          <label for="email">Email address</label>
23          <input type="email" id="email" placeholder="charlie@example.com" required />
24        </div>
25        <div class="form-group">
26          <label for="password">Password</label>
27          <input type="password" id="password" placeholder="Min. 8 characters"
28 required />
29        <button type="submit" class="btn-primary btn-full">Create account</button>
30      </form>
31
32      <p class="auth-footer">
33        Already have an account? <a href="login.html">Log in</a>
34      </p>
35    </div>
36  </div>
37  <script src="auth.js"></script>
38 </body>
39 </html>
```

login.html — Complete Login Page

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8" />
5   <title>Log in – MyApp</title>
6   <link rel="stylesheet" href="style.css" />
7   <link rel="stylesheet" href="auth.css" />
8 </head>
9 <body>
10   <div class="auth-container">
11     <div class="auth-card">
12       <div class="auth-logo">MyApp</div>
13       <h2>Welcome back</h2>
14       <p class="auth-sub">Log in to your account</p>
15
16       <form id="loginForm" class="auth-form">
17         <div class="form-group">
18           <label for="email">Email address</label>
19           <input type="email" id="email" placeholder="charlie@example.com" required />
20         </div>
21         <div class="form-group">
22           <label for="password">Password</label>
23           <input type="password" id="password" placeholder="Your password" required />
24         </div>
25         <div class="form-extra">
26           <label><input type="checkbox" /> Remember me</label>
27           <a href="#">Forgot password?</a>
28         </div>
29         <button type="submit" class="btn-primary btn-full">Log in</button>
30       </form>
31
32       <p class="auth-footer">
33         Don't have an account? <a href="signup.html">Sign up free</a>
34       </p>
35     </div>
36   </div>
37   <script src="auth.js"></script>
38 </body>
39 </html>
```



```
1  /* Shared styles for login.html and signup.html */
2  .auth-container {
3      min-height: 100vh;
4      background: linear-gradient(135deg, #eff6ff 0%, #f0fdf4 100%);
5      display: flex;
6      align-items: center;
7      justify-content: center;
8      padding: 40px 20px;
9  }
10
11 .auth-card {
12     background: white;
13     border-radius: 20px;
14     padding: 48px 44px;
15     width: 100%;
16     max-width: 420px;
17     box-shadow: 0 20px 60px rgba(0,0,0,0.08);
18     text-align: center;
19 }
20
21 .auth-logo {
22     font-size: 1.6rem;
23     font-weight: 900;
24     color: #3b82f6;
25     margin-bottom: 24px;
26 }
27
28 .auth-card h2 {
29     font-size: 1.6rem;
30     font-weight: 800;
31     color: #0f172a;
32     margin-bottom: 8px;
33 }
34
35 .auth-sub {
36     color: #64748b;
37     margin-bottom: 32px;
38     font-size: 0.95rem;
39 }
40
41 .auth-form {
42     display: flex;
43     flex-direction: column;
44     gap: 20px;
45     text-align: left;
46 }
47
48 .form-group label {
49     display: block;
50     font-size: 0.875rem;
51     font-weight: 600;
52     color: #374151;
53     margin-bottom: 6px;
54 }
55
```



```
.form-group input {
```


width: 100%;

padding: 12px 16px;

border: 1.5px solid #d1d5db;

border-radius: 10px;

font-size: 0.95rem;

color: #1e293b;

outline: none;

transition: border-color 0.2s;


```
.form-group input:focus { border-color: #3b82f6; }
```


justify-content: space-between;

align-items: center;

font-size: 0.875rem;

color: #64748b;


```
.form-extra a { color: #3b82f6; }
```



```
.btn-full { width: 100%; padding: 14px; font-size: 1rem; }
```


margin-top: 24px;

font-size: 0.9rem;

color: #64748b;


```
.auth-footer a{ color: #3b82f6; font-weight: 600; }
```

auth.js — Form Validation & Submission Logic

JavaScript

Your project should now have these files:

index.html !' landing page

signup.html !' create account page

login.html !' login page

style.css !' shared styles

auth.css !' form styles

auth.js !' form logic

script.js !' landing page scripts

What is React and why use it?

React is a JavaScript library that makes building complex web apps much easier. Instead of writing one giant HTML file, you split your app into small reusable pieces called "components". Think of components like LEGO blocks — each one does one job, and you connect them together to build your app.

'L Plain HTML Approach

- ONE big index.html file
- Copy-paste nav bar on every page
- Update one thing !' edit every page
- Gets messy after 5 pages

' React Approach

- `<Navbar />` component used everywhere
- Change Navbar once !' updates everywhere
- Easy to scale to 100+ pages
- Industry standard for modern apps

Create a React Project on Replit

1

Create a new Repl

Go to your dashboard, click "+ Create Repl".

2

Choose the React template

In the search box type "React" and select "React" or "React + Vite".

3

Name it and click Create

Example name: "my-react-app". Click "Create Repl".

4

Click %¶ Run

Replit installs all dependencies automatically (this takes ~30 seconds the first time). A default React page appears in the Preview.

React Project File Structure

```
1 my-react-app/
2 % % % src/
3 %   % % % main.jsx      !• Entry point (DO NOT delete)
4 %   % % % App.jsx       !• Your main component (start here)
5 %   % % % App.css       !• Styles for App
6 %   % % % components/   !• Put your own components here
7 %       % % % Navbar.jsx
8 %       % % % Hero.jsx
9 %       % % % Footer.jsx
10 % % % public/
11 %   % % % index.html    !• Base HTML (leave this as-is)
12 % % % package.json     !• Project config
13 % % % vite.config.js    !• Build tool (leave this as-is)
```

Your First React Component — App.jsx

Open src/App.jsx. Delete everything. Type this:

```

1  import { useState } from 'react';
2  import './App.css';
3
4  // This is the main App component
5  function App() {
6    // useState creates a variable React watches.
7    // When count changes, React re-draws the page automatically.
8    const [count, setCount] = useState(0);
9    const [name, setName] = useState('');
10
11   return (
12     <div className="container">
13       <h1>My React App</h1>
14
15       {/* Counter section */}
16       <div className="card">
17         <p>Count: <strong>{count}</strong></p>
18         <button onClick={() => setCount(count + 1)}>+ Add 1</button>
19         <button onClick={() => setCount(0)}>Reset</button>
20       </div>
21
22       {/* Name input section */}
23       <div className="card">
24         <input
25           type='text'
26           placeholder='Type your name...'
27           value={name}
28           onChange={(e) => setName(e.target.value)}
29         />
30         {name && <p>Hello, {name}! Ø=ÜK</p>}
31       </div>
32     </div>
33   );
34 }
35
36 export default App;

```

5 React Rules Every Beginner Must Know

- Component names MUST start with a CAPITAL letter: `function Navbar() {}` !• correct `function navbar() {}` !• WRONG
- Every component must return ONE parent element. Wrap multiple elements in `<div>` or use the empty shorthand `<> ... </>`
- Use {curly braces} to put JavaScript values inside JSX: `<h1>{userName}</h1>` or `<p>Count: {count}</p>`
- Never modify state directly. Always use the setter function: `setCount(count + 1)` !• correct `count = count + 1` !• WRONG
- Event handlers use camelCase: `onClick`, `onChange`, `onSubmit` — NOT `onclick` or `on-click`

Secrets & Environment Variables

Keep passwords and API keys safe — never in your code


What are Environment Variables?

Imagine your app needs an API key to talk to a weather service. The wrong way is to paste that key directly in your code — if your project is public on GitHub, ANYONE can steal it and run up charges on your account. The right way is to store it as a "Secret" — encrypted, outside your code.



NEVER do this in your code: `const apiKey = "sk-abc123realkey";` — This is visible to anyone who views your code. Use Secrets instead.

How to Add a Secret in Replit — Step by Step

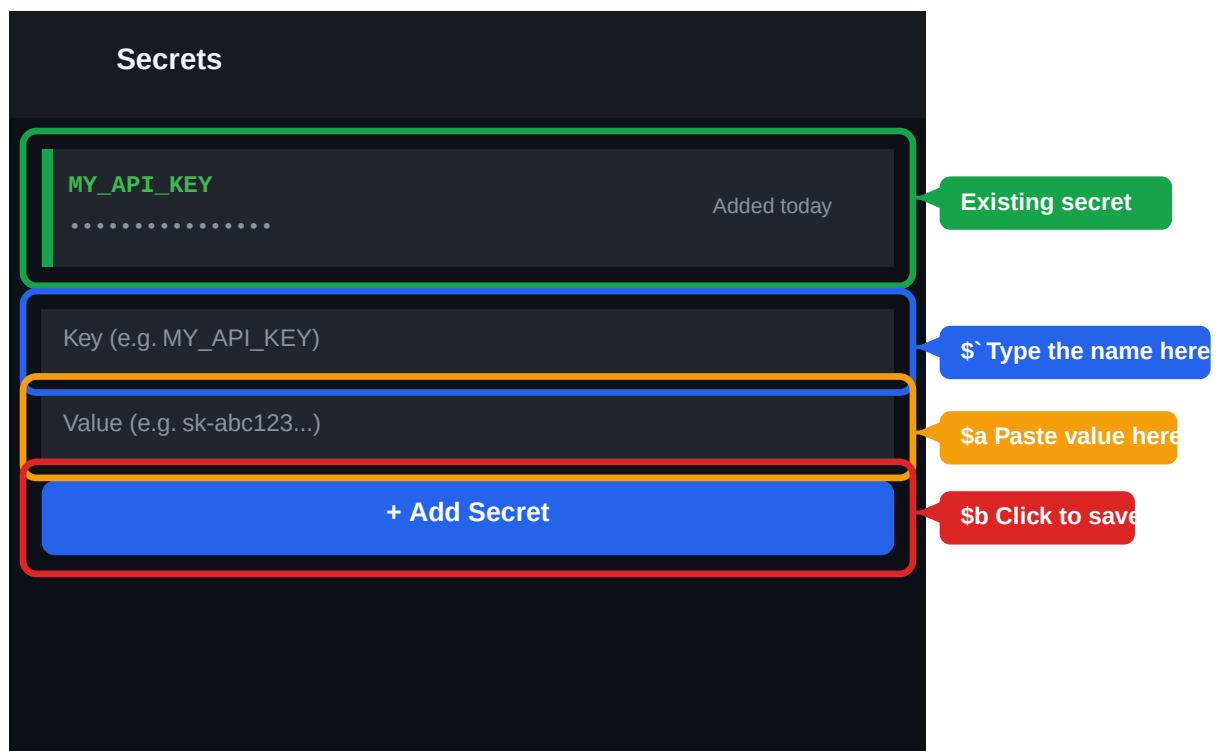

How to Access Secrets in Your Code

In JavaScript (Node.js or React):

JavaScript

```
1 // Access the secret – process.env reads from Replit Secrets
2 const myApiKey = process.env.MY_API_KEY;
3 console.log('Key loaded:', myApiKey ? 'YES' : 'NO');
4
5 // Use it in a fetch call:
6 fetch('https://api.example.com/data', {
7   headers: {
8     'Authorization': 'Bearer ' + myApiKey
9   }
10 })
```

In Python:

Python

```
1 import os
2
3 # os.environ.get() reads from Replit Secrets
4 my_api_key = os.environ.get('MY_API_KEY')
5 print('Key loaded:', 'YES' if my_api_key else 'NO')
```


Deploy Your App Live

Make your app accessible to anyone, anywhere in the world

What "Deploying" means

Right now your app only runs INSIDE Replit — it stops when you close your browser. Deploying means putting your app on a permanent server so it runs 24/7 and has a real URL like "https://myapp.username.repl.co" that anyone can visit.

Deploy with Replit — Step by Step

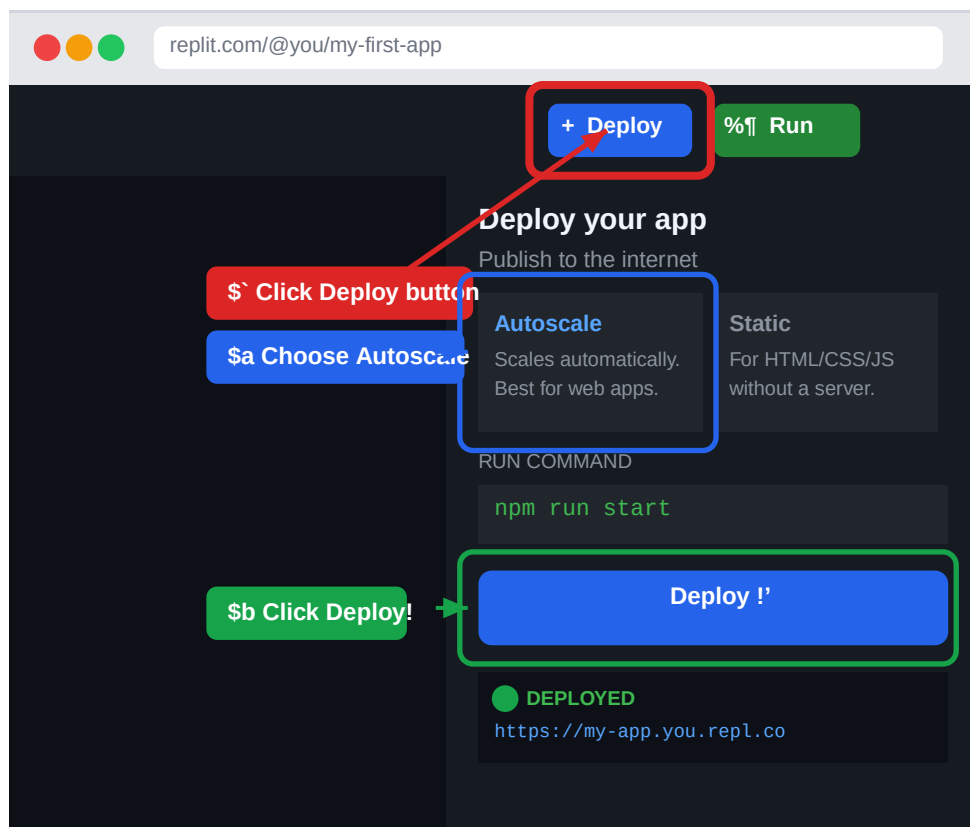

1

Click the "Deploy" button

Find the blue Deploy button in the top toolbar (highlighted above with the red box).

2

Choose "Autoscale"

For most web apps, pick Autoscale. For plain HTML/CSS/JS sites with no server, pick Static.

3

Set the run command

Type the command that starts your app. For Node.js: "npm run start". For React + Vite: "npm run preview".

4

Click the blue Deploy button

Wait 1–3 minutes. When it says "DEPLOYED" in green, your app is live!

5

Copy your URL

Replit gives you a live URL. Click it to see your app. Share it with anyone!

Keyboard Shortcuts Cheat Sheet

Work faster — memorise these and you'll save hours every week

Editor Shortcuts

Ctrl + S	SAVE the current file	Use constantly — save after every few lines you write
Ctrl + Z	UNDO the last change	Accidentally deleted something? Press this immediately
Ctrl + Y	REDO (un-undo)	Undo too many times? This brings changes back
Ctrl + A	SELECT ALL text	Select everything in the current file
Ctrl + C	COPY selected text	Select text first with mouse, then copy
Ctrl + X	CUT selected text	Like copy but removes the original
Ctrl + V	PASTE	Paste copied/cut text at cursor position
Ctrl + F	FIND text in file	Opens a search box — type what you are looking for
Ctrl + H	FIND AND REPLACE	Change all occurrences of a word at once
Ctrl + /	COMMENT / UNCOMMENT	Disables or re-enables selected lines of code
Ctrl + D	Select next match	Highlight a word, press Ctrl+D to select the next same word
Ctrl + Enter	RUN the project	Same as clicking the %f Run button
Tab	INDENT right	Moves selected lines right (add spaces)
Shift + Tab	INDENT left	Moves selected lines left (remove spaces)
Alt + !' / !"	MOVE LINE up/down	Move the current line up or down
Ctrl + Shift + P	COMMAND PALETTE	Search for any editor command by name

Shell Tab Commands — Must Know

\$ node --version	Check which version of Node.js is installed
\$ npm install	Install all packages listed in package.json
\$ npm install express	Install a specific package called "express"
\$ npm run dev	Start the development server (hot-reload enabled)
\$ npm run build	Build/compile the app for production deployment
\$ npm run start	Run the production-ready app

```
$ ls
```

List all files and folders in the current directory

```
$ cd foldername
```

Enter a folder called "foldername"

```
$ cd ..
```

Go back up one folder level

```
$ mkdir foldername
```

Create a new folder

```
$ touch filename.js
```

Create a new empty file

```
$ clear
```

Clear the shell screen (just visual — does not delete anything)

Common Errors & How to Fix Them

Read the error message — it is telling you exactly what is wrong

How to Read an Error Message

When something goes wrong, Replit shows the error in the CONSOLE tab (right panel). The error always has three parts:

ReferenceError: myVariable is not defined

at script.js:14:5

at HTMLButtonElement.onclick (index.html:12)

← Error type +

← File name + line number

Read "ReferenceError" !' tells you the TYPE of error. Read "not defined" !' tells you THE PROBLEM. Read "script.js:14" !' tells you THE EXACT LINE to fix.

The Most Common Errors

ReferenceError: X is not defined

Cause: You used a variable before declaring it, or misspelled the name.

'L WRONG

```
console.log(myNmae); // typo in the name
```

' FIX

```
const myName = 'Charlie';  
console.log(myName);
```

SyntaxError: Unexpected token

Cause: Missing bracket, parenthesis, or comma. Look at the line number and check for missing { } () [] , or "

'L WRONG

```
function greet( {  
  return "hello";  
} // missing ) after (
```

' FIX

```
function greet() {  
  return 'hello';  
}
```

TypeError: Cannot read properties of undefined (reading 'name')

Cause: You are trying to use `.name` on a variable that has no value yet. Check the variable exists first.

'L WRONG

```
console.log(user.name); // user might be
undefined
```

' FIX

```
if (user && user.name) {
  console.log(user.name); // safe
}
```

Cannot find module 'express'

Cause: You imported a package but forgot to install it first.

'L WRONG

```
const express = require('express'); //
crashes if not installed
```

' FIX

```
// In the Shell tab, first run:
// $ npm install express
// THEN use require()
```

Quick Fix Checklist for Any Error

- Preview is blank !' Open the Console tab and read the red error message
- App not updating after edit !' Press Ctrl + S to save, then click % Run again
- "command not found: node" !' Your project might be Python-based; use python instead of node
- Packages seem broken or missing !' Open Shell and run: `npm install`
- "Permission denied" in Shell !' Add `sudo` before the command: `sudo npm install -g nodemon`
- Changes not saving !' Check you are editing the right file (look at the tab name at the top)
- Error on line X !' Click on the line number in the Console to jump to that line in the editor

YOU ARE READY TO BUILD

Now go build something! Ø=þ€

Every great developer started exactly where you are now.
You have the code. You have the guide. Just start typing.

What you now know how to do:

- ' Create a Replit account and your first project
- ' Navigate the editor — files, code, preview, shell
- ' Write HTML, CSS, and JavaScript from scratch
- ' Build a full landing page with navbar, hero, and features
- ' Create a signup page and a login page with working forms
- ' Install packages with npm install
- ' Build a React app with components and useState
- ' Keep API keys safe using Replit Secrets
- ' Deploy your app live so anyone can visit it
- ' Read and fix error messages