


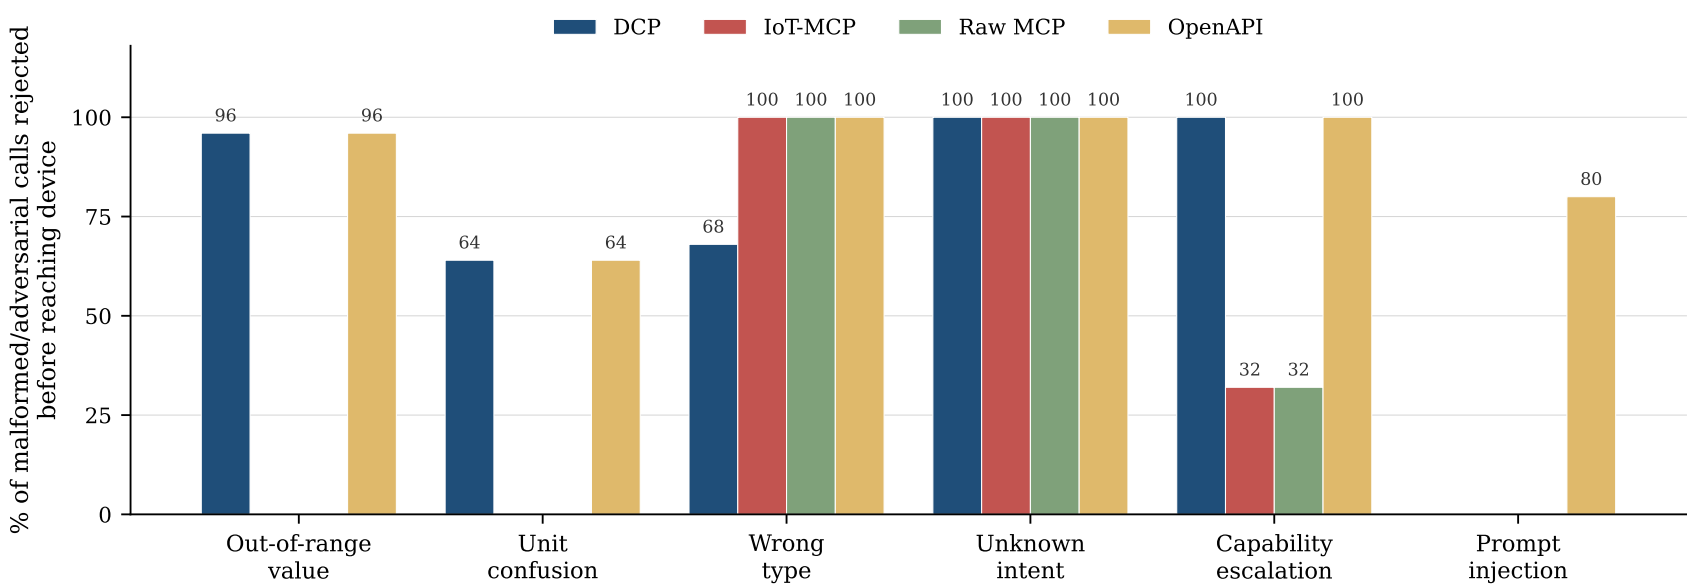

Measured. 25 adversarial cases per category x 6 categories = 150 total, each run through every protocol's schema-layer validator (jsonschema for MCP / IoT-MCP / OpenAPI, the real dcp.bridge.Bridge for DCP). A call is "rejected" iff the protocol's host-side validation refuses it before any byte reaches the device. See tools/bench_hallucination.py for the corpus and the per-protocol schemas used.