

1. Creating S3 Bucket

General purpose (Selected)
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

Directory
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket namespace
Choose the namespace where you want to create your bucket. [Learn more](#)

Global namespace (Selected)
By default, S3 creates general purpose buckets in the global namespace.

Account Regional namespace (recommended)
General purpose buckets created in your account's Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name [Info](#)
my-7636-8884-8832-bucket-udacity
Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in one following configuration are copied.
[Choose bucket](#)
Format: s3://bucket/prefix

Object Ownership [Info](#)
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership
ACLs disabled (recommended) (Selected)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership
Bucket owner enforced

Block Public Access settings for this bucket
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

2. The bucket

Amazon S3 > Buckets

Buckets
General purpose buckets | All AWS Regions | Directory buckets

General purpose buckets (1) [Info](#)
Buckets are containers for data stored in S3.

[Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Name	AWS Region	Creation date
my-7636-8884-8832-bucket-udacity	US East (N. Virginia) us-east-1	July 4, 2026, 11:48:01 (UTC+05:30)

Account snapshot [Info](#)
Updated daily
[View dashboard](#)
Storage Lens provides visibility into storage usage and activity trends.

External access summary [Info](#)
Updated daily
External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

3. The bucket is public

Amazon S3 > Buckets > my-7636-8884-8832-bucket-udacity

my-7636-8884-8832-bucket-udacity [Info](#)

[Objects](#) [Metadata](#) [Properties](#) [Permissions](#) (Selected) [Metrics](#) [Management](#) [File systems - new](#) [Access Points](#)


Permissions overview
Access finding
Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#).
[View analyzer for us-east-1](#)

Block public access (bucket settings) [Edit](#)
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

Block all public access
Off [Edit](#)
[Individual Block Public Access settings for this bucket](#)

Bucket policy [Edit](#) [Delete](#)
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

4. Uploading files in bucket

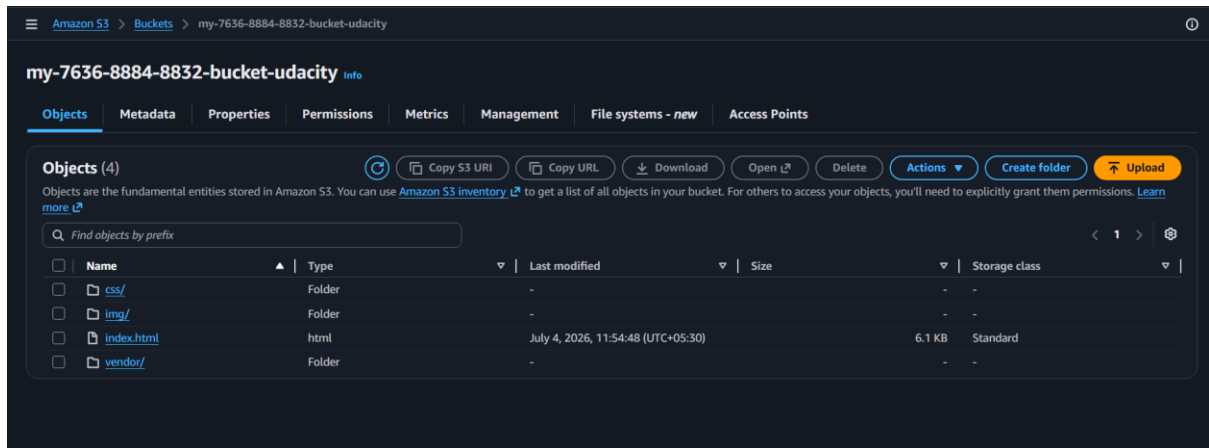

my-7636-8884-8832-bucket-udacity [Info](#)


Objects (4) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open ↗](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

☐	Name	Type	Last modified	Size	Storage class
☐	css/	Folder	-	-	-
☐	img/	Folder	-	-	-
☐	index.html	html	July 4, 2026, 11:54:48 (UTC+05:30)	6.1 KB	Standard
☐	vendor/	Folder	-	-	-

5. Adding bucket policy

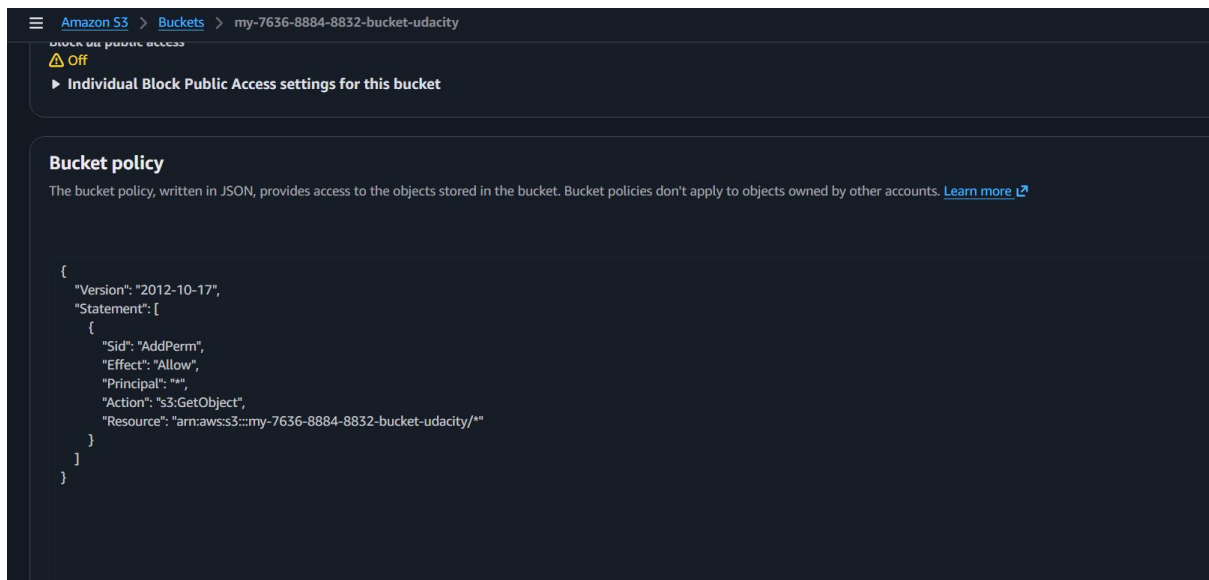

Amazon S3 > Buckets > my-7636-8884-8832-bucket-udacity

Block public access

Off


Individual Block Public Access settings for this bucket

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AddPerm",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::my-7636-8884-8832-bucket-udacity/*"
    }
  ]
}
```

6. Static web hosting enabled:

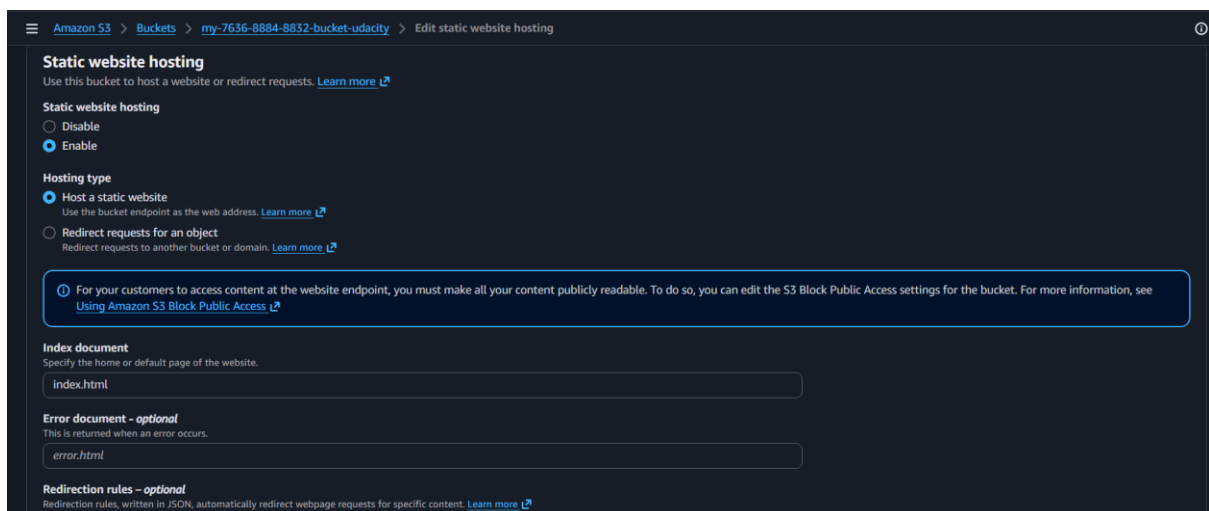

Amazon S3 > Buckets > my-7636-8884-8832-bucket-udacity > Edit static website hosting

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

Static website hosting

☐ Disable

☒ Enable

Hosting type

☒ Host a static website

Use the bucket endpoint as the web address. [Learn more](#)

☐ Redirect requests for an object

Redirect requests to another bucket or domain. [Learn more](#)

For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see [Using Amazon S3 Block Public Access](#)

Index document

Specify the home or default page of the website.

index.html

Error document - optional


This is returned when an error occurs.

error.html


Redirection rules - optional

Redirection rules, written in JSON, automatically redirect webpage requests for specific content. [Learn more](#)


7. Static web hosting enabled(after saving)

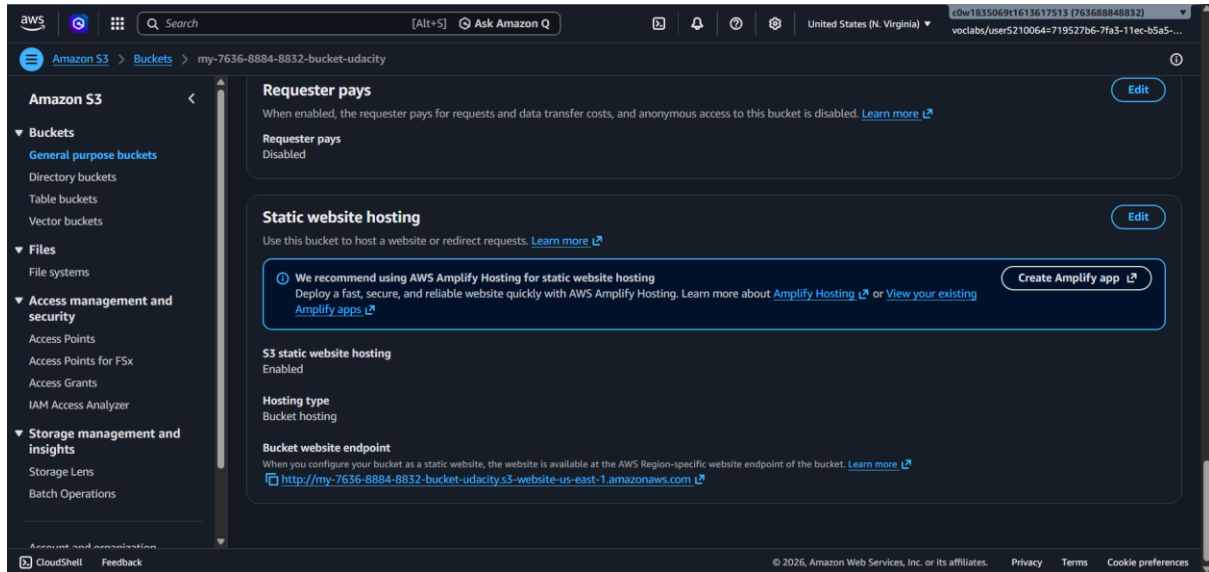

8.The website is distributed via CloudFront

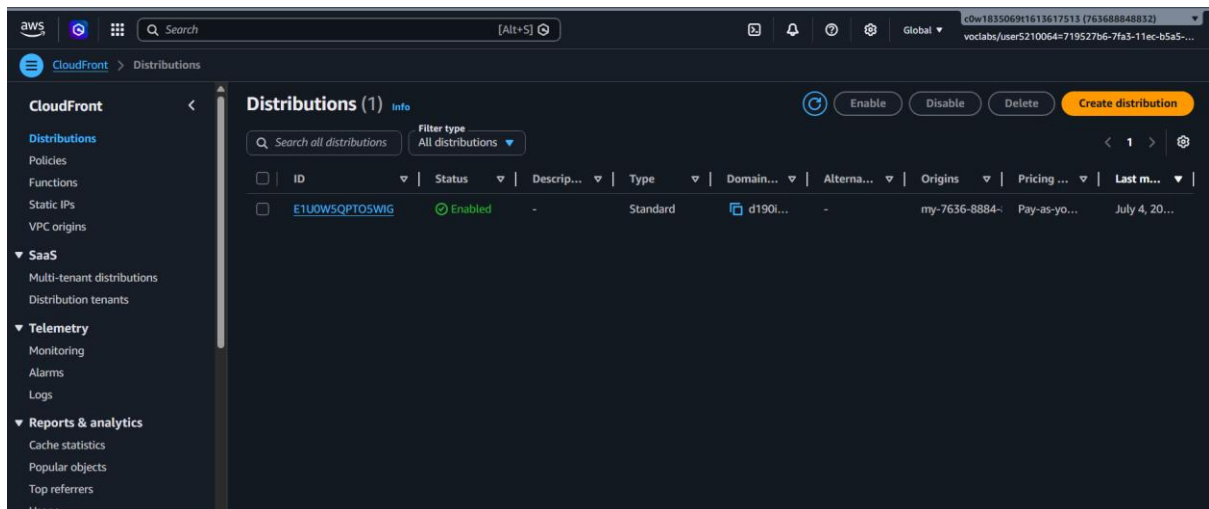

9. Opening the website with CloudFront Domain name

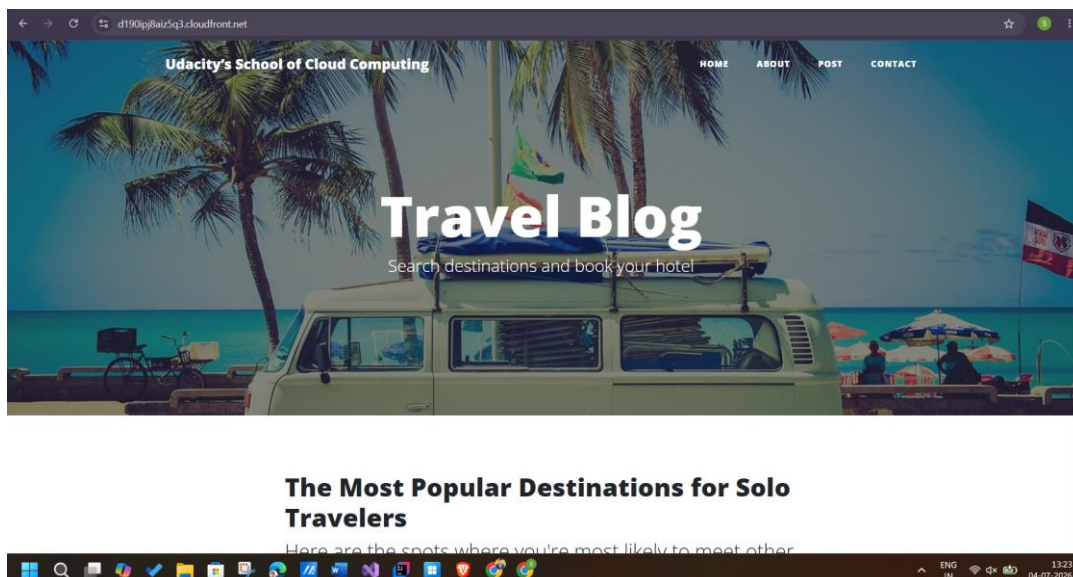

10.Public URL using cloudFront:

<https://d190ipj8aiz5q3.cloudfront.net/>