

1. Creating S3 Bucket

General purpose
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

Directory
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket namespace
Choose the namespace where you want to create your bucket. [Learn more](#)

Global namespace
By default, S3 creates general purpose buckets in the global namespace.

Account Regional namespace (recommended)
General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name [info](#)
my-7636-8884-8832-bucket-udacity

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in one following configuration are copied.

Choose bucket
Format: s3://bucket/prefix

Object Ownership [info](#)
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

ACLs disabled (recommended)
All objects in the bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership
Bucket owner enforced

Block Public Access settings for this bucket
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

2. Uploading files in bucket

Amazon S3 > Buckets > my-7636-8884-8832-bucket-udacity

my-7636-8884-8832-bucket-udacity [Info](#)

Objects | Metadata | Properties | Permissions | Metrics | Management | File systems - new | Access Points

Objects (4) [Refresh](#) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐	Name	Type	Last modified	Size	Storage class
☐	css/	Folder	-	-	-
☐	img/	Folder	-	-	-
☐	index.html	html	July 4, 2026, 11:54:48 (UTC+05:30)	6.1 KB	Standard
☐	vendor/	Folder	-	-	-

3. Adding bucket policy

Amazon S3 > Buckets > my-7636-8884-8832-bucket-udacity

Block all public access
[Info](#) **Off**

Individual Block Public Access settings for this bucket

Bucket policy
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AddPerm",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::my-7636-8884-8832-bucket-udacity/*"
    }
  ]
}
```

4. Static web hosting enabled:

Amazon S3 > Buckets > my-7636-8884-8832-bucket-udacity > Edit static website hosting

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

Static website hosting

☐ Disable

☒ Enable

Hosting type

☒ Host a static website

Use the bucket endpoint as the web address. [Learn more](#)

☐ Redirect requests for an object

Redirect requests to another bucket or domain. [Learn more](#)

For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see [Using Amazon S3 Block Public Access](#)

Index document

Specify the home or default page of the website.


Error document - optional

This is returned when an error occurs.

Redirection rules - optional

Redirection rules, written in JSON, automatically redirect webpage requests for specific content. [Learn more](#)

4. Opening the website with CloudFront Domain name

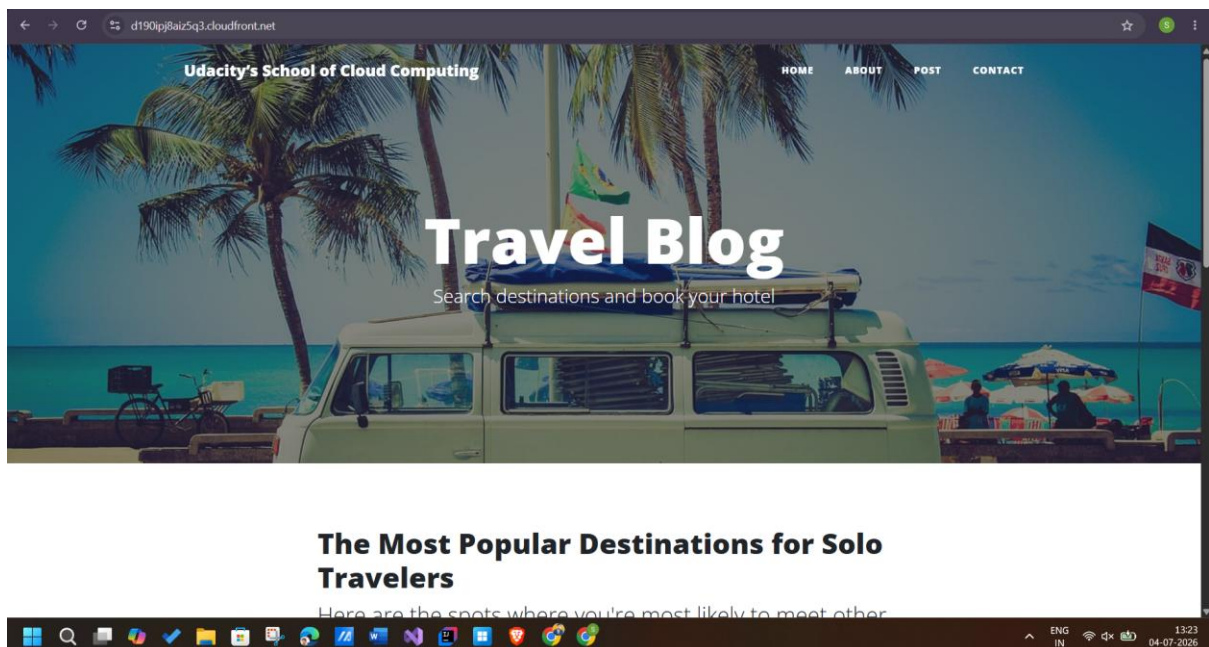

Public URL:

<https://d190ipj8aiz5q3.cloudfront.net/>