Ferrule: Bounded Storage-Backed Weight Residency

Lu Huanbing
Independent Researcher
luhuanbing084@gmail.com

Working draft

Abstract

Storage-backed inference must bound temporary weight copies and prevent reuse while reads, transfers, or device consumers still hold them. We present Ferrule, which connects source-bound materialization plans, stage-local resource admission, and exact completion evidence to explicit ownership through retirement. A bounded next-expert read schedule uses the same worker, host and device budgets, and synchronous forward as a blocking control. On Qwen3.5-35B-A3B, five paired blocks complete all 120 HTTP requests with the prescribed output checks, identical logical reader work, zero wasted read bytes, and logical host reservations below 64 MiB. In this configuration, the prespecified paired summaries show 8.18% lower end-to-end latency, 11.24% lower time to first content, and 10.91% higher qualified serial-window goodput with lookahead. Separate cache-budget, profiling, component-failure, and HTTP-cancellation experiments clarify the mechanism's resource and completion behavior. The five-block estimates are descriptive: shared filesystem caches limit independence, logical budgets do not bound the complete physical working set, and integrated fault conservation and final physical release remain unverified.

1 Introduction

Storage-backed inference repeatedly brings selected weights into an execution cache rather than keeping every execution weight resident. This approach can reduce device residency, but a small cache alone does not bound the resources used to fill it. A read may retain host buffers, an upload may outlive its caller, and an evicted binding may still have device consumers. Releasing a logical request therefore does not necessarily make its capacity reusable. The central problem is to coordinate materialization and physical lifetime under explicit resource limits.

Weight streaming and prefetch are established techniques in systems such as FlexGen, ZeRO-Inference, and PowerInfer-2 [2, 5, 4]. Ferrule studies a complementary question: how can a bounded materialization schedule preserve source identity, accounting, and safe reuse across normal completion, cancellation, and uncertain completion? We separate three properties that are often conflated: a configured resource budget, a measured physical working set, and evidence that a particular operation has finished using its resources.

The design follows *plan, admit, materialize, publish, execute, retire*. A frozen plan identifies the source and destination generations. Admission acquires the claims required by each stage. Completion validates the exact operation before publication, while the physical owner retains buffers and charges until the relevant consumers finish. If completion cannot be proved, the owner retains the uncertain resources instead of treating an error or cancellation as permission to reuse them.

The concrete scheduling mechanism is deliberately small. After uploading the current routed expert, the operator can submit one read for the next selected expert before submitting current

computation. The blocking control uses the same read worker but waits immediately at demand. Neither schedule changes expert order, arithmetic, cache policy, or the synchronous forward interface. This comparison isolates a scheduling choice without weakening the resource or completion contract.

Contributions.

1. A resource and ownership model that distinguishes logical admission limits from physical memory, and producer completion from consumer retirement.
2. Reference algorithms for exact materialization and bounded cleanup, together with an implemented, bounded next-expert schedule for a private model-operator path.
3. An evaluation connecting output checks, resource accounting, logical I/O, client outcomes, correlated profiling, and scoped failure behavior.

Research questions.

RQ1: Bounded completion. Can requests complete under the declared limits, and how does residency change across coupled cache budgets?

RQ2: I/O demand. What work reaches the logical reader and shared filesystem client, and which physical traffic remains unknown?

RQ3: Scheduling. Does bounded lookahead reduce waiting and client latency, and what read–compute overlap is directly observed?

RQ4: Failure and custody. What resources and state remain after clean abort, uncertain completion, and HTTP cancellation?

For the evaluated single-device text profile, five paired blocks show 8.18% lower client end-to-end latency, 11.24% lower time to first content, and 10.91% higher qualified serial-window goodput with lookahead. All blocks show lower host demand waiting, with equal logical reader work and no wasted read bytes. These results concern one configuration and short fixed outputs; they establish neither statistical significance nor performance leadership. The evidence boundaries are consolidated in Table 4.

Section 2 defines the model and assumptions. Section 3 develops the mechanisms and algorithms, and Section 4 maps them to the implemented path. Section 5 fixes the methodology before Section 6 answers the four questions. Related work, limitations, and a concise account of separate evidence follow.

2 Resource Model and Assumptions

2.1 Representations and physical memory

An execution profile π specifies the model, arithmetic, placement, inputs, state lifetime, and output-quality criterion. The evaluated profile performs text prefill and autoregressive decoding with resident KV state. A weight representation r includes its encoded payload, scales, decoding metadata, expansion, and required copies. Checkpoint size S_{ckpt}, complete compact-weight size W_{compact}, and full execution-weight footprint $W_{\text{full}}(r)$ describe different objects. None is the complete inference working set.

Let $\mathcal{D}_{\text{phys}}$ contain disjoint physical memory pools, with available capacity B_d in pool d. Aggregate capacity is

$$B_{\text{mem}} = \sum_{d \in \mathcal{D}_{\text{phys}}} B_d. \tag{1}$$

Discrete host and device memory can be separate pools; two aliases of unified physical memory cannot. Backing files add storage, not resident-memory capacity. Per-pool accessibility and placement constraints still apply when the aggregate capacity is sufficient.

The physical working set $M_d(t)$ includes attributable weights, expansion, activations, KV and recurrent state, staging, outstanding transfers, retained buffers, metadata, allocator and driver reserves, and resident file-backed pages. Shared allocations count once. The feasibility condition and a sampled observation are distinct:

$$\begin{aligned} M_d^{\text{peak}} &= \sup_{t \in \mathcal{T}} M_d(t) \le B_d, \\ \widehat{M}_d^{\max} &= \max_{t_i \in \mathcal{T}} \widehat{M}_d(t_i), \end{aligned} \tag{2}$$

where $\mathcal{T}$ covers the declared execution interval. Samples may miss transients or include other consumers. Independent component maxima cannot be added to obtain a simultaneous peak.

A full execution representation cannot reside in aggregate memory if $W_{\text{full}}(r) > B_{\text{mem}}$. This does not prove that storage is necessary: complete compact weights might still fit with online expansion. Conversely, a deliberately small cache can exercise bounded residency even when the compact checkpoint fits in physical memory. This paper studies that controlled-budget problem rather than compact-residency impossibility.

Symbol	Meaning
π, r	Execution/quality profile and weight representation
$B_d, M_d(t)$	Physical pool capacity and attributable resident bytes
b_a, U_a, c_a	Accounting limit, current charge, and additional stage claim
δ, ρ_a	Demand class and reserve protected from speculation
F_a, R_a, I_a, L_a, T_a	Free, reserved, in-flight, live, and retained claims
$P = (K, \boldsymbol{q}, \boldsymbol{\ell})$	Frozen key, stage claims, and resident claims
K, g_s, g_x	Full resource identity, source generation, and destination generation
o, s, e, J	Operation, stage, completion evidence, and persistent owner journal
$\Omega, k, w, \mu_o[s]$	Cleanup worklist, visit limit, cursor, and cancellation marker
$H, P_{\max}, M, S$	Host limit, largest packed expert, metadata allowance, and requested stack bytes

Table 1: Core notation. Accounting quantities use their declared units; physical-memory and host-staging quantities are bytes.

2.2 Accounting and stage-local admission

An accounting domain $a \in \mathcal{D}_{\text{acct}}$ may count bytes, slots, pages, or queue entries. Its configured limit b_a need not cover an entire physical pool. Accounting domains can overlap and cannot generally be added. For an additional claim c_a, the capacity condition is

$$U_a(t) + c_a \le b_a \qquad \text{for every covered domain } a. \tag{3}$$

Already held grants are not charged again on a revisit. The owner also validates units, overflow, source and placement compatibility, reservation authority, and demand policy. With reserve

$0 \le \rho_a \le b_a$, the policy-accessible ceiling is

$$b_a^{\mathrm{eff}}(\delta) = \begin{cases} b_a, & \delta = \mathsf{Required}, \\ b_a - \rho_a, & \delta \in \{\mathsf{Warmup}, \mathsf{Prefetch}\}. \end{cases} \tag{4}$$

Required execution may use the reserve, but not exceed the hard limit.

Admission returns one of three abstract outcomes. Rejected means that the plan is invalid or a stage exceeds its policy ceiling even without competing occupancy. Wait means that an otherwise feasible stage is blocked by current occupancy; it retains existing grants and registers a revisit condition. Admitted means that the authoritative owner has validated and acquired the stage's claims. Admission is local to a stage, not an atomic reservation of all future resources.

A frozen plan $P = (K, \boldsymbol{q}, \boldsymbol{\ell})$ binds the full resource key, read/upload/install claims, and persistent residency claims. The key includes model instance, source identity, semantic content, encoding, backend, device, and generations g_s, g_x. The destination authority supplies the actual reservation and reuse generation before hard admission. Extent alignment and decoding can make source, staged, and execution byte counts different. The plan must account for those differences rather than assuming one byte count for every stage.

2.3 Completion, quality, and progress assumptions

Protocol correctness requires exact identity, authorized publication, and no reuse while physical references remain. Numerical quality is a separate contract: visible text, generated IDs, full-vocabulary logits, routes, and internal states provide different evidence. Argmax agreement alone does not establish numerical agreement, and checkpoint quantization does not specify activation or KV arithmetic.

Completion evidence e must identify operation o, key K, submitted stage s, both generations, outcome-specific bytes, and any required fence. A mismatched event has no mutation or release authority. A matching event that reports non-success can end its named stage but cannot authorize publication. Producer success and consumer retirement also differ: finishing an upload does not establish that a later kernel has stopped using the destination.

We use *custody* to mean responsibility for retaining the physical resources and evidence needed to close an obligation. Unknown denotes an obligation whose physical completion cannot be proved. Such an obligation retains allocations and charges, potentially indefinitely. Cancellation changes demand or caller outcome; it is not itself a completion certificate.

The reference contracts assume authoritative owners, source and destination generations that identify reuse, and completion evidence supplied by the relevant provider. Conditional progress additionally requires feasible resources, acyclic waits, fair revisits, live providers, and eventually observable completion. The model does not assume that a blocking provider becomes nonblocking when called by a worker. It also does not place OS page cache, storage-server cache, or unaccounted allocator overhead under the runtime's logical credit limits.

3 Materialization, Custody, and Bounded Scheduling

3.1 Normal execution

A nonresident dependency moves through six stages. The adapter first freezes a source-bound plan and obtains an exact destination reservation. The owner then admits the read, upload, and installation claims as each stage becomes eligible. Before any preparation can submit physical work, it records the provisional operation and cleanup intent in a persistent journal.

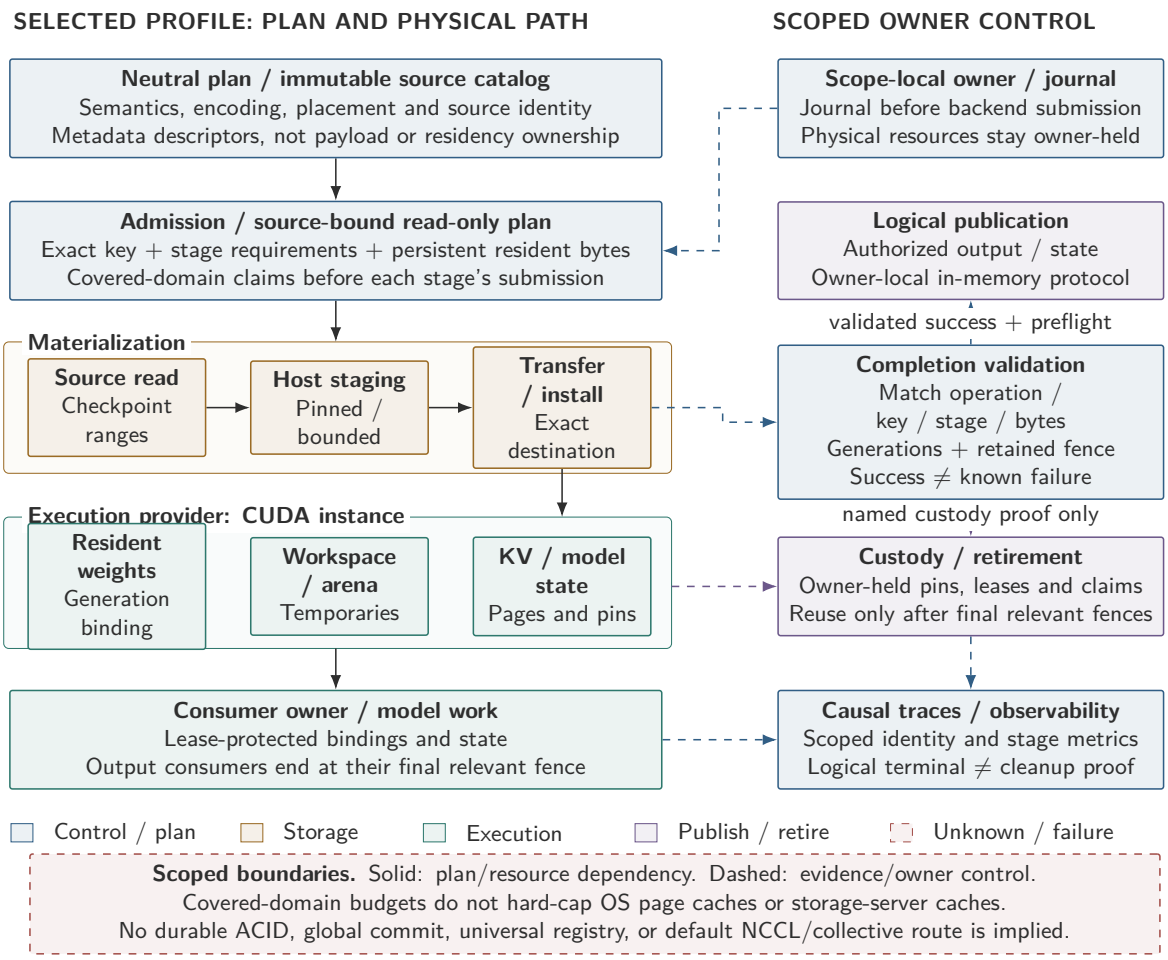


Figure 1: Profile-scoped architecture. Planning and admission precede physical materialization; the owner retains resources through publication and retirement. Blue denotes control, ochre storage, teal execution, violet publication and custody, and brick uncertainty. Solid arrows show dependencies; dashed arrows show evidence or owner control. The diagram specifies roles, not universal registry integration or measured hardware overlap.

A successful read returns read custody. The owner explicitly releases the read slot and storage-read claims while retaining the host payload charge for upload. The upload's fence ends DMA custody, but the destination remains owned. Installation validates the new binding; replacing an old binding also requires evidence that its previous consumers have finished. Publication then transfers the resident grant and resolves the exact waiters. It does not evict the newly resident bytes.

Before execution, the consumer revalidates its dependency and lease epochs and acquires any resume claims. Consumer completion and state publication have their own evidence. A request can finish while persistent KV state or cached weights remain live. Figure 1 summarizes these roles; Section 4 distinguishes the concrete operator path from the more general materialization protocol.

3.2 Safety invariants

Unique accounting ownership. For each covered domain, the intended partition is

$$\begin{aligned} b_a &= F_a + R_a + I_a + L_a + T_a, \\ U_a &= R_a + I_a + L_a + T_a, \qquad F_a = b_a - U_a. \end{aligned} \tag{5}$$

Every claim belongs to exactly one class: free, reserved, provider-in-flight, live, or retained. Different claims of one operation may occupy different classes. Unknown claims belong to T_a; uncertainty does not create a second charge. Returning custody can change ownership without reducing U_a. Release or transfer is an explicit action. This is a semantic invariant of the reference contract, not five literal implementation fields or a measured integrated conservation proof.

Exact evidence before mutation. An event must match the operation, key, stage, generations, and byte contract before it changes state. Success requires the full expected amount; a partial failure is not readiness. Stale identity cannot release a newer generation's grant. A matching event with a validated non-success outcome instead selects cleanup for its own operation. Notifications merely trigger revalidation.

Reachable physical custody. Each outstanding physical reference remains reachable from an authoritative owner, including after preparation or submission fails without returning a public handle. Read return, upload completion, resident transfer, and consumer retirement close different obligations. An address or read-only snapshot supplies neither allocation ownership nor completion authority.

Publication before reuse, with distinct proofs. Producer success makes a candidate ready; publication also validates the actual binding and authorization. Replacement requires old-consumer quiescence. For prepared KV state, exact installation acknowledgments precede logical publication, and retirement acknowledgments precede page reuse. This ordering is a scoped in-memory lifecycle, not distributed durable commit.

Terminal demand preserves residual obligations. Accepted cancellation detaches only the terminating demand. Independent waiters and persistent owners remain. Cancellation acceptance does not prove quiescence or reverse an irreversible publication decision. Missing physical proof retains the payload and charge as Unknown. A late exact completion can close a named stage without clearing a separately poisoned physical owner. Figure 2 makes the distinction between logical outcome and resource lifetime explicit.

3.3 Reference materialization and cleanup algorithms

Algorithms 1 and 2 express reference contracts for the relevant owners. Their helper names are protocol roles, not a claim that every runner invokes one common manager. The operation record and journal persist across calls. A pending or idle notification is pollable only while its original obligation remains known. AdmitStage checks intrinsic feasibility, canonical units, overflow, authority, compatibility, and the policy in Equations 3–4, then acquires grants with an owner-side capacity recheck. It preserves previously held grants on Wait. SelectCleanup records the primary reason once and prevents later calls from restarting normal dispatch.

Publication preflight distinguishes a live-custody block from an invalid binding. Rejection after installation preserves the journal and physical binding for cleanup; it does not undo the installation.

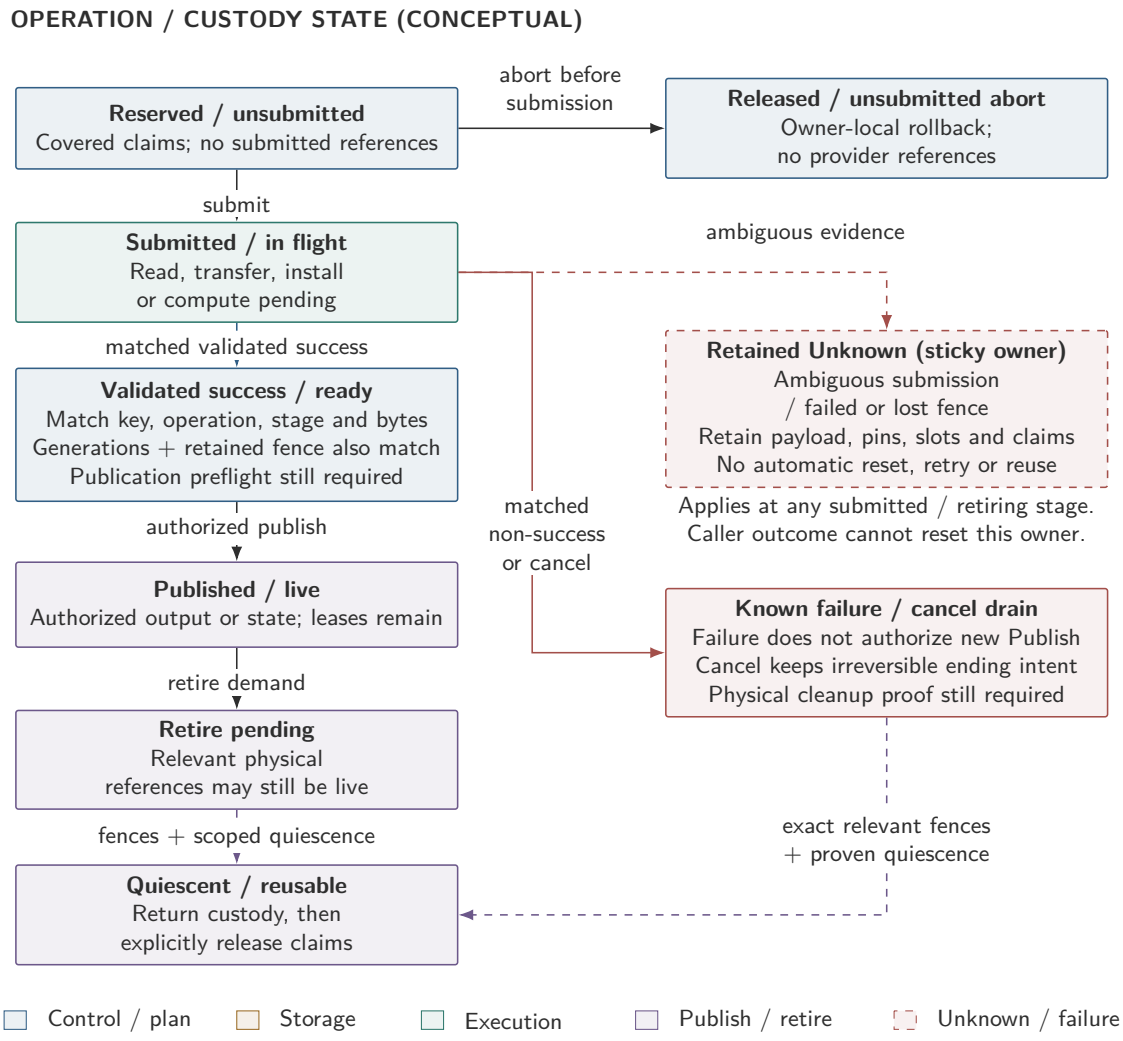


Figure 2: Logical operation and physical custody states. Exact validated success and publication preflight permit publication; known non-success selects cleanup. The dashed Unknown state retains resources and has no automatic recovery or reuse transition. Producer readiness does not establish consumer retirement, and returning custody is not an implicit credit refund.

Algorithm 1 Progress one exact materialization operation

Inputs: frozen plan P, provider v, ledger $\mathcal{L}$, demand δ, journal J
Outputs: result in {Ready, Pending, Terminal}; residual custody stays reachable

Persistent state: operation o, its stage s, grants, and original tickets
if cleanup is selected or o retains Unknown **then**
  continue only Algorithm 2; **return** Terminal
end if
while o is not resident **do**
  if o is installed **then**
    $p \leftarrow \text{PublicationPreflight}(o)$
    if $p =$ Ready **then**
      publish exact binding; transfer resident grant; resolve exact waiters
      retire load once; mark o resident
    else if $p =$ Blocked **then**
      retain binding and grants; arm replacement-custody revisit
      return Pending
    else
      SelectCleanup(J, o, p); **return** Terminal
    end if
  else
    $s \leftarrow o.stage$
    if s is not submitted **then**
      $\alpha \leftarrow \text{AdmitStage}(P, s, \mathcal{L}, \delta)$
      if $\alpha =$ Rejected **then**
        SelectCleanup(J, o, α); **return** Terminal
      else if $\alpha =$ Wait **then**
        retain held grants; arm admission revisit; **return** Pending
      end if
      journal stage custody before SubmitOnce(v, o, s)
      if submission fails or its disposition is ambiguous **then**
        retain original payload and claims; select cleanup; **return** Terminal
      end if
    end if
    $e \leftarrow \text{PollOriginal}(v, o, s)$
    if e is pending or idle and the original obligation is known pollable **then**
      arm completion revisit; **return** Pending
    else if e mismatches identity, stage, generations, or byte contract **then**
      reject without mutation; retain original obligation and revisit
      return Pending
    else if e is pending/idle without that proof, a provider fault, or lacks physical proof **then**
      retain Unknown; select cleanup; **return** Terminal
    end if
    apply exact stage-custody return once; retain residual claims
    if e reports validated non-success **then**
      SelectCleanup(J, o, e); **return** Terminal
    else if $s =$ Read **then**
      release read-slot/read-byte claims; retain host payload charge
      advance to upload; clear only completed read ticket
    else if $s =$ Upload **then**
      release upload and host claims after exact fence; retain destination
      advance to install; clear only completed upload ticket
    else
      mark o installed
    end if
  end if
end while
return Ready

A terminal load result likewise does not mean physical closure. Journaled returns and releases are applied once, even if a subsequent cleanup step fails.

A terminal pass operates on a finite worklist Ω of obligations reachable through J after demand detachment. The persistent cursor w and unvisited cohort prevent unresolved entries at the front from hiding later entries. New obligations cannot overtake that cohort. Removing an entry from the local worklist never removes it from its authoritative owner. A custody handoff takes effect only after acknowledgment by the new owner.

For each exact operation and stage, cancellation marker $\mu_o[s]$ is one of None, Pending, Submitted, or Uncertain. It also binds the key and generations. Known non-acceptance permits an owner-authorized retry with the original arguments; acceptance permits only polling. An ambiguous reply latches uncertainty and cannot be retried as though cancellation had been rejected. A different stage has a different marker. Safe discard of an unsubmitted reservation follows the same rule when it requires provider cancellation.

Algorithm 2 visits at most k obligations, with at most one observation and one cleanup advancement per visited item. This bounds work per pass, not provider-call latency or total cleanup time. A secondary error preserves the primary reason, original phase and arguments, and partial returns already recorded. Cleanup remains pending only while its original obligation is known pollable; otherwise it becomes Unknown. Neither a wake nor an unrelated later fence authorizes reuse. Clearing a poisoned physical owner would require a separately established teardown or isolation boundary, which these algorithms do not supply.

3.4 Bounded next-expert lookahead

Algorithm 3 describes the implemented synchronous expert-operator schedule. A bucket binds an expert to its selected token rows; the operator preserves the existing bucket order. Let H be its logical host-staging limit, $P_{\max}$ the largest selected expert's packed weights and scales, M the metadata allowance, and S the requested worker-stack reservation. Both schedules require

$$2P_{\max} + M + S \leq H \tag{6}$$

before starting the worker. The factor two covers packed/prepared coexistence, not two permanent expert copies. During execution the charged occupancy is

$$C_{\text{host}}(t) = B_{\text{packed}}(t) + B_{\text{prepared}}(t) + M(t) + S(t) \leq H. \tag{7}$$

Packed quota covers queued, in-flight, and held completions. Prepared quota remains charged while any weight or scale alias survives. Aliases do not add copies, and dropping one alias does not release the remaining allocation. Retained Unknown is already included in these charges. One worker, a queue of depth one, and two charged read slots bound the outstanding host work.

Read completion validates the prepared source image, not a device destination generation. Destination binding and reuse checks remain with upload and consumer ownership. The residency hint is read-only: it neither pins the next expert nor alters replacement order. Speculative failure becomes relevant only if that exact expert is later demanded. Unused reads are drained and counted as wasted work; lookahead is therefore permitted to read more than blocking, although it does not do so in the paired experiment. Cancellation cannot interrupt an already executing synchronous file read. The owner still waits for its existing consumer proofs, so the complete forward remains synchronous.

Weak liveness witnesses track prepared allocations without adding payload copies. Strong aliases retain quota; after their final retirement, weak control blocks and allocator-retained memory can still occupy physical memory. Thus quota release and RSS reduction are separate observations.

Algorithm 2 One bounded terminal-custody pass

Inputs: journal J, terminal intent i, visit limit $k > 0$
Outputs: caller outcome y and custody status h; unresolved ownership persists

Persistent state: worklist Ω, cursor w, exact cancellation markers $\mu_o[s]$
if i requests cancellation and the terminal owner rejects it **then**
  return current outcome and custody status
end if
latch accepted y; detach terminating demand once; preserve irreversible intent
$\Omega \leftarrow \text{ResumeOrSnapshot}(J, w)$; $n \leftarrow \min(k, |\Omega|)$
while $n > 0$ **do**
  $o \leftarrow \text{Pop}(\Omega)$; $s \leftarrow o.stage$; $n \leftarrow n - 1$
  if another waiter or persistent owner still holds o **then**
    preserve shared load or acknowledged handoff; do not cancel or refund
  else if o has persistent physical-owner Unknown **then**
    retain payload, charge, and poison; block reuse
    apply any late exact stage completion only to its named obligation
  else if o is positively unsubmitted **then**
    attempt safe discard once under $\mu_o[s]$
    discharge eligible claims only with exact discard proof
  else
    $e \leftarrow \text{ObserveOriginalOnce}(o)$
    if e mismatches the exact completion contract **then**
      reject without mutation; preserve o
    else if e proves named stage-custody return **then**
      journal the return once; advance original cleanup at most once
      preserve primary outcome and residual custody on any cleanup error
      release only proved claims; confirm retirement before reuse
    else if e is pending and the original obligation is known pollable **then**
      if cancellation is legal and $\mu_o[s] \in \{\mathsf{None}, \mathsf{Pending}\}$ **then**
        $\gamma \leftarrow \text{CancelOnce}(o, \mu_o[s])$
        if $\gamma = \mathsf{Accepted}$ **then**
          $\mu_o[s] \leftarrow \mathsf{Submitted}$; await physical completion
        else if $\gamma = \mathsf{NotAccepted}$ **then**
          $\mu_o[s] \leftarrow \mathsf{Pending}$; retain exact retry arguments
        else
          $\mu_o[s] \leftarrow \mathsf{Uncertain}$; retain Unknown; prohibit retry
        end if
      end if
    else
      retain payload and journal; classify held claims in T_a without recharging
    end if
  end if
  advance w past o; defer unresolved entries behind unvisited entries
  arm exact completion, cleanup, or owner-progress revisit
end while
persist unvisited Ω, cursor, and all unresolved owner records in J
if no unvisited or unresolved custody remains **then**
  $h \leftarrow \mathsf{Closed}$ for this bookkeeping scope
else if physical-owner Unknown remains **then**
  $h \leftarrow \mathsf{UnknownRetained}$
else
  $h \leftarrow \mathsf{Pending}$; schedule a later pass
end if
return (y, h)

Algorithm 3 Bounded next-expert reads in a synchronous forward

Inputs: ordered selected buckets $\mathcal{B}$, source-bound plans, mode $m \in \{\mathsf{Blocking}, \mathsf{Lookahead}\}$, limits H, M, S
Outputs: unchanged bucket order and device proofs; residual custody retained

validate three-artifact plans and Equation 6; start the same worker
State: at most one next ticket τ, exact deferred error, payload-alias charges
for current bucket b in $\mathcal{B}$ **do**
    admit and pin current device residency and scratch; validate source
    if current expert is not resident **then**
        drain unrelated speculation by its original identity
        honor any error deferred for b before new dispatch
        if no exact carried ticket for b **then**
            $\tau \leftarrow$ SubmitExact(b) under read-slot and byte limits
        end if
        await original τ; blocking waits immediately after submission
        if worker custody is Unknown **then**
            retain identity, charge, and poison; return through terminal cleanup
        end if
        take completion once
        Validate the original operation, prepared source-image identity, selected expert,
          read plan, byte count, and source freshness.
        if evidence mismatches or reports non-success **then**
            preserve primary error and residual custody; return through terminal cleanup
        end if
        reserve prepared quota while packed bytes remain charged
        construct gate/up/down artifacts without rereading; track payload aliases
        upload current expert under destination-generation checks and CUDA proofs
    end if
    drain speculation made redundant by a current resident hit
    release current host charge only after payload-alias retirement
    inspect next selected bucket without pinning it or changing replacement order
    if $m = \mathsf{Lookahead}$ and next expert is nonresident and host custody permits **then**
        try one next read before current compute submission
        defer speculative submission or read errors to that exact later demand
    end if
    submit current computation from resident device handles
    consume output under its lease; preserve existing fences and retirement
end for
on scope end or error, cancel unused reads, drain, and join the original worker
retain Unknown and alias-held quota; host join does not discharge device custody

4 Implementation

4.1 Private model-operator path

The evaluated Mixed-precision model path implements Algorithm 3 inside its private CUDA expert operator. It does not instantiate the general runtime resource manager or materialization registry for these expert reads. Its local owners implement source validation, host quota, device-cache admission, and consumer completion. Algorithms 1 and 2 provide reference contracts for reasoning about these responsibilities, not a claim of one universal call path.

The checkpoint catalog records tensor descriptors and ordered file extents. A read plan binds filesystem identity using device, inode, length, modification time, and change time. The worker verifies this identity before and after positioned reads; the consumer rechecks it before constructing the three compressed gate, up, and down artifacts. Descriptor hashes describe dtype, shape, and extent metadata rather than authenticating every payload byte. The worker receives neither CUDA handles nor cache leases or runtime continuations.

Both schedules explicitly enable this worker. Blocking submits required demand and waits; lookahead carries one exact next ticket across current compute submission. After upload, the operator computes from resident device handles and immutable binding metadata, allowing temporary host aliases to retire before the next read. Kernel mathematics, selected expert order, and completed-only cache replacement remain unchanged. A pipeline-disabled path would not be an equivalent control.

Responsibility	Evaluated implementation	Boundary
Source binding	Immutable catalog and ordered positioned-read plans	Metadata identity, not payload authentication
Host materialization	One worker; packed and prepared quota held through aliases	Logical reservation, not process-memory limit
Device residency	Private expert-cache owner, scratch admission, retained CUDA proofs	Separate from host read quota
Scheduling	One next-expert ticket before current compute submission	Synchronous forward remains unchanged
State lifetime	Prepared state, exact installation acknowledgment, retirement	Request completion can retain KV and weight residency
Observation	Passive counters, token records, owner snapshots, separate profiler	Observation does not refund or repair custody

Table 2: Mapping from the contracts to the evaluated operator's responsibilities.

The principal configuration uses a 64 MiB host limit containing 8 MiB of metadata and 2 MiB of requested stack reservation. The remaining 54 MiB is split equally between packed and prepared payload quota. Device cache and scratch are separately accounted. Prepared payload charges survive escaped weight or scale aliases. Passive snapshots report mode, read counts, waits, payload charges, join state, and retained uncertainty without changing them. Allocator detail is omitted from passive snapshots when obtaining it would poll retirement fences.

4.2 Other protocol implementations

The general materialization path installs a registry only when a runner transfers a physical provider to the resident engine. This path merges compatible exact keys, validates completion before mutation, and separates stage-custody return from credit release and resident-grant transfer. Its routed-expert provider uses pinned host reads and CUDA upload and installation. Registered slabs retain aligned

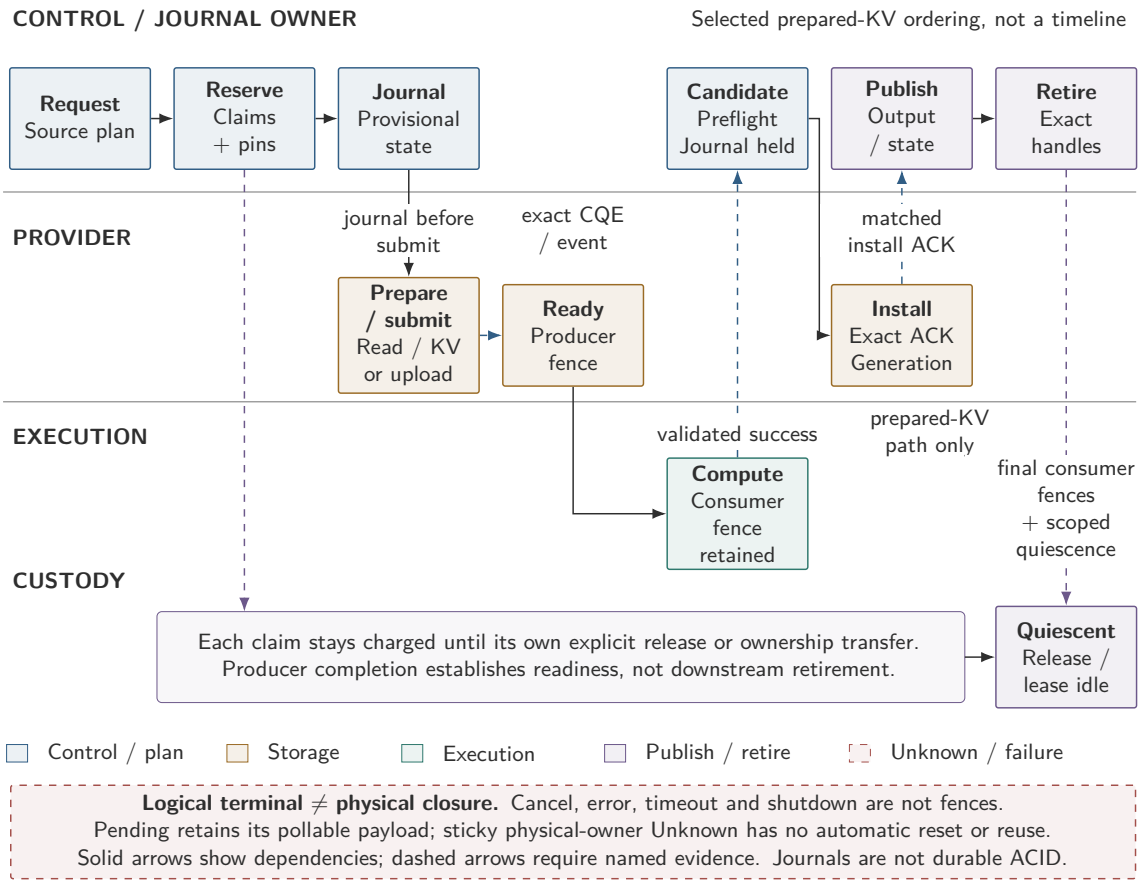


Figure 3: Prepared-state lifecycle. The provisional journal precedes backend preparation. Exact installation acknowledgments precede logical publication; consumer quiescence and retirement precede reuse. The lanes show causal ordering, not a measured overlap timeline. Cancellation preserves any irreversible ending decision and its residual cleanup obligations.

ranges and generations; upload tickets retain the original event and frame after notification errors. Replacement also carries the old binding and its consumer-completion evidence.

The resource broker canonicalizes and checks claims before charging them. A later-stage budget wait retains earlier buffers and destinations. Grants have no implicit destructor refund. The five accounting classes in Equation 5 are refinements of these ownership states, not five directly measured counters.

State publication uses a separate prepared-state protocol. A provisional journal precedes backend preparation because preparation can submit work before returning a handle. Lost installation acknowledgments cause polling of the same operation rather than redispatch. Exact acknowledgments precede logical publication; displaced-state retirement and page confirmation precede reuse. Committed KV reads revalidate owner, slot, incarnation, generation, layout, frontier, range, and page authority. Finishing a transaction consumes its handle custody, not every independent weight, KV page, or cache pin.

These integrations share ownership concepts but have different progress and completion authorities. An exact late registry completion may close its stage while an independent device owner remains poisoned. Host-worker join cannot clear that device uncertainty. Ordinary pipeline, host-KV, and

collective paths therefore require their own audits; the evaluated single-device path does not establish universal registry coverage or a default device-collective implementation.

5 Experimental Methodology

5.1 Model, configuration, and quality criteria

The serving experiments use Qwen3.5-35B-A3B-FP8 with text-only execution on one CUDA device: pipeline, tensor, and expert parallelism are each one. Experts are materialized lazily and KV state remains resident. The Mixed profile uses BF16 activations, KV, and convolution state, with F32 accumulation and state-space-model state. Checkpoints reside on a shared NFS mount. The paired, pressure, profiling, and HTTP-cancellation experiments use the same frozen serving executable; the component-fault experiment uses a separate small test executable.

Platform and observation. The serving experiments use one NVIDIA GeForce RTX 3090 with 24 GiB of physical device memory. A same-boot post-hoc inventory associated with the paired study reported an Intel Xeon Platinum 8369B at 2.90 GHz, 128 visible logical CPUs, and 754.913 GiB of kernel-visible memory on x86-64 Linux 4.19.91; experiment-time affinity, cgroup limits, and unchanged hardware configuration were not established. The observer sequentially samples device-wide GPU memory and process-tree RSS/PSS, then waits 2 s. For samples wholly within request phases, including inter-request gaps, start-to-start intervals are 2.261–2.377 s in the paired study and 2.276–2.368 s in the pressure study; collection adds time to the nominal wait. Whole-lifecycle maxima use 49–54 samples per paired arm and 36 per pressure point, not continuous or uniform-rate observations.

Table 3 gives the paired configuration. The two arms change only the read schedule. Both retain the same source checks, arithmetic, cache policy, worker, consumer proofs, and synchronous forward. Runtime profiling is disabled for ordinary timings; the separate overlap captures enable it. Logging is identical between timing arms. No experiment flushes page or NFS caches, and a fresh server is not assumed to have cold storage.

Control	Paired-study setting
Read pipeline	One positioned-read worker, queue depth one, two charged slots
Host staging	64 MiB logical ceiling, including 8 MiB metadata and 2 MiB requested stack
Expert device cache	64 entries; 320 MiB charge including 8 MiB scratch
Other device policies	7 GiB admission target, 2 GiB workspace, 16 MiB KV
Scheduling	Context 128; batch-token limit 8; active-sequence limit 2; decode cohort target 1 without deferral
Build and observation	CUDA 12.4.99, SM86; profiling annotations compiled, runtime profiling disabled
Requests	Concurrency one; fixed prompts, resets, generation, and request order

Table 3: Controls held fixed between blocking and lookahead. Limits can overlap and are not additive physical-memory partitions. MiB and GiB denote 2^{20} and 2^{30} bytes.

Independent reference. Numerical references use Hugging Face eager model forwards from Transformers 5.5.3 and Torch 2.13.0+cu129, independently of Ferrule's execution kernels. FP8 checkpoint values and BF16 scales are decoded in F32 and rounded to BF16 execution weights, with BF16 activations and KV state and explicitly preallocated F32 SSM state. This is decoded-storage

BF16 execution, not the stock dynamic-FP8 quantizer or default SSM-cache precision. Exactly equal raw routing logits are resolved deterministically by lower expert ID; distinct-logit selections and native F32 routing probabilities and weights remain unchanged. Full-forward tests use a frozen two-prompt reference; retained-state tests and HTTP canaries use a separately generated three-prompt reference with the same pinned HF implementation and precision policy.

Quality is checked at two levels. Factory tests compare the model's numerical outputs with these references using tolerance $0.00025 + 0.012|\text{reference}|$, with exact generated-ID checks where observed. They cover the complete 40-layer forward, retained fresh-state execution, ordinary execution without diagnostic observers, and cold-owner execution in both schedules, plus a small constructor/provider check. Factory tests and the serving executable are distinct, so HTTP observations supply the serving-quality evidence rather than inheriting numerical acceptance from source identity alone.

For HTTP requests, we join actual worker-enqueued token IDs to request identities, emission ordinals, terminal usage, and complete server-sent-event (SSE) responses. IDs are not inferred by retokenizing text. An SSE content event is not necessarily a token boundary. Eight-token requests must match the frozen ID, text, and usage references; two-token smoke requests check length and usage only. The profiled and pressure requests use these same output criteria within their stated request sets.

5.2 Paired design and prespecified estimator

Five paired blocks use the fixed order B–L, B–L, L–B, L–B, B–L, where B is blocking and L is lookahead. Each arm starts a fresh server and executes 12 requests: four initial checks, one excluded QA request, two QA warmups, and five measured QA requests. Thus 50 measured requests are nested within ten lifecycles and five paired analysis units. The protocol fixes the workload, order, time limits, and all-five-pairs-or-no-aggregate rule before collection. It permits no retries, replacement pairs, extra warmups, or pooled profiling timings.

For block i, mode m, and measured request j, client end-to-end time t_{imj} runs from send to response EOF. Time to first content f_{imj} (often called TTFT) runs from send to the first nonempty SSE content event. The arm summaries and paired estimator are

$$\begin{aligned} E_{im} &= \operatorname{median}_{j=1}^{5} t_{imj}, \qquad F_{im} = \operatorname{median}_{j=1}^{5} f_{imj}, \\ G_{im} &= \frac{40 \text{ qualified tokens}}{\sum_{j=1}^{5} t_{imj}}, \quad \widehat{R}_X = \exp\!\left(\operatorname{median}_{i=1}^{5} \ln \frac{X_{iL}}{X_{iB}}\right), \quad X \in \{E, F, G\}. \end{aligned} \tag{8}$$

End-to-end latency is primary; TTFT and goodput are secondary. G is a qualified serial request-window rate, excluding startup and inter-request gaps, not concurrent server throughput. The descriptive resampling procedure enumerates all $5^5 = 3{,}125$ ordered paired-block resamples and exponentiates the median log ratios at nearest ranks 79 and 3047. It does not treat individual requests as independent replicates.

5.3 Complementary experiments and observation scope

Three fresh blocking lifecycles jointly vary cache entries and byte ceilings in fixed order: 8 entries/64 MiB, 64/320 MiB, and 128/640 MiB. Each executes one two-token smoke and three eight-token canaries: QA, arithmetic, and Chinese. This is a coupled-budget sensitivity study, not independent entry and byte ablations. The new points receive HTTP/ID checks, not a transfer of full-logit, route, or state qualification.

The overlap experiment captures one fresh QA request per schedule, separately from the timing pairs. It correlates worker read envelopes, contained positioned-read system-library calls, and actual

expert kernels on the profiler's common clock. The component experiment crosses two schedules with clean failure and withheld completion proof in a two-layer numerical fixture. It executes real reads, uploads, and CUDA computation. The HTTP cancellation experiment instead uses the complete model: it disconnects after the first nonempty content event and then issues a new recovery request in the same process.

Interpretation boundary. The measurements answer different questions rather than composing into one universal guarantee. Logical charges are not RSS or certified physical peaks; shared NFS counters are not request-exclusive backend traffic; and component failure checks are not full-model fault conservation. The timing estimate is descriptive at $n = 5$: shared cache state leaves cross-block independence unestablished, so its ranges are not guaranteed-coverage confidence intervals or significance tests. Table 4 consolidates the main availability limits; the results below retain each measurement's units and scope without imputing missing fields as zero.

Question	Available evidence	Not established
RQ1	Numerical factory checks; HTTP/ID checks; logical high-waters; device and host samples	Total physical peak, physical admission at each cache point, capacity frontier, storage necessity
RQ2	Logical reader/upload counters; request process-I/O snapshots; shared NFS deltas	Startup/shutdown process-I/O deltas, request-exclusive network or backend-disk bytes
RQ3	Five paired timing blocks; two scoped read/kernel captures	Statistical significance, global trace completeness, physical storage-service overlap, critical-path causality
RQ4	Four real-CUDA component cells; full-model HTTP cancellation and new-request recovery	Hardware/driver faults, integrated five-class conservation, full-model Unknown recovery, final physical release

Table 4: Measurement availability and limits. A missing observation remains unknown rather than becoming a zero or a guarantee.

6 Evaluation

The results separate bounded completion, logical I/O demand, scheduling behavior, and failure handling. Each comparison retains its own workload and observation scope.

6.1 RQ1: Bounded completion and cache-budget sensitivity

All 120 requests in the paired study complete under the declared accounting limits, and all three cache-budget points complete their separate four-request workloads. The numerical checks for the paired configuration also satisfy their acceptance criteria in all nine factory tests (Table 5). These observations establish bounded completion at the tested settings, not a minimum feasible capacity.

The serving study has ten completed lifecycles, 110 exact eight-token oracle matches, and ten length/usage-only smoke checks. All 900 generated IDs join to successful HTTP terminal evidence. Failed, censored, and unissued request counts are zero. The 50 measured QA requests remain the latency subset; quality checks do not increase the number of paired replicates.

Every paired lifecycle reaches the same logical host high-water:

$$2(3{,}146{,}112) + 8{,}388{,}608 + 2{,}097{,}152 = 16{,}777{,}984 < 67{,}108{,}864 \text{ bytes}. \tag{9}$$

Factory scope	Tests	Metrics/test	Vocabulary values/test	Additional check
Full model	2	804	1,986,560	Prefill and first decode; diagnostic routes/states
Retained fresh state	2	5,427	9,187,840	64 fingerprints per schedule across four streams
Ordinary execution	2	27	9,187,840	64 fingerprints match same-schedule diagnostic outputs
Cold owner	2	1,809	3,228,160	28 fingerprints match current reference/configuration
Constructor	1	—	128 total	Four cells, each with 32 finite values and six verified reads

Table 5: Factory quality checks for the paired serving configuration. Two-test rows contain one test per schedule. Vocabulary counts for stateful rows describe common-history comparisons, not every checked stream. Ordinary-execution route and state metrics are unobserved.

This matches the packed/prepared, metadata, and requested-stack accounting in Equations 6 and 7. The selected-device sampled maximum is 4,125 MiB in every arm, based on 49–54 samples per arm, against the 7 GiB policy target. Figure 5 reports these logical and sampled quantities separately.

Coupled cache sensitivity. Increasing the cache budgets increases ending residency and sampled device memory, but does not reduce the observed reader work. The three fresh points complete 12 requests, including nine exact eight-ID canaries, and generate 78 tokens in total, 72 covered by those oracles. Figure 4 shows ending entry counts of 8, 64, and 128; logical cache high-waters of 41.554, 209.574, and 401.598 MiB; and sampled device maxima of 3,997, 4,125, and 4,317 MiB. Each device maximum uses 36 retained observations. Host-tree PSS maxima are 6,417.381, 6,417.131, and 6,419.145 MiB.

Each point performs exactly 36,240,064,128 logical reader bytes, 69,114 reader calls, and 11,519 verified expert reads/uploads, with zero observed expert hits. Evictions decrease from 11,511 to 11,455 to 11,391; installs minus evictions explains the ending entry counts. The reduced eviction count is therefore additional retained residency, not evidence of cache reuse or fewer reads. Host logical high-water remains 16,777,984 bytes at every point.

6.2 RQ2: Equal logical demand and limited storage attribution

Blocking and lookahead perform identical observed logical reader work in every paired lifecycle, while the available filesystem observations do not identify physical backend traffic. For request q, let $\mathcal{V}_q$ be its anchored decoder invocations and define

$$L_q = \sum_{v \in \mathcal{V}_q} \Delta_v B_{\text{read}}, \qquad H_q = \sum_{v \in \mathcal{V}_q} \Delta_v B_{\text{upload}}, \qquad \Delta_q = H_q - L_q. \tag{10}$$

Here B_{read} counts logical checkpoint-reader bytes and B_{upload} counts bytes requested through the host-to-device copy interface, not physical bus traffic. The 1,020 invocation records reconcile with owner-lifetime totals and the shutdown ledger. High-water gauges are maxima, never summed deltas.

Table 6 shows that lookahead changes when work is issued, not its aggregate amount in this workload. Both modes repeatedly materialize weights and record zero expert hits. Equal aggregate counts do not by themselves establish an identical route-ID sequence or infer a cache-miss rate.

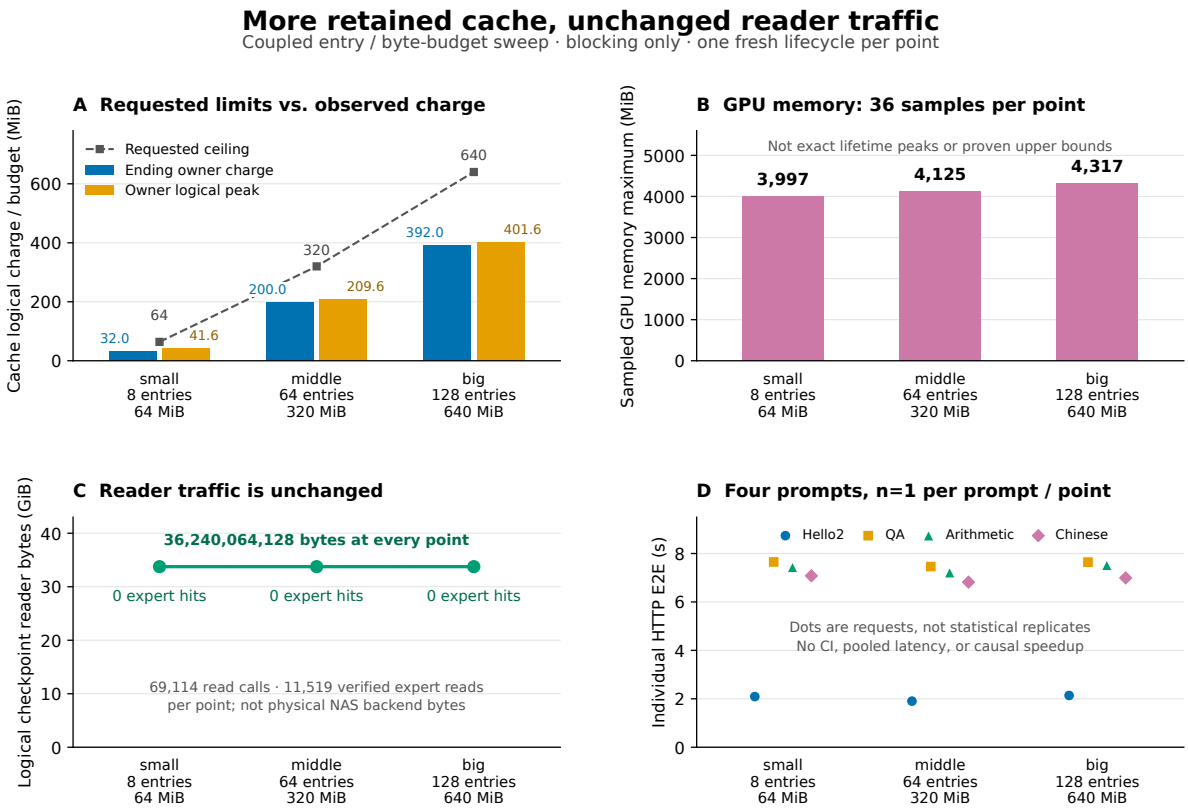



Figure 4: Coupled cache-budget sensitivity. Entry/byte limits increase together from 8/64 MiB to 64/320 MiB and 128/640 MiB. (A) Ending charge and logical high-water are separate observations under the requested ceiling; charge includes 8 MiB scratch. (B) Device-memory values are maxima of 36 samples per point. (C) Logical reader bytes remain 36,240,064,128 with zero expert hits. (D) Each latency dot is one prompt at one point, not a statistical replicate. All 12 requests complete. The sweep demonstrates bounded completion and increased residency, but neither read reduction nor a physical capacity frontier.

Per lifecycle, 12 requests	Blocking	Lookahead
Submitted and verified read operations	40,943	40,943
Checkpoint-reader calls	245,658	245,658
Logical reader bytes	128,811,263,616	128,811,263,616
Host-to-device interface bytes	128,811,927,312	128,811,927,312
Speculative reads consumed	0	36,863
Wasted read bytes	0	0
Uncertain read operations/bytes	0 / 0	0 / 0

Table 6: Identical totals in each of the five lifecycles per mode. A read operation can contain multiple positioned reads. Upload-interface bytes exceed reader bytes by 663,696 per lifecycle.

The paired archive contains 120 request-window and 30 lifecycle-phase NFS counter deltas. The first blocking request phase records 314,825,320 bytes in the shared client's server-read counter. Its individual request windows sum to 312,732,264 bytes, leaving 2,093,056 bytes between those windows inside the phase. The other nine request phases record zero. In the separate pressure study, the shared client's normal-read counter increases by 36,491,264,808 bytes per point, while server-read and read-RPC deltas are zero. These are distinct client-level observations, consistent with cache-served logical reads but insufficient to attribute service to a physical NAS device.

Request-boundary process-I/O observations comprise 240 identity-bound snapshots and 120 deltas. Corresponding startup/shutdown process-I/O snapshots and startup logical-reader totals were not collected. Neither the zero client deltas nor fresh process lifecycles establish storage-cold behavior.

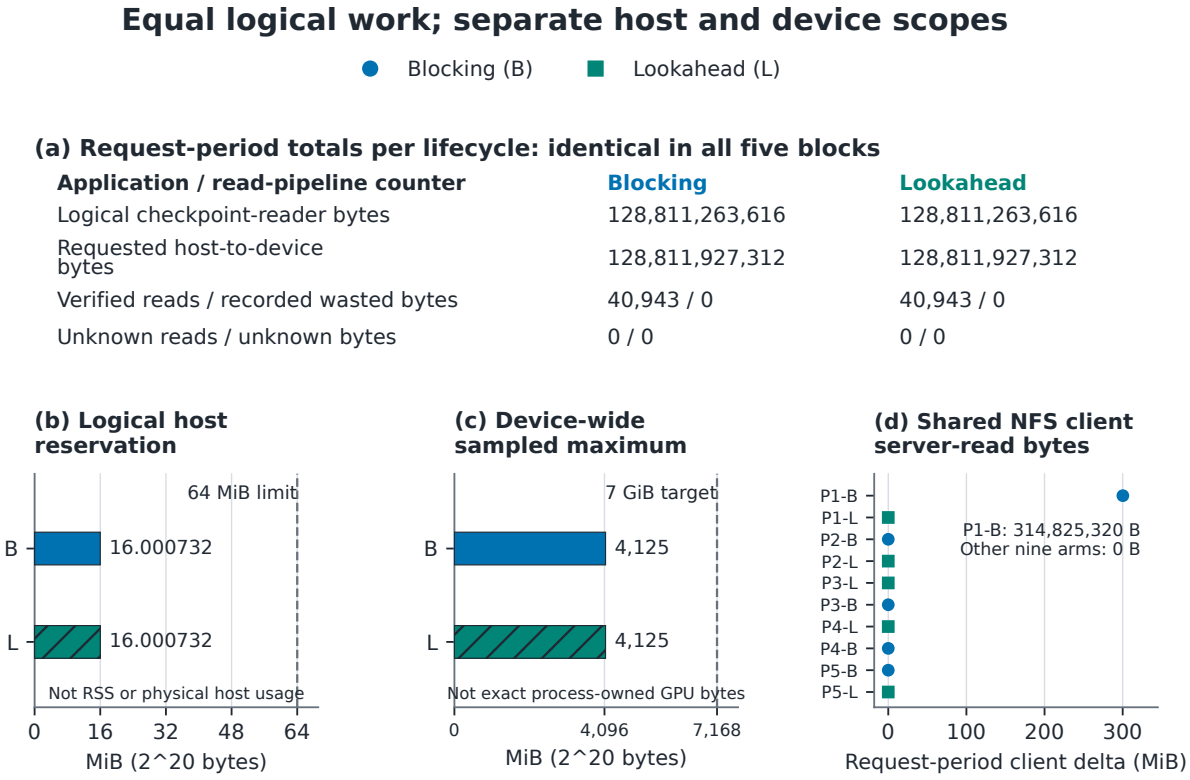

Bars: the same maximum in every arm, not a sum of lifetime peaks. Host logical peak = 16,777,984 B; device maximum = 4,125 MiB.
Reader and H2D totals are equal across modes, not to one another. Recorded zero waste is not unknown physical backend traffic.
Do not add host PSS to device or logical gauges. Shared NFS/page cache may be warm; startup/shutdown PID-I/O deltas remain unknown.

Figure 5: Logical work and memory observations for all ten paired lifecycles. Both modes read 128,811,263,616 logical bytes and request 128,811,927,312 upload bytes per lifecycle, with zero wasted read bytes. Logical host high-water is 16,777,984 bytes under 64 MiB; device-wide sampled maximum is 4,125 MiB under the 7 GiB policy target. These quantities are not additive physical partitions. Only the first blocking request phase has a positive shared-client server-read delta, with 2,093,056 bytes outside individual request windows. Shared-client counters do not measure request-exclusive backend traffic.

6.3 RQ3: Less waiting and scoped read–compute overlap

Lookahead reduces median host demand waiting and client end-to-end latency in all five paired blocks. The prespecified summaries are 8.18% lower end-to-end latency, 11.24% lower TTFT, and 10.91% higher qualified serial-window goodput (Table 7 and Figure 6).

Outcome	Aggregate L/B	Relative change	Descriptive range
Client end-to-end latency	0.91823	−8.18%	[0.89303, 0.94946]
Client TTFT	0.88755	−11.24%	[0.86004, 0.94888]
Qualified serial-window goodput	1.10908	+10.91%	[1.07393, 1.13498]

Table 7: Five-block paired estimates from Equation 8. Ranges are descriptive block-resampling endpoints, not significance tests or guaranteed-coverage confidence intervals.

Across the five measured arm windows per mode, blocking generates 200 qualified tokens in 193.581 s of summed request time, and lookahead generates 200 in 175.393 s. The resulting 1.03316 and 1.14029 tokens/s are separate accounting summaries, not replacements for the paired estimator. Launch to readiness takes 12.847–13.247 s and is excluded from request latency.

Host demand-wait reductions range from 0.398 to 0.703 s per arm-median request; end-to-end reductions range from 0.384 to 0.827 s (Figure 7). A request's wait is the sum of anchored per-invocation demand-wait durations, followed by the median within each arm. Equal logical work and zero wasted bytes support interpreting this as a scheduling contrast rather than a smaller workload. The association does not decompose the critical path: host waiting cannot be added to client latency or treated as a measurement of GPU activity.

Direct overlap observation. The separate profiled lookahead request has 174.409210 ms of reader-envelope intersection with expert kernels, but only 0.751507 ms of positioned-read wall-time intersection; blocking has zero observed intersection in both measures. Table 8 keeps these quantities separate. Let $\mathcal{R}$ contain allocation-plus-read worker envelopes, $\mathcal{P}$ the contained `pread` wall intervals, and $\mathcal{K}$ actual expert kernels identified by unique launch correlations. For half-open intervals on the common profiler clock, write $\mathcal{U}(X)$ for their merged union. We report $|\mathcal{U}(\mathcal{R}) \cap \mathcal{U}(\mathcal{K})|$ and $|\mathcal{U}(\mathcal{P}) \cap \mathcal{U}(\mathcal{K})|$, not intersections with a first-to-last kernel envelope.

Whole-request union duration (ms)	Blocking	Lookahead
Reader envelope	2,982.515538	2,989.969321
Positioned-read wall time	2,299.019830	2,295.077102
Actual expert kernels	194.741187	194.217266
Reader envelope ∩ kernels	0	174.409210
Positioned-read wall time ∩ kernels	0	0.751507

Table 8: One separately profiled QA request per schedule. Union lengths preserve gaps between kernels and do not represent physical storage-service time.

Each arm completes the same eight-ID QA output over nine decoder invocations, with 3,678 worker read envelopes, 22,068 contained positioned reads, and 33,403 attributed expert kernels. Each records 11,571,399,936 source-verified requested bytes. The profiler's file-call records do not expose an interpreted byte count or per-call success value, so those requested bytes come from the operation ledger, not the profiling API. The read envelopes cover allocation and the source read call, excluding session opening and source verification.

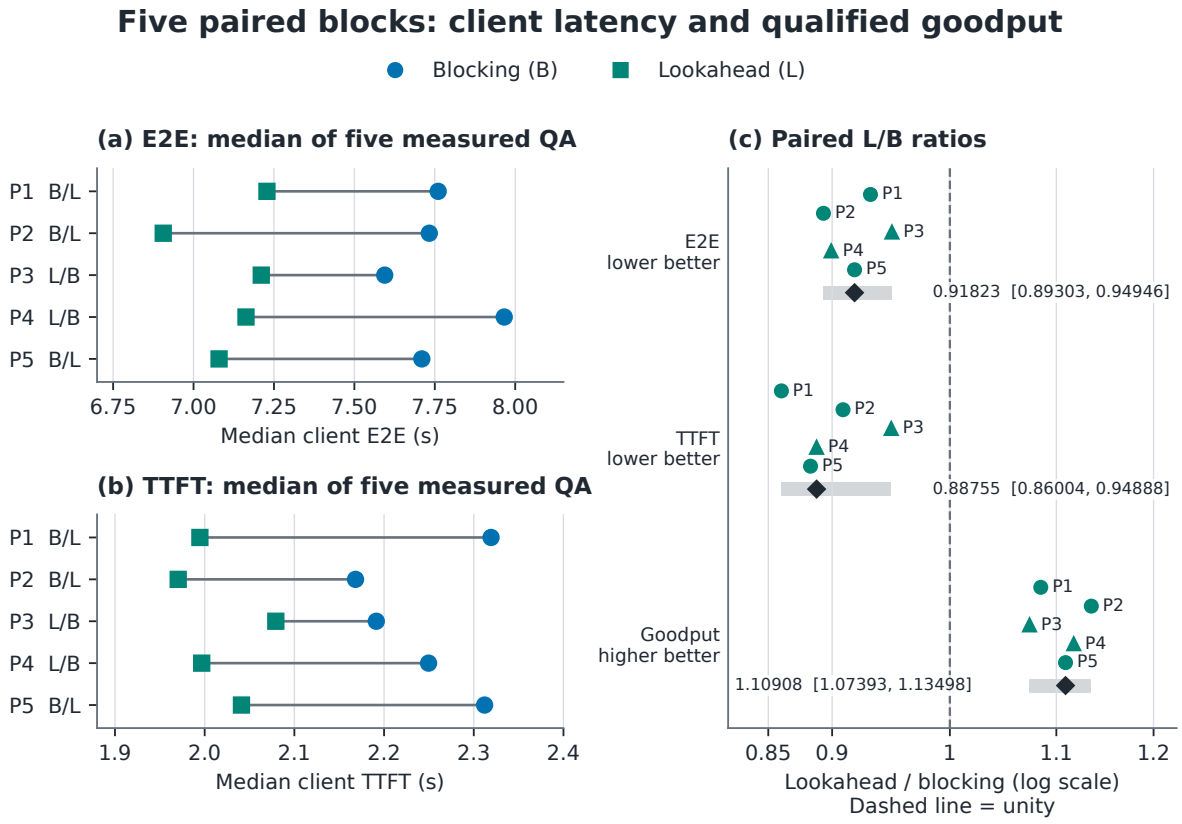


Figure 6: Paired client outcomes. Connected values are arm medians of five measured QA requests; goodput is 40 qualified tokens divided by summed client duration. Blue circles denote blocking and teal squares lookahead. Block order is retained. Diamonds show the exponentiated median paired log ratio; brackets show descriptive endpoints over all 3,125 ordered block resamples. The analysis unit is the paired block ($n = 5$), not the 50 measured requests. Startup is excluded, and serial-window goodput is not concurrent serving throughput.

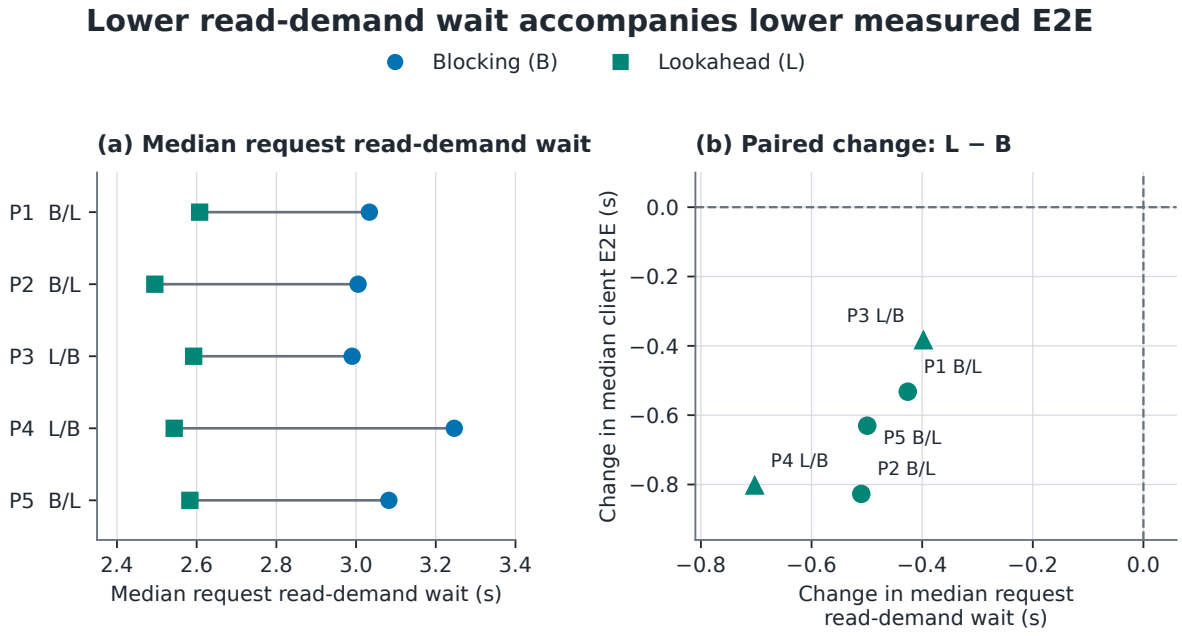


Figure 7: Host demand waiting and client-latency changes in the five paired blocks. Each arm summarizes five measured requests. The difference panel subtracts blocking from lookahead arm medians, rather than taking a median of requestwise differences. All five blocks show lower wait and end-to-end latency with lookahead. These host measurements establish an association, not a causal critical-path decomposition or hardware-overlap result.

The lookahead intersections are 5.83314% of the reader-envelope union and 0.0327443% of the positioned-read union. Target-process checks pass, but global trace completeness remains unverified: each capture retains three warnings concerning a non-CUDA wrapper, neither is accepted as a globally complete trace, and the dropped-event count is unknown. Observed launch/kernel correlations close without orphan or duplicate keys, which cannot exclude simultaneous loss of both records. These two profiled requests are not timing replicates and are not pooled with the five ordinary pairs.

6.4 RQ4: Abort, uncertain custody, and HTTP cancellation

Clean component failures preserve committed state and permit a checked retry; withheld completion proof instead retains device charges and blocks unsafe reuse. Separately, a real HTTP disconnect reaches a cancelled worker outcome, after which a new request in the same process matches its eight-token oracle. These results test different boundaries of the lifetime contract.

Real-CUDA component failures. Both blocking and lookahead preserve committed state after clean abort and retain device charges after completion-proof discard. These four component cases use a small fixture with two layers, four experts per layer, hidden and expert-intermediate dimensions of 16, and a vocabulary of 32. It uses FP8 weights with BF16 scales and the Mixed arithmetic profile. Its cache has one entry and a 65,536-byte logical limit; host staging has a separate 2 MiB limit.

The injected boundary follows a real routed-expert output submission. For the clean case, a scheduled software error is handled with valid completion evidence. For the Unknown case, the fixture first successfully waits for the actual compute event and upload synchronization, then deliberately discards that proof. This tests the response to missing authority, not a failed driver, hung device, or physically lost event.

After clean abort, committed recurrent-state and KV contents remain unchanged, transient resources are released, and retrying the same continuation succeeds before its test transaction is aborted. After proof discard, repeated abort and independent waits do not clear the poisoned owner. Its logical cache retains 6,918 bytes of the 65,536-byte limit: 774 pending-upload bytes and 6,144 scratch bytes, all classified within the retained Unknown subset. That subset is not an additional charge. Host cleanup reaches zero logical charge in both schedules, illustrating that host and device custody are different domains. Device state contents after Unknown are unobserved rather than assumed equal. Table 9 summarizes the distinction.

Full-model HTTP cancellation. The client closes its connection after receiving the first nonempty SSE content event. The matching worker terminal is observed 0.6680 s later with cancellation accepted and submitted, rather than natural maximum-length completion. The worker enqueues one token for the cancelled request. This deliberately censored request has no complete client usage or successful QA outcome. Only after cancellation acceptance does the client issue a new request and session in the same resident process. That request delivers all eight expected IDs, text, usage, and terminal evidence. It is fresh-request recovery, not continuation of the cancelled request.

The owner records 5,116 completed and verified read operations with zero cancelled or uncertain reads. Thus cancelling the HTTP request does not imply that an individual synchronous source read was interrupted. At shutdown, logical host charge and observed pending operations are zero; device-cache charge is 209,739,776 bytes with residency retained. Per-request KV/frontier snapshots and a before/after pending-operation ledger are unavailable.



Figure 8: Scoped read–compute overlap. The upper tracks show deterministic 20-ms excerpts starting at the first source-qualified worker read in each arm: reader envelopes, positioned-read wall intervals, and actual expert kernels. Start symbols do not enlarge durations. The lower panels use whole-request unions, not estimates from the excerpts. Lookahead intersects kernels for 174.409210 ms of reader envelopes but only 0.751507 ms of positioned-read wall time; blocking has zero observed intersection. Target-process checks pass, while wrapper warnings and an unknown drop count leave global completeness unverified. File-call wall time does not establish physical NAS-service overlap.

Experiment	Outcome	Resource/state evidence
Clean component failure, both schedules	Abort completes; same continuation retry succeeds	Committed state unchanged; transient charge released; 4,096-byte scratch reservation remains
Proof-discard component, both schedules	Unknown remains; unsafe reset, publication, and release rejected	Host charge zero; 6,918 device-cache bytes retained; post-Unknown contents unobserved
HTTP disconnect, complete model	Cancelled after first content; new request passes exact eight-ID check	Worker terminal observed in 0.668 s; final host charge zero; device residency retained

Table 9: Scoped failure results. Component faults are synthetic interventions after real CUDA work; HTTP cancellation is an ordinary client disconnect. Neither supplies a complete serving fault ledger or final physical-release proof.

Across the ten paired serving lifecycles, the owners also report known local closure with retained residency and zero final logical read charge. Process drain and idle observations complete supervision, but do not certify final physical release. The component cache equations are not measurements of the runtime broker's five-class invariant in Equation 5; integrated serving conservation under faults remains unverified.

6.5 Reproducibility

The supplementary materials contain the frozen configurations, request references, provenance inventories, public measurement projections, and offline checkers. They reconstruct all paired arms, token-to-response joins, logical counters, shared-client observations, and descriptive resamples, as well as the separate pressure, overlap, and cancellation results. Figure inputs derive from those records. Appendix A explains why earlier incomplete studies and unmatched supplements do not contribute to the reported denominators. The accompanying artifact guide maps each result to its inputs and checks, distinguishing public offline verification from rebuilding or rerunning with external artifacts.

7 Related Work

Storage-backed inference. FlexGen [2] distributes tensors across GPU, CPU, and disk and optimizes throughput-oriented schedules with compression and attention-cache management. ZeRO-Inference [5] describes CPU or NVMe weight hosting, layer streaming, prefetch, and release. PowerInfer-2 [4] targets smartphone inference beyond resident capacity using neuron clusters, segmented caching, and an I/O/computation pipeline. These systems establish weight streaming and transfer/computation scheduling as prior work. Ferrule focuses on the contract that links each materialization stage to its resource claims, completion identity, and eventual reuse.

Resident offload and state management. PowerInfer [3] exploits activation locality by executing hot neurons on a GPU and cold neurons on a CPU. This resident-domain hybrid differs from PowerInfer-2's storage pipeline. vLLM's PagedAttention [1] addresses serving KV memory through paged allocation; it is relevant to state lifetime but is not the same operation as request-time weight materialization. A fair comparison must specify the representation, physical memory pools,

arithmetic, and quality criterion. The separate resident vLLM observations in Appendix A.4 do not match those conditions and are not used to estimate a comparative speedup.

Scheduling and lifetime. An asynchronous interface, an independent progress worker, and hardware overlap are distinct properties. The comparison in this paper holds worker, representation, and resource limits fixed, then changes when one next-expert read is submitted. Client timing measures the resulting behavior; correlated file-call and kernel intervals separately measure observed overlap. Neither the presence of a worker nor an intersection of broad host ranges is used as a substitute for device activity.

System	Resource focus	Principal mechanism
FlexGen	GPU, CPU, disk	Tensor placement, batching, compression
ZeRO-Inference	CPU or NVMe to GPU	Layer streaming and prefetch
PowerInfer	GPU–CPU residency	Hot/cold neuron execution
PowerInfer-2	Smartphone memory/storage	Neuron clusters and I/O pipeline
vLLM	Serving KV residency	PagedAttention

Table 10: Comparison by the mechanisms described in the cited sources, not by matched performance measurements.

Ferrule contributes a profile-scoped account of source binding, stage-local admission, publication, and retirement, together with measurements that keep logical and physical observations separate. We have not exhaustively audited the custody or failure semantics of the systems above and do not claim that they lack equivalent mechanisms. The empirical contribution is the controlled comparison and its explicit resource and completion scope, not a first-system or state-of-the-art claim.

8 Limitations

Resource and deployment scope. The experiments bound selected logical accounts, not the complete physical working set. The host limit includes packed and prepared payloads, metadata, and requested worker stack; OS stack rounding, TLS, allocator overhead, weak-reference backing, and file-cache residency require additional headroom. Device samples can miss transient peaks and lack exact process attribution. The three cache points vary entry and byte limits together, so they neither isolate a replacement-policy effect nor locate a physical capacity frontier. The complete compact checkpoint may fit in host memory. Other representations, long contexts, shared-memory devices, and multimodal workloads remain outside the evaluated profile.

Statistical and measurement scope. The timing study contains five paired blocks of short fixed outputs, not 50 independent repetitions. Shared page and NFS caches can carry state across fresh servers. The descriptive resampling ranges therefore provide neither guaranteed coverage nor a significance or power result. Serial-window goodput excludes startup, gaps, and concurrency. Identical instrumentation controls one source of bias, but its overhead is unmeasured. The profiling study observes overlap in two separate requests; it does not identify the cause of the timing difference. Its target-process checks pass, while wrapper warnings and an unknown dropped-event count leave global trace completeness unverified. File-call wall time can include cache service and preemption, and shared NFS counters do not identify physical backend traffic.

Failure and verification scope. The component experiment runs real CUDA operations but injects a software failure or discards proof after valid fences. It does not exercise a driver failure, lost hardware event, or full-model uncertain completion. The HTTP experiment tests a client disconnect followed by a new request, not resumed execution or recovery from a poisoned owner. Neither experiment establishes the integrated five-class conservation invariant across a serving request. Final physical release remains unobserved. Unknown custody can reduce availability indefinitely; the design supplies no general in-place reset, durable crash recovery, or arbitrary cross-rank atomic commit.

Reproducibility scope. The supplementary materials support offline reconstruction of the public measurements and their exclusions. They do not independently replay private process authentication or recover omitted executables, native dependencies, model payloads, and live mapped-memory contents. Integrity hashes bind retained inputs but are not external attestations. Earlier rejected or incomplete studies remain separate rather than becoming successful repetitions.

9 Conclusion

Bounded storage-backed inference requires a lifetime contract as well as a cache policy. Ferrule connects source-bound planning and stage-local admission to exact completion, publication, and custody through retirement. Its bounded next-expert schedule preserves the blocking control's worker, budgets, arithmetic, and synchronous consumer proofs. In five paired blocks, lookahead completes the same checked workload with equal logical reads, zero wasted read bytes, less host demand waiting, and descriptive reductions of 8.18% in end-to-end latency and 11.24% in time to first content, with 10.91% higher qualified serial-window goodput. The additional experiments show bounded completion across three coupled cache budgets, limited measured read–kernel overlap, safe component abort or retained uncertainty, and fresh-request recovery after HTTP cancellation. These results support the mechanism within its measured scope while leaving complete physical accounting, integrated fault conservation, and final release open.

References

[1] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient Memory Management for Large Language Model Serving with PagedAttention, 2023. arXiv:2309.06180.

[2] Ying Sheng, Lianmin Zheng, Binhang Yuan, Zhuohan Li, Max Ryabinin, Daniel Y. Fu, Zhiqiang Xie, Beidi Chen, Clark Barrett, Joseph E. Gonzalez, Percy Liang, Christopher Ré, Ion Stoica, and Ce Zhang. FlexGen: High-Throughput Generative Inference of Large Language Models with a Single GPU, 2023. arXiv:2303.06865.

[3] Yixin Song, Zeyu Mi, Haotong Xie, and Haibo Chen. PowerInfer: Fast Large Language Model Serving with a Consumer-grade GPU, 2023. arXiv:2312.12456.

[4] Zhenliang Xue, Yixin Song, Zeyu Mi, Xinrui Zheng, Yubin Xia, and Haibo Chen. PowerInfer-2: Fast Large Language Model Inference on a Smartphone, 2024. arXiv:2406.06282.

[5] ZeRO-Inference: Democratizing massive model inference. DeepSpeed technical web page, September 2022. September 9, 2022; technical web page, not a conference paper.

A Additional Quality Detail and Separate Evidence

A.1 Numerical coverage

For each retained-fresh and ordinary schedule in Table 5, common-history and free-feedback streams each cover 27 calls and 9,187,840 vocabulary values; reset covers nine calls and 3,228,160 values, and fork covers one call and 248,320 values. For each cold-owner schedule, common history, feedback, and reset each cover nine calls and 3,228,160 values; fork covers one call and 248,320 values. Fingerprints identify compared outputs rather than adding logit observations. Ordinary execution does not observe diagnostic route or state fields. The fork check replays a same-history committed frontier; it does not test divergent KV copy-on-write or broad task accuracy.

The pressure study supplies narrower evidence at its three new cache points: complete visible outputs and actual generated IDs. It does not establish full-vocabulary, route, or internal-state equivalence at those settings. Likewise, the tiny component fixture tests lifecycle behavior, not the numerical quality of the complete 35B model.

A.2 Incomplete and non-pooled observations

Earlier rejected studies remain excluded from successful-result denominators, with their original outcomes retained in the supplementary materials. Table 11 summarizes the exclusions by scientific scope rather than by implementation chronology. Later corrections establish new measurements; they do not retrospectively complete a missing request or turn a rejected capture into an accepted repetition.

Separate evidence	Observed outcome	Treatment
Two earlier paired studies	Each attempts one lifecycle but completes none; all 120 HTTP requests and 50 measured QA slots unissued	Each retains five incomplete pairs and no aggregate
Earlier pressure study	Three requests complete, one is censored, eight unissued; only two complete HTTP canaries	No qualifying cache point; raw worker IDs do not repair missing HTTP termination
Pressure admission rejection	No server starts; all 12 requests unissued	No latency, memory, or I/O observation
Earlier profiler captures	Two collected captures rejected; other preparations stop before collection	Neither contributes an accepted arm; only the two fresh scoped captures support RQ3
Earlier numerical configurations	Initialization failures and observation-policy rejections coexist with some numerically accepted tests	Outcomes stay configuration-specific and are not added to current tests

Table 11: Non-pooled evidence. Missing execution or observation is not reported as zero cost or numerical failure. Detailed identities and diagnostics remain in the artifact documentation.

A.3 Earlier logical-demand observation

A separate, heavily instrumented single-lifecycle observation with the read pipeline disabled completed four serial requests. One was a two-token length/usage smoke; three passed visible-text and eight-token usage canaries. Generated IDs, logits, routes, and states were not observed. Its 30 decoder invocations recorded 36,240,064,128 logical reader bytes, 36,240,248,688 upload-interface

bytes, 11,519 expert uploads, 11,455 evictions, and zero expert hits. The final observed cache held 64 entries. These values describe an earlier logical-demand workload, not additional repetitions of either schedule in the paired experiment.

At the observed invocation boundaries, entry counts reconcile as

$$N_j = N_{j-1} + I_j - E_j, \tag{11}$$

where N_j is resident entries and I_j, E_j are installation and eviction deltas. The initial zero is implied by the first boundary, not directly measured. This count identity does not establish byte conservation or continuous occupancy. Historical plots and the detailed timing and memory samples remain in the supplementary materials rather than extending the current performance evidence.

A.4 Unmatched resident-system supplement

Two separate resident tensor-parallel blocks compared Ferrule with vLLM using fresh owners, three excluded QA requests, and five measured requests per window. The observed tradeoff differs by metric: Ferrule has higher output rate and lower mean end-to-end latency in both windows, while vLLM has lower TTFT, startup time, sampled device memory, and host PSS (Table 12).

Window	Output tok/s	TTFT ms	E2E ms	Startup s	GPU GiB/card	PSS GiB
Ferrule 1	14.317	176.248	523.399	349.585	21.04	61.05
vLLM 1	10.376	132.676	694.228	66.239	19.28	7.71
vLLM 2	10.330	134.651	699.213	62.814	19.28	7.32
Ferrule 2	14.804	171.333	515.106	366.133	21.04	60.14

Table 12: Separate resident observations in two blocks. TTFT and end-to-end values are request means; GPU memory and PSS are sampled maxima. Arithmetic and resource budgets are unmatched, so these are not comparative speedup estimates.

Both selected deployments use pipeline parallelism one and tensor parallelism two, but their arithmetic differs: Ferrule uses its qualified Mixed GemmEx/routing path, while vLLM uses BF16/FP8 Marlin execution. A 22 GiB per-device policy and a device-utilization fraction of 0.8 also do not match total working-set budgets. The descriptive output-rate ratios of 1.380 and 1.433 consequently do not establish a causal speedup or a state-of-the-art ranking. The measured vLLM version is 0.28.0 with CUDA 12.9 and Torch 2.13.0. Unpaired startup-metadata observations and further numerical comparisons are retained with the artifacts and are not combined with these windows.

The independent W8A16 strict numerical comparison fails logits, ordered routes, and state checks despite argmax agreement. That negative result remains a failure of its own quality contract and cannot be replaced by the successful Mixed-profile observations.