Storage-demand TP1 middle -02 | single DEBUG run, n=1

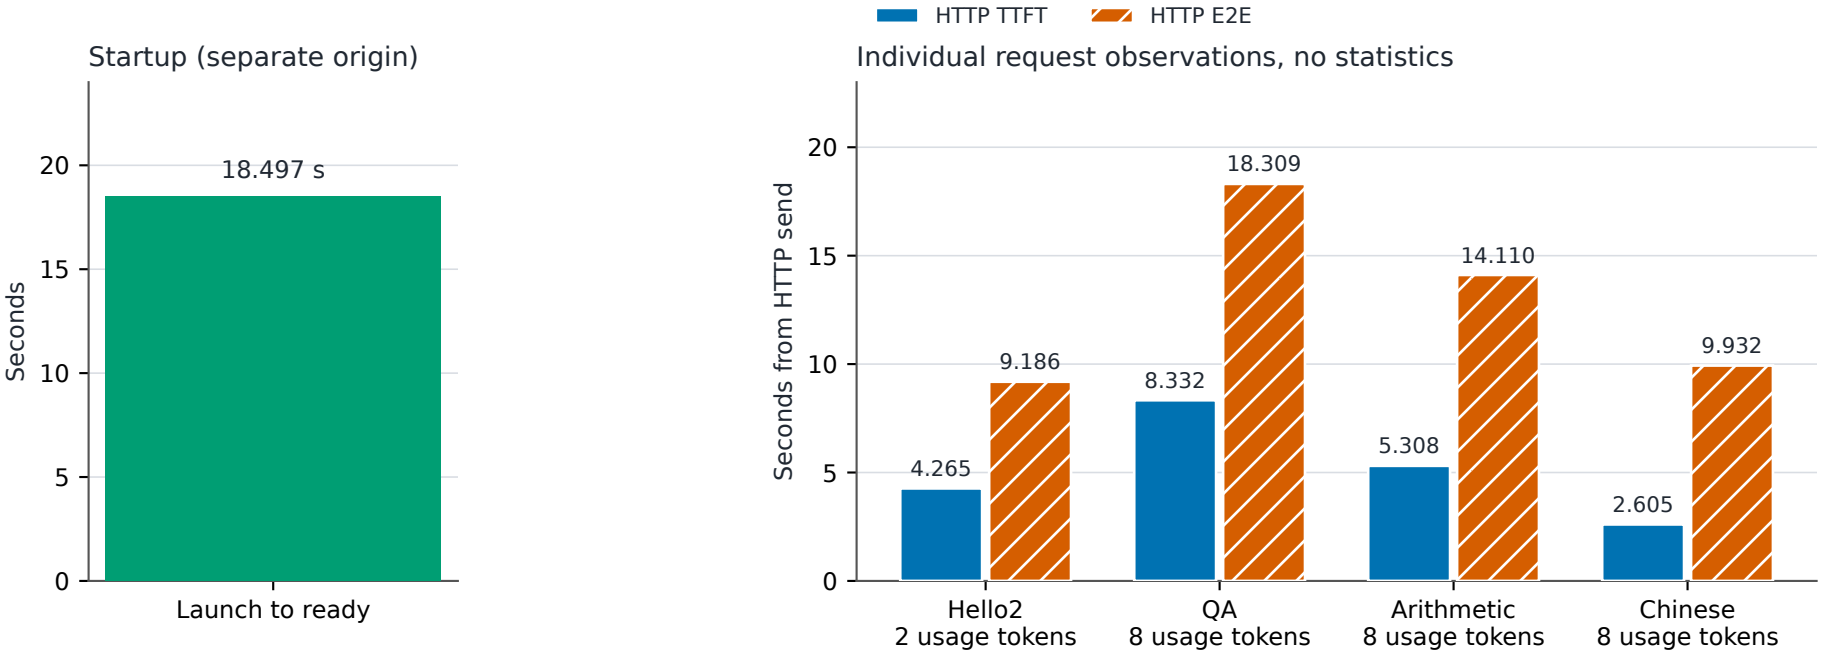

TTFT: send to first nonempty SSE content. E2E: send to EOF. DEBUG overhead unmeasured; no speedup claim.
Hello2: HTTP/usage only. Three canaries: text + usage checks only. Exact IDs and numeric acceptance unknown.