Ferrule: Bounded Storage-Backed Weight Residency

Lu Huanbing
Independent Researcher
luhuanbing084@gmail.com

Working draft — not a submission

Abstract

Storage-backed inference needs bounded materialization and safe reuse, not merely a small device cache. Ferrule connects source-bound plans, stage-local admission, exact completion identities and physical custody to bounded weight residency. Its next-expert lookahead and safe blocking control use the same positioned-read worker, host/device budgets and synchronous forward. After nine source-qualified factory gates, a preregistered study of Qwen3.5-35B-A3B completes five paired blocks, ten fresh server lifecycles and 120/120 HTTP requests. Worker-to-HTTP joins cover all 900 generated token IDs; 110 requests match exact eight-token oracles and ten are two-token smoke checks. Every lifecycle records identical logical reader work, zero wasted read bytes and a 16,777,984-byte logical host high-water below 64 MiB. Device-wide samples reach 4,125 MiB against a 7 GiB policy, not a certified physical peak. The exponentiated median paired log ratio gives 8.18% lower client E2E, 11.24% lower TTFT and 10.91% higher qualified serial-window goodput with lookahead; all five blocks show less host demand waiting. These are descriptive results from five blocks, not significance or state-of-the-art claims. Shared NFS-client counters do not establish NAS backend traffic, and host waits do not prove GPU overlap. Capacity frontiers, integrated fault testing and post-drop physical release remain open; physical-memory necessity and nonblocking execution are not claimed.

1 Introduction

Storage-backed weight residency lets an inference owner repeatedly materialize selected weights into a bounded execution cache. The problem is to bound those copies and reuse their capacity safely, whether or not the complete compact checkpoint could fit in host memory. Exceeding device memory, exceeding aggregate physical residency, and choosing a controlled cache budget are different conditions. Checkpoint file size, expanded weight size and the request working set are not interchangeable: the latter also includes activations, model state, staging, outstanding transfers, allocator/driver reserves, metadata and resident file-backed pages.

Ferrule follows *plan, admit, materialize, publish, execute, retire.* A source-bound plan fixes what is read; admission bounds covered claims; completion validates the requested generation; custody prevents reuse while physical references remain. Its concrete next-expert pipeline separates the read window from owner compute submission. A safe blocking control waits on the same worker immediately; lookahead submits one next selected read after current upload and before current compute submission. The whole forward remains synchronous. The question is whether this bounded scheduling change reduces waiting while preserving quality, logical work and resource limits, not whether a worker thread alone establishes hardware overlap.

Research questions.

RQ1 – bounded completion. Can a quality-accepted request finish with repeated materialization under declared accounting limits, and what physical memory is actually observed? A configured-budget point is not a capacity frontier or evidence that compact weights exceed physical memory.

RQ2 – request I/O. What demand is visible at the logical-reader and NFS-client levels after separating startup and request windows, and which attribution and backing-store quantities remain unknown?

RQ3 – safe scheduling. Under identical representation, quality, safety and budgets, how do blocking and bounded lookahead differ in host demand wait, speculative work and client outcomes? Correlated device overlap is a separate measurement question.

RQ4 – custody and failure. What closure is observed, and which fault cases still need to test stale publication, premature reuse and retained Unknown capacity?

Contributions and results. The paper contributes a resource model separating physical pools from accounting domains; a source-bound materialization contract with exact completion and custody; and structured normal, terminal and bounded-lookahead algorithms with explicit integration limits. Its evaluation connects these contracts to a completed, source-pinned serving experiment rather than to implementation intent alone.

On the current serving source cut, nine exact-once factory gates pass for constructor/provider and both schedules' full40, retained-fresh, ordinary and cold-owner paths. A separate preregistered HTTP study then completes five paired blocks, ten fresh lifecycles and all 120 requests, including 50 measured QA requests. It joins 900 actual worker token IDs to HTTP terminal evidence, keeping eight-token oracle checks and two-token smoke checks distinct. Every lifecycle records the same logical work, zero wasted read bytes and a logical host high-water below its 64 MiB limit. With the paired block as the analysis unit, lookahead has 8.18% lower client E2E, 11.24% lower TTFT and 10.91% higher qualified serial-window goodput. All five blocks show lower host demand waiting. These descriptive results support bounded residency with measured wait reduction at this point, not statistical coverage, general server throughput or a causal overlap claim.

The evidence has deliberate boundaries. Device samples are not certified physical peaks; shared NFS counters are not NAS backend traffic; process drain and known owner-local closure are not post-drop physical release. Integrated fault injection remains pending. Earlier qualification cuts, two stopped studies and four historical DEBUG plots are retained separately, not borrowed as successful repetitions. The resident vLLM supplement has unmatched arithmetic and total budgets and is not a SOTA comparison. Storage inference and prefetch are prior art; no first-system, physical-memory necessity, universal registry, multimodal or nonblocking-forward claim is made.

Section 2 defines the resource and execution contracts. Sections 3–5 give the normal path, invariants and algorithms; Section 6 maps their implementation boundaries. Section 7 proceeds from current factory quality to serving quality/budgets, equal work/I/O, paired outcomes and fault-contract limits. Related work and limitations follow, with historical evidence in Appendix A.

2 Resource Model and Execution Contracts

Symbol	Meaning and units
π, r	Execution/quality profile and weight representation/placement
$S_{\text{ckpt}}, W_{\text{compact}}, W_{\text{full}}(r)$	Checkpoint, complete compact, and full-resident weight bytes
$d \in \mathcal{D}_{\text{phys}}, B_d$	Disjoint physical domain and available physical byte capacity
$a \in \mathcal{D}_{\text{acct}}, b_a$	Covered accounting domain and configured limit in that domain's unit
$M_d(t), M_d^{\text{peak}}$	Deduplicated physical working-set bytes at time t, and its true peak
$\widehat{M}_d(t_i), \widehat{M}_d^{\max}$	Reported sample and maximum over stated sampling times; not a true peak
$U_a(t), c_a$	Charged occupancy and additional proposed claim, in domain a's unit
$\delta, \rho_a, b_a^{\text{eff}}(\delta)$	Demand class, execution reserve, and its policy-accessible accounting ceiling
F_a, R_a, I_a, L_a, T_a	Free, reserved, provider-in-flight, live, and retained claims
$P = (K, \boldsymbol{q}, \boldsymbol{\ell})$	Frozen plan: exact key, stage claim vectors, resident claim vector
K, g_s, g_x	Full resource key, source generation, destination reuse generation
o, e, J	Owned operation, completion evidence, provisional owner journal
$\Omega, k, w, \mu_o[s]$	Post-detachment worklist, per-pass visit limit, persistent cursor, and exact-stage cancellation marker
$\mathcal{V}_q, L_q, H_q, \Delta_q$	Request q's invocations, logical reader bytes, facade H2D bytes, and $H_q - L_q$
N_j, I_j, E_j	Expert entries at invocation boundary j, installs/uploads, and evictions
$X_j, Q_j, S_j, C_j^{\text{cache}}, Z_j$	Resident, pending-upload, scratch, cache charge, and retained Unknown subset gauges
$C_{\text{peak}}^{\text{cache}}$	Lifetime cache-accounting high-water; not a total physical-owner peak
$P_q^{\text{net}}, P_q^{\text{blk}}$	Physical network and backing-block bytes attributed to request q
$b_{\text{cache}}, b_{\text{scratch}}$	Configured cache-credit and scratch limits; neither is a physical-domain bound

Table 1: Notation used by the contracts, algorithms, and evaluation. Accounting limits are never substituted for physical capacity.

2.1 Representations and one notation

The target is a complete request or forward output under a declared model, arithmetic, placement, and quality profile π. Text decoding is the current instance: prefill, multiple decode steps, and KV/state lifetime. Vision, audio, and combined modalities require their own complete-output contracts and remain future implementation and evaluation work.

A representation r identifies payload, decoding metadata, expansion, and required physical copies. Checkpoint bytes S_{ckpt} include the specified files and container layout. Complete compact weights W_{compact} include all encoded weights, scales, and decoding metadata. Full-resident weight demand $W_{\text{full}}(r)$ is the footprint of all weights under representation and placement r; it is weight-only, not the complete inference working set. Expanded execution weights may be larger than compact weights and need not all be live at once. Aliased views are not extra copies; genuinely copied payloads are.

2.2 Physical capacity and measured working set

Physical capacity counts disjoint resident-memory pools once:

$$B_{\text{mem}} = \sum_{d \in \mathcal{D}_{\text{phys}}} B_d. \tag{1}$$

For a declared representation and placement, consider

$$W_{\text{full}}(r) > B_{\text{mem}}. \tag{2}$$

The inequality rules out aggregate full residency of *that* representation/placement, not streaming feasibility. Disk is excluded. Discrete host and GPU pools may be added; host and accelerator aliases

of one physical pool may not. Unified virtual addressing over separate physical pools does not merge those pools. Report installed capacity, fixed exclusions, co-tenants, copies, and placement/migration policy for each evaluated domain. Per-domain accessibility and placement remain constraints even when the aggregate sum is sufficient.

Define $M_d(t)$ as physical bytes resident in domain d that are attributable to the selected inference deployment at time t. Count resident weights, expansion/workspace, activations, model state, staging, outstanding and retained buffers, metadata, allocator/driver reserves, and attributable file-backed pages, deduplicating shared physical allocations. A full attribution requires fixed and external consumers to be measured or excluded explicitly; a process heap or device counter alone does not supply it. The desired feasibility condition and the reported sampling statistic are different:

$$\begin{aligned} M_d^{\mathrm{peak}} &= \sup_{t\in\mathcal{T}} M_d(t) \le B_d \quad \text{for each } d, \\ \widehat{M}_d^{\max} &= \max_{t_i\in\mathcal{T}} \widehat{M}_d(t_i) \qquad \text{over the declared samples.} \end{aligned} \tag{3}$$

$\mathcal{T}$ is the declared startup/request/cleanup interval. A sampled maximum can miss a transient peak; selected-device telemetry also includes unattributed processes, and tree PSS does not cover every machine consumer. Thus those proxies are not silently identified with $M_d(t)$. Independent component maxima must not be added into a simultaneous working-set peak. RQ1 and Figure 4 report the current logical host high-water and device samples separately; neither converts accounting or sample maxima into certified physical bounds.

The stronger, optional storage-necessity claim additionally asks whether *all compact weights and metadata* can remain resident with online expansion under the quality contract. It is not a prerequisite for the bounded-residency mechanism studied here. Failure to fit expanded weights is insufficient if that compact alternative fits. A low configured cache budget is likewise not physical host-memory insufficiency. Storage necessity is scoped to evaluated representations, not a proof against every possible compression scheme.

2.3 Accounting and admission contract

A covered accounting domain a may count bytes, slots, pages, or queue entries. Its limit b_a is configured, not installed physical capacity; accounting domains can overlap or omit parts of a pool and cannot in general be summed. A cache limit covers its cache, not the whole working set. The necessary covered-domain capacity condition is

$$\forall a \in \mathcal{D}_{\mathrm{acct}}, \qquad U_a(t) + c_a \le b_a. \tag{4}$$

Here c_a is the additional charge to acquire, not a second charge for an already held grant. A revisit preserves that grant and rechecks only unmet claims. The inequality is not sufficient for admission: the owner must also validate canonical claims and units, arithmetic overflow, source/placement/backend compatibility, actual reservation and grant authority, and the selected demand policy. With execution reserve $0 \le \rho_a \le b_a$, the policy-accessible ceiling is

$$b_a^{\mathrm{eff}}(\delta) = \begin{cases} b_a, & \delta = \mathsf{Required}, \\ b_a - \rho_a, & \delta \in \{\mathsf{Warmup}, \mathsf{Prefetch}\}. \end{cases} \tag{5}$$

A non-required demand cannot consume the execution reserve even if Equation 4 holds. Required execution may use that reserve, not exceed the hard ceiling. The reserve protects accounting capacity from speculation, not eventual progress against a stalled provider.

The abstract admission result has three cases. Rejected includes invalid plans and an intrinsically impossible stage: for example, a required claim exceeding b_a, or a non-required claim exceeding its unchanged policy-accessible ceiling even with no other occupancy. Waiting cannot fix such a stage; it needs rejection or an explicitly changed, revalidated plan or demand policy. Wait means the otherwise admissible stage is blocked by current occupancy, including reserve-protected capacity. It retains existing claims and registers a revisit condition rather than recharging or redispatching them. Admitted requires all authority, compatibility, and policy checks as well as capacity. These are explanatory result classes, not a new backend API, and do not imply that all future stages can be admitted atomically or that their resource waits are acyclic.

Each claim has an authoritative owner, unit, and end condition. Canonicalizing same-kind claims is not deduplication of arbitrary aliased allocations. A bounded request channel does not bound all downstream buffers. Map claims to the actual ledger and physical allocations on the selected path; do not infer one global broker from a common interface.

The plan P binds K, read/upload/install claim vectors $\boldsymbol{q}$, and persistent residency $\boldsymbol{\ell}$. K includes model instance, source identity, semantic content descriptor, encoding, backend/device, and g_s, g_x. Alignment and multiple extents may change staged byte counts; expansion may change execution bytes. The destination authority supplies the actual reservation and g_x before hard admission. Publication consumes validated bindings, not requested addresses. Algorithm 1 uses the capacity and policy checks in Equations 4 and 5 before each physical dispatch.

OS page cache, storage-server cache, metadata, and driver reserves are not implicitly under runtime credit control. Resident file-backed pages count as memory; the backing file adds no capacity. Swap must be disabled or explicitly accounted for. A logical read, page fault, or migration between physical pools is not evidence of a physical storage read. RQ2 consequently distinguishes $L_q, H_q, \Delta_q, P_q^{\text{net}}, P_q^{\text{blk}}$ rather than translating them into one bandwidth number.

2.4 Quality, completion, and progress contracts

Protocol exactness means compatible sharing, exact completion identity, authorized publication, and no reuse before physical references end. It is separate from numerical/task quality. A quality contract fixes complete outputs, independent reference, arithmetic/state precision, inputs, and acceptance thresholds. Visible text, usage, generated IDs, full-vocabulary logits, ordered routes, and internal states are different checks; argmax agreement does not establish numerical agreement. Quantized checkpoint storage alone does not specify kernel or KV arithmetic.

Completion evidence must name its operation, full key, submitted stage, generations, outcome-specific byte count, and any required physical fence. Rejecting an event with mismatched identity, stage, generation, or byte contract is not the same as accepting a matching event whose validated `CompletionOutcome::Stale` is a non-success result. The former supplies no mutation/release authority; the latter selects terminal cleanup of its named operation, never readiness or publication of a newer generation. Returning named read custody is separate from releasing the read-slot and storage-read claims; pinned host capacity remains charged through upload or proven cleanup. Publication preflight similarly distinguishes Ready, Blocked by live replacement custody, and Rejected by an invalid binding/conflict. Rejected publication retains its journal and remaining custody for cleanup.

Only validated producer success proves readiness of that stage, not quiescence of a later consumer. Only owner-accepted cancellation selects a canceled caller outcome and detaches demand; a cancellation request or provider acceptance alone does not prove physical completion. Shared loads retain their remaining owners. Pending/Idle is retained as Pending only for a positively known original pollable obligation; otherwise it retains Unknown custody. Unknown means remaining

physical references cannot be proved. Unknown retains allocation and credits, possibly indefinitely. A late exact scoped completion can close its named registry obligation but cannot clear physical-owner poison or quarantine. Bounded cleanup passes retain unresolved obligations and a traversal cursor across wakes and revisits, so the same first items do not hide unvisited obligations. Ambiguous cancellation replies remain non-retryable without exact owner evidence; they are not treated as known non-acceptance. Neither that scheduling contract nor Unknown retention promises eventual reclamation or availability.

Conditional liveness requires feasible per-domain resources, no cyclic resource waits, fair progress and completion handling, live providers, and eventually observable completion. A blocking provider or stalled progress worker can violate these conditions. An asynchronous API, event-driven progress, and hardware overlap are separate properties. Neither algorithms nor current receipts establish global nonblocking execution, lock freedom, durable crash recovery, or arbitrary multi-owner atomic commit.

3 A Normal Profile Walkthrough

Consider a profile π with a nonresident weight dependency. The following walkthrough composes protocol roles; it is not a claim that every TP1 runner uses the general registry. It connects the resource model to the algorithms and to the observables evaluated in Section 7.

Plan and admit. The adapter binds source descriptors, representation, placement, and workspace. The destination authority supplies the actual reservation and reuse generation. The resulting $P = (K, \boldsymbol{q}, \boldsymbol{\ell})$ is frozen before hard admission. Equation 4 is a necessary covered-domain check, not complete admission or a sum of heterogeneous budgets. The stage also passes authority, compatibility, intrinsic-capacity, and execution-reserve checks in Section 2. An impossible stage is rejected; only otherwise admissible demand blocked by current occupancy waits. Before preparation can submit physical work, the owner records provisional state and cleanup intent in journal J.

Read, transfer, and install. A new load admits read/staging claims and submits once. Exact read completion returns named read custody. On read success, the owner then explicitly releases held ReadSlot and StorageReadBytes credits while retaining the pinned buffer and PinnedHostBytes charge for upload. Custody return alone is not that credit discharge. Upload needs its own admission and retained fence; its completion ends DMA custody but not destination ownership. Installation admits its own claims. Replacement also needs evidence that old consumers have stopped using the old binding. An ambiguous submission retains its ticket, allocations, and claims even when no public handle is returned.

Publish and consume. Install success is validated against operation, key, stage, bytes, and both generations. Publication preflight checks the actual binding and replacement rules. Ready permits resident-grant transfer and exact waiter resolution; Blocked waits for replacement leases/custody to end; Rejected preserves the original journal, grants, and physical binding for terminal cleanup instead of publishing or refunding residency. Only Ready retires the load operation by transferring its resident grant. This is not eviction: resident bytes remain charged. A consumer revalidates its dependency and lease epochs and obtains resume admission before executing. A compatible resident hit skips materialization; a compatible in-flight load can be joined only on paths that implement sharing.

Bounded next-expert scheduling. On the concrete routed-expert path, the owner first uploads the current expert and retires its temporary host payload aliases. It can then submit one read for the next selected, nonresident expert before submitting current compute. A read-only residency hint neither pins that next expert nor changes cache replacement order. Blocking uses the same worker and waits at demand instead. This split is a scheduling candidate, not a measured GPU overlap or an asynchronous forward API (Algorithm 3).

End and retire. Consumer completion returns only the custody discharged by its adapter. Ending/publication and post-ending cleanup are separate phases. Prepared-KV owners require exact install acknowledgments before logical publication and retirement acknowledgments before displaced pages are reused. Independent cache pins and persistent state survive request completion. Cancellation changes the caller outcome, not these end conditions; Unknown may retain capacity indefinitely.

The walkthrough supplies three different evidence gates: startup final-claim completion, materialization producer/replacement completion, and consumer/ ending completion. None substitutes for another. The experiment should record those transitions alongside complete-output quality, physical memory samples, and request I/O. The arrows in Figure 1 are conceptual dependencies, not measured hardware overlap.

4 Design Invariants

These are intended contracts for the implemented boundaries, not completed formal verification or independently measured properties of every profile.

I1: bounded, uniquely owned claims. Admitted claims must preserve $U_a + c_a \le b_a$, together with the demand policy and authority checks; this inequality alone is not admission. For each accounting domain, the intended semantic partition is

$$\begin{aligned} b_a &= F_a + R_a + I_a + L_a + T_a, \\ U_a &= R_a + I_a + L_a + T_a, \qquad F_a = b_a - U_a. \end{aligned} \tag{6}$$

Each claim occupies exactly one class: free, reserved, provider-in-flight, live, or retained. Different claims of one operation can occupy different classes. Unknown is classified in T_a, not charged again as $I_a + T_a$. Returning provider custody does not necessarily decrease U_a: an explicit release or ownership transfer is separate. The broker records capacity, occupancy, authenticated owner, and a submitted bit, not five literal bucket fields. Equation 6 is an intended invariant; the serving read ledger does not independently measure this general partition under faults. RQ4 separates observed owner-local closure from the missing integrated fault and physical-release evidence.

I2: exact evidence before mutation. A completion must match o, K, submitted stage, g_s, g_x, and outcome-specific bytes. Success requires the full expected amount; partial failure is not readiness. Identity-stale, retired, unowned, wrong-stage, or generation-mismatched events are rejected before mutation and cannot release a newer generation's grants. In contrast, a matching completion whose validated `CompletionOutcome::Stale` reports non-success ends the named stage according to its proof and selects terminal cleanup; it is not an identity rejection and does not authorize publication. Waiter/request/dependency epochs and mapping epochs have different scopes; a wake notification is not validation of any of them.

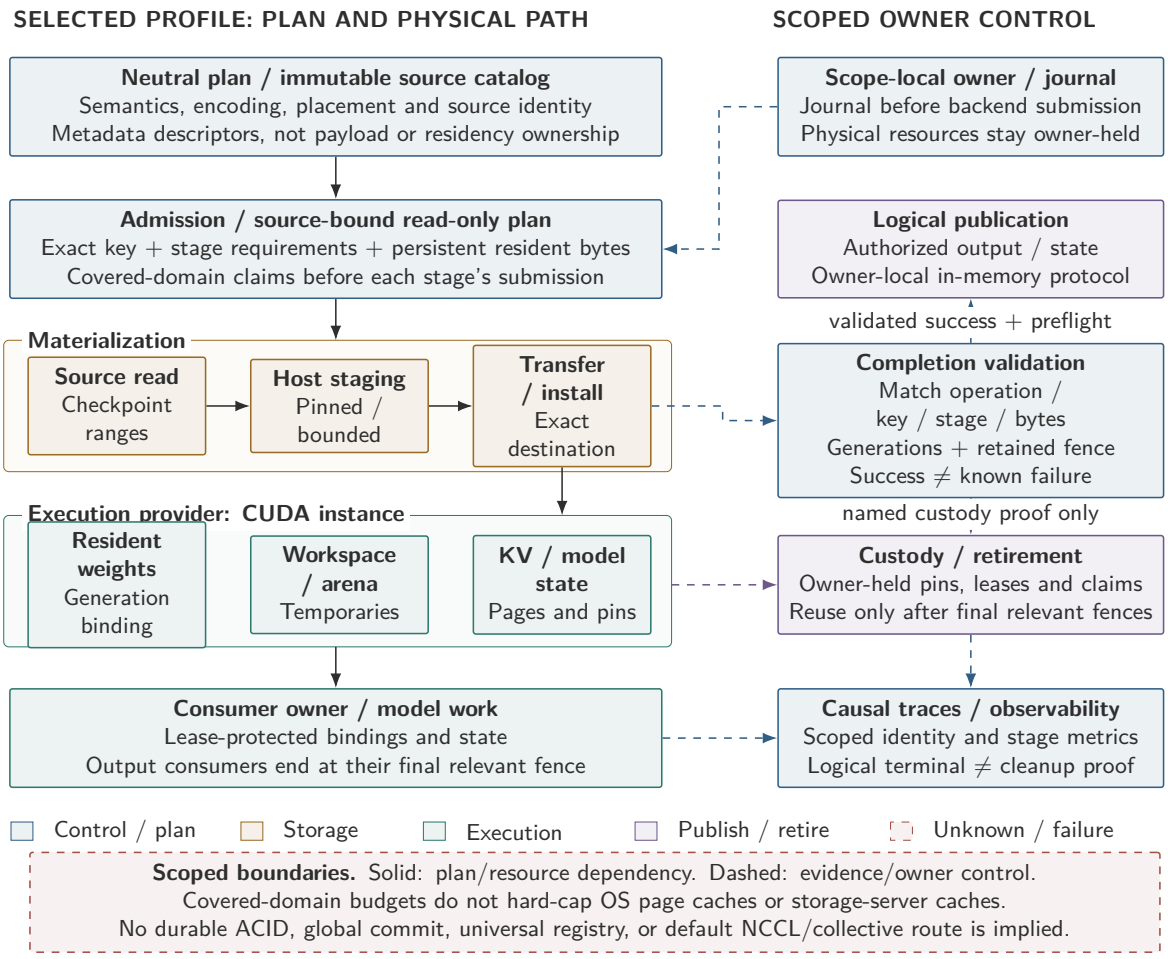


Figure 1: Conceptual, profile-scoped architecture. The shared palette uses blue for control/planning/validation, ochre for storage/materialization, teal for execution/provider resources, violet for publication/custody/retirement, and brick for Unknown/failure. Named nodes and labeled swatches carry the meaning independently of color. Solid arrows denote dependencies; dashed arrows name evidence or owner-control gates. Source planning and covered-domain admission precede materialization; providers retain physical resources. CUDA is one provider instance. No universal registry, OS-cache hard cap, durable/cross-rank ACID, or default NCCL/device-collective route is implied.

I3: custody follows physical work. Every outstanding physical reference is required to remain reachable from an authoritative owner, including on submission, notification, preparation, or cleanup errors. Read return, upload-fence return, resident transfer, and consumer retirement close different obligations. An address descriptor is not allocation ownership or a completion certificate. A read snapshot is not mutation authority.

I4: publication and reuse have different proofs. Producer success makes a candidate ready. Publication additionally checks the actual binding and authorization; old-consumer quiescence and retirement permit replacement reuse. Typed committed-KV sources and append witnesses are revalidated against the current page authority, and zero-reference pages are reused only after retirement confirmation. Several participant ACKs establish this scoped lifecycle order, not arbitrary distributed atomic commit.

I5: terminal demand does not erase obligations. Owner-accepted cancellation detaches only its demand, preserving other waiters and persistent owners. An unsubmitted shared load is preserved under its remaining authority or handed off with acknowledgment, never discarded because one demand ended. Provider cancellation acceptance is recorded once per exact operation/stage/generation; it is not a quiescence certificate. It cannot reverse an irreversible install/publish intent. Pending cleanup polls the original identity and arguments without redispatch. Unknown retains physical payload and credits and preserves applicable owner poison or quarantine. A matching later registry completion may close a named stage; it cannot heal a separately poisoned physical owner. No general in-place reset/ replay or unconditional eventual reclamation is asserted.

The testable consequences are no stale publication, no duplicate dispatch, no premature slab/page reuse, and retained capacity when proof is missing. RQ1 checks bounded completion, RQ2 checks the load demand, RQ3 checks progress and physical intervals, and RQ4 checks these invariants under faults. A process exit or idle sample does not independently prove any final owner ledger.

5 Lifecycle and Bounded Scheduling Algorithms

The pseudocode names protocol roles and abstract result classes, not new provider APIs. Its records and journal persist across calls. AdmitStage validates intrinsic feasibility, canonical claims, authority, compatibility, and demand/reserve policy before acquiring that stage's grants. An added claim $c_a > b_a^{\text{eff}}(\delta)$ is intrinsically impossible under that policy; an otherwise feasible claim blocked by current $U_a + c_a > b_a^{\text{eff}}(\delta)$ waits. The authoritative owner rechecks capacity on acquisition, without implying a cross-owner atomic reservation. Rejected means no further dispatch under the unchanged plan; Wait preserves already held custody and arms a budget/owner-progress revisit. RetainCleanup records the primary reason and original payload, then selects the cleanup protocol in Algorithm 2; it does not recreate a ticket or discard other demand. Publication Rejected is the abstract class for preflight validation/conflict errors, distinct from a live-custody Blocked result. Rejection after install does not undo the physical installation. The owner journal records applied custody returns and releases so later cleanup advances only residual obligations, without applying a return twice. Cleanup selection is latched: subsequent calls cannot restart normal dispatch or replace the primary failure reason. Pending/Idle requires a positively known original pollable obligation; otherwise its custody is Unknown and retained. Unknown follows cleanup without clearing physical-owner poison.

A Terminal load result selects cleanup, not physical closure. Identity rejection leaves the original operation owned and pollable; a validated Stale outcome instead follows its terminal retirement

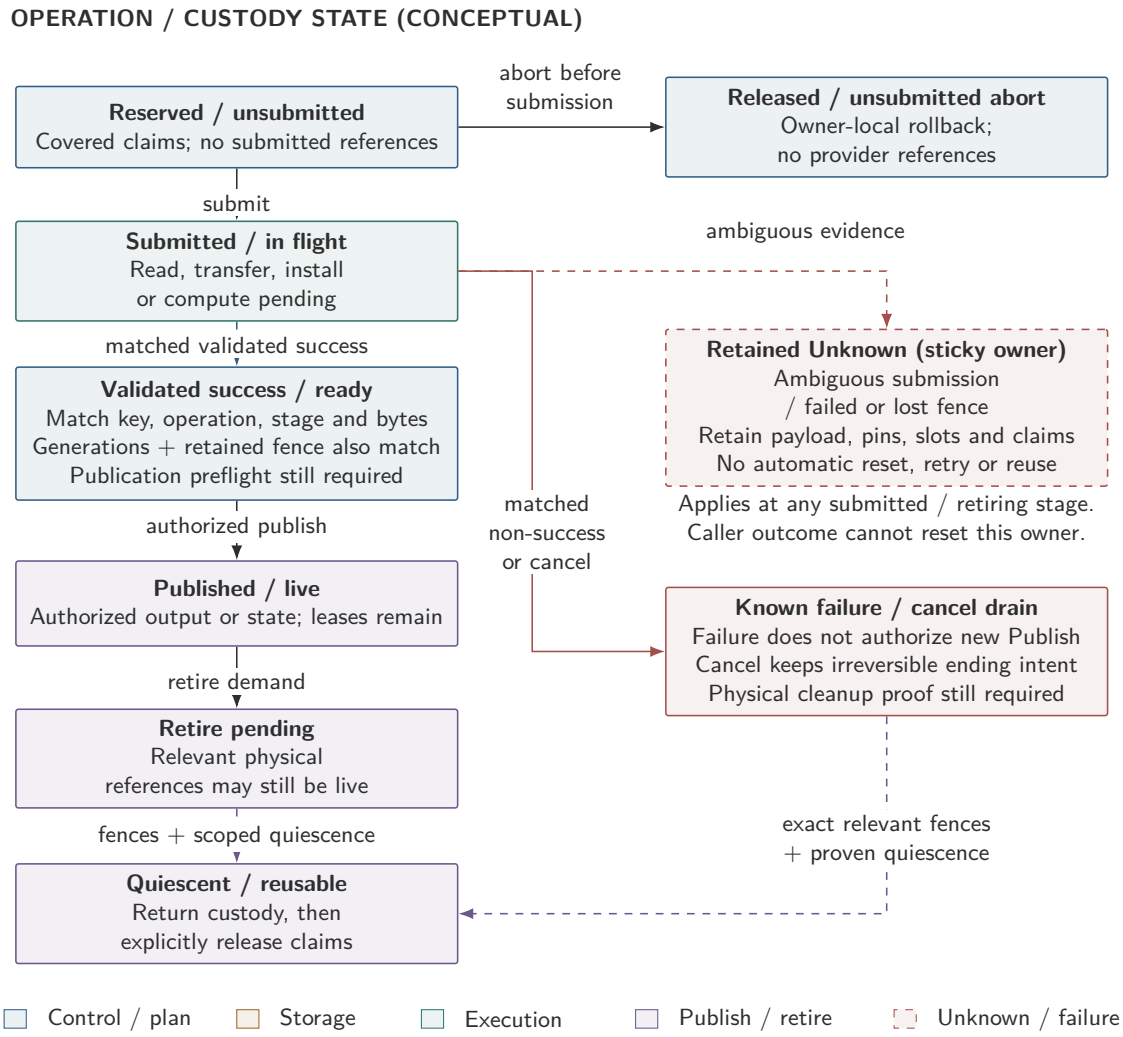


Figure 2: Conceptual operation/custody states, not one Rust enum. Labeled roles retain the shared blue planning/validation, ochre storage, teal execution, violet publication/retirement, and brick Unknown/failure palette. Only exact validated success plus publication preflight authorize new publication. Known non-success drains the named stage, not readiness; cancellation keeps irreversible ending intent. Dashed-border physical-owner Unknown retains payload, pins, slots, and claims and has no automatic recovery/reuse edge. Closing a matching registry-stage obligation does not heal a separately poisoned owner. Logical outcomes and charged resources are separate axes.

Algorithm 1 Progress one exact materialization operation

Inputs: P : Plan, v : Provider, $\mathcal{L}$: Ledger, δ : Demand, J : Journal
Outputs: h : {Ready, Pending, Terminal}, o : LoadRecord; residual custody stays reachable

State: persistent o : LoadRecord; s : Stage; e : Evidence; p : PublicationResult; α : AdmissionResult
Preconditions: frozen plan, exact destination, authoritative journal; residency/sharing checked
if cleanup is selected or o has retained Unknown **then**
    preserve J, o; continue only Algorithm 2
    return (Terminal, o)
end if
while $o.phase \neq$ Resident **do**
    if $o.phase =$ Installed **then**
        Publication: $p \leftarrow$ Preflight(o)
        if $p =$ Ready **then**
            publish exact binding; transfer resident grant
            resolve exact waiters; retire once; $o.phase \leftarrow$ Resident
        else if $p =$ Blocked **then**
            retain J, o; arm replacement-custody revisit
            return (Pending, o)
        else if $p =$ Rejected **then**
            RetainCleanup(J, o, p); **return**(Terminal, o)
        end if
    else
        $s \leftarrow o.stage$
        if stage s is not submitted **then**
            Admission: validate/canonicalize units, overflow, authority,
            source/placement/backend compatibility, and demand policy
            if validation fails or $\exists a : c_a > b_a^{\text{eff}}(\delta)$ **then**
                $\alpha \leftarrow$ Rejected with invalid-plan/intrinsic-capacity reason
                RetainCleanup(J, o, α); **return**(Terminal, o)
            else if $\exists a : U_a + c_a > b_a^{\text{eff}}(\delta)$ **then**
                $\alpha \leftarrow$ Wait; retain held claims; arm admission revisit
                return (Pending, o)
            else
                acquire owner-rechecked stage grants; $\alpha \leftarrow$ Admitted
            end if
            journal stage custody; SubmitOnce(v, o, s)
            if submission fails or is ambiguous **then**
                RetainCleanup($J, o,$ SubmissionError); **return**(Terminal, o)
            end if
        end if
        Completion: $e \leftarrow$ PollOriginal(v, o, s)
        if e is Pending/Idle and the original obligation is positively known pollable **then**
            retain o; arm completion/owner-progress revisit
            return (Pending, o)
        else if e is an identity/stage/generation/byte-contract mismatch **then**
            reject event without mutation; retain o and revisit
            return (Pending, o)
        else if e is Pending/Idle without that proof, a fault, or lacks physical proof **then**
            retain Unknown; RetainCleanup(J, o, e); **return**(Terminal, o)
        end if
        apply exact validated stage-custody return; retain residual claims
        if $e.outcome \in$ {Failed, Cancelled, Stale} **then**
            validated non-success: RetainCleanup($J, o, e.outcome$)
            return (Terminal, o)
        else if e is read success **then**
            release held ReadSlot/StorageReadBytes credits; retain pinned host charge
            $o.stage \leftarrow$ Upload; clear only the completed read ticket
        else if e is upload success **then**
            discharge upload/pinned claims and slab after exact fence; retain destination
            $o.stage \leftarrow$ Install; clear only the completed upload ticket
        else
            exact install success: $o.phase \leftarrow$ Installed
        end if
    end if
end while
return (Ready, o)

reason. A validated non-success can return only the custody named by its stage proof, with remaining credit discharge and physical retirement left to cleanup. No read, upload, install, or publication gate substitutes for a later consumer fence.

Algorithm 1 advances a load, not an entire request. Its record persists across Pending returns; fresh records start in the read-admission phase, with the frozen plan and exactly-once retirement authority. When every dependency is ready, the consumer revalidates the exact lease set and any typed read snapshot, acquires ready-cohort/resume claims, and submits execution. Pending execution retains its original payload. Only validated execution success enters the existing ending phase. Prepared-KV profiles preflight and revalidate the participants, dispatch install once, and poll that identity for exact ACKs. Other profiles advance their existing provider ending. Logical publication follows those ACKs; post-ending cleanup cannot resubmit ending. Displaced state retires on its own ACKs, and page retirement is confirmed before reuse. Figure 3 shows this scoped sequence.

Persistent cleanup and cancellation state. The terminal authority first accepts or rejects the requested caller outcome. Only an accepted terminal selection detaches that request's demand; shared, prefetch, and persistent owners survive. After detachment, Ω is a finite snapshot by reference of the affected obligations reachable through J: shared reservations, submitted tickets, ending/cleanup payloads, and retained claims. Removing an item from this snapshot does not remove it from its authoritative owner. Sharing and cancellation legality are rechecked at action time, not inferred from the earlier snapshot. A handoff removes local custody only after another authoritative owner acknowledges it; otherwise the original record stays reachable and charged. On revisits, the selected caller outcome and demand detachment are not applied again. A persistent cursor w starts the next snapshot after the last visited identity, including when that item is unresolved, and wraps at the end. Retired or newly added obligations are handled by the authoritative worklist, not by restarting every pass at its head or permanently skipping items before the cursor. ResumeOrSnapshot first resumes the persisted unvisited cohort; new obligations cannot overtake it, and visited unresolved items move behind unvisited ones. Repeated passes over a finite reachable set must examine every item. This is a scheduling requirement, not measured starvation freedom.

The persistent marker $\mu_o[s]$ records None, Pending, Submitted, or Uncertain for operation o and exact stage s. Its identity also includes the full key and source/destination generations. CancelOnce may call the provider only if cancellation is legal, no independent demand remains, no irreversible ending is reversed, and $\mu_o[s] \in \{\mathsf{None}, \mathsf{Pending}\}$. Provider acceptance records Submitted; later passes poll/drain rather than resubmit that stage's cancellation. Known non-acceptance retains Pending with exact arguments for an owner-authorized retry. An ambiguous return latches Uncertain and retains Unknown custody: later passes cannot retry it as though the provider had rejected cancellation. Uncertain is a cancellation-marker state, not proof that physical-owner Unknown has ended. A new stage does not inherit an old stage's submitted marker. For a positively unsubmitted reservation, DiscardOnce follows the same marker rule if provider cancellation is needed, or the owner's exact safe preparation-discard protocol otherwise. Neither marker nor acceptance proves that submitted physical references have ended.

A pass visits at most k obligations from its finite snapshot, with at most one observation and one cleanup advancement per visited item and no redispatch of an accepted or ambiguous stage cancellation. The remaining snapshot is persisted before return; unvisited and unresolved obligations stay in persistent owner records. Cursor advancement keeps earlier Pending/Unknown items from hiding later items on every pass. Matching completion, accepted handoff, budget or lease release, and owner progress wake a later pass; without a notification, the known pollable path requires a

Algorithm 2 One bounded terminal-custody pass

Inputs: J : Journal, i : TerminalIntent, $k : \mathbb{N}_{>0}$
Outputs: y : Outcome, $h : \{\mathsf{Closed}, \mathsf{Pending}, \mathsf{UnknownRetained}\}$; unresolved custody persists

State: Ω : Worklist; $n : \mathbb{N}$; o : Obligation; s : Stage; e : Evidence; γ : CancelReply; β : CleanupReply; persistent w : Cursor, $\mu_o[s]$: CancelMarker
Preconditions: owner authority and exact identities; independent owners, irreversible intent, and live pins preserved
if $i = \mathsf{Cancel}$ and the terminal owner rejects cancellation **then**
  return $(\mathrm{CurrentOutcome}(J), \mathrm{CustodyStatus}(J))$
end if
Outcome: latch owner-accepted y; detach terminating demand once
preserve irreversible intent; suppress success only for accepted cancellation
$\Omega \leftarrow \mathrm{ResumeOrSnapshot}(J, w)$ after detachment; $n \leftarrow \min(k, |\Omega|)$
while $n > 0$ **do**
  $o \leftarrow \mathrm{Pop}(\Omega)$; $s \leftarrow o.stage$; $n \leftarrow n - 1$
  if another waiter/prefetch/persistent owner still holds o **then**
    preserve shared load or ACK-handoff; no cancel/discard or credit refund
  else if o has sticky physical-owner Unknown **then**
    retain payload, charge, and poison; block unsafe reuse
    if late exact scoped registry-stage completion is available **then**
      close only that named registry obligation; never clear owner poison
    end if
  else if o is positively unsubmitted **then**
    Discard: $\mathrm{DiscardOnce}(o, \mu_o[s])$
    if exact safe-discard proof is present **then**
      discharge only eligible held claims; consume retirement authority once
    end if
  else
    Drain: $e \leftarrow \mathrm{ObserveOriginalOnce}(o)$
    if e mismatches identity/stage/generation/byte contract **then**
      reject event without mutation; preserve original o
    else if e is validated and proves named stage-custody return **then**
      apply return; validated Failed/Cancelled/Stale selects terminal cleanup only
      Cleanup: $\beta \leftarrow \mathrm{AdvanceOriginalCleanupOnce}(o)$
      if $\beta = \mathsf{Error}$ **then**
        record secondary error; retain primary/phase/arguments; no ending redispatch
        keep custody Pending only if original cleanup is known pollable; else retain Unknown
      end if
      discharge only proved claims; account residency; confirm retirement before reuse
    else if e is Pending/Idle and the original obligation is positively known pollable **then**
      if cancellation is legal/unshared and $\mu_o[s] \in \{\mathsf{None}, \mathsf{Pending}\}$ **then**
        $\gamma \leftarrow \mathrm{CancelOnce}(o, \mu_o[s])$
        if $\gamma = \mathsf{Accepted}$ **then**
          $\mu_o[s] \leftarrow \mathsf{Submitted}$; still await physical evidence
        else if $\gamma = \mathsf{NotAccepted}$ **then**
          $\mu_o[s] \leftarrow \mathsf{Pending}$; retain exact retry arguments
        else
          $\mu_o[s] \leftarrow \mathsf{Uncertain}$; retain Unknown custody; no retry
        end if
      end if
    else
      Unknown: classify held claims in T_a once, without a second charge
      retain physical payload/journal and applicable quarantine; no reset/reuse
    end if
  end if
  $w \leftarrow \mathrm{AdvanceCursor}(w, o)$; defer unresolved behind unvisited
  arm exact completion/cleanup/owner revisit; never release on a wake alone
end while
persist unvisited Ω and cursor in J; retain unresolved owner records
if J has no unvisited or unresolved custody **then**
  finish only scoped terminal bookkeeping; $h \leftarrow \mathsf{Closed}$
else if J contains physical-owner Unknown **then**
  retain poison, payload, and charge; $h \leftarrow \mathsf{UnknownRetained}$
else
  retain J; $h \leftarrow \mathsf{Pending}$; arm a later pass
end if
return (y, h)

scheduled owner revisit rather than a busy loop. These are bounded-work scheduling obligations, not a claim that provider calls are nonblocking, passes have bounded wall-clock latency, or every cleanup finishes. A stale identity event cannot mutate current custody, while a matching validated Stale outcome is terminal cleanup evidence only for its exact scope.

A secondary cleanup error preserves the primary outcome, current cleanup phase, exact identity and arguments, and residual custody; the same rule applies to discard and retirement errors. It cannot restart irreversible install/publication/ending. Revisit the original cleanup only if it remains positively known pollable; otherwise retain Unknown. Journaled partial returns/releases are not applied twice, even when a later cleanup step fails.

Physical-owner Unknown is never cleared by this algorithm. A late exact completion can close its named registry-stage obligation without resetting independent owner poison or freeing still-retained allocations. Such a registry closure alone cannot make the cleanup result Closed while that physical owner remains retained in J. An acknowledged custody handoff changes the responsible owner, not the retained charge or poison. Replacing a poisoned owner requires a separately established physical teardown/isolation boundary and fresh admission; logical shutdown, a new generation, or an unrelated later fence is insufficient. Cleanup success is not successful inference, and scoped bookkeeping closure does not flush live caches or prove system-wide quiescence.

5.1 Bounded next-expert lookahead

Algorithm 3 is the synchronous expert owner's schedule, not assumed general-registry use. Immutable plans select canonical gate/up/down artifacts; tickets bind exact operations, generations and extents. Matching demand validates source and binding before consuming a completion.

Symbol	Host-staging accounting meaning (bytes)
H	Combined configured host staging ceiling
$P_{\max}$	Largest selected expert's packed compressed weights and scales
M, S	Charged metadata allowance and requested worker-stack reservation

Table 2: Scheduling byte bounds; $P_{\max}$ is distinct from resource plan P.

Before spawning the worker, both modes require

$$2P_{\max} + M + S \leq H. \tag{7}$$

This covers packed/prepared coexistence, not two permanent expert copies. For admitted host scope, the owner additionally maintains

$$C_{\text{host}}(t) = B_{\text{packed}}(t) + B_{\text{artifact}}(t) + M(t) + S(t) \leq H. \tag{8}$$

B_{packed} includes queued, in-flight and held-completion quota; B_{artifact} retains the artifact reservation while any exact weight/scale payload alias survives. Aliases do not add copies or earn a refund; independent copies need their own charge. $M(t)$ and $S(t)$ are the metadata and requested-stack reservations of live/retained host scope. Unknown is already retained in these charges, not added twice. One worker has queue depth one and two charged slots. The measured owner-transition high-water tests this logical contract, not continuous RSS: OS stack rounding, guards, TLS, weak-reference backing and allocator headroom remain distinct.

Algorithm 3 One bounded next-expert read window in a synchronous forward

Inputs: ordered selected buckets $\mathcal{B}$, source-bound plans, mode $m \in \{\mathsf{Blocking}, \mathsf{Lookahead}\}$, limits H, M, S
Outputs: unchanged bucket order and device proofs; residual custody retained

Preflight: validate canonical three-artifact plans and Equation 7; start the same bounded worker in both modes
State: at most one next ticket τ; exact deferred error; packed/prepared payload charges and allocation-alias witnesses
for current bucket b in $\mathcal{B}$ **do**
  owner admits/pins current device residency and scratch; validate source
  if current expert is not physically resident **then**
    drain any unrelated speculation using its original identity
    honor only b's deferred error before any new dispatch
    if no exact carried ticket for b **then**
      $\tau \leftarrow$ SubmitExact(b) under shared read-slot/byte limits
    end if
    Demand: await original τ (immediately after blocking submission)
    if worker custody is Unknown **then**
      retain original identity/charge/poison; do not take or fabricate completion
      return with residual custody reachable
    end if
    take completion once; validate ticket, plan, image/layer/expert and source
    if non-success or mismatched evidence **then**
      preserve primary error and residual custody; select terminal cleanup
      return without fabricated completion or publication
    end if
    reserve prepared-payload quota while packed bytes remain charged
    construct exact gate/up/down artifacts without reread; track all payload aliases
    upload current expert using existing owner admission and CUDA proofs
  end if
  Read window: drain speculation made redundant by a current resident hit
  release current host charge only after alias retirement
  inspect next selected bucket with read-only residency hint; no next pin/LRU mutation
  if $m = \mathsf{Lookahead}$ and next is nonresident and host custody permits **then**
    try to submit that one next read before current compute submission
    retain speculative submission/read errors for that exact later demand
  end if
  Compute: owner submits current compute from resident device handles
  consume output under current lease; preserve existing fences and retirement
end for
Scope end/error: cancel unused reads, drain and join original worker custody
retain Unknown/poison and alias-held quota; host join never heals GPU Unknown

Speculative errors wait for the matching demand, not the current bucket. Unused reads are canceled/drained and counted; lookahead may read more bytes than blocking. Hints do not pin a later hit, and alias/budget checks never refund live custody. OS reads are not interruptible by cancellation; host join proves no GPU quiescence. Whole forwards remain synchronous.

Weak witnesses track exact weight/scale allocations without adding payload copies. Strong aliases retain quota. After their last retirement, weak backing/control allocations and allocator-retained memory may still exist: quota release is not RSS reduction. Passive observations preserve Unknown and poison without refund, recovery or fabricated Closed status.

6 Implementation Mapping and Integration Boundaries

The implementation separates common protocol identities, model semantics, backend physical work, and runtime coordination. CLI/HTTP interfaces deliver caller-visible results; they are not the model driver's publication authority. Table 3 maps the preceding contracts to concrete modules and names the coverage that must be checked before interpreting a run. These are local implementation anchors, not a profile-wide correctness result.

Contract	Implementation anchor (under `crates/`)	Evaluation obligation
Source-bound P	`ferrule-model/src/checkpoint/`: catalog, source, read plan	Freeze source/representation; descriptor hash is not payload authentication
Exact K, e	`ferrule-common/src/io_protocol.rs`: keys, completion, slabs, leases	Reject stale operation/stage/generation/byte evidence
Covered claims	`ferrule-runtime/src/scheduling/resources.rs`: `PhysicalResourceBroker`	Map ledgers to real allocations and final retained custody
Load publication	`ferrule-runtime/src/io/registry.rs`: reserve, completion, preflight, resident transfer	Verify provider transfer installs this registry on the evaluated path
Physical completion	`ferrule-model/src/moe/cuda_materialization.rs`: routed-expert provider	Trace pinned read, upload, install, replacement, and Unknown ownership
State publication	`ferrule-runtime/src/parallel/pipeline/owner.rs`; decoder KV and page manager	Journal before preparation; exact ACKs and retirement before reuse

Table 3: Contract-to-code mapping. Common interfaces do not imply universal registry integration or measured storage traffic.

Source binding and startup preparation. Checkpoint catalogs and read plans hold semantic tensor descriptors, ordered file extents, and filesystem identity snapshots, not payload bytes. In this adapter, `ContentHash` hashes dtype/shape/byte descriptors; source identity additionally binds paths, offsets, and file metadata. Neither is a read-and-hash authentication of every payload byte. The physical provider resolves the plan against the residency authority and obtains the actual destination generation. A startup CUDA image claim is a different authority from a per-request load ticket: actual image grants, compiled context, image fence, KV/initial-state creation, and the final claim fence are checked before claim consumption. Eligible raw execution bindings may then be replaced by runtime descriptors; surviving shared source aliases are not thereby freed.

6.1 Implemented bounded expert-read path

The opt-in checkpoint pipeline is a real positioned-read worker, not a task that reports completion without performing I/O. Its immutable plan preserves ordered extents and original filesystem snapshots. Unix physical-source identity version 2 includes device/inode, length, mtime, and ctime coordinates; ctime strengthens change detection but is not payload authentication. The worker verifies the source before/after reading, and the consumer rechecks it before constructing the canonical three compressed artifacts. No CUDA handle, cache lease, or runtime continuation enters that worker.

The integration has three local anchors: checkpoint `read_pipeline.rs` implements tickets, reads, completion custody and join; transformer `expert_reads.rs` selects gate/up/down plans and accounts payload aliases; transformer `standard/cuda.rs` separates the read window from compute submission. CLI options flow through a prepared, source-bound admission plan and lower into the existing numeric BF16 factory/materializer. The selected path remains PP1/TP1/EP1, resident KV and lazy experts; enabling host staging does not enable unsupported topology or a different forward API.

Both *blocking* and *lookahead* explicitly enable the same pipeline; the default disabled CLI

path has no worker-read evidence and is not the control. Blocking submits required demand and waits immediately. Lookahead carries one next ticket across the current owner compute call, then waits/takes it only when that exact expert is demanded. After current upload, temporary host artifacts leave the compute path: compute borrows resident GPU handles and immutable binding metadata. A next-residency probe is read-only and occurs after current admission/upload; it neither pins the next expert nor changes completed-only LRU order, routes, or kernel mathematics. Submission and source errors from speculation are deferred to the matching demand; abandoned work is canceled/drained and counted as wasted read activity.

The study configuration fixes $H = 64$ MiB, $M = 8$ MiB, and $S = 2$ MiB, with one worker, queue depth one, and two read-operation slots in both arms. These host charges are separate from the 64-entry, 320 MiB device cache charge and its 8 MiB scratch component. Metadata and requested stack are *inside* the host ceiling; actual OS/TLS/allocator overhead requires additional unmeasured headroom. Packed completion and prepared payload quota stay live through their actual aliases, including escaped weight/scale `Arc`s. Weak liveness witnesses do not add a payload copy, but retained allocation backing and allocator RSS are distinct from quota (Section 5.1).

Passive snapshots expose requested/effective mode, worker/read evidence, operation, image, layer and expert identity, demand waits, completed and wasted bytes, charged payload/metadata/stack, join status, and retained Unknown. Reading a snapshot does not repair poison, join a worker, or refund custody. A scope-ended status is not a final physical-resource closure certificate. Cancellation/drain/join proves only named host obligations, never GPU quiescence or healing of a poisoned GPU owner. Whole forwards still block on their existing consumer proofs. These mechanisms and CPU test fixtures exist. The frozen `86c58a0` factory/profile passes the nine GPU gates in Table 4; the same-cut CLI then completes the five paired blocks in Section 7. The older `033519c` qualification and both stopped CLI studies remain separate (Appendix A.1). Passive resource snapshots leave allocator state unobserved because its getter can poll retirement fences; separately reported allocator high-water is not cost-free passive telemetry or physical release evidence.

6.2 Other lifecycle integration boundaries

General materialization path. The registry is installed only when a runner transfers a physical materialization provider to the resident engine. It merges compatible exact keys, validates completion before mutation, and separates return of stage custody from credit release and resident-grant transfer. The concrete routed-expert provider uses Linux pinned reads/io_uring and CUDA upload/installation. Registered slabs retain aligned ranges and exact generations; upload tickets retain the original event and frame, even after notification errors. Replacement passes the previous binding and old-consumer compute proof to the install adapter. A generic lease completion contract is owner metadata, not an independently recorded global GPU fence. Some preparation helpers use compute and upload stream events; synchronization is not excluded.

The broker canonicalizes claims and validates their limits before charging. Required execution can use a reserve unavailable to warmup/speculation, but that does not guarantee progress if a provider stalls. Load admission is stage-local, not an atomic reservation of all future stages. A later-stage budget wait leaves earlier slabs/destinations charged. Returned provider custody clears the submitted obligation, not occupancy; grants have no implicit destructor refund. The five classes of Equation 6 are therefore semantic refinements of owner state, not five measured fields.

Owner-local state protocols. Ordinary TP1 pipeline segments use startup preparation, persistent stage owners, and a prepared-KV journal; they do not automatically inherit registry single-flight or I/O overlap. The provisional journal precedes backend preparation because preparation can

submit work before returning a handle. Readiness validates existing evidence, not new submission. Lost install ACKs poll the same identity without redispatch. Exact participant ACKs precede logical publication, then displaced-state retirement and zero-reference-page confirmation precede reuse. Finish consumes transaction-handle custody, not live weights, KV, or independent pins. HostKV decode/idle reclaim use typed read and placement/page-retirement protocols rather than the expert registry. Committed-KV source snapshots include owner, slot, incarnation, generation, layout, frontier, range, and pages; acquiring a read lease revalidates them, and physical quiescence precedes pin release. Append witnesses are also revalidated against the live reservation. These are not database snapshots.

Unknown and collective scope. Provider Unknown retains native tickets, allocations, claims, and cleanup intent, and may poison slot layers, devices, or executors. A matching registry completion can close a named obligation without resetting independent poison. There is no general in-place reset/replay or device-reset recovery claim. Prepared-KV coordination is a narrow state lifecycle, not arbitrary distributed atomic publication. Current collective exchanges have separate host-payload bounds; Mixed device participation defaults to disabled/host. A typed device permit is not evidence of a default GPU reduction or cross-rank fence. For the vLLM supplement, Socket-plugin initialization is not proof that local GPU payload used Socket: the scoped logs record `NCCL_P2P_DISABLE=1` and local channels `via SHM/direct/direct`. No NCCL capability or transport conclusion is generalized beyond the recorded profile.

What must be traced. A full path audit names each progress owner, queue/limit, dependencies, submission behavior, completion evidence, blocking calls, locks, and synchronization from request admission through storage, expansion, transfer, execution, publication, retirement, cancellation, and shutdown. Include model-specific and host-KV bypasses. A worker wrapping a blocking call is not proof of event-driven progress or hardware overlap. Current BF16/numeric and Mixed TP profiles have distinct shard/cache/expansion policies; actual storage integration and residency require profile-specific evidence. Shared/unified physical pools and other modalities remain design scope, not evaluated support. Rust ownership assists local reasoning but does not discharge asynchronous physical references owned by providers.

7 Evaluation: Qualified Bounded Residency and Paired Scheduling

The primary evidence is the completed `mapfixed-20261015-01` study: five preregistered paired blocks, ten fresh server lifecycles and 120 serial HTTP requests. Both arms execute the same CLI, SHA-256 `7cc8e0ff...e607a01`, built from `86c58a0` (1,484 archived source members). Only `-expert-read-schedule` changes. We first establish factory and serving quality, then bounded accounting and equal logical work, before interpreting latency and waiting. Historical failures, the earlier disabled-pipeline plots and unmatched resident comparisons remain separate in Appendix A.

7.1 RQ1: Factory qualification and a serving budget point

Current factory qualification. All nine exact-once GPU gates pass on the serving source cut `86c58a0`: one constructor gate and four composition gates per schedule (Table 4). The earlier nine-gate qualification on `033519c` is a separate archived cut, not another nine repetitions of this experiment. Constructor, composition and CLI are distinct executables; common provenance does not establish mathematical executable equivalence. The HTTP observations below supply the serving evidence instead.

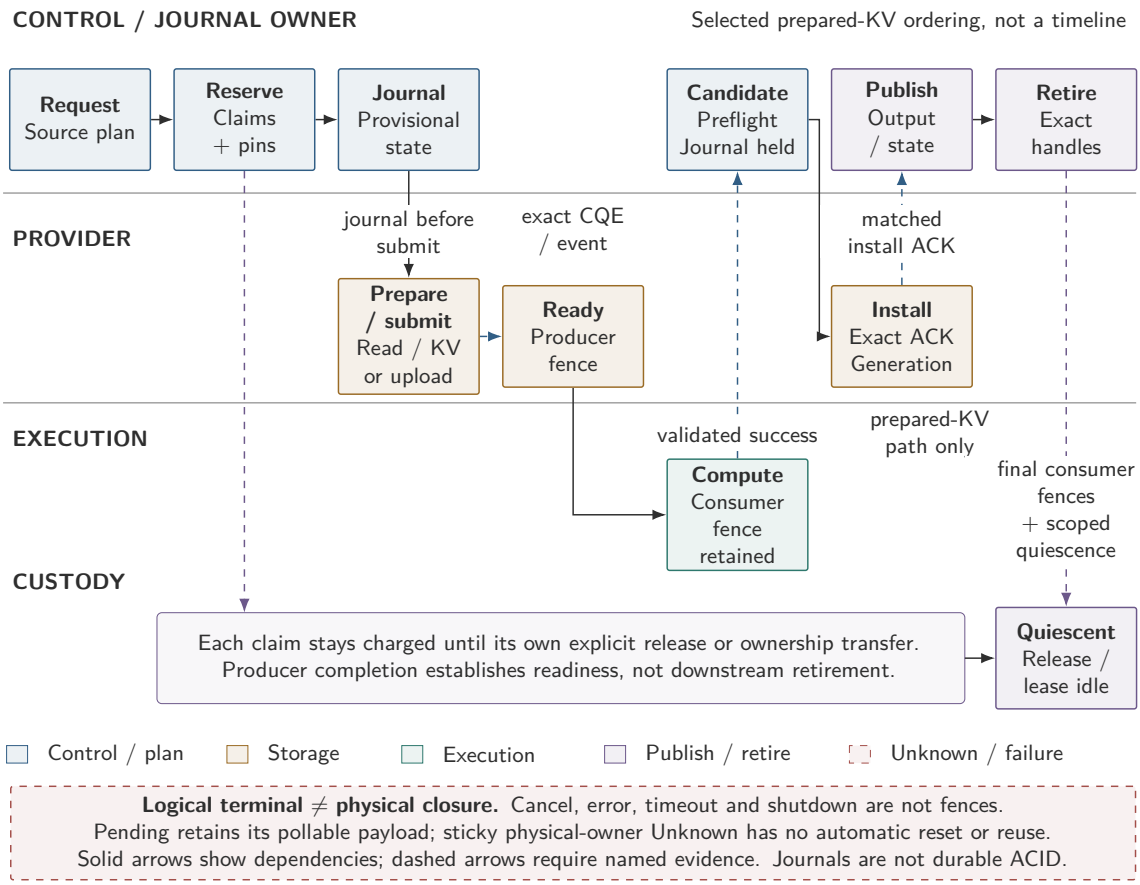


Figure 3: Conceptual successful lifecycle for the selected prepared-KV owner, not a measured overlap timeline. Named lanes and swatches retain blue control/validation, ochre materialization, teal execution, violet publication/custody, and brick Unknown/failure roles. The provisional journal precedes backend preparation even if submission fails without a handle. Candidate readiness validates existing evidence; exact generation-matched install ACKs precede logical publication on this path. Producer readiness is not consumer retirement. Final relevant fences and scoped quiescence precede custody return, with explicit release/transfer still required. Cancellation cannot reverse irreversible ending. Neither durable ACID, universal registry integration, nor general cross-rank atomicity follows.

Phase	Gates	Metrics/gate	Vocab values/gate	Additional evidence
Full40	2	804	1,986,560	Prefill and first decode; diagnostic routes/states
Retained fresh	2	5,427	9,187,840	64 fingerprints per schedule across four streams
Ordinary	2	27	9,187,840	All 64 match own-schedule diagnostic primary; routes/states unobserved
Cold owner	2	1,809	3,228,160	All 28 match own current primary/config/oracle
Constructor	1	—	128 total	Four boundary/schedule cells; 32 finite values and six verified reads each

Table 4: Current `86c58a0` factory qualification, not performance repetitions. Two-gate rows contain one gate per schedule. Fresh/ordinary/cold vocabulary counts are common-history only; constructor is tiny-provider evidence. The older `033519c` archive is not pooled into these denominators.

Control	Identical setting in both arms
Read pipeline	One positioned-read worker, queue depth one, two charged slots
Host staging	64 MiB logical limit, including 8 MiB metadata and 2 MiB requested stack
Device expert cache	64 entries; 320 MiB charge including 8 MiB scratch
Other device policies	7 GiB admission target; 2 GiB workspace; 16 MiB KV
Scheduler	Context 128, batch-token limit 8, active-sequence limit 2; cohort target/maximum deferrals 1/0
Build/observation	CUDA 12.4.99, SM86; NVTX compiled, runtime profiling OFF; identical logging
Workload	Concurrency one; fixed prompts, resets, generation and request order; no cache flush

Table 5: Controlled-budget serving configuration. Overlapping accounting limits are not additive physical partitions or a total RSS/VRAM bound. Instrumentation overhead is unmeasured, not assumed zero. MiB and GiB are 2^{20} and 2^{30} bytes.

Acceptance uses $0.00025 + 0.012|\text{reference}|$, with exact IDs where observed, not universal bit-exactness. For each fresh/ordinary schedule, common history and free feedback each cover 27 calls/9,187,840 vocabulary values; reset covers 9/3,228,160 and fork 1/248,320. For each cold schedule, common history, feedback and reset each cover 9/3,228,160; fork covers 1/248,320. Fingerprints are not additional logit values, and diagnostic route/state metrics are not added to ordinary output metrics. Ordinary route/state fields remain unobserved/null. Fork scope is same-history committed-frontier replay, not divergent KV copy-on-write or broad task quality.

Fixed serving contract. The model is Qwen3.5-35B-A3B-FP8, text-only PP1/TP1/EP1, resident KV and lazy experts. Mixed arithmetic uses BF16 activation/KV/convolution and F32 accumulation/SSM. Both modes retain the same nominal routing/cache policy, source checks, consumer proofs and synchronous forward; the disabled path is not the blocking control. Table 5 fixes the covered budgets. The remaining payload reservation is 54 MiB, split equally between packed and prepared artifacts; metadata and requested stack are inside the 64 MiB limit, not added outside it.

Actual HTTP quality and complete denominators. All ten lifecycles and all 120 requests complete successfully; failed, censored and unissued request counts are zero. Each lifecycle executes four initial requests, one excluded QA request, two QA warmups and five measured QA requests.

Per-lifecycle observable (12 requests)	Blocking	Lookahead
Submitted/verified pipeline operations	40,943	40,943
Checkpoint-reader calls	245,658	245,658
Logical reader bytes	128,811,263,616	128,811,263,616
Facade H2D bytes	128,811,927,312	128,811,927,312
Speculative reads taken	0	36,863
Wasted read bytes	0	0
Unknown read counts/bytes	0 / 0	0 / 0

Table 6: Every one of the five lifecycles per mode has these totals. H2D exceeds logical reader bytes by 663,696 bytes per lifecycle. These application observations are neither physical bus traffic nor NAS backend I/O.

Thus 50 measured QA requests are nested in ten arms and five blocks, not 50 independent repetitions. Of all requests, 110 match their exact eight-token oracle; ten two-token smoke requests have usage/length checks only. All 900 generated token IDs are actual worker-enqueue records, joined by worker/HTTP identities, emission ordinals, terminal usage and SSE/DONE evidence. They are not token IDs exposed by the client API or retokenized text. Enqueue is not client consumption; the positive terminal joins establish delivery for these successful requests. SSE content events are not token boundaries. Serving logits/routes/states were not measured.

Bounded observations, not a capacity frontier. Every lifecycle's logical host-reservation high-water is

$$2(3{,}146{,}112) + 8{,}388{,}608 + 2{,}097{,}152 = 16{,}777{,}984 < 67{,}108{,}864 \text{ bytes}. \tag{9}$$

This tests the covered contract in Equations 7 and 8, not RSS. Every arm's selected-device sampled maximum is 4,125 MiB against the 7 GiB policy, with 49–54 samples per arm. It is not a continuous peak or exact process-owned GPU attribution. Host PSS, logical reservations and device maxima are neither interchangeable nor summable into one working-set peak (Equation 3). This closes a quality-qualified configured-budget point. A budget frontier, complete physical attribution and compact-residency impossibility remain unmeasured; physical-memory insufficiency and storage necessity are not claimed.

7.2 RQ2: Identical logical work and scoped client I/O

For request q, anchored invocation deltas define

$$\begin{aligned} L_q &= \sum_{v \in \mathcal{V}_q} \Delta_v \text{reader_bytes}, \\ H_q &= \sum_{v \in \mathcal{V}_q} \Delta_v \text{facade_H2D_bytes}, \qquad \Delta_q = H_q - L_q. \end{aligned} \tag{10}$$

Across all 1,020 invocation records (102 per lifecycle), both modes perform the same observed logical work (Table 6). Each pipeline operation can cover multiple positioned reads: 40,943 verified operations are distinct from 245,658 checkpoint-reader calls. Lifetime totals are reconciled against invocation deltas and the shutdown ledger; peak gauges are maxima, never summed deltas. Equal aggregate work is not a full route-ID signature or a cache-miss equivalence proof.

What reached the shared client. The archive includes 120 request-window and 30 lifecycle-phase NFS deltas. For P1 blocking, the enclosing request phase records 314,825,320 bytes in the shared-client server-read counter (`serverreadbytes`). Its individual request windows sum to 312,732,264 bytes. The 2,093,056-byte gap lies between those windows inside the phase and is not attributed to requests. The other nine request phases record zero. Neither zero nor a positive shared-mount delta establishes request-exclusive network traffic, NAS cache misses or physical backing-disk reads. Fresh servers do not flush page/NFS caches. No storage-cold or NAS-bandwidth claim follows. There are also 240 PID/birth-bound request I/O snapshots (120 deltas), but startup/shutdown PID-I/O snapshots were not collected: those fields remain null, not zero or retrospectively reconstructed. Startup logical-reader bytes are also unobserved. Figure 4 keeps these scopes separate. RQ2 is answered at the logical and shared-client levels, with physical backend traffic explicitly unknown.

7.3 RQ3: Lower observed waiting under the same budgets

Prespecified design and estimator. The five paired analysis blocks retain order B–L, B–L, L–B, L–B, B–L (B: blocking; L: lookahead), a fixed 3:2 balance, with a fresh server per arm. The independent map-fixed generation uses the readiness-map validator from `7d3bee2`, not a new CLI or an adaptive execution plan. The 7,200 s absolute envelope, 650 s lifecycle bound, 100 s final reserve and all-five-pairs-or-null rule were frozen before collection. No retries, replacement pairs, extra pilot/warmup requests, cache flushes or profiling timings enter the study. Recorded study elapsed time is 1,519.725 s; launch-to-ready probes span 12.847–13.247 s and are excluded from request latency. Both earlier stopped studies retain their original null aggregates (Appendix A.1).

For block i, mode m and its five measured requests j, define client E2E t_{imj} as send-to-EOF and TTFT f_{imj} as send-to-first-nonempty SSE content. The arm summaries and paired estimator are

$$\begin{aligned} E_{im} &= \operatorname{median}_{j=1}^{5} t_{imj}, \qquad F_{im} = \operatorname{median}_{j=1}^{5} f_{imj}, \\ G_{im} &= \frac{40 \text{ qualified tokens}}{\sum_{j=1}^{5} t_{imj}}, \\ \widehat{R}_X &= \exp\left(\operatorname{median}_{i=1}^{5} \ln \frac{X_{iL}}{X_{iB}}\right), \quad X \in \{E, F, G\}. \end{aligned} \tag{11}$$

G is qualified serial request-window goodput, not concurrent server throughput or startup-inclusive completion rate. It uses sums of durations, not an average of per-request rates. The archive enumerates all $5^5 = 3,125$ ordered paired-block resamples, takes each median log ratio, and exponentiates nearest ranks 79 and 3047 for descriptive 2.5/97.5 percentile endpoints. Requests are not resampled as independent replicates. Cross-block independence is not established under shared page/NFS caches. At $n = 5$ these ranges are not coverage-guaranteed 95% confidence intervals, significance tests or power guarantees; shared-client/cache conditions further limit generalization.

As a separate accounting summary across all ten measured arm windows, blocking supplies 200 qualified tokens over 193.581 s (1.03316 tok/s), and lookahead supplies 200 over 175.393 s (1.14029 tok/s). These sums exclude startup and inter-request gaps; they neither replace the paired estimator nor turn ten lifecycles into ten independent paired replicates.

Waiting and client outcomes. All five blocks show lower measured-QA median host demand wait and lower client E2E with lookahead (Figure 6). Wait reductions range from 0.398 to 0.703 s per arm-median request; E2E reductions range from 0.384 to 0.827 s. Each request wait is the sum of anchored `demand_wait_ns` invocation deltas, followed by a within-arm median. Equal logical work

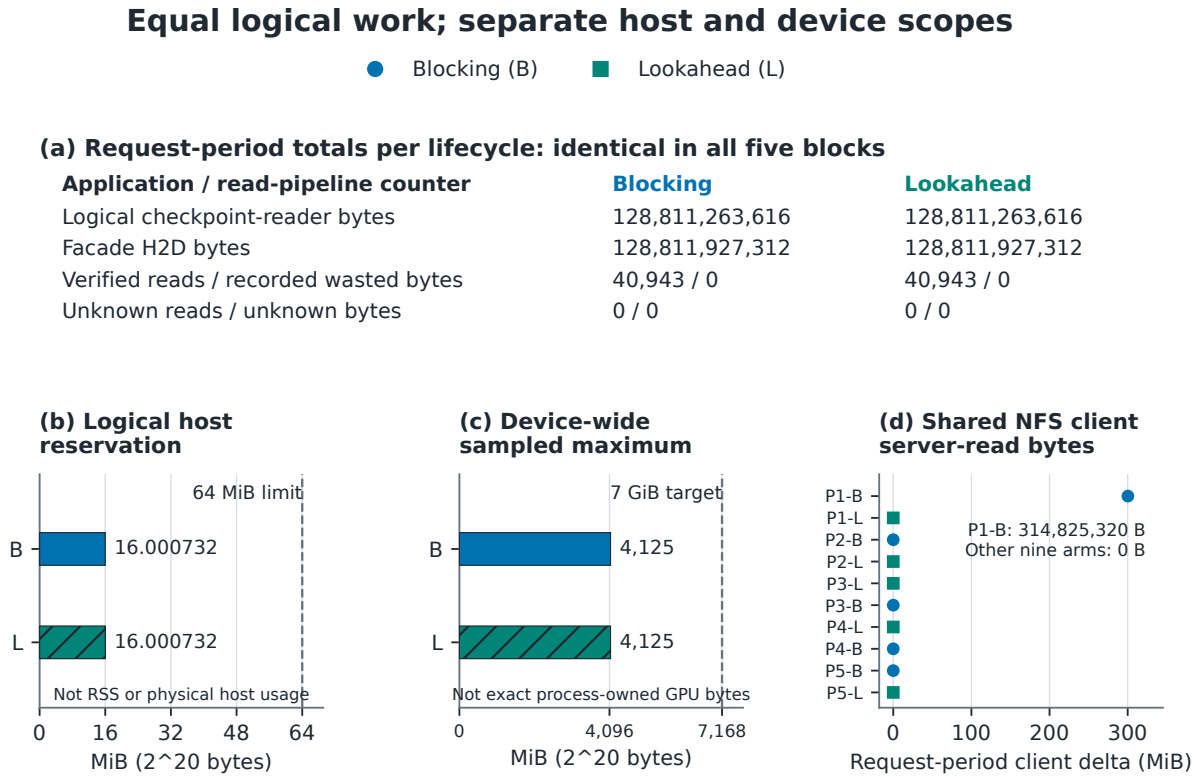


Figure 4: Equal logical work and distinct memory/accounting scopes for all ten lifecycles. Each records 128,811,263,616 logical reader bytes and 128,811,927,312 facade H2D bytes: equal across modes, not to each other. Every arm has 40,943 verified read operations, zero wasted bytes and zero unknown read counts/bytes. The host-reservation maximum is 16,777,984 bytes (16.000732 MiB) against a 64 MiB logical limit, not RSS. Separately, the device-wide sampled maximum is 4,125 MiB against a 7 GiB target, not a continuous or process-owned peak. Bars are common maxima, never sums of lifetime peaks or PSS plus GPU memory. P1 blocking's shared NFS request phase records 314,825,320 bytes; request windows sum to 312,732,264, leaving 2,093,056 unattributed between windows. The other nine phases record zero, not proof of no disk traffic or cold caches. Startup/shutdown PID-I/O is unobserved; zero final logical charges do not prove physical release.

Outcome	Aggregate L/B	Relative change	Descriptive range
Client E2E	0.91823	−8.18%	[0.89303, 0.94946]
Client TTFT	0.88755	−11.24%	[0.86004, 0.94888]
Qualified serial-window goodput	1.10908	+10.91%	[1.07393, 1.13498]

Table 7: Prespecified paired summaries for all five qualified blocks. Primary outcome is E2E; TTFT and goodput are secondary. Ranges are descriptive block-bootstrap endpoints, not inferential coverage or external performance rankings.

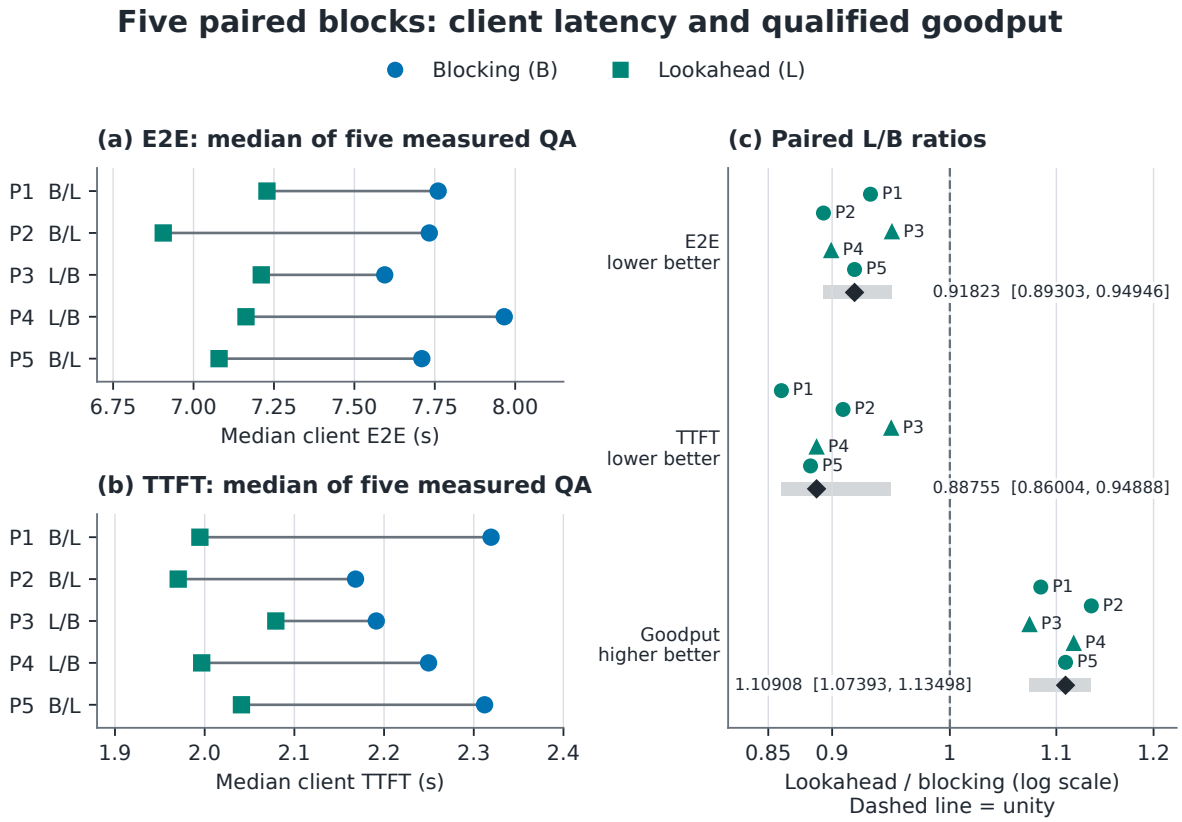


Figure 5: Client latency and qualified goodput in the sealed five-block study. Connected latency values are medians of five measured QA requests; goodput uses 40 qualified tokens divided by their summed client E2E durations. B (blue circles) is blocking and L (teal squares) is lookahead. Rows retain P1 B/L, P2 B/L, P3 L/B, P4 L/B, P5 B/L. The log-ratio panel shows blocks (circles B/L, triangles L/B), unity and the aggregate $\exp(\text{median}\ln(L/B))$ as a diamond: E2E 0.91823, TTFT 0.88755, goodput 1.10908. Gray strips and brackets are descriptive nearest-rank 2.5/97.5 percentile ranges over all 3,125 ordered block resamples (ranks 79 and 3047), not coverage-guaranteed confidence intervals or significance tests. The resampling unit is the block ($n = 5$), not 50 requests. Startup is separate. Goodput is a serial-window metric, not server throughput; this one instrumented study supports no power or SOTA claim.

and zero wasted bytes make this a measured scheduling contrast rather than a smaller-workload comparison. The association is consistent with less waiting, but is not a causal critical-path decomposition: host waits cannot be added to client latency, and neither proves GPU overlap.

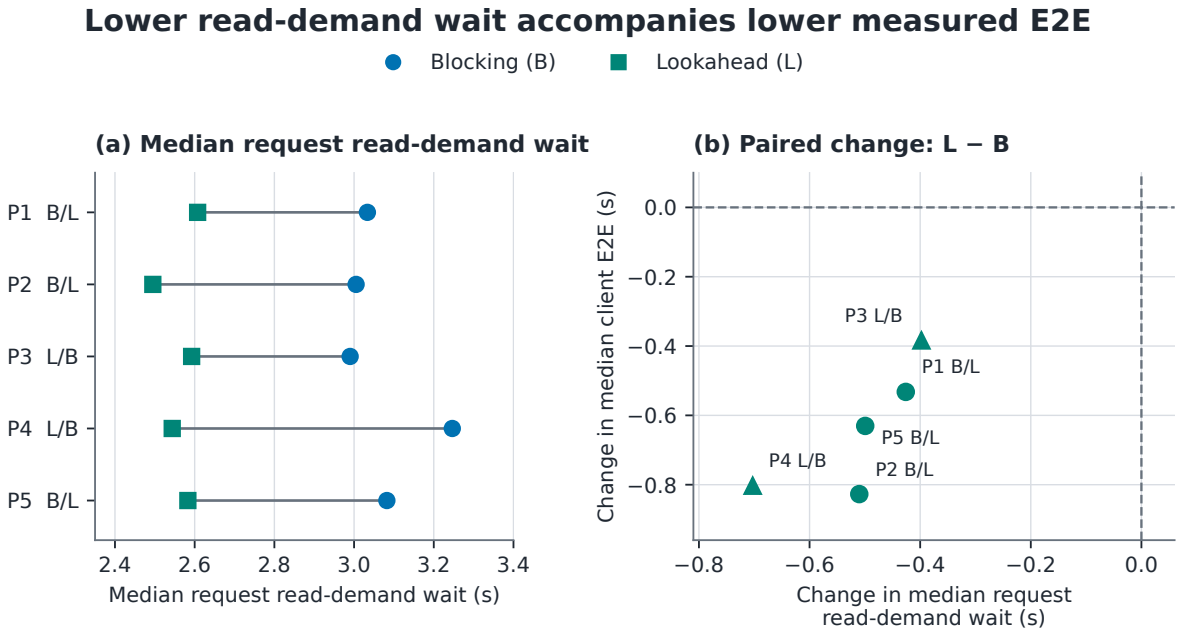


Figure 6: Read-demand wait and client-latency changes in the same five blocks. Request wait sums anchored per-invocation host `demand_wait_ns` deltas; each arm is the median of five measured QA waits. Connected points show blocking (blue circles) and lookahead (teal squares), retaining order. The right panel compares lookahead-minus-blocking differences of arm medians for wait and E2E, not medians of requestwise differences. All five blocks have lower observed wait and E2E with lookahead. This association is not proof that waiting caused the critical-path change. Host intervals are not CUDA timelines, are not additive to client latency and do not establish GPU overlap. No fitted causal coefficient or additional independent replicates are inferred.

Overlap remains a separate gate. Both timing arms compile NVTX source annotations but run with `FERRULE_PROFILE_NVTX=0`. No profiled timing is pooled here. A separate first capture stopped in blocking before QA on an additional profiler-library allowlist requirement: zero target ranges, lookahead unissued, four official warnings and full-trace acceptance false. A collector correction and independent capture remain outside this result. Physical kernel/read/copy overlap requires accepted correlated activities and clock alignment, not host-span intersections or the last read-ticket receipt.

7.4 RQ4: Observed closure and the fault-contract boundary

All ten serving owners are recorded known closed with retained residency; final logical read charges are zero. Authenticated `ECHILD`, absent recorded descendants, stable-idle observations and released/reprobed locks close process supervision. They do not prove post-drop physical release or

Question	Answer at the evaluated point	Not established
RQ1	Current factory gates; actual HTTP token/terminal quality; bounded logical charge and device samples	Capacity frontier, total physical peak or necessity
RQ2	Aligned invocation/request demand, PID-I/O and shared NFS observations	Startup/shutdown PID-I/O; request-exclusive NAS backend traffic
RQ3	Five paired blocks: less host wait, 8.18% lower E2E, 11.24% lower TTFT, 10.91% higher serial-window goodput	GPU overlap, causality, statistical coverage or SOTA
RQ4	Known owner-local closure/retention and process drain	Integrated E5 faults and post-drop physical release

Table 8: Scoped answers, not an all-or-nothing qualification across profiles.

universal GPU quiescence. In particular, a host worker join cannot discharge independent device custody, and retained residency is not a freed allocation.

Component fixtures cover exact source/ticket validation, alias-held quota, deferred speculative errors, cancellation and drain. They are not integrated fault injection in this HTTP study. E5 remains pending for delayed/stale completion, cancellation at each stage, primary-plus-cleanup failure, owner loss and lost ACKs. It must check publication/reuse and credit conservation before and after named completion evidence, retaining Unknown capacity rather than forcing zero. Algorithm 2 is the intended contract, not a measured proof of fault recovery, eventual reclamation or availability on every path.

7.5 Claim closure and reproducibility

The portable `publication_results_v1` archive at commit `c624335` contains 623 files (4,451,307 bytes; 4.25 MiB) and an offline Python 3.10+ standard-library checker with 29 tests. It reconstructs all arms, 900 token joins, 1,020 invocations, 150 NFS deltas, 120 PID-I/O deltas, 20 runtime-library projections (12/12 required pins each), all 3,125 resamples and both historical failure denominators. This is receipt analysis, not replay of private authentication or mapped-memory byte equivalence. Executables, model/oracle payloads and full source/native archives remain external hash-pinned inputs.

The independent `analysis_v1` at `fc7f712` binds 840 exact inputs and generates the three current plots with deterministic data and rendering manifests; 16 tests and a read-only byte-comparison mode check reproduction. Both directories are under

```
papers/arxiv/experiments/storage_demand/paired_read_v1/
```

Their READMEs and `analysis_v1/PLOTS.md` state commands, units and privacy boundaries. The earlier `qualification_v1` archive (`17b16fa`, 249 files/5.38 MiB) preserves `033519c`, not the current CLI cut. Archival and offline checks do not constitute new GPU runs.

8 Related Work and Positioning

Storage-backed and offloaded inference predate Ferrule. The comparison here is by resource representation, physical domains, quality contract, and measured traffic—not by model name or an engine's feature list.

Storage-backed inference. FlexGen [2] places tensors across GPU, CPU, and disk and optimizes throughput-oriented schedules with compression and attention-cache management. DeepSpeed ZeRO-Inference's technical report [5] describes CPU/NVMe weight hosting, layer streaming, prefetch, and release. PowerInfer-2 [4] studies smartphone inference beyond resident capacity with neuron clusters, segmented caching, and an I/O/computation pipeline. These systems establish that storage-backed model inference and transfer/computation scheduling are prior art. Their existence also rules out a first-storage-inference claim for Ferrule.

The relevant distinction is not whether a GPU cache is small. A comparison must say whether complete compact encoded weights and metadata can remain resident, whether expanded execution weights are streamed, which physical pools are disjoint, and whether request-time reads are physical backing reads or cache-served logical reads. A configured cache budget or an expanded-weight overflow does not establish storage necessity.

Resident-domain offload and serving. PowerInfer [3] uses activation locality to place hot neurons on a GPU and compute cold neurons on a CPU. This is a GPU–CPU hybrid and should not be conflated with PowerInfer-2's storage pipeline. Host/device movement, page migration, and file-backed I/O are different observables; shared physical pools must not be added twice. vLLM's PagedAttention [1] addresses serving KV memory and is a useful resident-state comparison, but KV paging is not request-time weight materialization. The frozen vLLM 0.28 resident observations in this paper are supplementary and arithmetic/resource-budget non-equivalent, although both selected crossblock engines use PP1/TP2; they are not a speedup proof. We make no capability-absence claim about other serving systems whose primary sources and exact profiles were not audited here.

Lifecycle and scheduling comparison. The design question in RQ3 is narrower than "which system is asynchronous?" The comparison requires submission/completion separation, dependency-ready work, progress ownership, bounded queues, and completion-driven physical lifetime. An asynchronous API does not prove event-driven progress, and worker offload does not prove nonblocking execution. Measured storage/transfer/compute overlap requires correlated provider or hardware traces. The current opt-in blocking and next-expert lookahead schedules share the same worker and bounds and pass selected same-cut GPU factory qualification. The five-block study measures lower waiting and client latency under that shared contract; physical overlap remains unobserved. Neither result establishes performance leadership over other systems.

Positioning. Ferrule contributes a profile-scoped contract connecting source-bound plans, stage-local admission, exact generations, physical custody, publication, and retirement. This is a protocol and measurement position, not a claim that prior systems lack equivalent mechanisms; their custody and failure semantics were not exhaustively audited here. The evaluated profile completes a quality-checked serving workload under declared logical limits with lower observed wait. Complete physical working-set attribution, backend traffic and integrated fault behavior remain separate empirical questions. Registry coverage, OS-cache hard caps, durable ACID, cross-rank atomicity,

Prior work	Resource/backing focus	Scheduling or state focus
FlexGen	GPU, CPU, disk	Tensor placement, batching, compression
ZeRO-Inference	CPU or NVMe to GPU	Layer streaming, release, prefetch
PowerInfer	GPU–CPU hybrid	Hot/cold neuron execution
PowerInfer-2	Smartphone memory/storage	Neuron clusters, cache, I/O pipeline
vLLM	Resident serving KV memory	PagedAttention

Table 9: Source-described comparison axes, not matched measurements or an exhaustive protocol audit. Unassessed guarantees are not marked unsupported.

NCCL/device-collective defaults, multimodal integration, and performance leadership are not implied by the design.

9 Limitations

Accounting is not the complete physical working set. The 64 MiB host limit bounds packed/prepared payload, metadata and requested stack charges. OS stack rounding, TLS, allocator headroom, weak-reference backing and file-cache residency are distinct. Device samples can miss transients and do not provide exact process attribution. A qualified configured-budget point does not establish a capacity frontier, compact-weight residency impossibility or storage necessity. Other representations, shared/unified memory and modalities require independent evidence.

One workload and five paired blocks. The current factory and HTTP checks apply to the frozen Mixed profile and short prompts, not broad task quality, long-context behavior or all model states. Ordinary factory routes/states and HTTP logits remain unobserved. Requests within a server are not independent replicates. Fixed 3:2 order balance and exact enumeration of 3,125 resamples do not guarantee interval coverage or power; uncontrolled shared caches and instrumentation limit external validity. The observed wait/latency association is not a causal critical-path decomposition. Serial-window goodput excludes startup, inter-request gaps and concurrency; it is not general serving throughput. The unmatched TP2/vLLM records remain descriptive supplements.

Unobserved physical I/O, overlap and release. Logical reads can be cache-served, shared NFS deltas are not request-exclusive, and NAS backing traffic is unknown. Startup/shutdown PID-I/O was not collected. Both measured modes compile NVTX but run with profiling off; the separate rejected capture supplies no physical-overlap result. Whole forwards still synchronize on existing consumer proofs. Known owner-local closed/retained state, zero logical charges, authenticated process drain and idle samples do not certify post-drop physical release.

Faults and reproducibility boundaries. Component tests and lifecycle algorithms do not constitute formal verification or integrated E5 fault acceptance. Unknown custody may retain capacity indefinitely; no general reset/replay, availability, device-reset recovery, durable ACID or arbitrary cross-rank atomicity is promised. The portable archive supports offline receipt reconstruction, not independent replay of omitted private authentication, live mapped-memory contents or external model/native/executable payloads. Historical failures remain failures, and source cuts are not pooled. No first-storage-inference or state-of-the-art performance claim is made.

10 Conclusion

Ferrule connects bounded storage-backed weight residency to source-bound planning, covered admission, exact completion, authorized publication and custody through retirement. Its one-next-expert read window preserves the same worker, budgets and synchronous device-consumer proofs as the blocking control. On a qualified current source cut, the five-block HTTP study completes all 120 requests with joined token/terminal evidence, equal logical reader work, zero wasted read bytes and bounded logical host charge. Lookahead shows lower host demand waiting in every block and paired summaries of 8.18% lower E2E, 11.24% lower TTFT and 10.91% higher qualified serial-window goodput. These are scoped measurements, not a performance ranking or GPU-overlap proof. Capacity frontiers, integrated faults and post-drop physical release remain open without weakening the reported bounded-residency and measured-wait result.

References

[1] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient Memory Management for Large Language Model Serving with PagedAttention, 2023. arXiv:2309.06180.

[2] Ying Sheng, Lianmin Zheng, Binhang Yuan, Zhuohan Li, Max Ryabinin, Daniel Y. Fu, Zhiqiang Xie, Beidi Chen, Clark Barrett, Joseph E. Gonzalez, Percy Liang, Christopher Ré, Ion Stoica, and Ce Zhang. FlexGen: High-Throughput Generative Inference of Large Language Models with a Single GPU, 2023. arXiv:2303.06865.

[3] Yixin Song, Zeyu Mi, Haotong Xie, and Haibo Chen. PowerInfer: Fast Large Language Model Serving with a Consumer-grade GPU, 2023. arXiv:2312.12456.

[4] Zhenliang Xue, Yixin Song, Zeyu Mi, Xinrui Zheng, Yubin Xia, and Haibo Chen. PowerInfer-2: Fast Large Language Model Inference on a Smartphone, 2024. arXiv:2406.06282.

[5] ZeRO-Inference: Democratizing massive model inference. DeepSpeed technical web page, September 2022. September 9, 2022; technical web page, not a conference paper.

A Historical Evidence and Separate Supplements

These records retain their original profiles, outcomes and denominators. They are not repetitions of the completed `mapfixed-20261015-01` study, and later success does not repair an earlier failure.

A.1 Qualification cuts and two permanently stopped studies

Table 10 separates numerical outcomes from wrapper acceptance. The original tolerance is $0.00025 + 0.012|\text{reference}|$, not bit-exactness or broad task quality.

Record	Metrics	Logit elements	Numerical / wrapper outcome
Middle quality `-01`	0	0	`cuInit (3)`; fresh/cold unissued
Full40 `-02`	804	1,986,560	Numerical PASS; strict post-idle wrapper FAIL
Retained fresh `-03`	5,427	9,187,840	Numerical PASS; strict post-idle wrapper FAIL
Cold owner `-04`	1,809	3,228,160	Numerical/wrapper PASS under stable-idle v2; different source cut
Frozen CLI quality `-01`	0	0	`cuInit (3)`; retained fresh unissued

Table 10: Historical 2026-10-14 TP1 test gates. Initialization failures are not numerical mismatches and are distinct from the prelaunch `DEVNULL` failure below. Numerical PASS does not override wrapper rejection.

The strict full40/fresh wrappers rejected first post-idle samples of 1%/6% GPU0 utilization (zero MiB, no compute applications); later idle does not repair them. Cold `-04` accepts stable-idle v2 on the 3,533-input `5662b7d2...` cut rather than `fbf0c225...`; its primary relation records `same_source_cut=false`. Separately, all nine factory gates pass once on `033519c`, archived in `experiments/storage_demand/qualification_v1/` at `17b16fa`. Its per-phase denominators match the structure of Table 4, but are not pooled with `86c58a0`. That older cut reports 2,089 full40, 25,116 fresh, 25,116 ordinary and 11,354 cold verified reads per schedule; logical host high-water is 16,777,984 bytes and allocator reserved high-water 4,106,223,616 bytes. The allocator getter can poll retirement fences; these are not cost-free passive physical peaks. The 249-file archive has 37 offline tests, not 37 new GPU runs.

Two stopped paired studies. The first enabled CLI study, `artifacts-current-20261015-01`, failed before Ready with `prepared source profile changed`. An unconditional TP2 cache accessor rejected enabled TP1's prepared-source payload before CUDA owner startup; this was not `cuInit` or a numerical mismatch. The catalog-selected source-plan query fix is `86c58a0`. The independent corrective V3 fixed cohort target/maximum deferrals to 1/0, not the earlier implicit 4/3. Its first execution, `artifacts-v3-final-20261015-01`, also stopped, reporting loaded-library mappings missing/deleted and a raw effective-mode mismatch. These are failed acceptance observations, not timings or numerical-quality results.

Separate study	Attempted	Completed	Unissued HTTP	Unissued QA
Original enabled CLI	1	0	120	50
Corrective V3 first execution	1	0	120	50

Table 11: Each stopped study planned ten lifecycles/five pairs; nine lifecycles were unissued. HTTP issued/terminal/success/failed/censored counts are all zero. All five incomplete pairs and null aggregates remain in each study; no retries, replacements or pooling.

Request	Logical GiB	Uploads	Evictions	TTFT (s)	E2E (s)
Hello2	2.813	960	896	4.265	9.186
QA canary	10.777	3,678	3,678	8.332	18.309
Arithmetic canary	10.396	3,548	3,548	5.308	14.110
Chinese canary	9.766	3,333	3,333	2.605	9.932

Table 12: Historical TP1 `-02`, not current-pipeline or comparative performance. Counts are exact invocation deltas; timings/bytes are rounded.

Historical observable	Value
Selected GPU0 sampled maximum (32 samples)	4,125 MiB
Server-tree PSS / RSS maxima (32 complete samples)	7,610.864 / 7,613.770 MiB
Last resident entries / bytes	64 / 201,351,168
Last scratch bytes	8,388,608
Cache charged-byte lifetime high-water	219,754,496
Last pending-upload / quarantine bytes	0 / 0

Table 13: Historical samples and compatible cache gauges, not additive physical peaks or process-owned GPU attribution. Zero invocation gauges are not a final resource ledger.

Neither study's final resource contract becomes a physical-release proof. The first has shutdown-only shared-client observations, not Ready/request I/O; missing owner evidence remains unknown. The map validator correction `7d3bee2` and independently frozen generation entry `ac224f7` precede the completed study without changing its CLI, workload or estimator. The portable bundle's `historical-failures.json` preserves both stopped journals and denominators (Section 7). The separate baseline pilot of five lifecycles, 60 requests and 25 QA slots remains unexecuted and is not added to any study.

A.2 Historical TP1 logical-demand observation

The initial CPU-prepared entry was unexecuted after canceled validation. Authorized attempt `-01` then failed before server launch with missing `subprocess.DEVNULL`: four planned, zero dispatched, four not run. It supplies no model/OOM, request, read or quality result. Attempt `-02` is a separate single DEBUG-instrumented run ($n = 1$) on CLI `36e6aaa5...70a58c`, with the read pipeline disabled. Its four serialized requests all terminate successfully: Hello2 is HTTP/usage-only, while QA, arithmetic and Chinese pass three frozen visible-text/eight-token usage canaries. Generated IDs, logits, routes and states are unobserved.

Its PP1/TP1/EP1 Mixed profile uses context 128, batch-token limit 8, active-sequence limit 2, resident KV and lazy experts. Configured device admission/workspace are 7,168/2,048 MiB; expert cache is 64 entries/320 MiB including 8 MiB scratch; KV/maximum tensor limits are 16/1,024 MiB. Host expert retention is zero, not zero OS page-cache residency or a physical host cap. These overlapping policies are not additive physical capacity.

The 30 invocations produce 26 usage output tokens, 69,114 reader calls and 36,240,064,128 logical bytes, 88,763 facade copies and 36,240,248,688 H2D bytes, zero recorded expert hits, 11,519 uploads, 11,455 evictions and 34,557 artifact uploads. Equation 10 gives a 184,560-byte H2D-minus-reader difference; startup reads are outside these sums. These application counters do not measure physical storage or bus traffic.

Entry-count reconciliation at observed invocation boundaries is

$$N_j = N_{j-1} + I_j - E_j, \quad j = 2, \ldots, 30, \qquad N_0^{\text{implied}} = N_1 - I_1 + E_1 = 0. \tag{12}$$

Initial zero is implied, not measured. All later boundary residuals are zero; 11,519 uploads minus 11,455 evictions equals 64 final observed entries. This is neither byte conservation nor continuous occupancy. Compatible resident, pending-upload and scratch gauges define the cache subset

$$C_j^{\text{cache}} = X_j + Q_j + S_j, \qquad C_{\text{peak}}^{\text{cache}} = \max_{u \in \mathcal{U}_{\text{owner}}} C_u^{\text{cache}} \le b_{\text{cache}}. \tag{13}$$

Unknown quarantine Z_j is already charged, not another additive copy. The reported 219,754,496-byte high-water covers cache update points under the 320 MiB ceiling, not all physical-owner allocations. The four frozen figures below retain these historical scopes and are not regenerated.

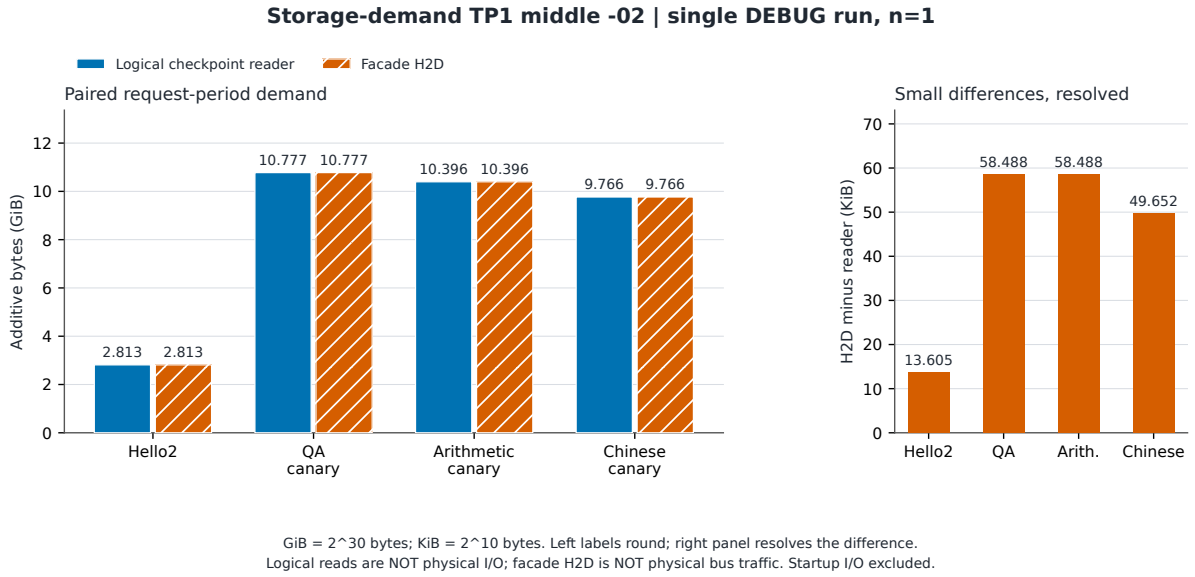


Figure 7: Paired logical checkpoint-reader and facade H2D byte deltas for four serialized requests in storage-demand TP1 middle -02. GiB means 2^{30} bytes; the right panel resolves the small H2D-minus-reader differences in KiB (2^{10} bytes). These are application counters, not physical storage I/O or physical bus traffic; startup I/O is outside invocation accounting (Equation 10).

Startup is 18.497 s; four HTTP windows sum to 51.538 s, excluding startup and inter-request overhead; supervisor wall time is 75.874 s. Their origins differ:

$$\begin{aligned} T_{\text{start}} &= t_{\text{ready}} - t_{\text{launch}}, \\ T_q^{\text{first}} &= t_q^{\text{first content}} - t_q^{\text{send}}, \qquad T_q^{\text{end}} = t_q^{\text{EOF}} - t_q^{\text{send}}. \end{aligned} \tag{14}$$

They do not form a cumulative throughput timeline or identify an I/O bottleneck share. Authenticated drain reaches `ECHILD` and idle checks pass, while `resource_contract_complete=unknown` and raw `gpu_quiescence=unverified` remain unchanged.

The original `report.json` files are under `experiments/storage_demand/runs/`, in the two directories

```
storage-demand-tp1-middle-20261013-01/
storage-demand-tp1-middle-20261013-02/.
```

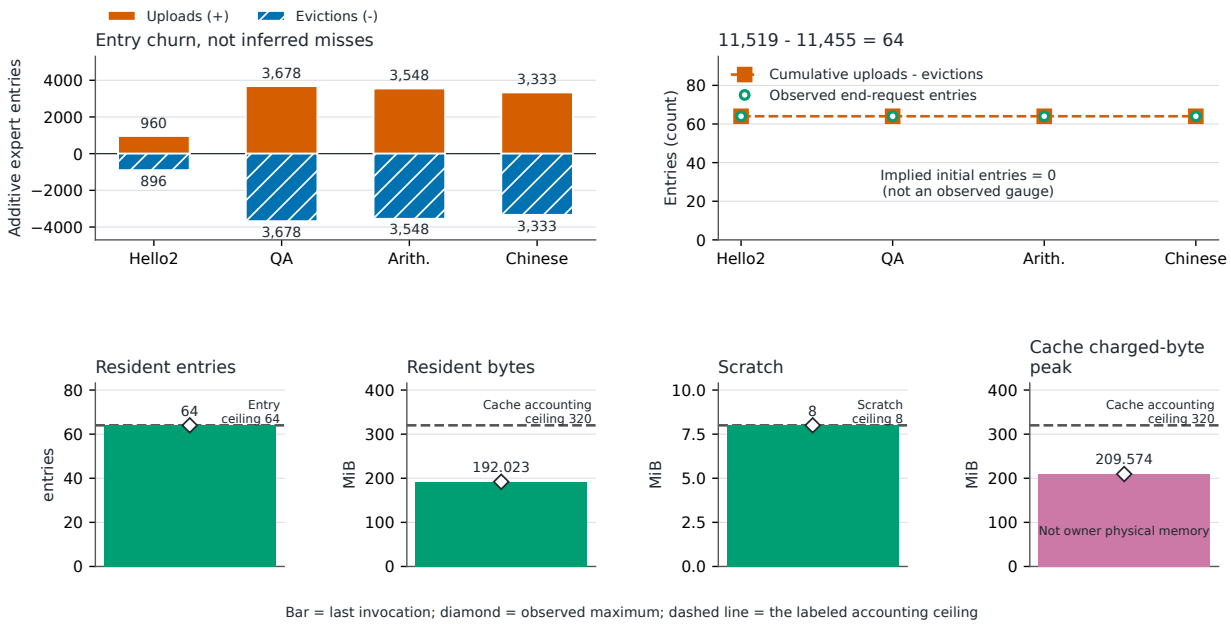


Figure 8: TP1 middle -02 entry reconciliation and cache-accounting gauges. Uploads minus evictions ($11{,}519 - 11{,}455 = 64$) match the last observed entries; initial zero is implied, not measured, and subsequent boundaries reconcile. Recorded `cache.peak_bytes`, 209.574 MiB, is the resident-plus-pending-plus-scratch high-water, bounded by `ExpertCacheLimits.max_bytes` = 320 MiB, not a physical-owner bound. Total physical-owner peak/ceiling are unobserved; no contradiction is implied. Invocation gauges and lifetime high-waters are not accumulated or a final ledger proof (Equations 12 and 13).

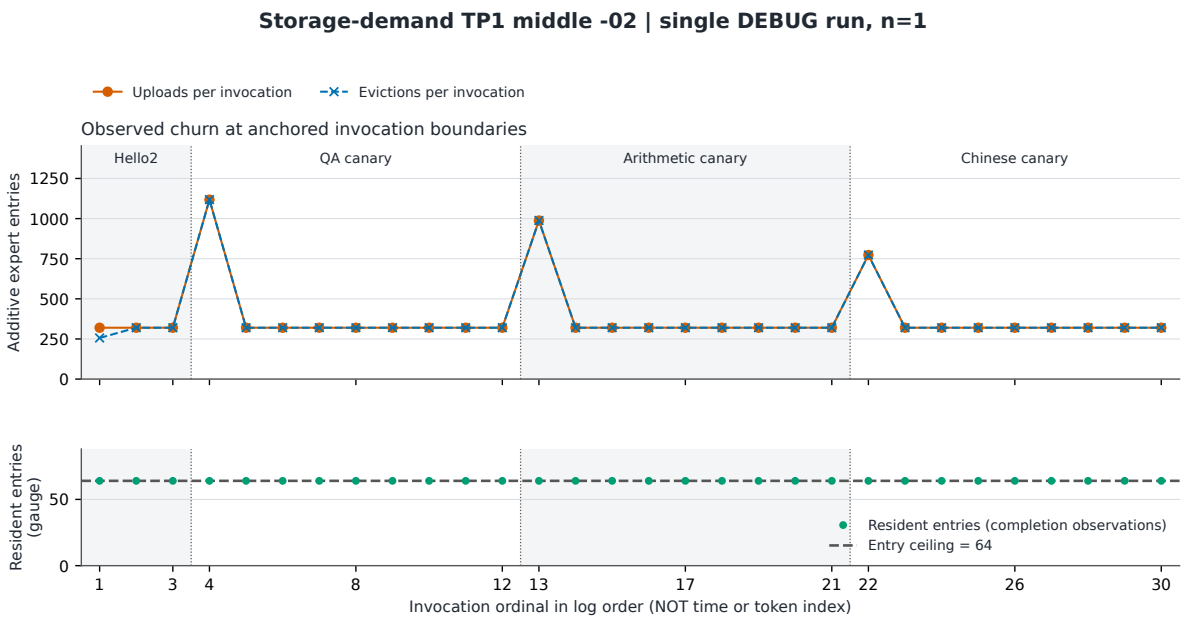


Figure 9: Per-invocation expert upload/eviction deltas and resident-entry observations for the 30 completed invocations in storage-demand TP1 middle -02. Serialized request/log-byte anchors assign the 3/9/9/9 invocations to requests. The x-axis is log-order invocation ordinal, not elapsed time, output-token index, or transaction-as-request ID. Entry occupancy is observed only at invocation completion, not continuously; uploads are not inferred cache misses (Equation 12).

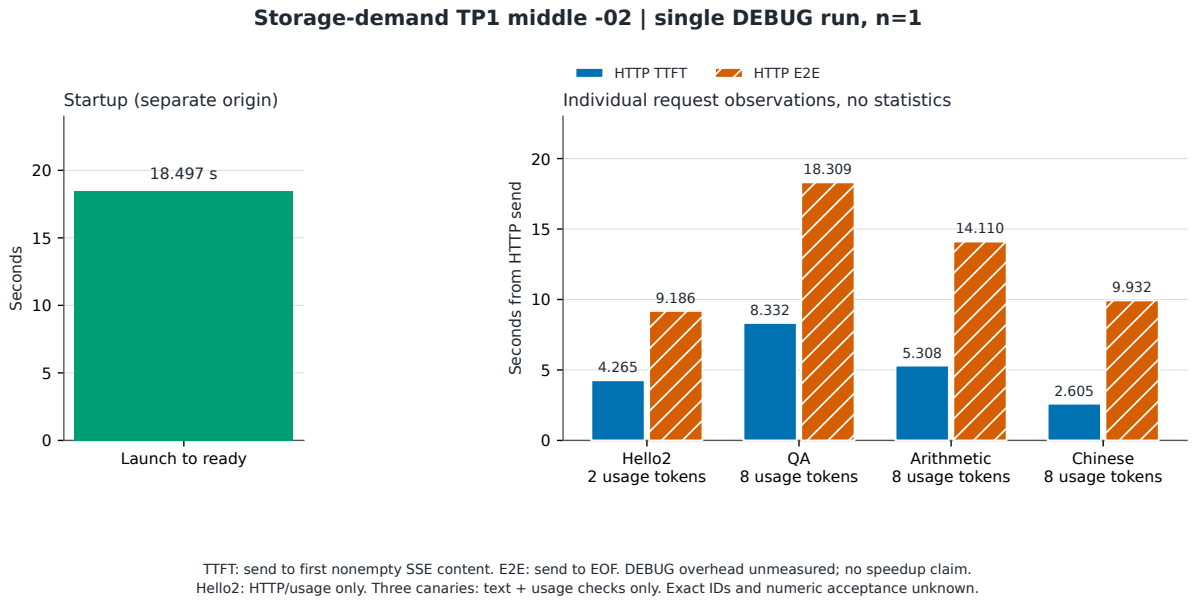


Figure 10: Launch-to-ready startup and per-request HTTP TTFT/E2E in the single successful DEBUG-instrumented storage-demand TP1 middle -02 run ($n = 1$). TTFT is send to first nonempty SSE content; E2E is send to EOF. Startup has a different origin and is not part of the request bars. Instrumentation overhead is unmeasured; there are no statistics, confidence intervals, kernel timings, or comparative speedups (Equation 14).

The offline analysis in `experiments/storage_demand/analysis/output/` binds 41 inputs/39 receipt pins with zero divergences; it is not another run. Paths in this appendix are relative to `papers/arxiv` unless stated otherwise.

Slot	Output tok/s	TTFT ms	E2E ms	Startup s	GPU GiB/card	PSS GiB
F1	14.317	176.248	523.399	349.585	21.04	61.05
V1	10.376	132.676	694.228	66.239	19.28	7.71
V2	10.330	134.651	699.213	62.814	19.28	7.32
F2	14.804	171.333	515.106	366.133	21.04	60.14

Table 14: Historical resident TP2 crossblocks ($n = 2$), not a SOTA or matched budget comparison. TTFT/E2E are request means; GPU/PSS are sampled maxima. F is Ferrule and V is vLLM.

A.3 Separate TP2 numerical and resident supplements

The `native-whole-capture-full40-02` comparator reports 2,178 exact fields each for Hello and Capital prefill/first decode, with zero max error, RMSE and field failures and matching greedy IDs. This is bounded captured comparator evidence, including oracle-only diagnostics, not a blanket bitwise claim over all device arrays. The separate `model-runtime-quality.json` selection under `experiments/tp2_resident/` records 33 calls/35,937 exact metrics: greedy4-02 10/10,890; fork2-03 6/6,534; canary2-01 5/5,445; recreate1-01, cold-owner1-01 and cold-owner1-02 each 4/4,356. The test binary is `a4977b85...e1cc`, not a serving binary. A different `production-opts-01` selection reports 37 calls/40,293 metrics; it is not substituted or added. Greedy4-01's supervisor failure remains failed. The frozen F32 process-EP8 pass is also profile-specific. The independent W8A16 strict oracle fails logits, ordered routes and states; argmax agreement does not reverse that failure.

The F1–V1/V2–F2 blocks each use fresh owners, three excluded QA8 requests and five measured requests (five input/eight output tokens each). Ferrule has higher output rate/lower mean E2E in both windows, whereas vLLM has lower TTFT/startup/GPU/PSS. Descriptive F/V rate ratios 1.380/1.433 are not causal speedups. Ferrule's HF-eager-qualified GemmEx/routing Mixed path and vLLM's BF16/FP8 Marlin differ in arithmetic; Ferrule's 22 GiB/device policy and vLLM's utilization 0.8 do not match total working-set budgets. The record retains `fairmatch=false`, `exact_speedup=null`. The measured deployment is vLLM `0.28.0+cu129` with Torch `2.13.0+cu129`, not an older source checkout. Raw metrics and identities are under `experiments/tp2_resident/runs/`, in `route-batch-vllm-crossblocks-20261012-01`.

Startup-metadata observations, also unpaired. The `36e6` release's S1/S2 smoke lifecycles pass source-bound canary/reuse/cancellation-policy gates and authenticated drain, not a fresh full numerical validation. Their startup/PSS are 222.079 s/42.716 GiB and 139.855 s/44.416 GiB. Ordinary F1 records 140.052 s/43.573 GiB and 40 usage tokens/2.877869 client seconds (13.899 tok/s). Its TTFT mean/p50/p95 are 192.944/187.513/209.700 ms. Historical `e674` ordinary F1 is a different series: 351.114 s/60.149 GiB/14.227 tok/s. These are not a paired before/after effect, and S1/S2 have no throughput measurement. Caches are uncontrolled. Five F1 proc reads cost 0.643/623.616/725.908/625.392/0.085 ms, outside the measured window; persistence cost is unmeasured. Linux 4.19 lacks `Pss_Anon/Pss_File` here and the post-exit sample is unavailable, not zero. Source relation and CPU checks do not replace fresh GPU numerical or physical-release evidence. The owner `REPORT.md` is under `../../target/validation/`, in `startup-metadata-owner-20261013-01/`. Raw F1 is under `experiments/tp2_resident/runs/`, in `startup-metadata-info-after-20261013-01/`. These local historical payloads are not made portable merely by citation.