
300-1200A Circuit Breakers
Electronic Trip
Spectra® RMS
SK1200 with Microversatrip® Plus and PM

Product Number Structure

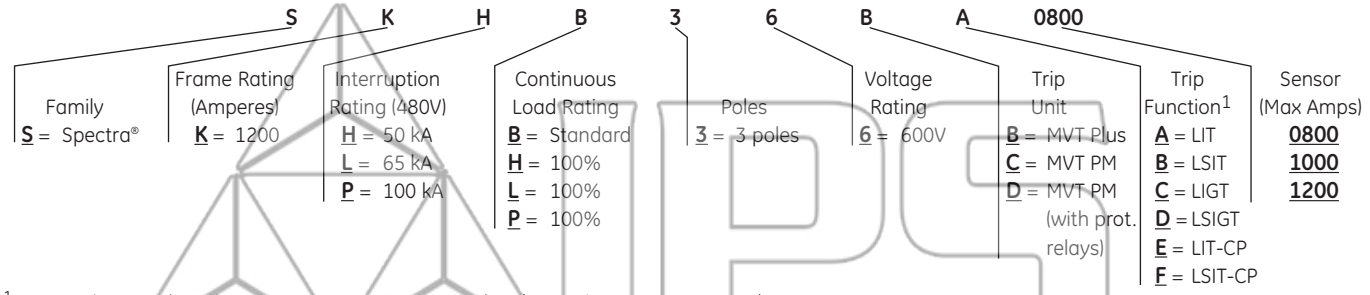

[1]L = Long Time, S = Short Time, I = Instantaneous, G = Ground Fault, T = Trip Target, CP = Control Power
Note: This information is provided for interpreting product numbers (it should not be used to build product numbers).

store.ips.us

MicroVersaTrip® Plus, Standard UL Rated

SK1200 Line, Suitable for Reverse Feed, UL File E-11592, CSA LR 40350
3-Pole, UL/CSA: 1200A, 600 Vac Max., IEC 947-2: 1250A, 690 Vac Max. (SKL, SKP only)

		Frame						Terminal Lugs for Front connection (Cu/Al)		
		IC @480 Vac, UL 489		IC @480 Vac, UL 489		IC @480 Vac, UL 489				
Current Sensor	Trip Function	50kA Product Number	List Price GO-135S	65kA Product Number	List Price GO-135S	100kA Product Number	List Price GO-135S	Product Number	List Price GO-135S	Wire Range
800	LIT	SKHB36BA0800	$4588.00	SKLB36BA0800	$5552.00	SKPB36BA0800	$8734.00	TCAL81	$47.00	(3) 3/0-500 Cu (3) 3/0-500 Al
	LSIT	SKHB36BB0800	$5953.00	SKLB36BB0800	$6917.00	SKPB36BB0800	$10099.00			
	LIGT[1]	SKHB36BC0800	$5798.00	SKLB36BC0800	$6762.00	SKPB36BC0800	$9944.00			
	LSIGT[1]	SKHB36BD0800	$7163.00	SKLB36BD0800	$8127.00	SKPB36BD0800	$11309.00			
	LIT-CP[2]	SKHB36BE0800	$4888.00	SKLB36BE0800	$5852.00	SKPB36BE0800	$9034.00			
	LSIT-CP[2]	SKHB36BF0800	$6253.00	SKLB36BF0800	$7217.00	SKPB36BF0800	$10399.00			
1200	LIT	SKHB36BA1200	$8077.00	SKLB36BA1200	$9048.00	SKPB36BA1200	$11854.00	TCAL125	$76.00	(4) 250-500 Cu (4) 250-500 Al
	LSIT	SKHB36BB1200	$9442.00	SKLB36BB1200	$10413.00	SKPB36BB1200	$13219.00			
	LIGT[1]	SKHB36BC1200	$9287.00	SKLB36BC1200	$10258.00	SKPB36BC1200	$13064.00			
	LSIGT[1]	SKHB36BD1200	$10652.00	SKLB36BD1200	$11623.00	SKPB36BD1200	$14429.00			
	LIT-CP[2]	SKHB36BE1200	$8377.00	SKLB36BE1200	$9348.00	SKPB36BE1200	$12154.00			
	LSIT-CP[2]	SKHB36BF1200	$9742.00	SKLB36BF1200	$10713.00	SKPB36BF1200	$13519.00			

MicroVersaTrip® Plus, 100% UL Rated

SK1200 Line, Suitable for Reverse Feed, UL File E-11592, CSA LR 40350
3-Pole, UL/CSA: 1200A, 600 Vac Max., IEC 947-2: 1250A, 690 Vac Max. (SKL, SKP only)

		Frame						Terminal Lugs for Front connection (Cu/Al)		
		IC @480 Vac, UL 489		IC @480 Vac, UL 489		IC @480 Vac, UL 489				
Current Sensor	Trip Function	50kA Product Number	List Price GO-135S	65kA Product Number	List Price GO-135S	100kA Product Number	List Price GO-135S	Product Number	List Price GO-135S	Wire Range
800	LIT	SKHH36BA0800	$7975.00	SKLL36BA0800	$9892.00	SKPP36BA0800	$11354.00	TCAL81	$47.00	(3) 3/0-500 Cu (3) 3/0-500 Al
	LSIT	SKHH36BB0800	$9340.00	SKLL36BB0800	$11257.00	SKPP36BB0800	$12719.00			
	LIGT[1]	SKHH36BC0800	$9185.00	SKLL36BC0800	$11102.00	SKPP36BC0800	$12564.00			
	LSIGT[1]	SKHH36BD0800	$10550.00	SKLL36BD0800	$12467.00	SKPP36BD0800	$13929.00			
	LIT-CP[2]	SKHH36BE0800	$8275.00	SKLL36BE0800	$10192.00	SKPP36BE0800	$11654.00			
	LSIT-CP[2]	SKHH36BF0800	$9640.00	SKLL36BF0800	$11557.00	SKPP36BF0800	$13019.00			
1200	LIT	SKHH36BA1000	$11624.00	SKLL36BA1000	$14414.00	SKPP36BA1000	$15410.00	TCAL125	$76.00	(4) 250-500 Cu (4) 250-500 Al
	LSIT	SKHH36BB1000	$12989.00	SKLL36BB1000	$15779.00	SKPP36BB1000	$16775.00			
	LIGT[1]	SKHH36BC1000	$12834.00	SKLL36BC1000	$15624.00	SKPP36BC1000	$16620.00			
	LSIGT[1]	SKHH36BD1000	$14199.00	SKLL36BD1000	$16989.00	SKPP36BD1000	$17985.00			
	LIT-CP[2]	SKHH36BE1000	$11924.00	SKLL36BE1000	$14714.00	SKPP36BE1000	$15710.00			
	LSIT-CP[2]	SKHH36BF1000	$13289.00	SKLL36BF1000	$16079.00	SKPP36BF1000	$17075.00			
1200[3]	LIT	SKHH36BA1200	$11624.00	SKLL36BA1200	$14414.00	SKPP36BA1200	$15410.00	Lugs not required[3]		
	LSIT	SKHH36BB1200	$12989.00	SKLL36BB1200	$15779.00	SKPP36BB1200	$16775.00			
	LIGT[1]	SKHH36BC1200	$12834.00	SKLL36BC1200	$15624.00	SKPP36BC1200	$16620.00			
	LSIGT[1]	SKHH36BD1200	$14199.00	SKLL36BD1200	$16989.00	SKPP36BD1200	$17985.00			
	LIT-CP[2]	SKHH36BE1200	$11924.00	SKLL36BE1200	$14714.00	SKPP36BE1200	$15710.00			
	LSIT-CP[2]	SKHH36BF1200	$13289.00	SKLL36BF1200	$16079.00	SKPP36BF1200	$17075.00			


[1]For grounded neutral systems (1**/3w or 3**4w) a neutral current sensor is required. Refer to page 3-69.
[2]For +24 Vdc Control Power Accessories refer to pages 3-66 to 3-69.
[3]100% UL rated SK1200 supplied with back-connected assembly which increases breaker depth. Refer to outline drawing 168D1678 Sh2 for details.
Note: All Spectra® breakers UL listed as HACR type. All Spectra® breakers marked CE.

Publications and Reference: See Section 22 for a complete list of additional product-related publications

Courtesy of store.ips.us

Quick Reference Guide
15-1200A Circuit Breakers
Electric Trip Spectra® RMS Breakers

Ratings do not apply to molded case switches. The interruption ratings and voltages shown in the table are maximum ratings. A circuit breaker of the type given in the left-hand column may be applied at the given circuit voltage in any electrical distribution system where the available fault current at the load terminals of the breaker does not exceed the value in the table. That circuit breaker type may also be applied at intermediate values of circuit voltage provided the available fault current at the load terminals of the breaker does not exceed the value in the table for the higher value of voltage.





SE 150

Spectra® RMS Circuit Breakers UL/CSA Ratings

Solid-State with Interchangeable Trip Unit (Rating Plug)

Circuit Breaker Type	Ampere Rating	No. Poles	Maximum Vac	UL Listed Interrupting Rating—kA 240 Vac	480 Vac	600 Vac	Dimensions Inches (mm) H	W	D	A	B	C	E	Approx. Ship Wt./Std. Pack
SE150 Current Limiting (UL File No. E-11592; CSA LR 40350)[1]														
SED[2]	15-150	2	480	18	18	—	6.31 (160)	4.12 (105)	3.38 (86)	2.41 (61)	2.47 (63)	.69 (18)	.72 (18)	5.65 lb/1
		3	600			14								
SEH[2]		2	480	65	25	—								
		3	600			18								
SEL		2	480	100	65	—								
		3	600			25								
SEP		2	480	200	100	—								
		3	600			25								
SF-250 Current Limiting (UL File No. E-11592; CSA LR 40350)[1]														
SFH[2]	70-250	2	480	65	35	—	10.12 (257)	4.12 (105)	3.81 (97)	3.87 (98)	3.87 (98)	.69 (18)	1.19 (30)	9.15 lb/1
		3	600			22								
SFL		2	480	100	65	—								
		3	600			25								
SFP		2	480	200	100	—								
		3	600			25								
SG600 Current Limiting (UL File No. E-11592; CSA LR 40350)[1, 3]														
SGH1[2,4]	60-150	3	600	65	35	25	10.09 (256) [5]	5.50 (140)	3.81 (97)	4.45 (113)	3.30 (84)	.91 (23)	1.18 (30) [5]	15.85 lb/1
SGD[2]	125-400	2	240	65	—	—								
		3												
SGH4[2]		2	600	65	35	25								
		3	600											
SGH6[2]	250-600	2	600	65	35	25								
		3	600											
SGL1[4]	60-150	3	600	100	65	65								
SGP1[4]		3	600	200	100	65								
SGL4	125-400	2	600	100	65	65								
		3	600											
SGP4		2	600	200	100	65								
		3	600											
SGL6	250-600	2	600	100	65	65								
		3	600											
SGP6		2	600	200	100	65								
		3	600											
SK1200 (UL File No. E-11592; CSA LR 40350)[1, 3]														
SKH8	300-800	2	600	65	50	25	15.50 (394) [6]	8.25 (210)	5.50 (140)	8.56 (217)	5.69 (145)	1.38 (35)	.62 (16) [6]	47.6 lb/1
		3												
SKL8		2	600	100	65	42								
		3												
SKP8		2	600	200	100	65								
		3												
SKH12	600-1200	2	600	65	50	25								
		3												
SKL12		2	600	100	65	42								
		3												
SKP12		2	600	200	100	65								
		3												

[1] UL listed as HACR (heating, air conditioning and refrigeration).
[2] Not current-limiting circuit breaker.
[3] Includes MicroVersaTrip Plus™ Trip Units and MicroVersaTrip PM™ Trip Units.
[4] MicroVersaTrip Plus™ Trip Units and MicroVersaTrip PM™ Trip Units only.
[5] Add 1.76 inches (45 mm) to each end with lugs and lug cover installed.
[6] Add 4.00 inches (101 mm) to upper end for SKP (100 kAIC-480V) lug cover.

Publications and Reference: See Section 22 for a complete list of additional product-related publications

Courtesy of store.ips.us

Molded Case Circuit Breakers
Industrial Circuit Breakers

Quick Reference Guide
15-1200A Circuit Breakers
Electric Trip Spectra® RMS Breakers

Ratings do not apply to molded case switches

IEC/JIS Ratings

Solid-State with Interchangeable Trip Unit (Rating Plug)

Circuit Breaker Type	Ampere Rating	No. Poles	IEC 947-2 Interruption Capacity — kA								Japanese Industry Standard Interruption Capacity kA			
			220-240 Vac		380-415 Vac		500 Vac		690 Vac		Vac			
			I_{cu}	I_{cs}	I_{cu}	I_{cs}	I_{cu}	I_{cs}	I_{cu}	I_{cs}	220-240	380-415	500	690
SE150 Current Limiting, 15-32A														
SED	15-32	2	18	9	10	5	—	—	—	—	18	10	—	—
		3					4	4					4	
SEH		2	65	33	15	10	—	—	—	—	65	15	—	—
		3					6	6					6	
SEL	15-32	2	100	50	20	15	—	—	—	—	100	20	—	—
		3					8	8	3	3			8	3
SEP		2	200	100	20	20	—	—	—	—	200	20	—	—
		3					10	10	5	5			10	5
SE150 Current Limiting, 40-160A														
SED	40-160	2	18	9	14	7	—	—	—	—	18	14	—	—
		3					14	7					14	
SEH		2	65	33	35	17	—	—	—	—	65	25	—	—
		3					25	12					18	
SEL	40-160	2	100	50	65	33	—	—	—	—	100	65	—	—
		3					40	20	5	5			25	5
SEP		2	200	100	100	50	—	—	—	—	200	100	—	—
		3					50	25	10	5			65	10
SF250 Current Limiting														
SFH	70-250	2	65	33	35	17	—	—	—	—	65	25	—	—
		3					25	12					18	
SFL	70-250	2	100	50	65	33	—	—	—	—	100	65	—	—
		3					40	20	14	7			25	14
SFP		2	200	100	100	50	—	—	—	—	200	100	—	—
		3					65	33	18	9			65	18
SG600 Current Limiting														
SGH1[1]	60-150	3	65	33	25	13	18	9	—	—	65	25	18	—
SGL1[1]			100	50	65	33	35	18	14	7	100	65	35	22
SGP1[1]			200	100	100	50	50	25	18	9	200	100	65	35
SGH4	125-400	2	65	33	25	13	—	—	—	—	65	25	—	—
		3					18	9					18	—
SGL4		2	100	50	65	33	—	—	—	—	100	65	—	—
		3					35	18	14	7			35	22
SGP4		2	200	100	100	50	—	—	—	—	200	100	—	—
		3					50	25	18	9			65	35
SGH6	250-600	2	65	33	25	13	—	—	—	—	65	25	—	—
		3					18	9					18	—
SGL6		2	100	50	65	33	—	—	—	—	100	65	—	—
		3					35	18	14	7			35	22
SGP6		2	200	100	100	50	—	—	—	—	200	100	—	—
		3					50	25	18	9			65	35
SK1200														
SKH8	300-800	2	65	16	50	13	25	13	—	—	65	50	25	—
		3												
SKL8		2	100	25	65	16	42	21	14	14	100	65	42	14
		3												
SKP8		2	140	35	85	25	50	25	18	18	140	85	50	18
		3												
SKH12	600-1250	2	65	16	50	13	25	13	—	—	65	50	25	—
		3												
SKL12		2	100	25	65	21	42	16	14	14	100	65	42	14
		3												
SKP12		2	140	35	70	25	50	25	18	18	140	85	50	18
		3												

[1] MicroVersaTrip Plus™ trip system only.



SE



SF



SG



SK

store.ips.us

Courtesy of store.ips.us