JAVASCRIPT Execution Context

File → run

Program

{ } → Global EC

(this) → in Browser is Window Object

* Execute on thread
* JS is single threaded

① Global Execution Context
② Function Execution Context
③ Eval EC (optional)

{ } → Memory Creation Phase (Places alloted to all variable & operations)

→ Execution Phase

Example

```
let val 1 = 10
let val 2 = 5

function addNum (num1, num2) {

let total = num1 + num2
return total
}
```

the

Quick Work
Page No.:
Date:
M T W T F S S

let result 1 = addNum (val 1, val 2)
let result 2 = addNum (10, 2)

Step 1 Global Execution
↓
this

1st cycle

step 2 Memory Creation Phase

val 1 → undefined
val 2 → undefined
addNum → definition
result 1 → undefined
result 2 → undefined

step 3 Execution Phase

val 1 ← 10
val 2 ← 5
~~addNum~~ (nothing to be executed)

New Executional Context

addNum → | new variable environment + Execution thread |

☆ The number of times function is called executed that number of time new executional Context is Created

Memory Creation Phase & Execution Phase is done again

Memory Phase

val 1 → undefined
val 2 → undefined
total → undefined

Execution context

num 1 → 10
num 2 → 5
total → 15

Deletes once work done

now returns to it parent execution context

Now

step3

val 1 ← 10
val 2 ← 5
add Num →
result 1 = 15
result 2 =

Memory Phase

val 1 → undefined
val 2 → undefined
total → undefined

Execution Phase

num 1 → 10
num 2 → 2
total → 12 → this total will be

new Variable environment + thread

taken to parent execution context

~~Once th.~~

Now

Step 3

Global Execution Context

val 1 ← 10
val 2 ← 2
result1 ← 15
result 2 ← 12

Now the Child Execution Context will be deleated after work

Call stack

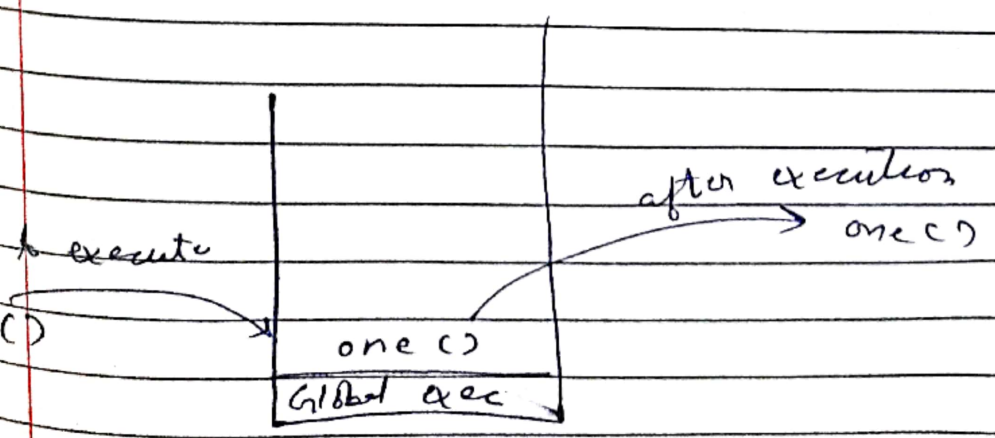

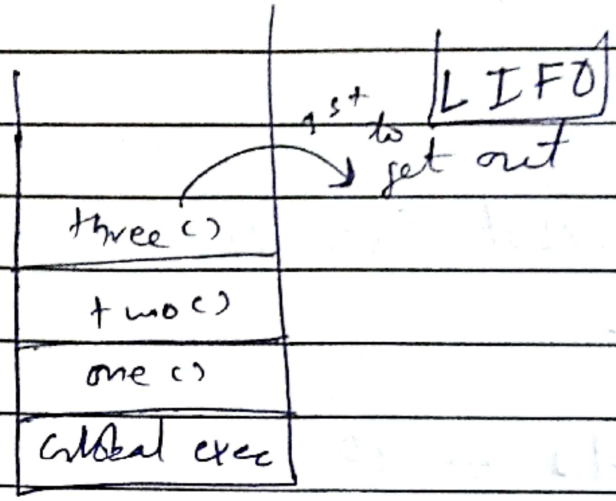

Scanned with OKEN Scanner