

Interaction Design

Command Language

P.VISWANATHAN

pviswanathan@vit.ac.in

04-DEC-2002

Key references/literature:

D.J. Mayhew (1992) Principles and guidelines in software user interface design. Prentice Hall.

chapter 7: dialog styles-command language

chapter 6: dialog styles-question and answer

chapter 17: user documentation.

ISO/FDIS 9241 (1997) Ergonomic requirements for office work with visual display terminals (VDTs).

Part 15: command dialogues.


C.M. Brown (1989) Human-computer interface design guidelines. Ablex Publ.

Chapter 3: effective wording.

What is a Command Language (CL)

- CL were used by many early computers and they remain very common.
- CL may however suffer from un-meaningful names.
- CL has usually a prompt (e.g. `c:\>`) to tell the user where to type in the commands.
- CL requires commands to be expressed using a precise syntax, and associated parameters, and are intolerant of even the slightest syntactic errors.
- The initiative of navigation is on the user who has to know what the allowable commands are and to have a clear idea of the function.
- CL is clearly unsatisfactory for novice users, but for the expert it typically represents the quickest form of communication, especially where abbreviations for commands names are allowed (e.g. `<ctrl> <s>` to save a file).

Command language interface

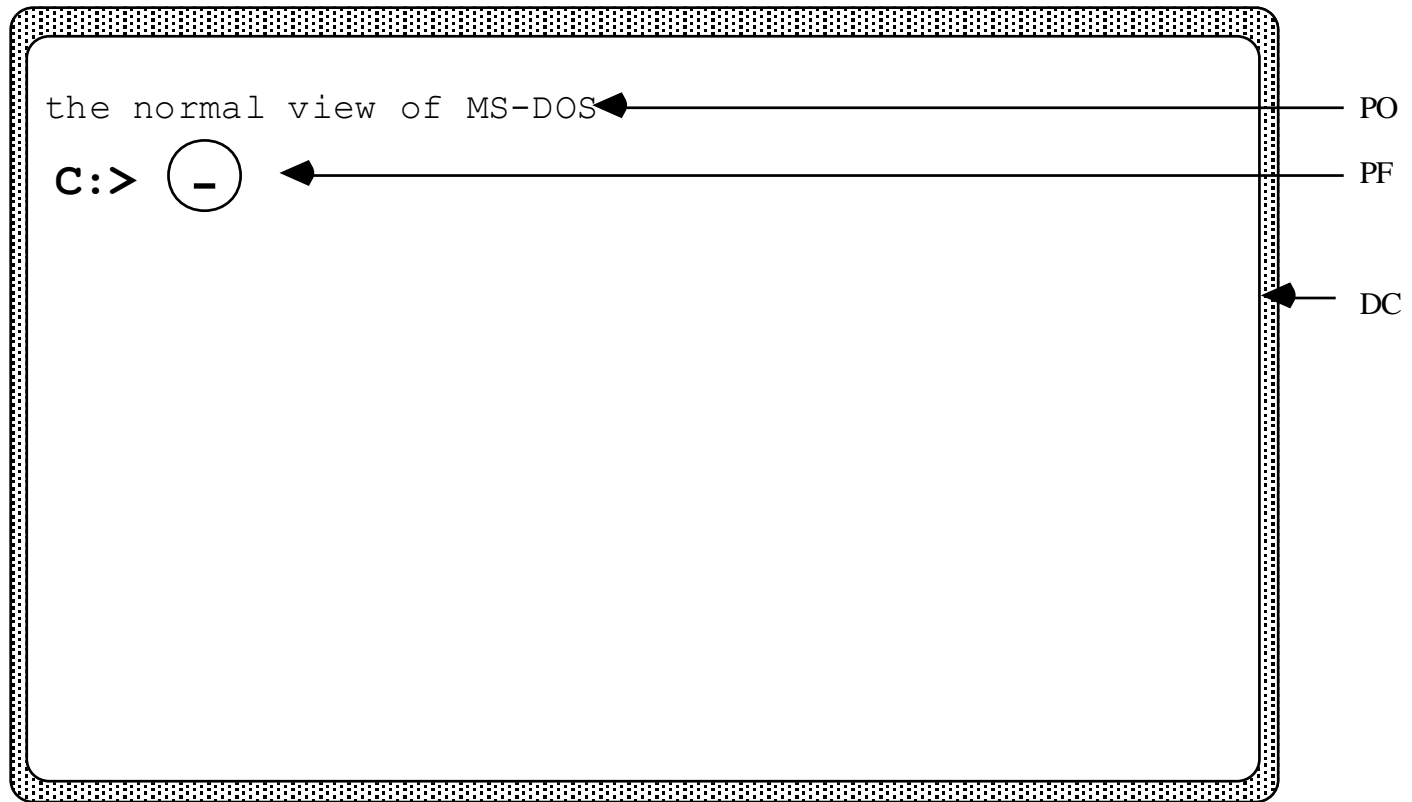

[PO: perceivable object; PF: perceivable function point; DC: dialogue context]

Basic definitions (1)

- **Command (C):**
whole word (text string), abbreviation, or string of words representing actions requested of the system.
- **Argument (A):**
independent variable (including object) used in a command phrase to modify or direct the action of a command (NOTE: arguments often include *parameters*).
- **Command language (CL):**
command set(s), phrases, structure and syntax associated with a specific interaction of a user with a system by means of commands.
- **Command language structure:**
logical structure of the command dialogue (and associated phrases).
- **Command phrase:**
phrase including the command (words or their abbreviations) and associated separators and arguments (with parameters).
- **Command set:**
all available commands to the user to perform a given task in a particular application context.
- **Command syntax:**
sequential and other procedural requirements for inputting the components into command phrases.

Basic definitions (2)

- **Command word (name):**
word (or name) used as a command in the command dialogue and representing actions requested from the system.
- **Command word abbreviation:**
shortened version of a command word which is recognizable by the system as representing the command.
- **Hot keys:**
keys, other than numbered function keys (e.g. F1, F2, etc.), not normally used for data entry such as modifier keys (e.g. CTRL, ALT), or key combinations (e.g. CTRL+c) which execute immediately without the need for any additional operations.
- **Keyword:**
word in a command phrase identifying a particular argument class (e.g. type font).
- **Modifier:**
argument that alters or limits the action of a command.
- **Parameter:**
value used in conjunction with a keyword to modify the action of a command or argument.
- **Separator:**
string of one or more characters, or a pause (for voice input), used to separate or organize elements in the command phrase and between command phrases.

Syntactical structure (1)

- **General:**

The CL should be designed such that users enter Cs in a manner which is natural or familiar to the user without concern for how the system will process the Cs to produce the output (e.g. the CL should reflect the user's needs rather than the system process and the syntax structure should be consistent with user expectations, task requirements and input devices).

- **Internal consistency:**

The CL should be internally consistent so Cs with the same name, function in the same way throughout the application regardless of the context. Cs that do the same thing should have the same name.

- **Macros:**

If sequences of command words or command phrases are used frequently, users should be allowed to create and use higher level commands (macros) for these sequences.

[NOTE macros should follow the same recommendations as commands]

- **Argument structure:**

Command phrases should be structured to minimize the complexity of arguments.

Long Lists - if arguments are long (more than 8 arguments), then additional command names should be created, functions should be combined under single arguments, or lists should be broken into some logical functional groupings

Dependencies - dependencies between arguments of a command should be not dramatically change the meaning of the command phrase (e.g. command “*quit filename*” to save data to the file named *filename*; command *cancel* to cancel without saving {instead of the more complex “*quit -c*”})

Syntactical structure (2)

- **Syntax:**
 - appropriateness for modality - the syntax structure of the command phrases should be appropriate for the input modality (e.g. voice, typed input, gestures).
[EXAMPLE voice input is used exclusively and the syntax is completely consistent with spoken language]
 - consistency with modality - syntax should be consistent within a given modality.
[EXAMPLE for a screen-based command dialogue, the object follows the action (e.g. 'action - object' syntax) throughout the application]
 - consistency across modalities - syntax should be consistent across modalities as much as possible.
[EXAMPLE voice is used as well as typed input for commands in an application and the syntax is 'object-action' for both modalities]
- **Command separation:**
 - if the input of multiple commands is allowed, a simple and consistent method to separate commands should be used.
[EXAMPLE BLANKS - if system constraints do not require the use of a specific separator, BLANKS should be used rather than punctuation marks to separate commands]
 - [EXAMPLE STANDARD SYMBOL - if system constraints require a separator other than BLANKS to distinguish separate stacked commands, a simple STANDARD SYMBOL should be used consistently; e.g. using the slash (/) in the sequence of commands words "*sort/format/print*"]

Syntactical structure (3)

- **Language compatibility**

command structure (semantics and syntax) should correspond to the terminology and data organisation familiar or natural to the user.

[EXAMPLE the rules for natural language syntax (e.g. English, French, etc) are applied in designing a query language]

- **Command arguments**

command arguments should be easy for the user to specify and to relate to the commands that they modify.

[NOTE in some cases, it may be appropriate to represent arguments as names rather than single letters]

command elements linkage - the command dialogue should be structured so that the relationship between the command phrase elements is clear.

arguments format - if appropriate to the task, keyword format (parameter designated by argument identifiers that precede them) should be used rather than positional formats (parameter designated by their sequential position in the argument string following the command).

[EXAMPLE (keyword format): *change* shape=round colour=red size=4]

[EXAMPLE (positional format): *change* round red 4]

placement of optional argument - if keyword format is used, optional arguments should be placed at the end of the argument list.

Separation of arguments - (a) if BLANK spaces are allowed, a variable number of blanks should be allowed between command elements; (b) if other separators are used, a simple standard symbol should be used consistently.

[EXAMPLE using the comma (,) in the command phrase “*print* fileA,fileB,fileC”]

Syntactical structure (4)

- **FLAT vs DEEP structure:**

a **flat** CL has lots of **commands** at every level whereas

a **deep** CL has a few basic **commands** which put the system into a level of input mode at which it will recognize certain **commands**.

Advantage of a flat CLs is that they are very powerful (very complex command sequences can be expressed by stringing the right commands together, but require users to remember lots of command words (e.g. UNIX).

- **POSITIONAL vs KEYWORD:**

positional CLs have a strict **syntax**: the order in which command words are issued contains information (e.g. UNIX command: *mv filename directoryname*).

For CLs which recognize **keywords**, the user can string **commands** together in any order - if there is potential ambiguity, the system will query/ask for confirmation before executing a command.

- **MNEMONICS:**

most CLs use abbreviated natural language words as commands to facilitate recall (e.g. *mkdir* for “*make directory*”).

Command representation (1)

- **Command names**

general - command names should be easily related to their function, generally stated as verbs (usually in imperative form), be easily remembered by users, and be consistent with the user's task requirements, experience and language usage.

distinctiveness - (a) command names should be distinctive; (b) command names should be avoided that look or sound similar but have different meanings; (c) if command operations have inverse or counterparts, congruent pairs of commands for these operations should be provided.

[EXAMPLE (a) in English, the words *insert* and *delete* are more semantically distinct than *add* and *remove* (i.e. *add* and *remove* typically have many different interpretations)]

[EXAMPLE (b) use *replace* rather than *change*]

[EXAMPLE (b) in English, *store* and *restore* should be avoided because they have different meanings but sound similar]

[EXAMPLE (c) *read/write*, *open/close*, *yes/no*]

user orientation - command names should be chosen that are consistent with the user's experience and correspond to the user's operational language.

[NOTE if there are multiple user groups, it may be important to provide different sets of command names for these different groups]

emotional content - words selected as command words should be emotionally neutral.

[EXAMPLE in English use *cancel* instead of *abort* and use *delete* rather than *kill*]

command word length - if command input is typed, command words should be not exceed 7 characters.

suffixes and prefixes - command word should not incorporate unnecessary suffixes or prefixes.

[EXAMPLE in English, *delete* rather than *deleting*, *deleted*, or *deletes*]

Command representation (2)

- **Abbreviations**

general - if users must type commands, they should be able to use abbreviations instead of typing complete commands. If it is appropriate to the task to provide command abbreviations, these abbreviations should be obvious to the user, easily remembered, and facilitate command input.

[NOTE if the command input is an abbreviation and system constraints allow, the 'whole' command name may be displayed prior to, or simultaneous with, execution (especially during learning the CL)]

abbreviations rules - (a) if command names are shortened, they should be shortened using as simple a rule as possible; that rule should apply to all commands and those arguments that can be abbreviated; (b) if the task requires the user to generate and remember commands, simple truncation should be used to shorten commands.

[EXAMPLE (a) truncation: *pr* for *print*; dropping of vowels: *prnt* for *print*]

[EXAMPLE (b) to drop off characters beyond those necessary to keep the command unique (e.g. *q* for *quit*; *qui* for *quit* and *que* for *query*)]

Command representation (3)

- **Function keys and hot keys**

general - if function keys or hot keys are used for command input, their use should be obvious to users or the key assignments should be readily accessible and these assignments should be consistent throughout the application.

[NOTE consider using function keys and hot keys for frequently used commands or when it is important to speed up command entry]

function key consistency - function key assignments for commands should be consistent across related tasks within an application, particularly for 'generic' commands like help.

hot key consistency - hot keys should have the same meaning throughout the whole application.

[NOTE if commands can be accessed by menu as well as typing, the hot key assignments should be the same as the accelerators used in the menus]

[EXAMPLE *ALT/c* is used for *cancel* and it is used consistently to provide that action throughout the application]

consistent grouping of modifiers - if modifier keys (e.g. *CRTL* or *ALT* keys) are used with other keys, there should be a consistent rule of the modifier key usage.

[EXAMPLE *ALT* + letter keys is used for navigation and window manipulation and *CRTL* + other letter keys is used for data manipulation]

limited modifiers - multiple simultaneous modifier keys should be used in hot keys only if there are more commands than can be accommodated meaningfully by single modifier keys.

[EXAMPLE in a dialogue, *ALT+p* (rather than *ALT+CRTL+p*) is used to issue a print command]

[NOTE if possible, use letter keys that are mnemonic in combination with modifiers; it may be desirable to require the depression of more than one modifier key to reduce the possibility of accidentally causing a destructive action]

Command name design (1)

Congruent: Hierarchical	Congruent: Non hierarchical	Non congruent: Hierarchical	Non congruent: Non hierarchical
Move robot forward move robot backward	Advance retreat	Move robot forward change robot backward	Go back
Move robot right move robot left	Right left	Change robot right move robot left	Turn left
Move robot up move robot down	Straighten bend	Change robot up move robot down	Up bend
Move arm right move arm left	Swing out swing in	Change arm right move arm left	Pivot sweep
Change arm open change arm closed	Release take	Change arm open move arm close	Unhook grab
Rating: 1.86	1.63	1.81	2.73
Errors #1: 0.50	2.13	4.25	1.63
Errors #2: 0.75	1.25	4.63	2.38

[taken from Carroll (1982) Learning, using and designing filenames and command paradigms.
Behaviour & Information Technology Vol 1(4):327-346]


Command name design (2)

	Notational	English-like
	Find:/tooth/;-1	Backward to “tooth”
	List:10	List 10 lines
	List:/ko/;* l:/ko/;*	List all lines with “ko” lalw “ko”
% task completed: novice	28	42
% task completed: familiar	43	62
% task completed: expert	74	84
% erroneous commands: novice	19.0	11.0
% erroneous commands: familiar	18.0	6.4
% erroneous commands: expert	9.9	5.6

[taken from Ledgard, Whiteside, Singer and Seymour (1980) The natural language of interactive systems.
Communications of the ACM vol 23:556:563]

Command name design (3)

Specific	General
Fetch	Transfer
Send	Put
Front	Move
Insert	Add
Rubout	Edit
Split	Open

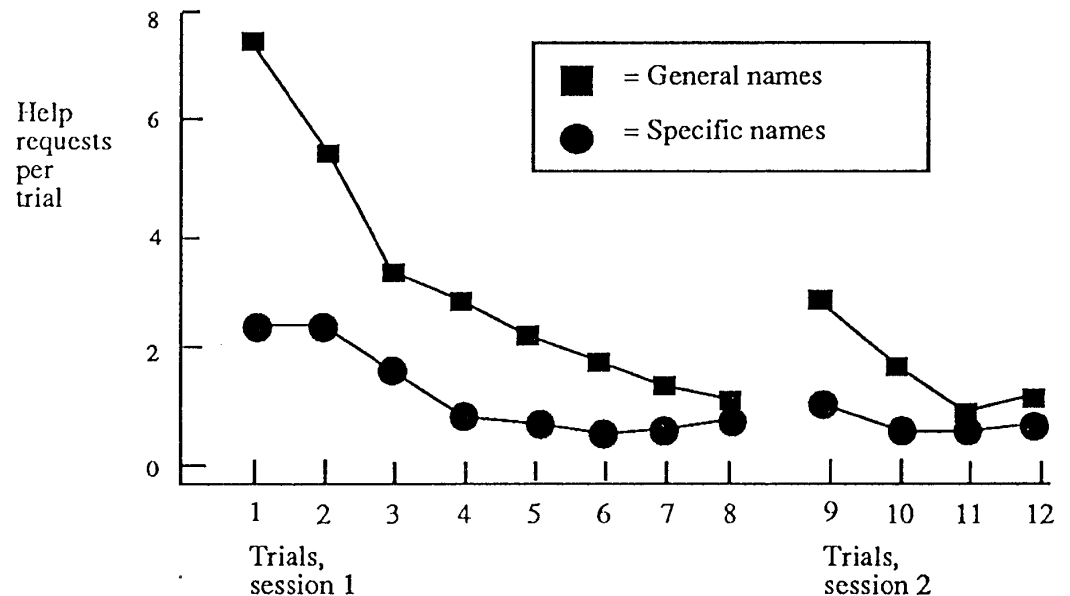

Proceedings, Human Factors in Computer Systems, March 1985, 5-1.
 MacLean, and Morton, "Learning and Remembering Interactive Commands",
 From Bartolq, Hammond,

Command language syntax design

Poor:

VolB!FileA!D\$\$

FileA!VolB!ER\$L!:KO:!*\$\$

Improved:

search (for) filea (in) volb.

open filea (in) volb. list all
lines with "KO".

OR

s filea volb.

o filea volb. lal "KO".

Command name abbreviation design (1)

- | | | |
|----------------------------|------------------|-------|
| 1. Truncation: | append = | APPE |
| | execute = | EXEC |
| 2. Vowel deletion: | append = | APPND |
| | execute = | EXCT |
| 3. Contraction: | append = | APND |
| | execute = | EXTE |
| 4. Minimum to distinguish: | translate = | TRANS |
| | transfer = | TRANF |
| 5. Phonetic: | append = | APND |
| | execute = | XQT |
| 6. First syllable: | append = | APPN |
| | execute = | EXEC |
| 7. User created: | (by individuals) | |

Command name abbreviation design (2)

Name	Abbreviations	
	Poor:	Improved:
Move forward	MovF	MovF
Move backward	Mvb	MovB
Insert	I	Ins
Delete	Dl	Del
Replace	Repl	Rep
Search	Srch	Sea
Delete	X	Del
Send	Sn	Sen
Print	Prt	Pri
Search	Srch	Sea
Send	Sn	Sen
Find	Fi	Fin
Choose	Ch	Cho

Command name abbreviation design (3)

Poor:		Improved:	
<u>Names</u>	<u>Abbreviations</u>	<u>Names</u>	<u>Abbreviations</u>
Next page	NP	Next page	NP
Previous page	PP	Previous page	PP
Home	H	First page	FP
Next document	ND	Next document	ND
Previous document	PD	Previous document	PD
First document	FD	First document	FD
Screen print	SP	Print screen	PS
Print document	PR	Print document	??
Mail it	MI	Print result	PR
Request	R	Display request	DR
Help	H	Display help	DH
Time	T	Display time	DT
Full	FL	Format full	FF
Short	SH	Format short	FS
Location	LO	Format location	FL
Select services	SS	Select services	SS
Exit	EX	Exit services	ES
Modify	M	Modify request	MR
New search	NS	Change request	CR
Change drawer	CD	Change drawer	CD
Change cabinet	CC	Change cabinet	CC

Input and output considerations (1)

- **General**
users should be in control of the dialogue at all times, be able to easily recover from errors, and not be required to input more information than is necessary for successful task performance.
- **Command reuse**
if the same sets of commands are used repeatedly during a work session, the system should provide a way of reusing the commands without requiring the user to type them again.
[EXAMPLE giving users a command history list from which they can select a previously used command]
- **Command queuing**
users should be provided with the capability to key in a series of commands (command queuing or stacking) rather than wait for the system to execute each individual command.
[NOTE separators should be provided to separate command strings (see above under separators)]
- **Error correction**
if errors occur, re-entry, or editing, should be required preferably for the erroneous portion of the command and associated parameters.
- **Editing**
(a) users should be allowed to edit commands prior to execution; (b) if the application has a text editor, the same text editing conventions used in the text editor should be apply to command dialogue editing.
- **Misspelling**
if appropriate for the task and system constrains allow, the system should provide for interpretation and acceptance of misspelled commands unless there is ambiguity as to what command was intended.

Input and output considerations (2)

- **Defaults**
defaults should be provided to minimise typing requirements and to facilitate learning.
[EXAMPLE if the disk drive is not identified it is assumed to be the currently set default drive]
[NOTE arguments that have default parameter values are often referred to as optional arguments]
- **Destructive commands**
(a) if a command may have unintentional or destructive consequences (e.g. *delete* a file): the user should be allowed to *cancel* or *undo* the previous (last) command and its effects; (b) the user should be required to confirm the intention of the command before command execution.
- **Customisation**
if system constraints allow, users should have the capability to designate and use synonyms for commands and command macros and they should be able to revert back to the default names when desired.
- **Echoing typed commands**
(a) the user's input should be displayed (echoed) in a consistent position; (b) typed in command characters should be displayed (echoed) as the user types each character.
[EXAMPLE (a) displayed on a 'command line' at the bottom of the screen or displayed after the prompt on the screen]
- **Output control**
if appropriate to the task and system constraints allow, the command phrase should allow arguments for redirecting output, interrupting output, or stopping output.
- **Consistent output format**
commands resulting in similar or related output should present their resulting data in a consistent format.
[EXAMPLE use of a single presentation format for lists of files, processes, directories, etc.]

Feedback and Help (1)

- **General**

feedback and help should be provide users with information allowing them to control the dialogue, recognise and recover from errors, and determine their next course of action.

- **Command processing**

completion - the system should indicate that the command processing has been completed by displaying the output resulting from the command and/or prompt for the next command.

[NOTE the feedback should be provide within 2 seconds]

intermediate feedback - if the command processing is expected to continue for a longer period (more than 5 seconds), visual feedback indicating that the process is continuing should be provided to the user.

[EXAMPLE hourglass with and (time) running out; repeatedly displaying a message “working”]

[NOTE it may be appropriate to provide such information earlier]

processing status - if appropriate to the task and system constraints allow, user should be provided with feedback concerning the relative amount of time remaining to complete the process.

[EXAMPLE a status bar is shown indicating the amount of processing completed]

- **Error feedback**

timing - error feedback should be provided after the full command (including associated parameters) has been entered rather than as soon as the error is discovered by the system.

[EXAMPLE the user misspells the command print by pressing the t key rather than r key and the system indicates the mistake after the entire command has been entered (and not before)]

highlighting - the unacceptable portion of the command should be highlighted (in the context of the full command or a logical part thereof).

[EXAMPLE the error portion might be highlighted by using reverse video or different colour]


Feedback and Help (2)

- **Command information**
if appropriate to the task, the user should be provided on request with information on:
 - * commands available and their meaning
 - * appropriate syntax structure
 - * required and optional arguments available (especially if the number is large)
 - * command entry history
- **Performance aids**
performance aids should be provided depicting command characteristics (e.g. name, function, syntax, parameters, abbreviations, hot key, function key assignment).
[EXAMPLE using a keyboard template to depict function key assignments for commands or using a quick reference card to list all available commands and associated information]
- **Long argument lists**
if a command has long list of arguments and associated parameters, the use of additional dialogue techniques should be provided.
[EXAMPLE for a command language with numerous arguments, the user can access a dialogue box that has a list with parameter values that can be selected for each command argument]

How to describe a CL?

	Content	Examples
Meta Syntax	Syntax to describe the syntax of the command language with meta symbols	Backus-Naur-Form (BNF) Syntax diagram State-transition net Written text
CL-Syntax	Syntax of the command language; major distinction between non-terminal and terminal symbols	Command := name + [argument [parameter]*]*
Commands	List of all specified commands	<i>cancel</i> <i>print</i> filename <i>list</i> commands

Command language interaction

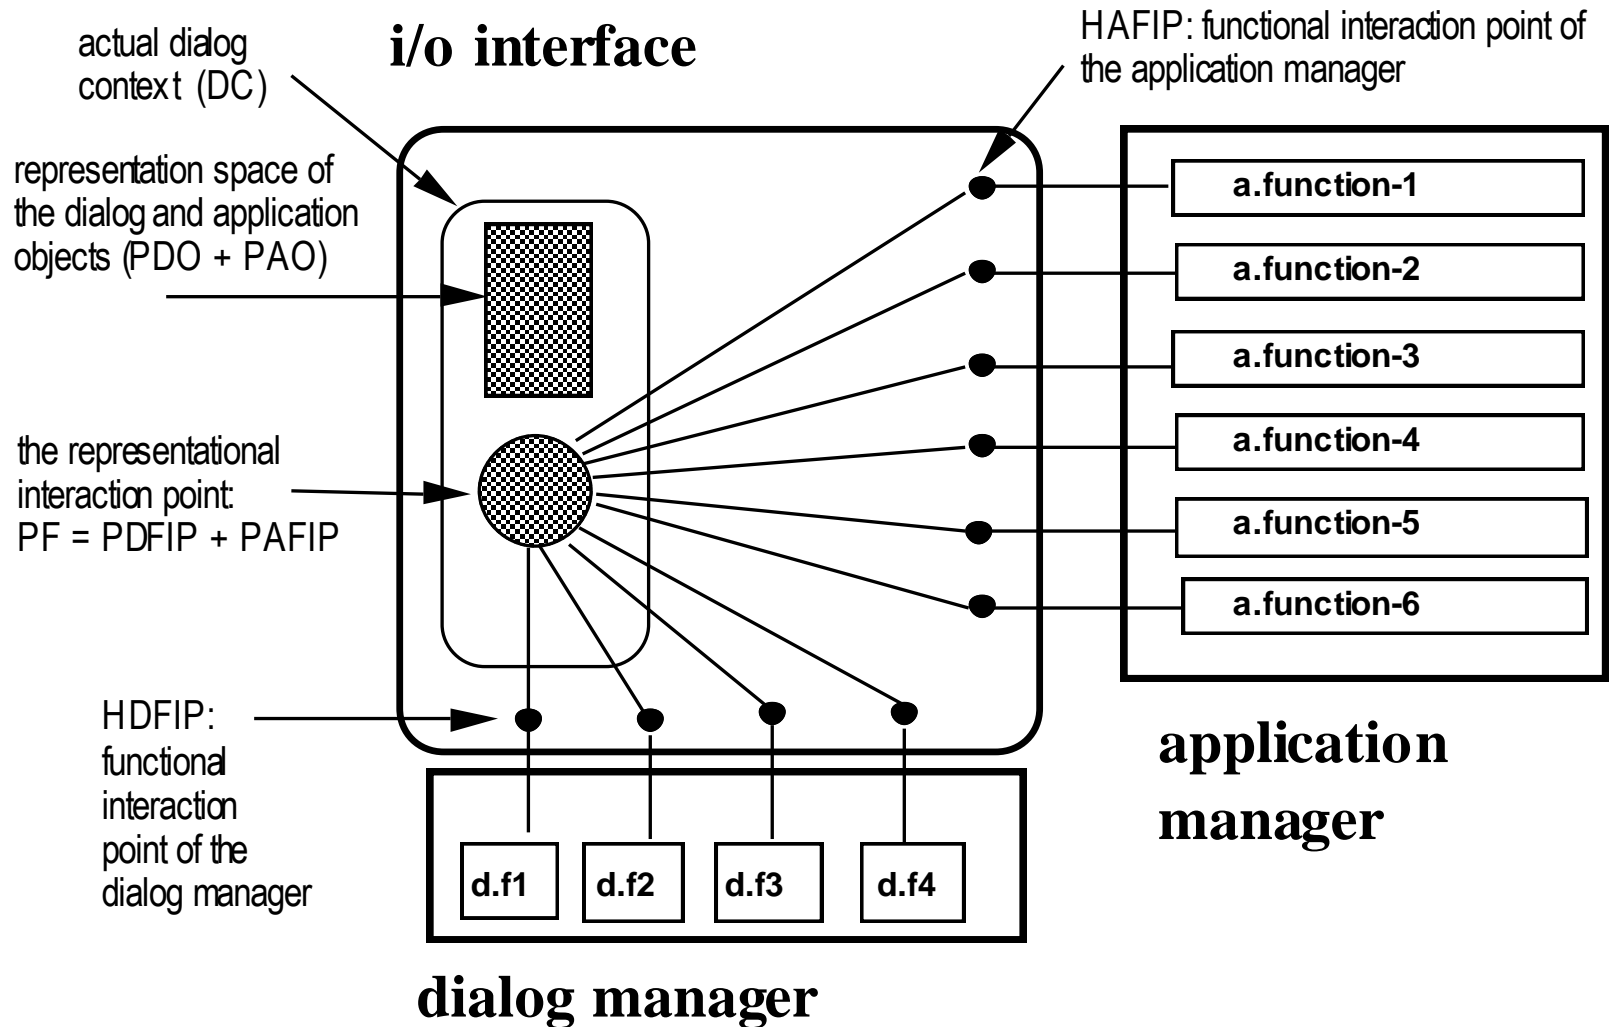

When to use CLs?

- **User characteristics**
 - positive attitude
 - high motivation
- **Knowledge and expertise**
 - moderate to high typing skills
 - high system experiences
 - high task experiences
 - high application experiences
 - infrequent use of other interaction styles
 - high computer literacy
- **Job and task characteristics**
 - high frequency of use
 - formal training
 - mandatory use
 - low turnover rate
 - high task importance
 - low task structure

Assignment-1 (1 group a 5)

- **Design a CL for a coffee machine:**
 - 1) analyze all functions of the coffee machine in IPO;
 - 2) design a CL (incl. abbreviations) for this machine;
 - 3) discuss the pros and cons of your design;
 - 4) prepare a presentation of about 10 min.

Assignment-2 (1 group a 5)

- **Assess the UNIX CL:**
 - 1) analyze the document about the UNIX CL;
 - 2) search on the internet for additional information about the described commands;
 - 3) assess this CL using the ISO 9241:part 15 procedure;
 - 4) discuss the pros and cons of this CL and come up with re-design recommendations;
 - 5) prepare a presentation of about 10 min.

Assignment-3 (1 group a 5)

- **Assess the PDP-11 editor CL:**
 - 1) analyze the document about the PDP-11 editor CL;
 - 2) search on the internet for additional information about the described commands;
 - 3) assess this CL using the ISO 9241:part 15 procedure;
 - 4) discuss the pros and cons of this CL and come up with re-design recommendations;
 - 5) prepare a presentation of about 10 min.

Assignment-4 (1 group a 5)

- **Design a CL for a phone:**
 - 1) analyze all basic functions of the phone on your desk;
 - 2) design a CL (incl. abbreviations) for this machine;
 - 3) discuss the pros and cons of your design;
 - 4) prepare a presentation of about 10 min.