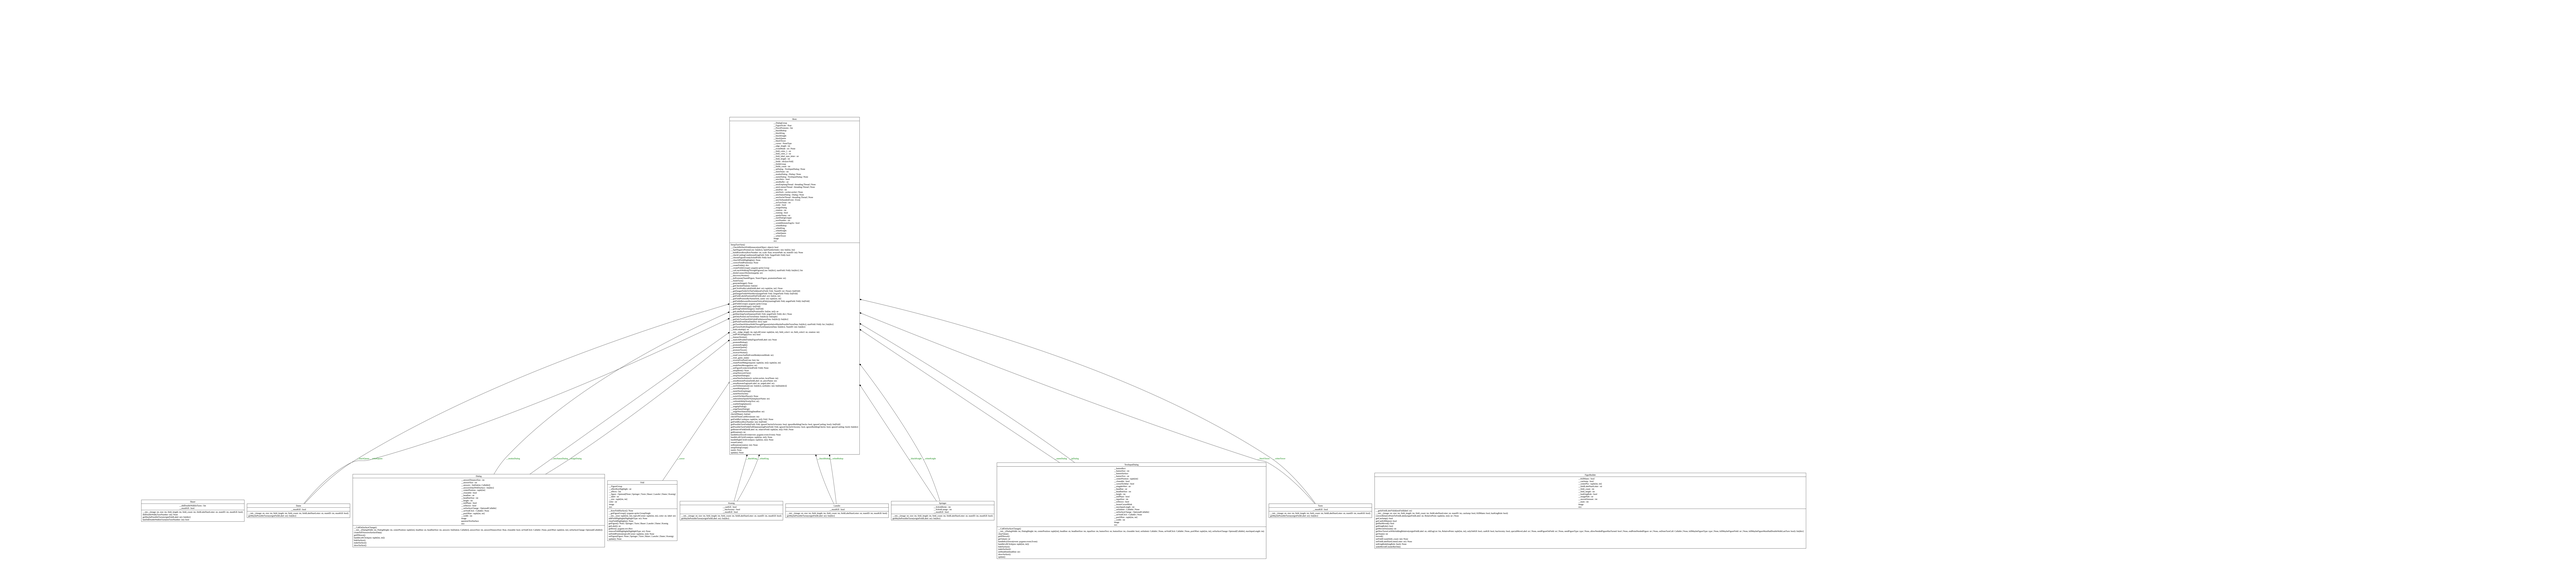

Brett
__DialogGroup
__FigureScale : float
__PawnPromotes : list
__blackBishop
__blackKing
__blackKnight
__blackQueen
__blackTower
__cursor : NoneType
__edge_length : int
__eventMode : str | None
__field_color_1 : str
__field_color_2 : str
__field_label_start_letter : str
__field_length : int
__fields : dict[str:Feld]
__fieldsGroup
__fields_count : int
__ipDialog : TextInputDialog | None
__meinTeam : int
__modusDialog : Dialog | None
__nameDialog : TextInputDialog | None
__netzAktiv : bool
__netzBuffer : str
__netzEmpfangThread : threading.Thread | None
__netzListenerThread : threading.Thread | None
__netzPort : int
__netzSock : socket.socket | None
__netzStatusDialog : Dialog | None
__netzSucheThread : threading.Thread | None
__netzVerbundenEvent : Event
__onTurnTeam : int
__ready : bool
__resignDialog
__rotation : int
__running : bool
__spielerName : str
__startDialogGruppe
__turnNumber : int
__wendeRemoteZugAn : bool
__whiteBishop
__whiteKing
__whiteKnight
__whiteQueen
__whiteTower
image
rect
SetupTurnVars()
__CheckIfIsNotAFeldInstance(testObject: object): bool
__SpitNegativePoints(Line: list[dict], SplitNumberIndex: int): list[list, list]
__buildPawnRow(RowNumber: int, scale: float, texturePath: str, teamID: int): None
__checkCastlingConditions(KingField: Feld, TargetField: Feld): bool
__chooseFigureEvent(clickedField: Feld): bool
__clearAllFieldHighlights(): None
__correctFieldPositions(): None
__createFields(): dict
__createFieldsGroup(): pygame.sprite.Group
__cutLineAtWalkingThroughFigures(Line: list[dict], startField: Feld): list[dict] | list
__direktConnectWorker(targetIp: str)
__discoveryWorker()
__doPromote(Team0Figure, Team1Figure, promotionName: str)
__finishTurn()
__generateImage(): None
__getCheckedTeams(): list[int]
__getClickPosByLabel(fieldLabel: str): tuple[int, int] | None
__getDangerFieldsToTheField(testForField: Feld, TeamID: int | None): list[Feld]
__getDangerFieldsWhenMove(targetField: Feld, OriginField: Feld): list[Feld]
__getFieldLabelsPositionIDs(FieldLabel: str): list[int, int]
__getFieldPositionByName(field_name: str): tuple[int, int]
__getFieldsBetweenHorizontalVerticalOnly(startingField: Feld, targetField: Feld): list[Feld]
__getFieldsGroup(): pygame.sprite.Group
__getFieldsWithKings(): list[Feld]
__getKingFieldsInDanger(): list[Feld]
__getLabelByPositionIDs(PositionIDs: list[int, int]): str
__getMatchingTurnData(startField: Feld, targetField: Feld): dict | None
__getOnlyPointsList(TurnsDatas: list[dict]): list[tuple]
__getOnlyTurnDataWithValidFields(turnsData: list[dict]): list[dict]
__getPointFromDict(DataDict: dict): tuple
__getTurnDataWithoutWalkThroughFigures(relativeMaybePossibleTurnsData: list[dict], startField: Feld): list | list[dict]
__getTurnsNotKillingMatesFromTurnData(turnsData: list[dict], TeamID: int): list[dict]
__holeLokaleIp(): str
__init__(edge_length: int, topLeftCorner: tuple[int, int], field_color1: str, field_color2: str, rotation: int)
__istIPv4Gueltig(ipText: str): bool
__listenerWorker()
__markAllPosibleFields(FigureFieldLabel: str): None
__promoteBishop()
__promoteKnight()
__promoteQueen()
__promoteTower()
__receiverWorker()
__resetCursorAndSetEventMode(eventMode: str)
__reset_game_state()
__reverseFirstPart(Line: list): list
__rotatePoint90degree(point: tuple[int, int]): tuple[int, int]
__sendeNetzMessage(text: str)
__setFigureEvent(clickedField: Feld): None
__setupBrett(): None
__setupNetzwerkVars()
__setupStartDialogs()
__setzeNetzSocket(sock: socket.socket, localTeam: int)
__setzeRemotePromo(fieldLabel: str, pieceName: str)
__setzeRemoteZug(startLabel: str, targetLabel: str)
__sortToDestination(Line: list[dict], sortIndex: int): list[list[dict]]
__starteMultiplayer()
__starteNetzEmpfang()
__starteNetzSuche()
__switchToOtherPlayer(): None
__uebernehmeSpielerName(playerName: str)
__verbindeMitIpText(ipText: str)
__waehleSingleplayer()
__zeigeIpDialog()
__zeigeNameDialog()
__zeigeNetzStatusDialog(headline: str)
checkIfMate(): list[int]
checkIfTeamCanMove(team: int)
getFieldByCords(pos: tuple[int, int]): Feld | None
getFieldRow(RowNumber: int): list[Feld]
getPossibleTurnFields(Field: Feld, ignoreChecksOrAnxiety: bool, ignoreBuildingChecks: bool, ignoreCastling: bool): list[Feld]
getPossibleTurnFieldsFullData(startingPointField: Feld, ignoreChecksOrAnxiety: bool, ignoreBuildingChecks: bool, ignoreCastling: bool): list[dict]
getRelativeField(fieldLabel: str, relativeField: tuple[int, int]): Feld | None
getRotation(): int
handleKeyDownEvent(event: pygame.event.Event): None
handleLeftClickEvent(pos: tuple[int, int]): None
handleRightClickEvent(pos: tuple[int, int]): None
restartGame()
setRotation(rotation: int): None
setupDialogGroup()
start(): None
update(): None
__blackPawn __whitePawn
Bauer
__didDoubleWalkInTurns : list
__mustKill : bool
__init__(image: str, size: int, field_length: int, field_count: int, fieldLabelStartLetter: str, teamID: int, mustKill: bool)
didDoubleWalk(TurnNumber: int): None
getMaybePossibleTurns(originFieldLabel: str): list[dict]
hasDidDoubleWalkInTurn(testTurnNumber: int): bool
__blackQueen __whiteQueen
Dame
__mustKill : bool
__init__(image: str, size: int, field_length: int, field_count: int, fieldLabelStartLetter: str, teamID: int, mustKill: bool)
getMaybePossibleTurns(originFieldLabel: str): list[dict]
__modusDialog
__netzStatusDialog
__resignDialog
Dialog
__answerDistanceSize : int
__answerSize : int
__answers : list[list[str, Callable]]
__answersDataWithSurface : list[dict]
__centerPosition : tuple[int]
__closeable : bool
__headline : str
__headlineSize : int
__height : int
__initPhase : bool
__isShown : bool
__onSurfaceChange : Optional[Callable]
__onVoidClick : Callable | None
__posOffset : tuple[int, int]
__width : int
image
questionTextSurface
rect
__CallOnSurfaceChange()
__init__(DialogWidth: int, DialogHeight: int, centerPosition: tuple[int], headline: str, headlineSize: int, answers: list[list[str, Callable]], answerSize: int, answerDistanceSize: float, closeable: bool, onVoidClick: Callable | None, posOffset: tuple[int, int], onSurfaceChange: Optional[Callable])
createSelfAnswersSurfaceData()
getIfShown()
handleLeftClick(pos: tuple[int, int])
hideSurface()
makeSurface()
showSurface()
__cursor
Feld
__FigureGroup
__effectKeyHighlight : str
__effects : list
__figure : Optional[None | Springer | Turm | Bauer | Laeufer | Dame | Koenig]
__label : str
__size : tuple[int, int]
color : str
image
rect
__drawFieldSurface(): None
__getFigureGroup(): pygame.sprite.GroupSingle
__init__(size: tuple[int, int], topLeftCorner: tuple[int, int], color: str, label: str)
addFieldHighlight(HighlightType: str): None
clearFieldHighlights(): None
getFigure(): None | Springer | Turm | Bauer | Laeufer | Dame | Koenig
getLabel(): str
getRect(): pygame.rect.Rect
removeFieldHighlight(HighlightType: str): None
setFieldPosition(topLeftCorner: tuple[int, int]): None
setFigure(Figure: None | Springer | Turm | Bauer | Laeufer | Dame | Koenig)
update(): None
__blackKing __whiteKing
Koenig
__canKill : bool
__hasAnxiety : bool
__mustKill : bool
__init__(image: str, size: int, field_length: int, field_count: int, fieldLabelStartLetter: str, teamID: int, mustKill: bool)
getMaybePossibleTurns(originFieldLabel: str): list[dict]
__blackBishop __whiteBishop
Laeufer
__mustKill : bool
__init__(image: str, size: int, field_length: int, field_count: int, fieldLabelStartLetter: str, teamID: int, mustKill: bool)
getMaybePossibleTurns(originFieldLabel: str): list[dict]
__blackKnight __whiteKnight
Springer
__SchrittBreite : int
__SchrittLaenge : int
__mustKill : bool
__init__(image: str, size: int, field_length: int, field_count: int, fieldLabelStartLetter: str, teamID: int, mustKill: bool)
getMaybePossibleTurns(originFieldLabel: str): list[dict]
__nameDialog __ipDialog
TextInputDialog
__buttonRect
__buttonSize : int
__buttonSurface
__buttonText : str
__centerPosition : tuple[int]
__closeable : bool
__cursorSichtbar : bool
__eingabeWert : str
__headline : str
__headlineSize : int
__height : int
__initPhase : bool
__inputSize : int
__isShown : bool
__letzterCursorBlink
__maxInputLength : int
__onSubmit : Callable | None
__onSurfaceChange : Optional[Callable]
__onVoidClick : Callable | None
__posOffset : tuple[int, int]
__width : int
image
rect
__CallOnSurfaceChange()
__init__(DialogWidth: int, DialogHeight: int, centerPosition: tuple[int], headline: str, headlineSize: int, inputSize: int, buttonText: str, buttonSize: int, closeable: bool, onSubmit: Callable | None, onVoidClick: Callable | None, posOffset: tuple[int, int], onSurfaceChange: Optional[Callable], maxInputLength: int)
clearValue()
getIfShown()
getValue(): str
handleKeyDown(event: pygame.event.Event)
handleLeftClick(pos: tuple[int, int])
hideSurface()
makeSurface()
setHeadline(headline: str)
showSurface()
update()
__blackTower __whiteTower
Turm
__mustKill : bool
__init__(image: str, size: int, field_length: int, field_count: int, fieldLabelStartLetter: str, teamID: int, mustKill: bool)
getMaybePossibleTurns(originFieldLabel: str): list[dict]
FigurBuilder
__KillMates : bool
__canJump : bool
__centerPos : tuple[int, int]
__fieldLabelStartLetter : str
__field_count : int
__field_length : int
__hasKingRole : bool
__imagePath : str
__movedAmount : int
__team : int
image
rect
__getIsFieldLabelValid(testFieldlabel: str)
__init__(image: str, size: int, field_length: int, field_count: int, fieldLabelStartLetter: str, teamID: int, canJump: bool, KillMates: bool, hasKingRole: bool)
convertRelativePointToFieldLabel(originFieldLabel: str, RelativePoint: tuple[int, int]): str | None
getCanJump(): bool
getCanKillMates(): bool
getHasMoved(): bool
getKingRole(): bool
getMovedAmount(): int
getNewTurnsListWithAddingRelative(originFieldLabel: str, oldZugList: list, RelativePoint: tuple[int, int], onlyOnKill: bool, canKill: bool, hasAnxiety: bool, specialMoveLabel: str | None, needFigureOnField: str | None, needFigureType: type | None, allowNeededFigureHasTurned: bool | None, endPointNeededFigure: str | None, onDoneTurnCall: Callable | None, killMaybeFigureType: type | None, killMaybeFigureField: str | None, killMaybeFigureMustHadDoubleWalkLastTurn: bool): list[dict]
getTeam(): int
moved()
setFieldCount(field_count: int): None
setFieldLabelStartLetter(Letter: str): None
setKingRole(kingRole: bool): None
undoMovedCounterByOne()