2014 AP® COMPUTER SCIENCE A FREE-RESPONSE QUESTIONS


4. The menu at a lunch counter includes a variety of sandwiches, salads, and drinks. The menu also allows a customer to create a "trio," which consists of three menu items: a sandwich, a salad, and a drink. The price of the trio is the sum of the two highest-priced menu items in the trio; one item with the lowest price is free.

Each menu item has a name and a price. The four types of menu items are represented by the four classes Sandwich, Salad, Drink, and Trio. All four classes implement the following MenuItem interface.


```
public interface MenuItem
{
   /** @return the name of the menu item */
   String getName();

   /** @return the price of the menu item */
   double getPrice();
}
```

The following diagram shows the relationship between the MenuItem interface and the Sandwich, Salad, Drink, and Trio classes.

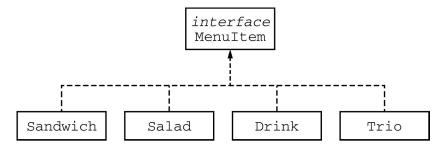

For example, assume that the menu includes the following items. The objects listed under each heading are instances of the class indicated by the heading.

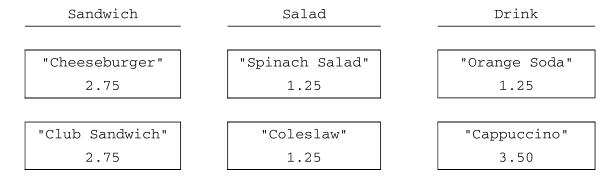

Question 4 continues on page 13

2014 AP® COMPUTER SCIENCE A FREE-RESPONSE QUESTIONS

The menu allows customers to create Trio menu items, each of which includes a sandwich, a salad, and a drink. The name of the Trio consists of the names of the sandwich, salad, and drink, in that order, each separated by "/" and followed by a space and then "Trio". The price of the Trio is the sum of the two highest-priced items in the Trio; one item with the lowest price is free.

A trio consisting of a cheeseburger, spinach salad, and an orange soda would have the name "Cheeseburger/Spinach Salad/Orange Soda Trio" and a price of \$4.00 (the two highest prices are \$2.75 and \$1.25). Similarly, a trio consisting of a club sandwich, coleslaw, and a cappuccino would have the name "Club Sandwich/Coleslaw/Cappuccino Trio" and a price of \$6.25 (the two highest prices are \$2.75 and \$3.50).

Write the Trio class that implements the MenuItem interface. Your implementation must include a constructor that takes three parameters representing a sandwich, salad, and drink. The following code segment should have the indicated behavior.

```
Sandwich sandwich;
Salad salad;
Drink drink;
/* Code that initializes sandwich, salad, and drink */
Trio trio = new Trio(sandwich, salad, drink); // Compiles without error
Trio trio1 = new Trio(salad, sandwich, drink); // Compile-time error
Trio trio2 = new Trio(sandwich, salad, salad); // Compile-time error
```

WRITE YOUR SOLUTION ON THE NEXT PAGE.

2014 AP® COMPUTER SCIENCE A FREE-RESPONSE QUESTIONS

Write the complete Trio class below.

STOP

END OF EXAM

© 2014 The College Board. Visit the College Board on the Web: www.collegeboard.org.