

# CSE 546: MACHINE LEARNING HOMEWORK 2

DAVID P. FLEMING

## CONTENTS

Introduction	1
Question 1: Multi-Class Classification using Least Squares	1
1.1: One vs all classification	1
1.2: Neural Nets with a random first layer: Using more features	3
Question 2: Multi-Class Classification using Logistic Regression and Softmax	4
2.1: Binary Logistic Regression	4

## INTRODUCTION

Please note that a copy of all the code I wrote to answer the questions in this assignment are included in my submission but also located online at [https://github.com/dflemin3/CSE\\_546/tree/master/HW2](https://github.com/dflemin3/CSE_546/tree/master/HW2). Some scripts require data, such as MNIST data, to run to completion and were not included on my github or in my submission due to file size constraints. If requested, I will happily send a compressed directory containing my homework and detailed instructions on how to reproduce my work. My primary email is dflemin3 (at) uw (dot) edu. Also for reproducibility, I set the random number generator seed near the top of each script such that rerunning my script will yield the same answers as presented here.

I collaborated with Matt Wilde, Serena Liu, and Janet Matsen for various questions on this assignment.

## QUESTION 1: MULTI-CLASS CLASSIFICATION USING LEAST SQUARES

In this question, I solve 10 linear regression problems using regularized Ridge Regression for all 10 digits of the MNIST dataset to build a “one vs all” classifier. Each regression is a binary classifier for the corresponding digit. I classify a sample according to the largest predicted score among my 10 predictors. The code used to solve this question is in the following attached files: `hw2_1.1.py`, `hw2_1.2.py`, `classifier_utils.py`, `regression_utils.py`, `validation.py`, `mnist_utils.py`.

### 1.1: One vs all classification.

---

*Date:* October 28<sup>th</sup>, 2016.

1.1.1. For ordinary least squares (OLS) linear regression,  $\hat{Y}_{OLS} = X(X^T X)^{-1} X^T Y$  where  $X$  is an  $N \times d$  matrix and  $Y$  is an  $N \times 1$  vector for  $N$  samples and  $d$  features. The complexities of taking multiple matrix products sum since they happen sequentially. If we take the pairwise matrix products to compute  $\hat{Y}_{OLS}$ , we get  $\mathcal{O}(Nd^2) + \mathcal{O}(Nd^2) + \mathcal{O}(dN^2) + \mathcal{O}(N^2)$ . Combining those terms with the  $\mathcal{O}(d^3)$  complexity from matrix inversion, I get a total complexity of  $\mathcal{O}(d^3 + (1 + 2d)N^2 + Nd^2)$  which asymptotes to  $\mathcal{O}(d^3 + dN^2 + Nd^2)$ . If  $N > d$ , this term can be reduced further however I make no assumptions about whether  $d$  or  $N$  is larger. For a regularized regression, specifically the ridge regression I used for this question, The estimator is  $\hat{Y}_{ridge} = X(\lambda I + X^T X)^{-1} X^T Y$  has the same asymptotic complexity as OLS since the addition of the identity matrix adds  $\mathcal{O}(d^2)$  which is dominated by the other terms. Therefore if I solve  $k$  linear regressions, the total complexity would be  $\mathcal{O}(kd^3 + kdN^2 + kNd^2)$  as this entire procedure is repeated  $k$  times within a loop.

1.1.2. In this question I compute the complexity for the OLS solution and then state how it generalizes to Ridge Regression. I can improve upon the complexity found in the previous problem by noting that I can fit for all weight coefficients for each class by having my regression yield a prediction vector instead of a prediction value. This can be accomplished by replacing the  $n \times 1$  label vector  $Y$  by the  $n \times k$  matrix  $Y$  for  $k$  classes. Each row of  $Y$  would be 0 except for the index equal to the class label, e.g., index 5 would be 1 for a label of 4 and all other indices would be 0 in that row. With this representation, the estimator remains  $\hat{Y}_{OLS} = X(X^T X)^{-1} X^T Y$  where  $\hat{Y}_{OLS}$  is now a  $n \times k$  matrix. To make a prediction for the  $i$ th sample, one need only return the  $\text{argmax}(\hat{y}_i)$ . Note that for my implementation, I use ridge regression where  $\hat{Y}_{ridge} = X(\lambda I + X^T X)^{-1} X^T Y$  but the same argument still holds.

As before, the complexities of taking multiple matrix products sum since they happen sequentially. If we take the pairwise matrix products to compute  $\hat{Y}_{OLS}$ , we get  $\mathcal{O}(Nd^2) + \mathcal{O}(Nd^2) + \mathcal{O}(dN^2) + \mathcal{O}(kN^2)$  where the extra factor of  $k$  on the last term comes about from the fact that  $Y$  is now  $n \times k$ . There is again an additional factor of  $\mathcal{O}(d^3)$  from the matrix inversion. This gives a total complexity of  $\mathcal{O}(d^3 + Nd^2 + (d + k)N^2)$  which is less than complexity of solving  $k$  linear regressions:  $\mathcal{O}(kd^3 + kdN^2 + kNd^2)$ .

1.1.3. I trained my classifier using Ridge Regression to leverage regularization to prevent my weight vector coefficients from becoming too large. The optimal regularization parameter  $\lambda$  was fit for along a regularization path. Since my training set was sufficiently large with  $N = 60,000$  samples, I randomly partitioned it into a validation set with  $N_{val} = 6,000$  and a training set with  $N_{train} = 54,000$ . I iterated over  $\lambda \in [10^{-1}, 10^4]$  in 5 logarithmic bins for 5 of the digits. For each  $\lambda$ , I fit the ridge regression on the training set then tested it on the validation data. I used the validation predictions to compute the 0-1 loss and stored it for each

point. I found the optimal  $\lambda = 10^4$  from the minimum value of the 0-1 loss vector. I adopted this value for  $\lambda$  as it was approximately the same for all tested digits. With the optimal  $\lambda$ , I then fit the ridge regression model on the entire  $N = 60,000$  sample training set for each digits to get a model with a  $w_0$  with shape  $k \times 1$  for  $k = 10$  digits and a  $d \times k$   $\hat{w}$ .

To make a prediction, I compute a  $k \times 1$  prediction vector  $\hat{y}_i$  using all  $k$  regression models on the  $i$ th sample. The class was selected using the regression model which predicted the largest element of  $\hat{y}_i$ . On the training set, I found a 0/1 loss of 0.141 and a square loss of 265.5. On the testing set, I found a 0/1 loss of 0.138 and a square loss of 264.4. Note that when computing both losses, I normalized by the number of samples in each set for comparison purposes since otherwise the training set loss would be much larger than the testing set loss by virtue of the training set having 6 times as many samples. Additionally for the square loss, I summed over the differences between all elements on my prediction vector  $\hat{y}_i$  and the label vector  $y_i$  instead of just comparing my predicted digit against the truth according to the following given formula for the square loss:

$$(1) \quad L(w) = \frac{1}{N} \sum_{i=1}^N \left( y^i - \sum_{j=1}^k w_j h_j(x^i) \right)^2$$

. Overall, my model performs rather well as it classifies  $\sim 86\%$  of the samples correctly in both sets.

**1.2: Neural Nets with a random first layer: Using more features.** I mapped  $X$  from a  $n \times d$  matrix to a  $n \times k$  matrix for  $k = 10000$  according to the procedure outlined in the question. Specifically, I generated a  $d \times k$  matrix  $v$  where each column  $v_j$  was a vector of length  $d$  whose elements were independently sampled from the standard uniform distribution. I then mapped  $X$  by taking the dot product  $X \cdot v$  subject to the constraint that  $h_j(x) = \max(v_j \cdot x, 0)$  is the  $j$ th column out of  $k$  total of the updated  $X$  matrix. I applied this procedure to both the training and testing images from the MNIST dataset taking care to use the same  $v$  for both mappings. I cached  $v$  for future questions.

Following the same procedure outlined in the previous question, I ran my linear regression multi-class algorithm on the mapped MNIST data. Given the size of the data involved, namely a  $60000 \times 10000$  input matrix, solving for the coefficients using Ridge Regression was rather computationally expensive. As such, I tested a few values of  $\lambda$  for regularization starting with the best fit of  $10^4$  found in the previous section. I tested other values according to the following heuristic presented by Prof. Kakade in lecture:

$$(2) \quad \lambda_{best} = cE[\|X\|^2]$$

where  $c$  is a scale constant. I found  $c = 1.0 \times 10^{-2}$  gave the best performance for this data.

I fit the transformed data using a multi-class Ridge Regression algorithm as was done on the original MNIST data in the previous question. On the training set, I found a 0/1 loss of 0.141 and a square loss of 265.5. On the testing set, I found a 0/1 loss of 0.228 and a square loss of 260.4. Interestingly, I found comparable losses on the training data as I did for my Ridge Regression on the original MNIST data. Regression on the transformed testing set, however, yielded much worse losses than the regression on the original MNIST testing set.

## QUESTION 2: MULTI-CLASS CLASSIFICATION USING LOGISTIC REGRESSION AND SOFTMAX

The code used to answer this question and all subquestions are contained within the following python files: `classifier_utils.py`, `validation.py`, `gradient_descent.py`, `mnist_utils.py`, `hw2_2.1.py`.

**2.1: Binary Logistic Regression.** For this question, I filtered the MNIST data such that all Y digits equal to 2 were set to 1 and all other labels set to 0 to make this a binary classification problem. I trained a logistic regression model on the MNIST training data using regularized batch gradient ascent to minimize the log-loss of the data as defined in class notes as

$$(3) \quad NLL = - \sum_j [y^j(w_0 + \sum_{i=1}^d X_i^j \hat{w}_i) - \log(1 + \exp(w_0 + \sum_{i=1}^d X_i^j \hat{w}_i))].$$

where  $NLL$  indicates that the log-loss = -log-likelihood. I derived the update rules for  $w$  and  $w_0$  used for my algorithm by taking the derivative of the  $NLL$ , Eqn. 3, with an additional  $l_2$  norm penalty of  $\lambda \sum ||w||_2^2$  to get a regularized solution.

My update rules for gradient descent are as follows:

$$(4) \quad w_i^{(t+1)} \leftarrow w_i^{(t)} - \eta(\lambda w_i^{(t)} - \sum_j x_i^j [y^j - \hat{P}(Y^j = 1|x^j, w^{(t)})])$$

and for the unregularized constant offset term

$$(5) \quad w_0^{(t+1)} \leftarrow w_0^{(t)} - \eta(- \sum_j [y^j - \hat{P}(Y^j = 1|x^j, w^{(t)})]).$$

Minimizing Eqn. 3 over the training set by applying the update rules given in Eqn. 4 and Eqn. 5 in a gradient descent algorithm then yields the predicted parameters  $\hat{w}$ ,  $w_0$ . I called my solution converged once the log-loss changed by less than 0.25%. I varied my convergence threshold and found comparable performance.

For my regularized batch gradient ascent implementation, I used the  $l_2$  norm penalty as was derived in class. When fitting this algorithm, I need to optimize of the following hyperparameters: the learning rate  $\eta$  and the regularization constant  $\lambda$ . The hyperparameters of my model were simultaneously fit for along a regularization grid. Since my training set was sufficiently large with  $N = 60,000$  samples, I randomly partitioned it into a validation set with  $N_{val} = 6,000$  and a training

set with  $N_{train} = 54,000$ . I iterated over a two-dimensional grid of  $\eta \in [10^{-6}, 1]$  in 6 logarithmic bins and  $\lambda \in [10^{-3}, 10^3]$  in 6 logarithmic bins. For each  $(\eta, \lambda)$  pair, I ran batch gradient ascent on the training set then tested it on the validation data. I used the validation predictions to compute the 0/1 loss and stored it for each grid point. I found the optimal  $\eta = 2.5 \times 10^{-4}$  and  $\lambda = 10^3$  from the minimum value of the 0/1 loss grid.

*2.1.1.* As discussed above in my description of how I optimized my hyperparameters, I found that  $\eta = 2.5 \times 10^{-4}$  gave the best fit. In practice in my algorithm at the start of each iteration, I reset  $\eta = k\eta_0/N$  where  $N$  is the number of samples fit over in a given batch,  $k = 1/\sqrt{t}$  is a scaling constant where  $t$  is the iteration number and  $\eta_0 = 2.5 \times 10^{-4}$ . I found that the inclusion of  $k$  which tends to suppress later step sizes prevented the solution from bouncing around optima and instead allowed for more runs to converge. In practice,  $k$  could also slow down convergence by reducing the step size even if the solution was tending towards the correct global optimum but I found that this was not an issue.

*2.1.2.* With my optimal hyperparameters, I refit the batch gradient ascent on the entire  $N = 60,000$  sample training set to get the final fit parameters  $w_0$  and  $\hat{w}$ . At each iteration of this fit, I computed the log-loss and 0/1 loss for both the training and testing set and plotted them in Fig. 1 and 2 below. As expected, the testing error is worse than the training error for most of the batch gradient ascent path. Interestingly, the testing loss actually dips below the training loss at the end of the fit near convergence.

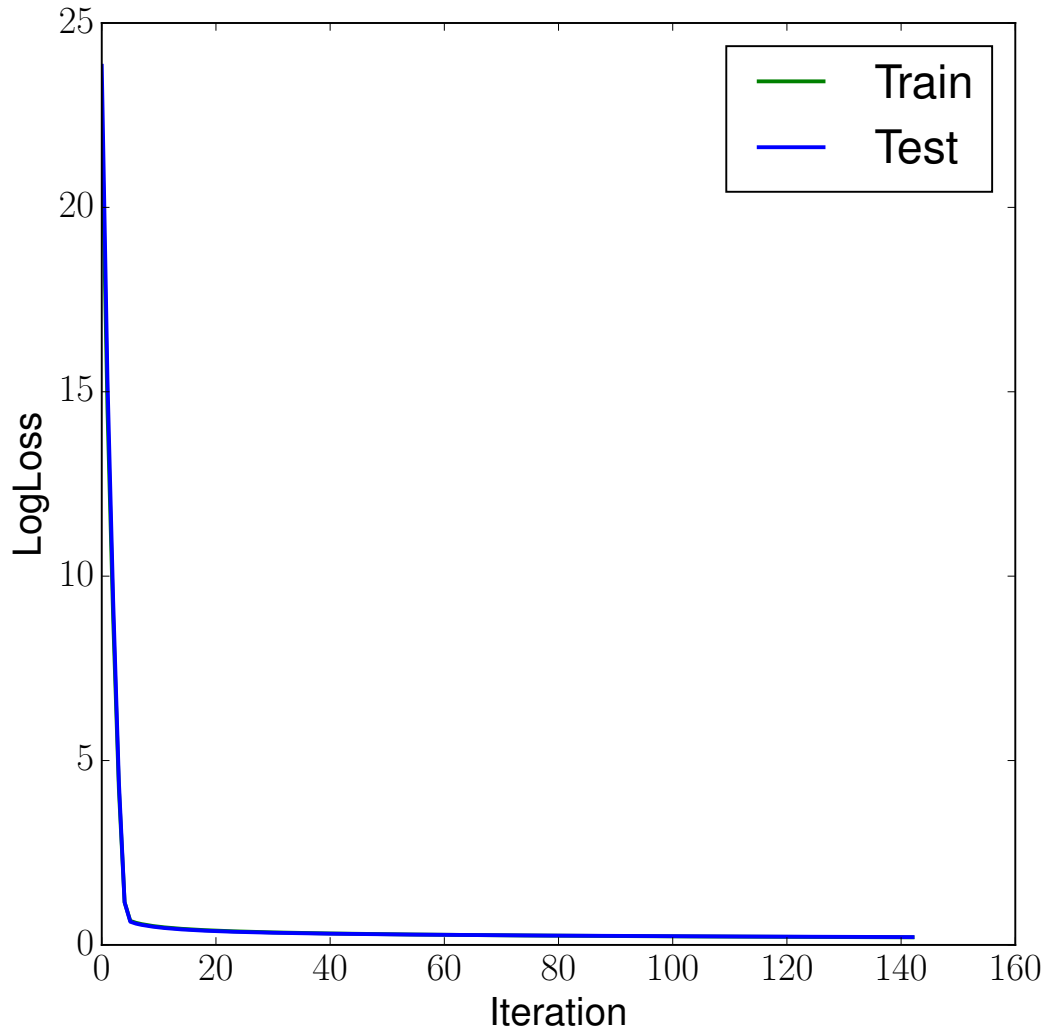


FIGURE 1. Log loss as a function of iteration for both the MNIST training and testing datasets for binary logistic regression. The log loss on the testing set was evaluated using the model parameters computed by fitting on the training set for each iteration. Note how the loss decreases for both sets with each iteration as the fit improves. In general, the testing loss is slightly larger than the training loss as expected.

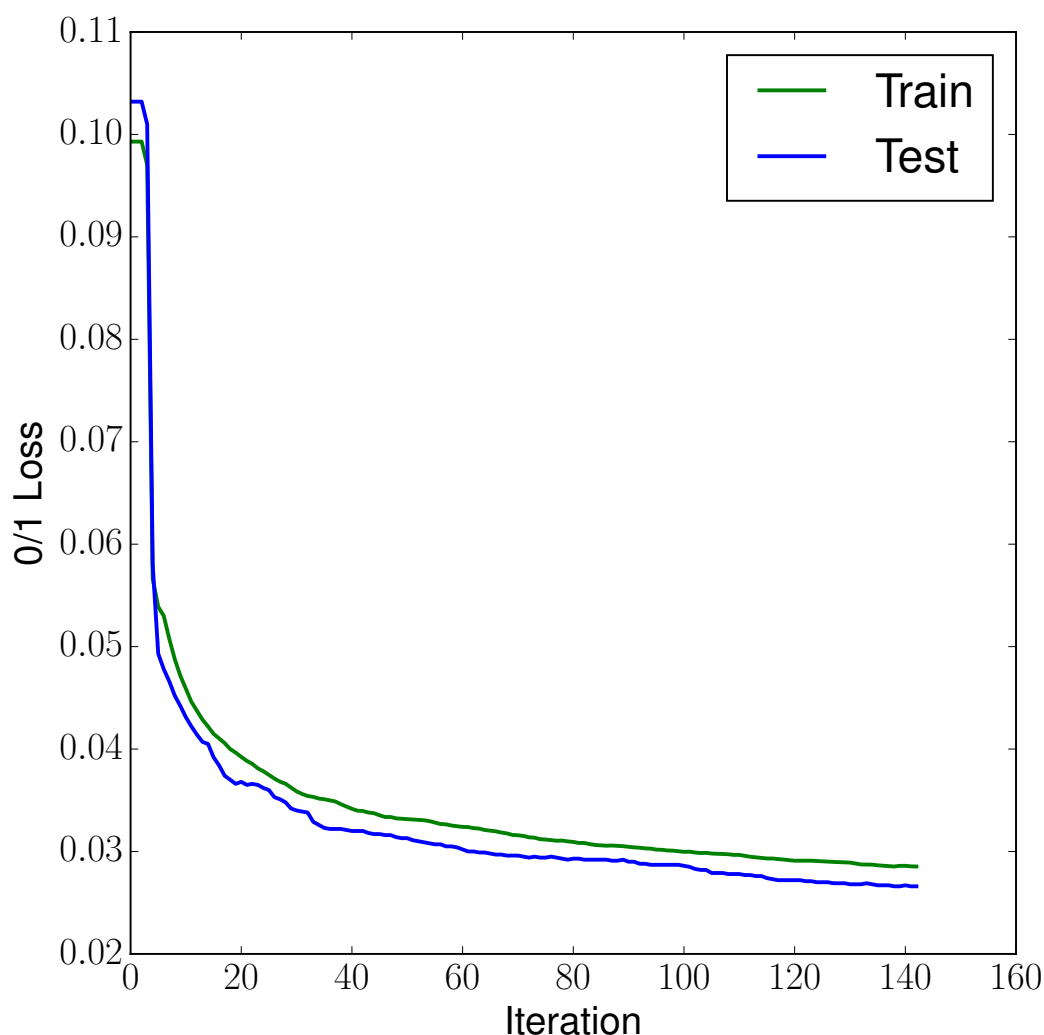


FIGURE 2. 0/1 loss as a function of iteration for both the MNIST training and testing datasets for binary logistic regression. The 0/1 loss on the testing set was evaluated using the model parameters computed by fitting on the training set for each iteration. Note how the loss decreases for both sets with each iteration as the fit improves. In general, the testing loss is slightly larger than the training loss as expected.

The log-loss for both sets decreases dramatically during early iterations but then slowly approaches convergence. The 0/1 loss, on the other hand, does not decrease as dramatically but instead gradually improves until the gradient descent

algorithm has convergence. Once converged, I find my model performs question well and appreciably better than my linear binary classifier from Homework 1 as anticipated.

*2.1.3.* Given how the sigmoid binary logistic regression link function maps a prediction to a probability-like range  $[0, 1]$ , a natural threshold for classification is to say if  $\hat{y} > 0.5$ , then  $Y = 1$  and 0 otherwise. With this threshold, I found a training log loss and 0/1 loss of 0.206 and 0.027, respectively. I found a testing log loss and 0/1 loss of 0.213 and 0.027, respectively. Note that I normalized both losses by the size of each respective set for comparison's sake. Overall, my model performs very well at is can successfully classify  $\sim 97\%$  of 2s in the MNIST dataset