Table of Contents

1 Introduction	1
2 Setup and Configuration	1
2.1 Installation	
2.2 JBoss Developer Studio Configuration.	2
2.3 Start the JBoss Enterprise BRMS Platform	3
2.4 Importing Rule Repository	
3 Running the Demo (TODO)	
3.1 todo	

1 Introduction

This is a BRMS demo application setup guide for the Rewards Demo. The setup will create a fully installed and configured BRMS environment so that you can demo the project in all the available jBPM components. It will provide you with a JBoss Developer Studio project with unit tests to demo the project in the IDE. It will provide a repository that you can import into BRMS BRM and demo the web tooling, web business central admin console and asset manager BRM tooling.

2 Setup and Configuration

2.1 Installation

You first need to extract the demo distribution zip (brms-rewards-demo-1.0.zip) to a location of your choosing. Once extracted, you will have the following folder structure:

- \brms-rewards-demo
 - \installs Initially empty, but will contain the BRMS platform downloads.
 - \projects The project that comprise the demo.
 - \support Additional supporting files used by the demo.
 - \target Will be created by running init.sh. Contains the fully configured BRMS runtime server.
 - init.sh Script to install and configure the run time server environment.
 - Quick Start Guide.odt This document

Next, download JBoss Enterprise BRMS Platform from the Red Hat Customer Portal (https://access.redhat.com/jbossnetwork).

Download BRMS Platform:

- 1. Under *JBoss Enterprise Platforms*, select the *BRMS Platform* product.
- 2. Select version 5.3.0 in the Version field.
- 3. Download *JBoss BRMS 5.3.0* (Please note that this is the deployable distribution, not the standalone one.)

Now copy brms-p-5.3.0.GA-standalone.zip, to the brms-rewards-demo's *installs* folder.

Lastly, from the brms-rewards-demo folder, run the *init.sh* script:

\$./init.sh

When the script completes you will have a new folder named *brms-standalone-5.3.0*, in the brms-rewards-demo's *target* folder. The *brms-standalone-5.3.0* folder is a ready to run BRMS 5.3.0 server runtime with the following modifications made:

- The *admin, krisv, mary, john, erics* accounts enabled (passwords are same as users name) in the *brms-roles.properties* and *brms-users.properties* file in *brms-customer-evaluation-demo/target/brms-standalone-5.3.0/jboss-as/server/default/conf/props*
- The users added in the *hypersonicDB-localDB.script* copied to *brms-customer-evaluation-demo/target/brms-standalone-5.3.0/jboss-as/server/default/data/hypersonic/localDB.script*
- The custom work items are activated by adding *CustomWorkItemHandlers.conf* and *drools.session.conf* to the *jbpm-gwt-console-server* at *brms-customer-evaluation-demo/target/brms-standalone-5.3.0/jboss-as/server/default/deploy/jbpm-gwt-console-server.war/WEB-INF/classes/META-INF*
- The domain model jar customereval-model.jar added to the console at brms-customer-evaluation-demo/target/brms-standalone-5.3.0/jboss-as/server/default/deploy/jbpm-gwt-console-server.war/WEB-INF/lib

2.2 JBoss Developer Studio Configuration

In this section, you will configure JBoss Developer Studio. Specifically you will add the BRMS 5.3.0 platform server runtime environment and then import the project that makes up the BRMS Rewards Demo.

Important: It is assumed that you already have JBoss Developer Studio installed. This demo has been tested with JBoss Developer Studio 5 (latest).

Launch JBoss Developer Studio

- 1. Either select or switch to a new workspace by pointing to the *brms-rewards-demo/projects* folder.
- 2. If the Welcome to JBoss Developer Studio screen appears, dismiss it by click the Workbench arrow in the upper right

Optional: fix for missing GEF dependency in SOA Tools update site

- 1. Select *Help* → *Install New Software...* and add GEF update site http://download.eclipse.org/tools/gef/updates/releases/
- 2. **Do not select any components**, move on to next step to install SOA tools update site and the needed dependencies for GEF will be automatically resolved.

Install SOA tools for BRMS

- 1. Select *Help* → *Install New Software...* and add SOA Tools update site https://devstudio.jboss.com/updates/5.0/staging/soa-tooling/
- 2. Select *BRMS Tooling, SOA-P Tooling* and *JBoss SOA Development (all sub-menu items will be selected)* and proceed thru installation and restart JBoss Developer Studio to complete the installation. You will be told to restart JBoss Developer Studio for the changes to take effect, do

this now.

Detect and add a BRMS 5.3.0 runtime environment

- 1. Select *Preferences* from the *Window* menu.
- 2. In the left hand side, expand JBoss Tools and then select JBoss Tool Runtime Detection
- 3. Select the *Add* button and navigate to the *brms-rewards-demo/target* folder, then select *OK*.
- 4. The *brms-standalone-5.3.0* runtime created earlier should have been found and selected. If so, select *OK*.
- 5. Select *OK* again to close the Preferences dialog window.

Detect and add jBPM BRMS 5.3.0 runtime environment

- 1. Select *Preferences* from the *Window* menu.
- 2. In the left hand side, expand JBM and then select Installed jBPM Runtimes
- 3. If not automatically listed in the view: Select the *Add* button, then the *Create a new jBPM Runtime...* button and navigate to the *brms-rewards-demo/target/brms-standalone-5.3.0* folder, then name the runtime *jBPM BRMS 5.3.0 runtime and* select *OK*.
- 4. The *jBPM BRMS 5.3.0 runtime* should be selected. If so, select *OK* to close the Preferences dialog window.
- 5. You will be told to restart JBoss Developer Studio for the changes to take effect, do this now.

Detect and add Drools 5.3.1 runtime environment

- 6. Select *Preferences* from the *Window* menu.
- 7. In the left hand side, expand *Drools* and then select *Installed Drools Runtimes*
- 8. If not automatically listed in the view: Select the *Add* button, then the *Create a new Drools 5 Runtime...* button and navigate to the *brms-rewards-demo/target/brms-standalone-5.3.0* folder, then name the runtime *Drools 5.3.1.Final runtime* and select *OK*.
- 9. Select the *Drools 5.3.1.Final runtime*.
- 10. In *Drools* in the left hand side menu select *Drools Flow nodes*, make sure all boxes are checked (some are unchecked by default, don't ask me why...) and select *OK* to close the Preferences dialog window.
- 11. You will be told to restart JBoss Developer Studio for the changes to take effect, do this now.

Import Projects

- 1. Select *Import*... from the *File* menu.
- 2. Expand the General folder, and then select Existing Projects into Workspace
- 3. Select the *Browse* button to *Select root directory*, you should be in the *brms-rewards-demo* folder (if not, then navigate there) and then select *OK*.
- 4. Make sure the project (brms-rewards-demo) is selected and then select Finish.
- 5. The projects are now imported.

2.3 Start the JBoss Enterprise BRMS Platform

In this section, you will start the server from within JBoss Developer Studio.

- 1. Select the *Servers* view
 If it is currently not open, select *Show View --> Other...* from the *Window* menu and search for the *Servers* view.
- 2. You should see the *brms-standalone-5.3.0* server you created earlier.
- 3. Right click on *brms-standalone-5.3.0* and select Start from the pop-up menu. In a few moments your JBoss Enterprise BRMS Platform will be running.

2.4 Importing Project Repository into BRM

In this section, you will import all of the JBoss Enterprise BRMS artifacts into the Business Rules Manager.

- 1. Open up your Web browser of choice and navigate to http://localhost:8080/jboss-brms/
- 2. Use the default credentials of admin/admin
- 3. Upon logging in, you will see the following prompt:

This looks like a brand new repository. Would you like to install a sample repository?

Important: Please be sure to select *No thanks*.

- 4. Select the *Administration* section on the left hand side
- 5. From the Administration list select Import Export. This will open the Import Export window.
- 6. Now select *Browse*... and navigate to brms-rewards-*demo/support* folder and select the *repository_export.xml* file.
- 7. Lastly, select the *Import* button. Select *OK* to confirm that you want to import the artifacts.

3 Running the Demo (TODO)

3.1 JBDS IDE demo

You can demo the project in the JBoss Developer Studio by making use of the editors, running the provided unit tests and watching the console for logged (verbose) output.

ProcessMain

You can run the process from your IDE, you just need the JBoss BRMS server running to provide you with a human task service and follow these steps to demo the functionality:

- 1. Start the JBoss BRMS server in JBDS via the Server tab.
- 2. Select *ProcessMain.java* file and right-click, *Run As..., Java Application* and watch the *Console* tab for output. This has started your process instance and it is waiting in the first human task.
- 3. Go to browser and login to http://localhost:8080/business-central (erics, krisv, admin will all work).
- 4. Open Task tab, select Group Tasks, Refresh, select entry that appears in list, hit Claim button,

task will now disappear from list.

- 5. Select *Personal Tasks*, *Refresh*, select entry listed, hit *View* button, fill in form and submit either as *Rejected* or *Accepted* as you desire.
- 6. Return to JBDS *Console* tab and view logged process completion output based on path chosen (*Accepted* or *Rejected*).
- 7. You can edit use *ProcessMainExtended.java* for a bit more verbosity in the output.

Unit Testing

The following will run the demo process with four unit tests:

1. Select the file brms-rewards-demo/src/test/java/CustomerEvaluationTest.java, right click, Run As..., JUnit Test.

Your output should look something like illustration 1 and example output of the console logging:

Test 1

Executing work item WorkItem 2 [name=Log, state=0, processInstanceId=1, parameters{Message=Reward for erics: (Amazing demos for JBoss World!), TaskName=Log}]

Test 2

Executing work item WorkItem 2 [name=Log, state=0, processInstanceId=1, parameters{Message=Reward for erics: (Cool demo for JBoss World!), TaskName=Log}]

```
- F
🔋 Package Explorer 🛭 📞 Navigator 📅 🗖 🗓 RewardsApprovalTest.java 🛱 🗓 ProcessMain.java 🔍 ee rewardsapproval.bpmn2
                                                          public RewardsApprovalTest() {
                                                                                                                                                     super(true);
                                                                                                                                        }
       ▼ # src/main/java
             ▼ ⊕ org.jbpm.rewards
                                                                                                                                           public void rewardApprovedTest() {
                  ProcessMain.java
                                                                                                                                                   StatefulKnowledgeSession ksession = createKnowledgeSession("rewardsapproval.bpmn2");
TaskService taskService = getTaskService(ksession);
       ▼ 🍅 src/main/resources
                    ApproveReward-taskform.flt
                 a org.jbpm.approval.rewards-image.png
                                                                                                                                                    ksession.getWorkItemManager().registerWorkItemHandler("Log", new SystemOutWorkItemHandler()); \\ ksession.getWorkItemManager().registerWorkItemHandler("Email", new SystemOutWorkItemHandler()); \\ ksession.getWorkItemManager().registerWorkItemManager().registerWorkItemHandler()); \\ ksession.getWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkItemManager().registerWorkIt
                    org.jbpm.approval.rewards-taskform.flt
                 c rewardsapproval.bpmn2
       ▼ 🎒 src/main/test
                                                                                                                                                     Map<String, Object> params = new HashMap<String, Object>();

▼ ⊕ org.jbpm.rewards

                                                                                                                                                    // initialize process parameters.
params.put("employee", "erics");
params.put("reason", "Amazing demos for JBoss World!");
      ▶ J RewardsApprovalTest.java
       ► ■ JRE System Library [Contents (MacOS X Default)]
       ▶ = IUnit 4
                                                                                                                                                     ProcessInstance processInstance = ksession.startProcess("org.jbpm.approval.rewards", params);
       ► ■ JBoss Enterprise Application Platform 5.x Runtin
                                                                                                                                                      // execute task by Mary from HR.
                                                                                                                                                     // execute task by Mary From NR. List-TaskSummary list = taskService.getTasksAssignedAsPotentialOwner("mary", new ArrayList-String>(), "en-UK");
TaskSummary task = list.get(0);
taskService.claim(task.getId(), "mary", new ArrayList-String>());
taskService.start(task.getId(), "mary");
                                                                                                                                                                                                                                                                                                                                                                                                     🔲 Properties 📳 Problems 👭 Servers 🖳 Console 😈 JUnit 🛭 📋 Guvnor Repositories
                                                                                                                     Finished after 7.644 seconds
                                                                                                                                                                                                                                    ■ Failures: 0
                                                                                                                                                         Errors: 0
                                                                                                                                                                                                                                                                                                                                                                                                                                                                →
                                                                                                                        ▼ in org.jbpm.rewards.RewardsApprovalTest [Runner: JUnit 4] (7.610 s)
                                                                                                                                                                                                                                                                                                    Failure Trace
                                                                                                                                          rewardApprovedTest (6.061 s)
```

Illustration 1: Unit testing Rewards Demo

3.2 BRMS BRM demo (todo onwards)

The package was already imported so now we can look closer at web designers viewing, rules asset viewing, package building and deploying, web business central admin console viewing.

Web Designer

The BRM is available on http://localhost:8080/jboss-brms once the BRMS server has been fully

started

- 1. Login with a user (admin, krisv, mary, john, erics available). To start fresh you can at any time import the original repository as follows: *Administration* → *Import Export* → *Choose File* -> *brms-customer-evaluation-demo/support/repository-export.xml* → *Import (Ok to pop-ups)*
- 2. View process: $Knowledge\ Bases \rightarrow Packages \rightarrow org.jbpm.evaluation.customer \rightarrow Asset\ tab \rightarrow view\ Processes\ and\ Open\ customereval\ and\ wait\ for\ web\ designer\ to\ appear.$

Rule asset viewing

To view some of the assets in your project:

1. Knowledge Bases \rightarrow Packages \rightarrow org.jbpm.evaluation.customer \rightarrow Asset tab \rightarrow view Technical Rule Assets, Model, Processes, Other assets or WorkItemDefinition.

Build package for deployment

To build your package for deployment:

1. Build package: Knowledge Bases → Packages → org.jbpm.evaluation.customer → Edit tab → Build Package button. Now the process has been deployed in the Business Central administration component.

Business Central

The Business Central administration console is available on http://localhost:8080/business-central once the BRMS server has been fully started and after deploying your process by building the package in BRMS BRM.

- 1. Login as user (admin, erics, krisv have same rights).
- 2. On left open *Processes* tab \rightarrow *Process Overview* and you should see *Customer Evaluation Demo v0* appear. If not, hit Refresh. If not, ensure the demo package has been built without errors in BRM as described previously.
- 3. Click on Rewards Approval v3 to select this process, then Start button and OK for pop-up.
- 4. You will be presented with a form to fill in for starting this process, add an *employee* and *reason* before you hit the *submit* button. Close the window.
- 5. Click on the running instance, then *Diagram* button which will pop up with illustration 2 showing the process started and waiting in the first human task node.
- 6. You can view the *Instance Data* by hitting that button on the left.
- 7. Change to *Tasks* tab on left, select *Group Tasks*, select task as it appears, hit *Claim* button. The task entry should disappear.
- 8. Select *Personal Tasks*, the previous task will appear in your list, select it, push *View* button and fill in the Explanation field in the form and submit as *Rejected* or *Approved*. Close the window.
- 9. Back to *Processes* tab, select *Process Overview*, hit *Refresh* and the instance that was listed as running should now disappear as it has completed.

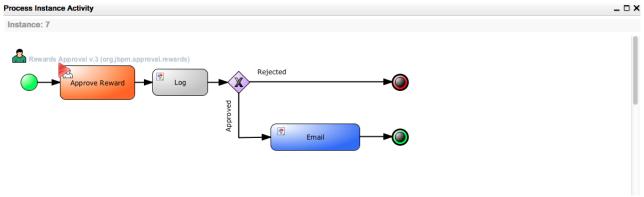


Illustration 2: Diagram process in action.