


Certified champion: PMAEncoder(num_layers=0) + PFPreProcessorMeanPt

89,606 encoder parameters · a permutation-invariant set encoder: no transformer body, no positional structure

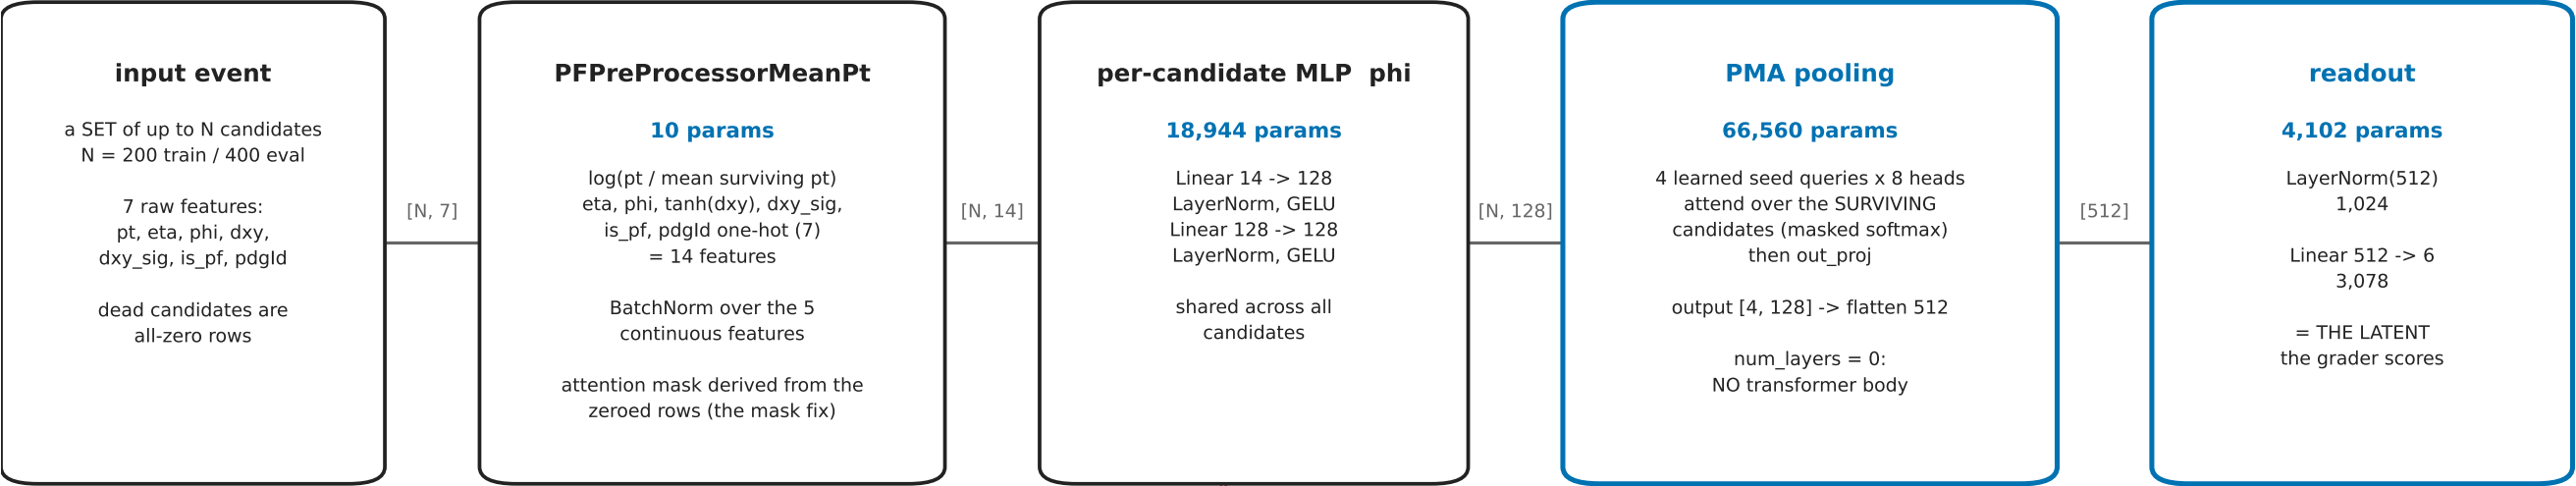

TRAINING ONLY (not shipped in the scored path)

dead-region augmentation on the INPUT:
five families, phi rotation, eta reflection

Projector 6 -> 12 -> classifier (4 classes)

loss = cross-entropy + 0.05 x supervised contrastive

GRADER (frozen probe)

EvalMLP probe FIT on CLEAN latents
then APPLIED to DEGRADED latents
of the same events

score = area under AUC vs severity

so the target is: the degraded latent must land
where the clean latent landed