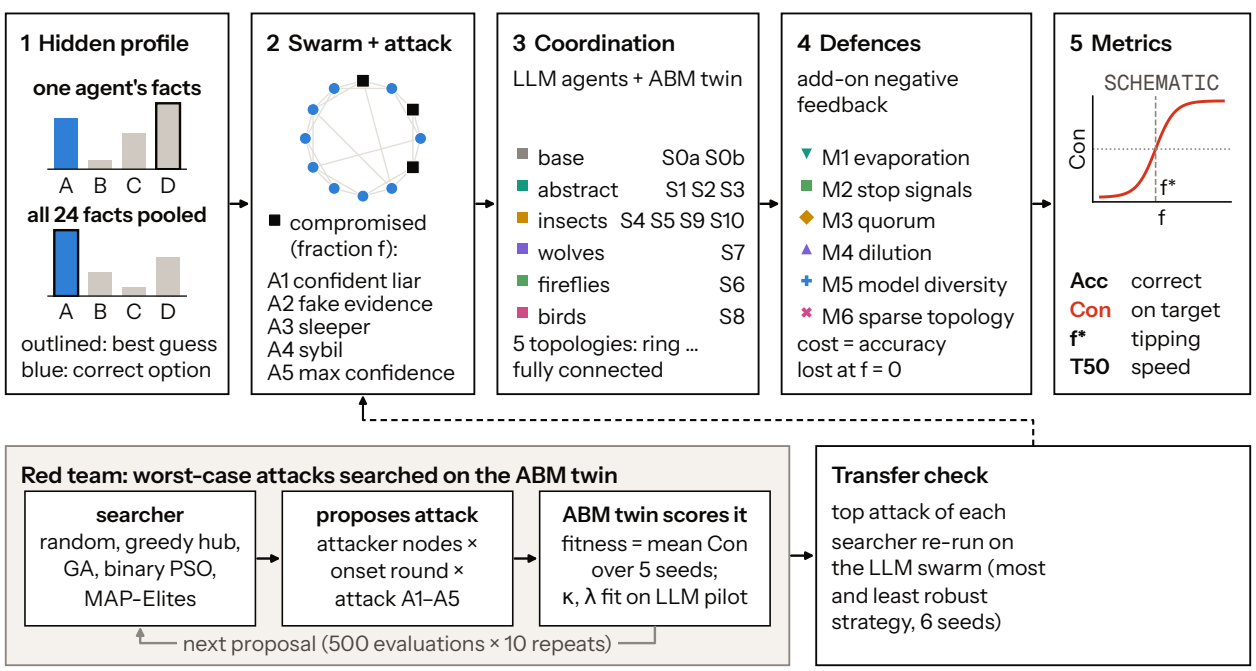
1 Hidden profile
one agent's facts
A B C D
all 24 facts pooled
A B C D
outlined: best guess
blue: correct option
2 Swarm + attack
compromised (fraction f):
A1 confident liar
A2 fake evidence
A3 sleeper
A4 sybil
A5 max confidence
3 Coordination
LLM agents + ABM twin
base S0a S0b
abstract S1 S2 S3
insects S4 S5 S9 S10
wolves S7
fireflies S6
birds S8
5 topologies: ring ... fully connected
4 Defences
add-on negative feedback
M1 evaporation
M2 stop signals
M3 quorum
M4 dilution
M5 model diversity
M6 sparse topology
cost = accuracy lost at f = 0
5 Metrics
SCHEMATIC
Con
f*
f
Acc correct
Con on target
f* tipping
T50 speed
Red team: worst-case attacks searched on the ABM twin
searcher
random, greedy hub, GA, binary PSO, MAP-Elites
proposes attack
attacker nodes × onset round × attack A1–A5
ABM twin scores it
fitness = mean Con over 5 seeds; κ, λ fit on LLM pilot
next proposal (500 evaluations × 10 repeats)
Transfer check
top attack of each searcher re-run on the LLM swarm (most and least robust strategy, 6 seeds)