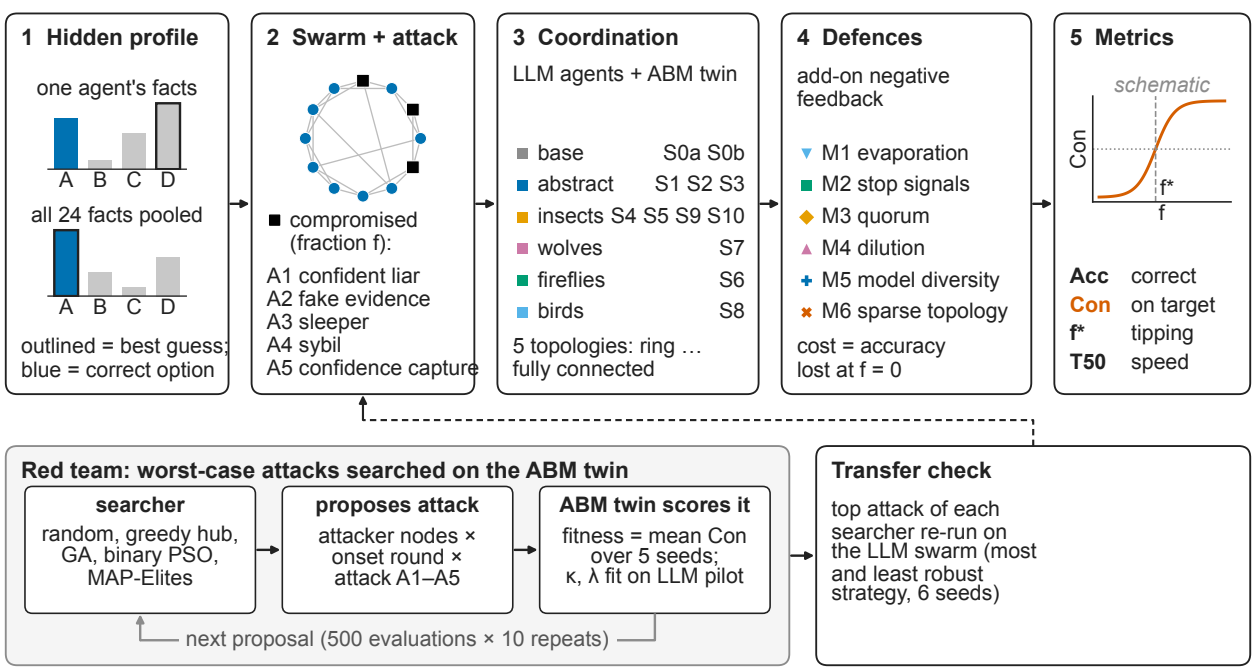

1 Hidden profile
one agent's facts
A B C D
all 24 facts pooled
A B C D
outlined = best guess;
blue = correct option
2 Swarm + attack
compromised
(fraction f):
A1 confident liar
A2 fake evidence
A3 sleeper
A4 sybil
A5 confidence capture
3 Coordination
LLM agents + ABM twin
base S0a S0b
abstract S1 S2 S3
insects S4 S5 S9 S10
wolves S7
fireflies S6
birds S8
5 topologies: ring …
fully connected
4 Defences
add-on negative
feedback
M1 evaporation
M2 stop signals
M3 quorum
M4 dilution
M5 model diversity
M6 sparse topology
cost = accuracy
lost at f = 0
5 Metrics
schematic
Con
f*
f
Acc correct
Con on target
f* tipping
T50 speed
Red team: worst-case attacks searched on the ABM twin
searcher
random, greedy hub,
GA, binary PSO,
MAP-Elites
proposes attack
attacker nodes ×
onset round ×
attack A1–A5
ABM twin scores it
fitness = mean Con
over 5 seeds;
κ, λ fit on LLM pilot
next proposal (500 evaluations × 10 repeats)
Transfer check
top attack of each
searcher re-run on
the LLM swarm (most
and least robust
strategy, 6 seeds)