PROJECT PLANNING PHASE

Project Planning Template – Product Backlog, Sprint Planning, Stories & Story Points

Date	08 October 2026
Team ID	SWTID-2026-2540
Project Name	Script-Controlled ACL – Restrict Record Access Based on Field Value
Maximum Marks	5 Marks

Product Backlog, Sprint Schedule, and Estimation (4 Marks)

The backlog follows the supplied planning template: Sprint, Functional Requirement (Epic), User Story Number, User Story/Task, Story Points, Priority and Team Members.

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	User & Role Setup	USN-1	As an administrator, I can create the EEE test user so that the ACL workflow can be tested.	2	High	
Sprint-1	User & Role Setup	USN-2	As an administrator, I can create roles bb1, bb2, bb3 and bb4 so that permissions can be separated by operation.	3	High	
Sprint-1	Institution Details Table	USN-3	As an administrator, I can create the u_institution_details table with the required fields.	3	High	
Sprint-1	Institution Details Table	USN-4	As an administrator, I can create ECE, EEE and CSE records so that record-level access can be tested.	2	High	
Sprint-2	READ ACL	USN-5	As a security administrator, I can configure a READ ACL for u_institution_details with the EEE branch condition.	3	High	
Sprint-2	READ ACL	USN-6	As a security administrator, I can use an advanced script to allow administrators and bb1 users while denying others.	3	High	
Sprint-2	READ ACL	USN-7	As a tester, I can impersonate users and verify EEE-only visibility, no-role denial and administrator access.	3	High	
Sprint-3	CREATE & WRITE ACL	USN-8	As a security administrator, I can configure a CREATE ACL requiring bb2.	2	Medium	

Sprint-3	CREATE & WRITE ACL	USN-9	As a security administrator, I can configure a WRITE ACL requiring bb3.	2	Medium	
Sprint-3	CREATE & WRITE ACL	USN-10	As a tester, I can verify create and edit permissions after combining bb1, bb2 and bb3.	3	High	
Sprint-4	DELETE & Final Validation	USN-11	As a security administrator, I can configure a DELETE ACL requiring bb4.	2	Medium	
Sprint-4	DELETE & Final Validation	USN-12	As a tester, I can validate the complete permission set and confirm the documented project outcome.	3	High	

Sprint-wise Estimation


Sprint	Planned Story Points	Focus
Sprint-1	10	Users, roles, table and test data
Sprint-2	9	READ ACL and access verification
Sprint-3	7	CREATE and WRITE ACLs with verification
Sprint-4	5	DELETE ACL and end-to-end validation

Project Tracker, Velocity & Burndown Chart (4 Marks)

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (Planned)	Sprint Release Date (Actual)
Sprint-1	10	6 Days	01 Oct 2026	06 Oct 2026	10	
Sprint-2	9	6 Days	07 Oct 2026	12 Oct 2026	9	
Sprint-3	7	6 Days	13 Oct 2026	18 Oct 2026	7	
Sprint-4	5	6 Days	19 Oct 2026	24 Oct 2026	5	

Velocity: Total planned story points = 31. Number of sprints = 4. Average planned velocity = 31/4 = 7.75 story points per sprint.

For comparison with the supplied planning-logic example, velocity is calculated from completed/planned story points divided by the number of sprints. The supplied example calculates 32 points across 2 sprints as 16 story points per sprint.

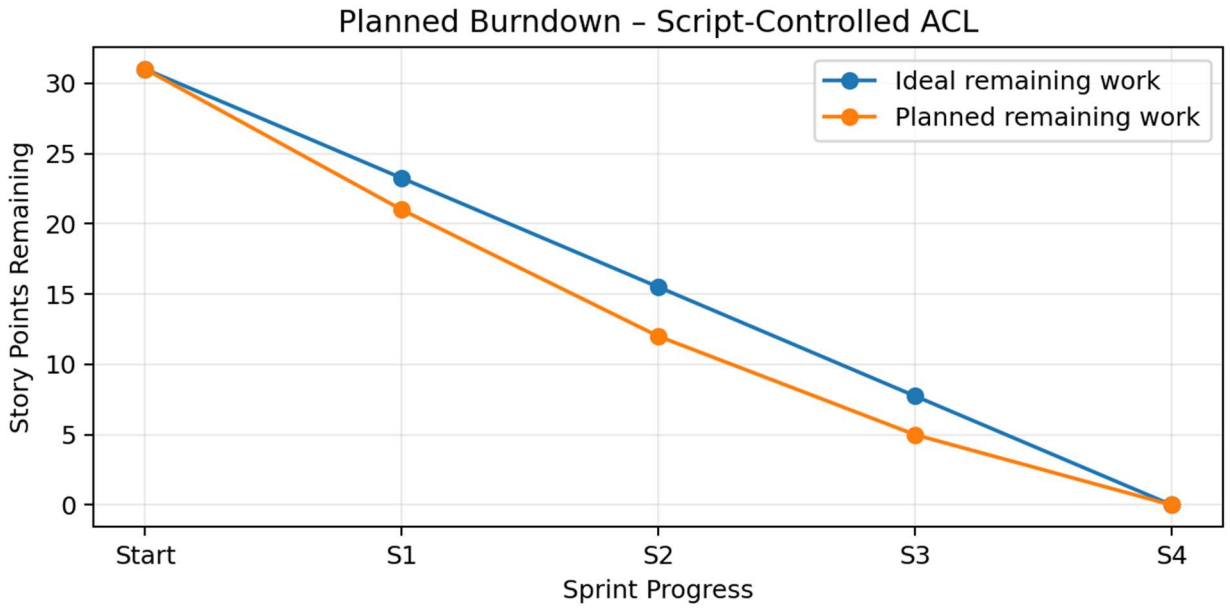

Burndown Interpretation

The burndown represents work remaining against sprint progress. The ideal line decreases evenly from the initial backlog to zero. The planned line drops according to the four sprint allocations: 10, 9, 7 and 5 story points.

Definition of Done

- The EEE test user and required roles are created.
- The Institution Details table and required fields are configured.
- ECE, EEE and CSE test records are available.
- READ ACL behavior is verified through impersonation.
- CREATE, WRITE and DELETE ACLs are configured and verified.
- The final combined role set is tested against the expected access behavior.
- Project documentation and sprint tracking are completed.

Planning Basis

This planning document uses the supplied Project Planning Template structure and the supplied Planning Logic document's concepts of sprint, epic, story, story point and velocity. The source planning logic defines story-point sizing using 1, 2, 3 and 5 as increasing effort levels and calculates velocity as total story points divided by the number of sprints.