
## Lab-Program -1

as connecting durices:

1) take 3 PCS and connect all those to I hub

(2) Setuphne IP address for the rend devices (PC)

3) Add PDV to each devices and in-

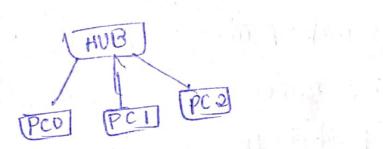

-> Morage sent from PCD is received by

HOB and it is prother sent to PCI and PC2.

Thus and devices may accept on suject the

mersage.