

Practical-1

Name: Dhanshree Pahanpate

PRN:- 202501050029

1.1.1 Calculate Momentum

Write a program that accepts the mass of an object (in kilograms) and its velocity (in meters per second), then calculates and displays the momentum of the object. The momentum is calculated using the formula: where: is the mass of the object (in kilograms). is the velocity of the object (in meters per second).

Input Format:

- A single floating-point number representing the mass of the object in kilograms.
- A single floating-point number representing the velocity of the object in meters per second.

Output Format:

- The output will display calculated momentum with appropriate units (kgm/s) (rounded up to 2 decimal places).

Code:

```
mass = float(input()) velocity
= float(input())
momentum = mass*velocity print(f"{momentum:.2f}kgm/s")
```

CODETANTRA Home Learn Anywhere 202501050029@mitae.ac.in Support Logout

Average time 0.019 s 19.50 ms Maximum time 0.022 s 22.00 ms 2 out of 2 shown test case(s) passed 2 out of 2 hidden test case(s) passed

Test case 1 22 ms Debug

Expected output	Actual output
5.0	5.0
10.0	10.0
50.00kgm/s	50.00kgm/s

Test case 2 22 ms Debug

Expected output	Actual output
2.3	2.3
4.8	4.8
11.04kgm/s	11.04kgm/s

< Prev Reset Submit Next >

1.1.2. Conditional Calculation Based on the Number of Digits

Write a Python program that accepts an integer as input. Depending on the number of digits in .

Constraints:

$$1 \leq n \leq 999$$

Input Format:

- The input consists of a single integer .

Output Format:

- If n is a single-digit number, print its square.
- If n is a two-digit number, print its square root (rounded to two decimal places).
- If n is a three-digit number, print its cube root (rounded to two decimal places).
- Else print "Invalid".

Code:

```
n=int(input()) if
```

```
0<=n and n<=9:
```

```
    print(n*n)      elif
```

```
10<=n and n<=99:
```

```
    print(f"{n**(1/2):.2f}") elif
```

```
100<=n and n<=999:
```

```
    print(f"{n**(1/3):.2f}") else:
```

```
    print("Invalid")
```

The screenshot displays the CODETANTRA online code editor interface. At the top, the header includes the logo, navigation links (Home, Learn Anywhere), a user profile (202501050029@mitaoe.ac.in), and a Logout button. The main workspace shows a Python script with a comment '#write your code here...'. Below the code editor, a summary box indicates '4 out of 4 shown test case(s) passed' and '3 out of 3 hidden test case(s) passed'. The average time is 0.011 s (10.71 ms) and the maximum time is 0.016 s (16.00 ms). The test cases are listed as follows:

Test Case	Expected Output	Actual Output
Test case 1	81	81
Test case 2	166 5.50	166 5.50
Test case 3	24 4.90	24 4.90
Test case 4	3456 Invalid	3456 Invalid

At the bottom, there are buttons for Terminal, Test cases, and navigation controls (Prev, Reset, Submit, Next).

1.1.3. Days between Two Dates

Write a Python program to calculate number of days between two dates.

Input Format:

- The first line contains the first date in the format YYYY-MM-DD
- The second line contains the second date in the format YYYY-MM-DD
- An integer representing the number of days between the given dates.

Output Format:

Code: from datetime import datetime

```
date1=input().strip() date2=input().strip()
```

```
d1=datetime.strptime(date1,"%Y-%m-%d")
```

```
d2=datetime.strptime(date2,"%Y-%m-%d")
```

```
difference = d2-d1 print(difference.days)
```

The screenshot shows the CODETANTRA online judge interface. At the top, there's a navigation bar with 'Home' and 'Learn Anywhere' links. The user's email '202501050029@mitaoe.ac.in' and a 'Logout' button are on the right. Below the navigation bar, a status bar indicates '2 out of 2 shown test case(s) passed' and '2 out of 2 hidden test case(s) passed'. The main area displays two test cases. Test case 1 shows expected output '2014-07-02', '2014-11-02', and '123', with actual output matching these. Test case 2 shows expected output '2014-07-02', '2014-07-11', and '9', with actual output matching these. At the bottom, there are buttons for '< Prev', 'Reset', 'Submit', and 'Next >'.

1.1.4. Reverse a Number

Write a Python program to reverse the digits of the number and print the reversed number.

Input Format:

- The input is a single integer.

Output Format:

- The output prints a single integer, which is the reversed number.

Code:

```
num = int(input()) reversed_num=
```

```
int(str(num)[::-1])
```

```
print(reversed_num)
```

CODETANTRA Home Learn Anywhere 202501050029@mitaoe.ac.in Support Logout

Average time: 0.008 s Maximum time: 0.010 s
7.60 ms 10.00 ms

2 out of 2 shown test case(s) passed
3 out of 3 hidden test case(s) passed

Test case 1 10 ms Debug

Expected output	Actual output
5367	5367
7635	7635

Test case 2 10 ms Debug

Expected output	Actual output
0132	0132
231	231

Terminal Test cases

Prev Reset Submit Next

1.1.5. Multiplication Table

Write a Python program that takes an integer as input and prints the multiplication table for that integer from 1 to 10.

Input Format:

- The first line of input contains an integer that represents the number for which the multiplication table is to be printed.

Output Format:


- Print the multiplication table for the given number in the format: **<number> x**

<multiplier> = <result> Code:

```
num = int(input()) for
```

```
i in range(1,11):
```

```
    print(f"{num} x {i} = {num * i}")
```

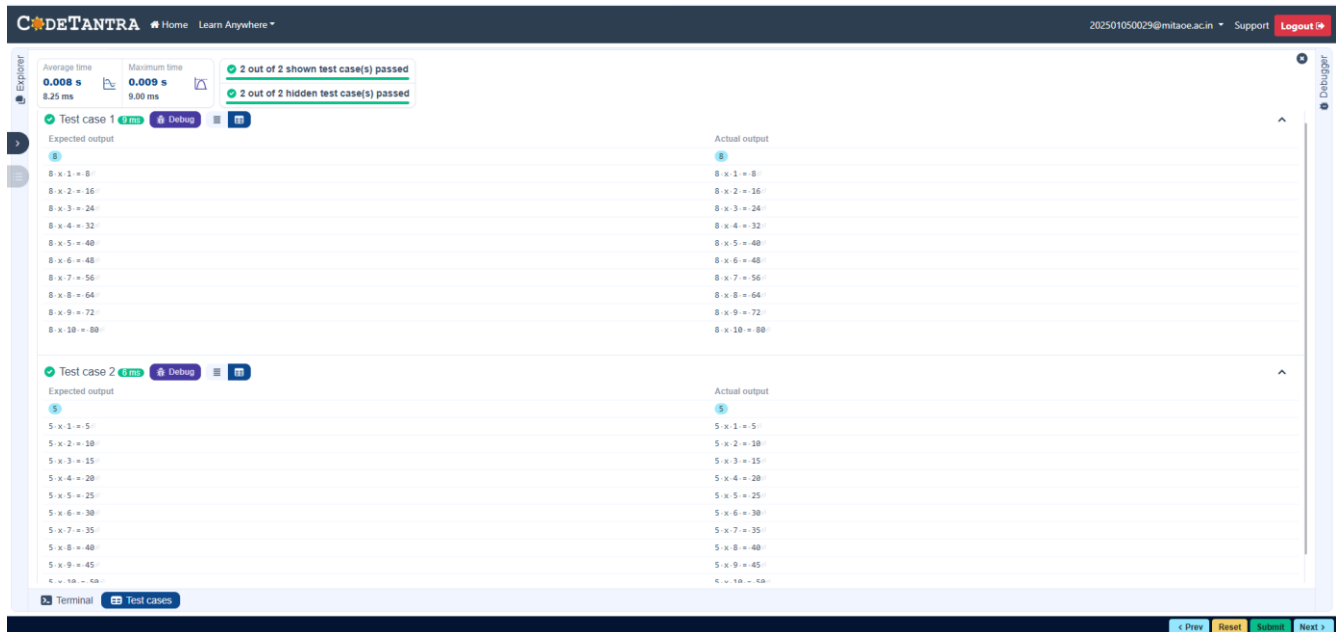

1.2.1. Pass or Fail

Write a Python program that accepts the number of courses and the marks of a student in those courses.

The grade is determined based on the aggregate percentage:

- If the aggregate percentage is greater than 75, the grade is Distinction.
- If the aggregate percentage is greater than or equal to 60 but less than 75, the grade is First Division.
- If the aggregate percentage is greater than or equal to 50 but less than 60, the grade is Second Division.
- If the aggregate percentage is greater than or equal to 40 but less than 50, the grade is Third Division.

Input Format:

- The first input will be an integer , the number of courses.
- The second input will be integers representing the marks of the student in each of the courses, separated by a space.

Output Format:

If the student passes all courses:

- Print the aggregate percentage (formatted to two decimal places).
- Print the grade based on the aggregate percentage.

If the student fails any course (marks < 40 in any course), print:

- "Fail".

Code:

```

def cal(marks, total_courses):
    if any(mark < 40 for mark in marks):
        return "Fail"

    total_marks = sum(marks)
    aggregate_percentage=(total_marks/(total_courses *100))*100

    if aggregate_percentage >75:
        grade="Distinction"
    elif aggregate_percentage >=60:
        grade= "First Division"
    elif aggregate_percentage >=50:
        grade= "Second Division"
    elif aggregate_percentage >=40:
        grade= "Third Division"

    return (aggregate_percentage,grade)

num_courses= int(input())
marks= list(map(int,input().split()))
result= cal(marks,num_courses)
if result == "Fail":
    print("Fail")
else:
    aggregate_percentage,grade=result
    print(f"Aggregate Percentage: {aggregate_percentage:.2f}")
    print(f"Grade: {grade}")

```

CDETANTRA Home Learn Anywhere™ 202501050029@mitaoe.ac.in Support Logout

Average time: 0.013 s Maximum time: 0.019 s 5 out of 5 shown test case(s) passed 5 out of 5 hidden test case(s) passed

13.30 ms 19.00 ms

Test case 1 17 ms Debug

Expected output: (4) 55 65 78 89
Aggregate Percentage: 71.75
Grade: First Division

Actual output: (4) 55 65 78 89
Aggregate Percentage: 71.75
Grade: First Division

Test case 2 13 ms Debug

Expected output: (5) 56 78 97 86 93
Aggregate Percentage: 82.00
Grade: Distinction

Actual output: (5) 56 78 97 86 93
Aggregate Percentage: 82.00
Grade: Distinction

Test case 3 11 ms Debug

Expected output: (5) 99 85 43 97 34
Fail

Actual output: (5) 99 85 43 97 34
Fail

Test case 4 11 ms Debug

Expected output: (3) 55 54 53
Aggregate Percentage: 54.00
Grade: Second Division

Actual output: (3) 55 54 53
Aggregate Percentage: 54.00
Grade: Second Division

Prev Reset Submit Next

Test case 5	Debug
Expected output	Actual output
5	5
48 45 42 48 41	48 45 42 48 41
Aggregate Percentage: 43.20	Aggregate Percentage: 43.20
Grade: Third Division	Grade: Third Division

< Prev Reset Submit Next >

1.2.2. Fibonacci Series

Write a Python program that uses recursion to print the first terms of the Fibonacci series.

Input Format:

- A single integer representing the number of terms to generate.

Output Format:

- A single line containing the first terms of the Fibonacci sequence, separated by spaces.

Code: def

fibonacci(n):

if n == 1:

return 0

elif n == 2:

return 1

else:

return fibonacci(n - 1) + fibonacci(n - 2)

= int(input()) for i in range(1, n + 1):

print(fibonacci(i), end=" ")

CODETANTRA
Home
Learn Anywhere
202501050029@mitaoe.ac.in
Support
Logout

Average time
0.025 s
24.50 ms

Maximum time
0.066 s
66.00 ms

2 out of 2 shown test case(s) passed
2 out of 2 hidden test case(s) passed

Test case 1
10 ms
Debug

Expected output
5
0 1 1 2 3

Actual output
5
0 1 1 2 3

Test case 2
7 ms
Debug

Expected output
15
0 1 1 2 3 5 8 13 21 34 55 89 144 233 377

Actual output
15
0 1 1 2 3 5 8 13 21 34 55 89 144 233 377

< Prev Reset Submit Next >

1.2.3. Pattern -1

Write a Python program to print a pattern of asterisks in the form of a right-angled triangle.

Input Format:

- The input is an integer, representing the number of rows in the pattern. **Output Format**
- The output should display the pattern of asterisks (*), with each row containing an increasing number of asterisks.

Code:

```
n = int(input())
for i in range(1, n+1):
    print('* ' * i)
```

The screenshot shows the CODETANTRA online code editor interface. At the top, there's a header with the logo, navigation links (Home, Learn Anywhere), a user email (202501050029@mitaoe.ac.in), and a Logout button. Below the header, a status bar indicates '2 out of 2 shown test case(s) passed' and '4 out of 4 hidden test case(s) passed'. The main area displays two test cases. Test case 1 shows an input of 5 and the expected output of a right-angled triangle of asterisks. Test case 2 shows an input of 4 and the expected output of a right-angled triangle of asterisks. The bottom of the interface has navigation buttons: < Prev, Reset, Submit, and Next >.

1.2.4. Pattern -2

Write a Python program to print a right-angled triangle pattern of numbers.

Input Format:

- The input is an integer, representing the number of rows in the pattern.

Output Format:

- The output should display the pattern of numbers separated by space, with each row containing increasing numbers starting from 1 up to the row number.

Code:

```
n = int(input())
for i in range(1, n+1):
    for j in range(1, i+1):
```

```
print(j,end=" ")
```

```
print()
```

CODETANTRA

HomeLearn Anywhere

202501050029@mitaoe.ac.inSupportLogout

Explorer

Average time
0.006 s
6.50 ms

Maximum time
0.007 s
7.00 ms

2 out of 2 shown test case(s) passed
2 out of 2 hidden test case(s) passed

Test case 1
6 ms
Debug

Expected output

Actual output

5
1
1 2
1 2 3
1 2 3 4
1 2 3 4 5

5
1
1 2
1 2 3
1 2 3 4
1 2 3 4 5

Test case 2
7 ms
Debug

Expected output

Actual output

8
1
1 2
1 2 3
1 2 3 4
1 2 3 4 5
1 2 3 4 5 6
1 2 3 4 5 6 7
1 2 3 4 5 6 7 8

8
1
1 2
1 2 3
1 2 3 4
1 2 3 4 5
1 2 3 4 5 6
1 2 3 4 5 6 7
1 2 3 4 5 6 7 8

< PrevResetSubmitNext >