

***Project Report***

***On***

***Cab fare Prediction***

AUTHOR: Dhanush U

# INDEX

<b>Chapter 1</b>	<b>Introduction</b>
1.1	Problem Statement
1.2	Data
<b>Chapter 2</b>	<b>Methodology</b>
2.1	Pre-Processing
2.2	Modelling
2.3	Model Selection
<b>Chapter 3</b>	<b>Pre-Processing</b>
3.1	Data Exploration and Cleaning (Missing Values and Outliers)
3.2	Creating some new variables from the given variable
3.3	Selection of Variables
3.4	Some more data exploration <ul style="list-style-type: none"><li>• Dependent and Independent Variables</li><li>• Uniqueness of Variables</li><li>• Dividing the variables categories</li></ul>
3.5	Feature Scaling
<b>Chapter 4</b>	<b>Modelling</b>
4.1	Linear Regression
4.2	Decision Tree
4.3	Random Forest
4.4	Gradient Boosting
4.5	Hyper Parameter tuning for Optimizing Results
<b>Chapter 5</b>	<b>Conclusion</b>
5.1	Model Evaluation
5.2	Model Selection
5.3	Some Visualization facts

## References

## Appendix

# Chapter 1

## Introduction

Now a day's cab rental services are expanding with the multiplier rate. The ease of using the services and flexibility gives their customer a great experience with competitive prices.

### 1.1 Problem Statement

You are a cab rental start-up company. You have successfully run the pilot project and now want to launch your cab service across the country. You have collected the historical data from your pilot project and now have a requirement to apply analytics for fare prediction. You need to design a system that predicts the fare amount for a cab ride in the city.

### 1.2 Data

Understanding of data is the very first and important step in the process of finding solution of any business problem. Here in our case our company has provided a data set with following features, we need to go through each and every variable of it to understand and for better functioning. Size of Dataset Provided: - 16067 rows, 7 Columns (including dependent variable) Missing Values: Yes Outliers Presented: Yes Below mentioned is a list of all the variable names with their meanings:

Variables	Description
fare_amount	Fare amount
pickup_datetime	Cab pickup date with time
pickup_longitude	Pickup location longitude
pickup_latitude	Pickup location latitude
dropoff_longitude	Drop location longitude
dropoff_latitude	Drop location latitude
passenger_count	Number of passengers sitting in the cab

# Chapter 2

## Methodology

### ➤ Pre-Processing

When we required to build a predictive model, we require to look and manipulate the data before we start modelling which includes multiple preprocessing steps such as exploring the data, cleaning the data as well as visualizing the data through graph and plots, all these steps is combined under one shed which is Exploratory Data Analysis, which includes following steps:

- Data exploration and Cleaning
- Missing values treatment
- Outlier Analysis
- Feature Selection
- Features Scaling
  - Skewness and Log transformation Visualization
- Visualization

### ➤ Modelling

Once all the Pre-Processing steps has been done on our data set, we will now further move to our next step which is modelling. Modelling plays an important role to find out the good inferences from the data. Choice of models depends upon the problem statement and data set. As per our problem statement and dataset, we will try some models on our preprocessed data and post comparing the output results we will select the best suitable model for our problem. As per our data set following models need to be tested:

- Linear regression
- Decision Tree
- Random forest,
- Gradient Boosting

- ❖ We have also used hyper parameter tunings to check the parameters on which our model runs best. Following are two techniques of hyper parameter tuning we have used:
  - Random Search CV
  - Grid Search CV

### ➤ Model Selection

The final step of our methodology will be the selection of the model based on the different output and results shown by different models. We have multiple parameters which we will study further in our report to test whether the model is suitable for our problem statement or not.

# Chapter 3

## Pre-Processing

### 3.1 Data exploration and Cleaning (Missing Values and Outliers)

The very first step which comes with any data science project is data exploration and cleaning which includes following points as per this project:

- Separate the combined variables.
- As we know we have some negative values in fare amount so we have to remove those values.
- Passenger count would be max 6 if it is a SUV vehicle not more than that. We have to remove the rows having passengers counts more than 6 and less than 1.
- There are some outlier figures in the fare (like top 3 values) so we need to remove those.
- Latitudes range from -90 to 90. Longitudes range from -180 to 180. We need to remove the rows if any latitude and longitude lies beyond the ranges.


### 3.2 Creating some new variables from the given variables.

Here in our data set our variable name pickup date time contains date and time for pickup. So we tried to extract some important variables from pickup date time:

- Year
- Month
- Date
- Day of Week
- Hour
- Minute

Also, we tried to find out the distance using the haversine formula which says:

The **haversine formula** determines the great-circle distance between two points on a sphere given their longitudes and latitudes. Important in navigation, it is a special case of a more general formula in spherical trigonometry, the law of haversines, that relates the sides and angles of spherical triangles.



So our new extracted variables are:

- fare\_amount
- pickup\_datetime
- pickup\_longitude
- pickup\_latitude
- dropoff\_longitude
- dropoff\_latitude
- passenger\_count
- year
- Month
- Date
- Day of Week
- Hour
- Minute
- Distance

### 3.3 Selection of variables

Now as we know that all above variables are of now use so we will drop the redundant variables:

- pickup\_datetime
- pickup\_longitude
- pickup\_latitude
- dropoff\_longitude
- dropoff\_latitude
- Minute

Now only following variables we will use for further steps:

	fare_amount	passenger_count	year	Month	Date	Day of Week	Hour	distance
0	4.5	1.0	2009.0	6.0	15.0	0.0	17.0	1.030764
1	16.9	1.0	2010.0	1.0	5.0	1.0	16.0	8.450134
2	5.7	2.0	2011.0	8.0	18.0	3.0	0.0	1.389525
3	7.7	1.0	2012.0	4.0	21.0	5.0	4.0	2.799270
4	5.3	1.0	2010.0	3.0	9.0	1.0	7.0	1.999157
5	12.1	1.0	2011.0	1.0	6.0	3.0	9.0	3.787239
6	7.5	1.0	2012.0	11.0	20.0	1.0	20.0	1.555807
8	8.9	2.0	2009.0	9.0	2.0	2.0	1.0	2.849627
9	5.3	1.0	2012.0	4.0	8.0	6.0	7.0	1.374577
10	5.5	3.0	2012.0	12.0	24.0	0.0	11.0	0.000000

Variable Names	Variable Data Types
fare_amount	float64
passenger_count	object
year	object
Month	object
Date	object
Day of Week	object
Hour	object
distance	float64

### 3.4 Some more data exploration

In this report we are trying to predict the fare prices of a cab rental company. So here we have a data set of 16067 observations with 8 variables including one dependent variable.

#### 3.4.1 Below are the names of Independent variables:

**passenger\_count, year, Month, Date, Day of Week, Hour, distance**

Our Dependent variable is: **fare\_amount**

#### 3.4.2 Uniqueness in Variable

We need to look at the unique number in the variables which help us to decide whether the variable is categorical or numeric. So, by using python script 'nunique' we tried to find out the unique values in each variable. We have also added the table below:

Variable Name	Unique Counts
fare_amount	450
passenger_count	7
year	7
Month	12
Date	31
Day of Week	7
Hour	24
distance	15424

### 3.4.3 Dividing the variables into two categories basis their data types:


Continuous variables - 'fare\_amount', 'distance'.

Categorical Variables - 'year', 'Month', 'Date', 'Day of Week', 'Hour', 'passenger\_count'


## 3.5 Feature Scaling

**Skewness** is asymmetry in a statistical distribution, in which the curve appears distorted or skewed either to the left or to the right. Skewness can be quantified to define the extent to which a distribution differs from a normal distribution. Here we tried to show the skewness of our variables and we find that our target variable absenteeism in hours having is one sided skewed so by using **log transform** technique we tried to reduce the skewness of the same.


Below mentioned graphs shows the probability distribution plot to check distribution before log transformation:

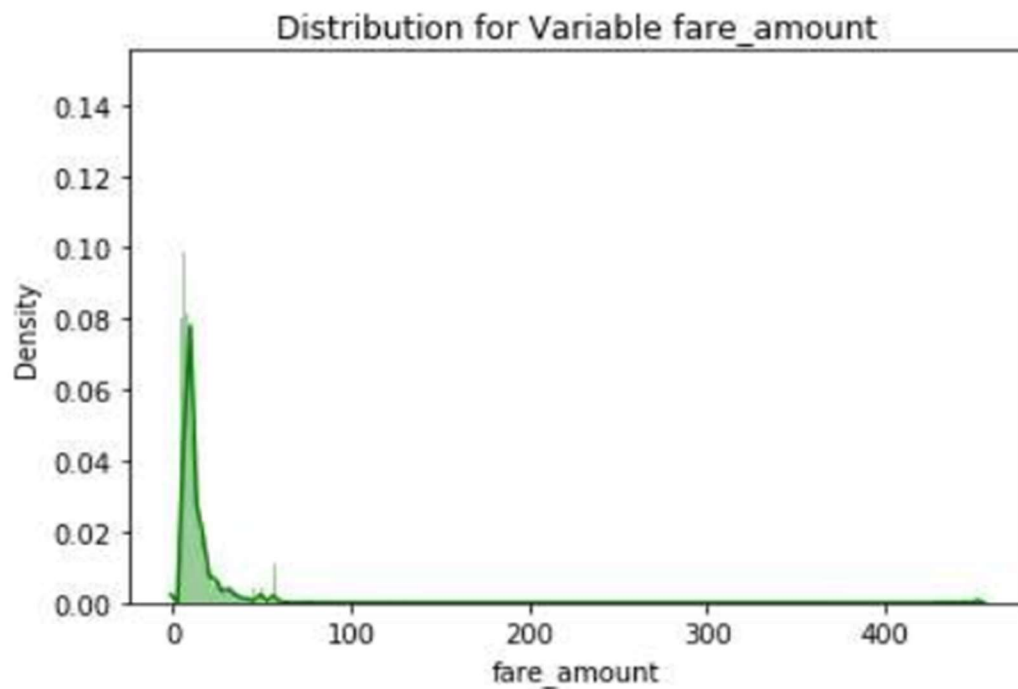




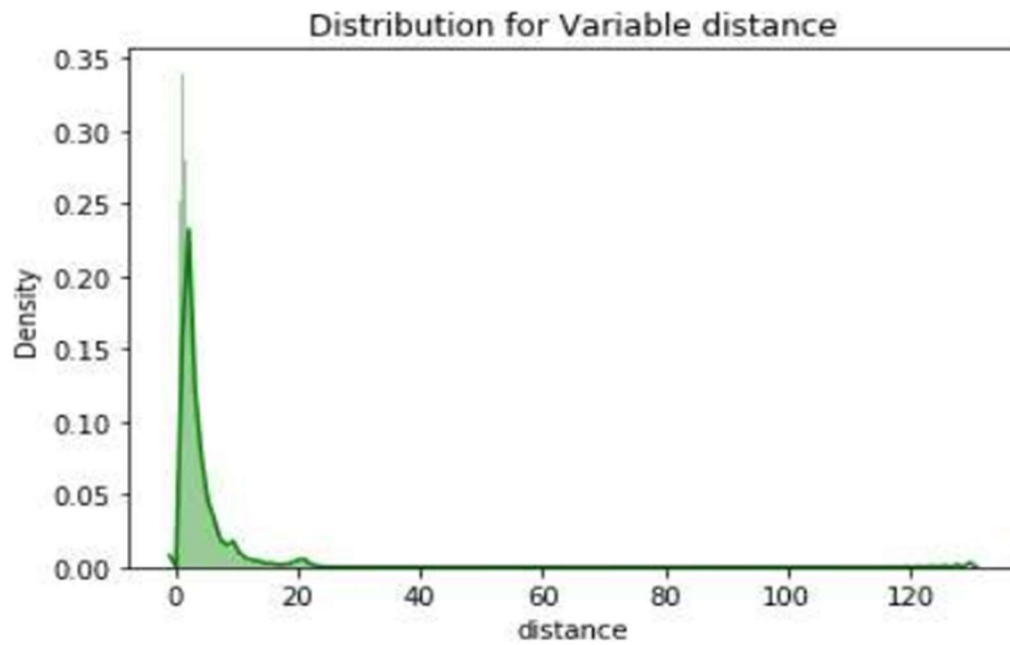

Below mentioned graphs shows the probability distribution plot to check distribution after log transformation:

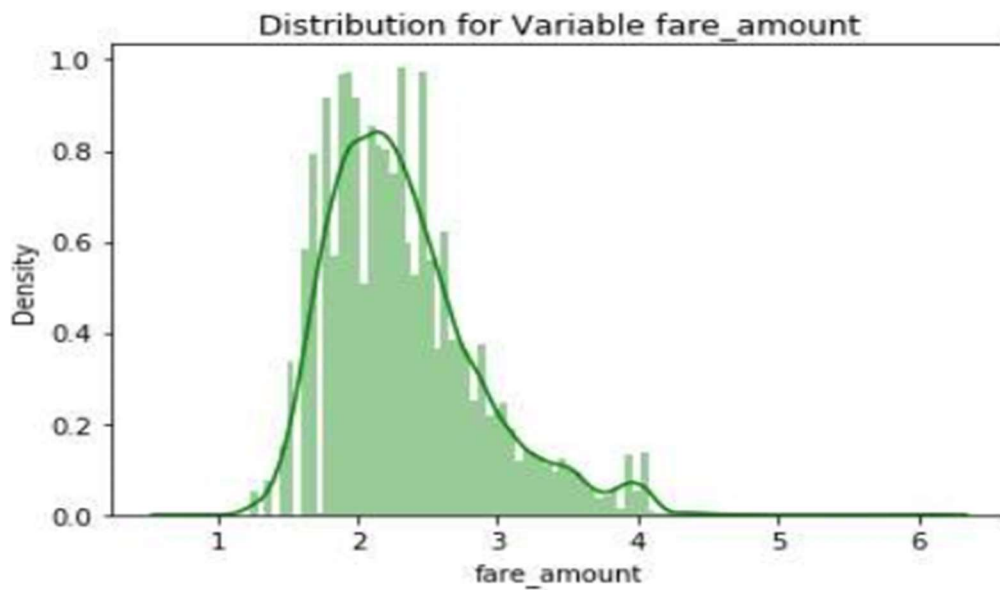

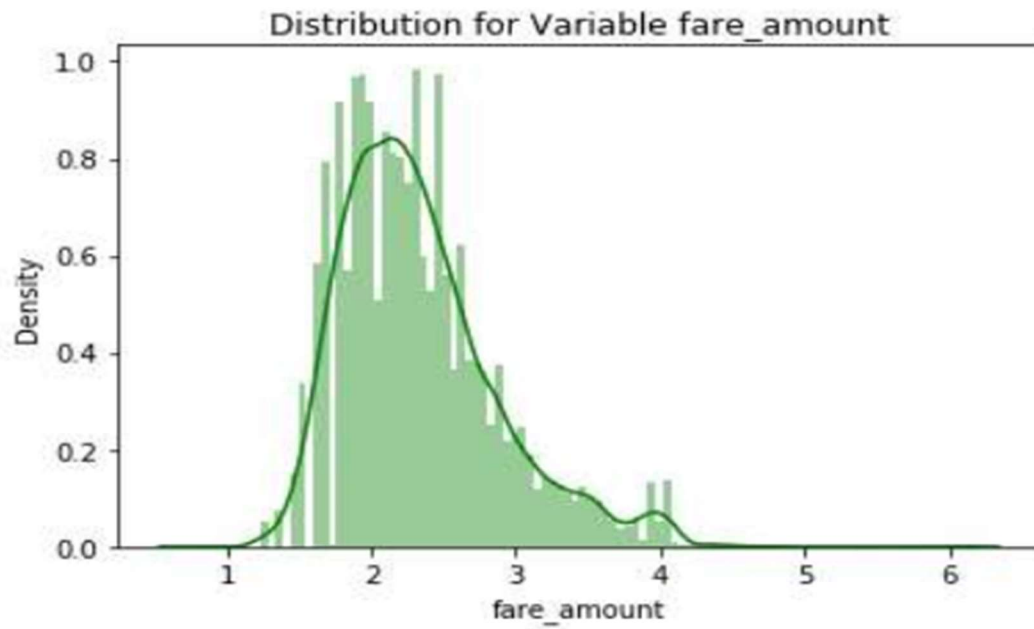

As our continuous variables appears to be normally distributed so we don't need to use feature scaling techniques like normalization and standardization for the same.

# Chapter 4

## Modelling

After a thorough preprocessing, we will use some regression models on our processed data to predict the target variable. Following are the models which we have built

- Linear Regression
- Decision Tree
- Random Forest
- Gradient Boosting

**Before running any model, we will split our data into two parts which is train and test data. Here in our case we have taken 80% of the data as our train data. Below is the snipped image of the split of train test.**

We need to split our train data into two parts

```
In [56]: from sklearn.tree import DecisionTreeRegressor
from sklearn.metrics import mean_squared_error
```

```
In [60]: ##train test split for further modelling
X_train, X_test, y_train, y_test = train_test_split( train_df.iloc[:, train_df.columns != 'fare_amount'],
                                                    train_df.iloc[:, 0], test_size = 0.20, random_state = 1)
```

```
In [61]: print(X_train.shape)
print(X_test.shape)
```

```
(12339, 7)
(3085, 7)
```

## 4.1 Linear Regression

Multiple linear regression is the most common form of linear regression analysis. Multiple regression is an extension of simple linear regression. It is used as a predictive analysis, when we want to predict the value of a variable based on the value of two or more other variables. The variable we want to predict is called the dependent variable (or sometimes, the outcome, target or criterion variable).

Below is a screenshot of the model we build and its output:

```
1. Linear Regression Model

In [62]: # Importing libraries for Linear Regression
from sklearn.linear_model import LinearRegression

In [63]: # Building model on top of training dataset
fit_LR = LinearRegression().fit(X_train , y_train)

In [64]: #prediction on train data
pred_train_LR = fit_LR.predict(X_train)

In [65]: #prediction on test data
pred_test_LR = fit_LR.predict(X_test)

In [66]: ##calculating RMSE for test data
RMSE_test_LR = np.sqrt(mean_squared_error(y_test, pred_test_LR))

In [67]: print("Root Mean Squared Error For Test data = "+str(RMSE_test_LR))

Root Mean Squared Error For Test data = 0.2503511796785927

In [68]: from sklearn.metrics import r2_score
#calculate R^2 for train data
r2_score(y_train, pred_train_LR)

Out[68]: 0.746855951097612

In [69]: r2_score(y_test, pred_test_LR)

Out[69]: 0.7778537029821875
```

## 4.2 Decision Tree

A tree has many analogies in real life, and turns out that it has influenced a wide area of machine learning, covering both classification and regression. In decision analysis, a decision tree can be used to visually and explicitly represent decisions and decision making. As the name goes, it uses a tree-like model of decisions.

Below is the screenshot of the query we executed and the result shown, we will compare the results of each model in a combined table later on.

### Decision Tree Algorithm

#### 2. Decision Tree Model

```
In [71]: fit_DT = DecisionTreeRegressor(max_depth = 2).fit(X_train,y_train)
```

```
In [72]: #prediction on train data  
pred_train_DT = fit_DT.predict(X_train)  
  
#prediction on test data  
pred_test_DT = fit_DT.predict(X_test)
```

```
In [73]: ##calculating RMSE for train data  
RMSE_train_DT = np.sqrt(mean_squared_error(y_train, pred_train_DT))  
  
##calculating RMSE for test data  
RMSE_test_DT = np.sqrt(mean_squared_error(y_test, pred_test_DT))
```

```
In [74]: print("Root Mean Squared Error For Training data = "+str(RMSE_train_DT))  
print("Root Mean Squared Error For Test data = "+str(RMSE_test_DT))
```

```
Root Mean Squared Error For Training data = 0.30120638747129796  
Root Mean Squared Error For Test data = 0.28969521517125973
```

```
In [75]: ## R^2 calculation for train data  
r2_score(y_train, pred_train_DT)
```

```
Out[75]: 0.70012186420221
```

```
In [76]: ## R^2 calculation for test data  
r2_score(y_test, pred_test_DT)
```

```
Out[76]: 0.7025442022580384
```

### 4.3 Random Forest

Random forests or random decision forests are an ensemble learning method for classification, regression and other task, that operate by constructing a multitude of decision trees at training time and outputting the class that is the mode of the classes (classification) or mean prediction (regression) of the individual trees. Random decision forests correct for decision trees' habit of overfitting to their training set.

**To say it in simple words: Random forest builds multiple decision trees and merges them together to get a more accurate and stable prediction.**

Below is a screenshot of the model we build and its output:

```
3. Random Forest Model

In [77]: # Importing libraries for Random Forest
        from sklearn.ensemble import RandomForestRegressor

In [78]: fit_RF = RandomForestRegressor(n_estimators = 200).fit(X_train,y_train)

In [79]: #prediction on train data
        pred_train_RF = fit_RF.predict(X_train)
        #prediction on test data
        pred_test_RF = fit_RF.predict(X_test)

In [80]: ##calculating RMSE for train data
        RMSE_train_RF = np.sqrt(mean_squared_error(y_train, pred_train_RF))
        ##calculating RMSE for test data
        RMSE_test_RF = np.sqrt(mean_squared_error(y_test, pred_test_RF))

In [81]: print("Root Mean Squared Error For Training data = "+str(RMSE_train_RF))
        print("Root Mean Squared Error For Test data = "+str(RMSE_test_RF))

        Root Mean Squared Error For Training data = 0.09594886483675674
        Root Mean Squared Error For Test data = 0.23918653965477282

In [82]: ## calculate R^2 for train data
        r2_score(y_train, pred_train_RF)

Out[82]: 0.9695704079865043

In [83]: #calculate R^2 for test data
        r2_score(y_test, pred_test_RF)

Out[83]: 0.7972255343157659
```

## 4.4 Gradient Boosting

Gradient boosting is a machine learning technique for regression and classification problems, which produces a prediction model in the form of an ensemble of weak prediction models, typically decision trees. It builds the model in a stage-wise fashion like other boosting methods do, and it generalizes them by allowing optimization of an arbitrary differentiable loss function.

Below is a screenshot of the model we build and its output:

### 4. Gradient Boosting

```
In [86]: # Importing library for GradientBoosting
from sklearn.ensemble import GradientBoostingRegressor

In [87]: # Building model on top of training dataset
fit_GB = GradientBoostingRegressor().fit(X_train, y_train)

In [88]: #prediction on train data
pred_train_GB = fit_GB.predict(X_train)

#prediction on test data
pred_test_GB = fit_GB.predict(X_test)

In [89]: ##calculating RMSE for train data
RMSE_train_GB = np.sqrt(mean_squared_error(y_train, pred_train_GB))
##calculating RMSE for test data
RMSE_test_GB = np.sqrt(mean_squared_error(y_test, pred_test_GB))

In [90]: print("Root Mean Squared Error For Training data = "+str(RMSE_train_GB))
print("Root Mean Squared Error For Test data = "+str(RMSE_test_GB))

Root Mean Squared Error For Training data = 0.22921680482502263
Root Mean Squared Error For Test data = 0.22939164285908767

In [92]: #calculate R^2 for test data
r2_score(y_test, pred_test_GB)

Out[92]: 0.813493068270751

In [93]: #calculate R^2 for train data
r2_score(y_train, pred_train_GB)

Out[93]: 0.8263361773771449
```



## 4.5 Hyper Parameters Tunings for optimizing the results

Model hyperparameters are set by the data scientist ahead of training and control implementation aspects of the model. The weights learned during training of a linear regression model are parameters while the number of trees in a random forest is a model hyperparameter because this is set by the data scientist. Hyperparameters can be thought of as model settings. These settings need to be tuned for each problem because the best model hyperparameters for one particular dataset will not be the best across all datasets. The process of hyperparameter tuning (also called hyperparameter optimization) means finding the combination of hyperparameter values for a machine learning model that performs the best - as measured on a validation dataset - for a problem.

Here we have used two hyper parameters tuning techniques

- Random Search CV
- Grid Search CV
- 1. **Random Search CV:** This algorithm set up a grid of hyperparameter values and select random combinations to train the model and score. The number of search iterations is set based on time/resources.
- 2. **Grid Search CV:** This algorithm set up a grid of hyperparameter values and for each combination, train a model and score on the validation data. In this approach, every single combination of hyperparameters values is tried which can be very inefficient.

Check results after using Random Search CV on Random forest and gradient boosting model.

```
In [101]: ##Random Search CV on Random Forest Model

RRF = RandomForestRegressor(random_state = 0)
n_estimator = list(range(1,20,2))
depth = list(range(1,100,2))

# Create the random grid
rand_grid = {'n_estimators': n_estimator,
             'max_depth': depth}

randomcv_rf = RandomizedSearchCV(RRF, param_distributions = rand_grid, n_iter = 5, cv = 5, random_state=0)
randomcv_rf = randomcv_rf.fit(X_train,y_train)
predictions_RRF = randomcv_rf.predict(X_test)

view_best_params_RRF = randomcv_rf.best_params_

best_model = randomcv_rf.best_estimator_

predictions_RRF = best_model.predict(X_test)

#R^2
RRF_r2 = r2_score(y_test, predictions_RRF)
#Calculating RMSE
RRF_rmse = np.sqrt(mean_squared_error(y_test,predictions_RRF))

print('Random Search CV Random Forest Regressor Model Performance:')
print('Best Parameters = ',view_best_params_RRF)
print('R-squared = {:.2}'.format(RRF_r2))
print('RMSE = ',RRF_rmse)

Random Search CV Random Forest Regressor Model Performance:
Best Parameters = {'n_estimators': 15, 'max_depth': 9}
R-squared = 0.79.
RMSE = 0.2414849508921194
```



```

In [103]: ##Random Search CV on gradient boosting model

gb = GradientBoostingRegressor(random_state = 0)
n_estimator = list(range(1,20,2))
depth = list(range(1,100,2))

# Create the random grid
rand_grid = {'n_estimators': n_estimator,
             'max_depth': depth}

randomcv_gb = RandomizedSearchCV(gb, param_distributions = rand_grid, n_iter = 5, cv = 5, random_state=0)
randomcv_gb = randomcv_gb.fit(X_train,y_train)
predictions_gb = randomcv_gb.predict(X_test)

view_best_params_gb = randomcv_gb.best_params_

best_model = randomcv_gb.best_estimator_

predictions_gb = best_model.predict(X_test)

#R^2
gb_r2 = r2_score(y_test, predictions_gb)
#Calculating RMSE
gb_rmse = np.sqrt(mean_squared_error(y_test,predictions_gb))

print('Random Search CV Gradient Boosting Model Performance:')
print('Best Parameters = ',view_best_params_gb)
print('R-squared = {:.2}'.format(gb_r2))
print('RMSE = ', gb_rmse)

Random Search CV Gradient Boosting Model Performance:
Best Parameters = {'n_estimators': 15, 'max_depth': 9}
R-squared = 0.77.
RMSE = 0.2550691086098142

```

Check results after using Grid Search CV on Random forest and gradient boosting model:

```

In [104]: from sklearn.model_selection import GridSearchCV
## Grid Search CV for random Forest model
regr = RandomForestRegressor(random_state = 0)
n_estimator = list(range(11,20,1))
depth = list(range(5,15,2))

# Create the grid
grid_search = {'n_estimators': n_estimator,
               'max_depth': depth}

## Grid Search Cross-Validation with 5 fold CV
gridcv_rf = GridSearchCV(regr, param_grid = grid_search, cv = 5)
gridcv_rf = gridcv_rf.fit(X_train,y_train)
view_best_params_GRF = gridcv_rf.best_params_

#Apply model on test data
predictions_GRF = gridcv_rf.predict(X_test)

#R^2
GRF_r2 = r2_score(y_test, predictions_GRF)
#Calculating RMSE
GRF_rmse = np.sqrt(mean_squared_error(y_test,predictions_GRF))

print('Grid Search CV Random Forest Regressor Model Performance:')
print('Best Parameters = ',view_best_params_GRF)
print('R-squared = {:.2}'.format(GRF_r2))
print('RMSE = ',(GRF_rmse))

Grid Search CV Random Forest Regressor Model Performance:
Best Parameters = {'max_depth': 5, 'n_estimators': 12}
R-squared = 0.8.
RMSE = 0.2398346306918429

```

```

In [105]: ## Grid Search CV for gradient boosting
gb = GradientBoostingRegressor(random_state = 0)
n_estimator = list(range(11,20,1))
depth = list(range(5,15,2))

# Create the grid
grid_search = {'n_estimators': n_estimator,
               'max_depth': depth}

## Grid Search Cross-Validation with 5 fold CV
gridcv_gb = GridSearchCV(gb, param_grid = grid_search, cv = 5)
gridcv_gb = gridcv_gb.fit(X_train,y_train)
view_best_params_Ggb = gridcv_gb.best_params_

#Apply model on test data
predictions_Ggb = gridcv_gb.predict(X_test)

#R^2
Ggb_r2 = r2_score(y_test, predictions_Ggb)
#Calculating RMSE
Ggb_rmse = np.sqrt(mean_squared_error(y_test,predictions_Ggb))

print('Grid Search CV Gradient Boosting regression Model Performance:')
print('Best Parameters = ',view_best_params_Ggb)
print('R-squared = {:.2}'.format(Ggb_r2))
print('RMSE = ',(Ggb_rmse))

```

```

Grid Search CV Gradient Boosting regression Model Performance:
Best Parameters = {'max_depth': 5, 'n_estimators': 19}
R-squared = 0.79.
RMSE = 0.2417391489664249

```

# Chapter 5

## Conclusion

### 5.1 Model Evaluation

The main concept of looking at what is called residuals or difference between our predictions  $f(x[i,])$  and actual outcomes  $y[i]$ .

In general, most data scientists use two methods to evaluate the performance of the model:

- I. **RMSE (Root Mean Square Error):** is a frequently used measure of the difference between values predicted by a model and the values actually observed from the environment that is being modelled.

$$RMSE = \sqrt{\frac{\sum_{i=1}^N (Predicted_i - Actual_i)^2}{N}}$$

- II. **R Squared( $R^2$ ):** is a statistical measure of how close the data are to the fitted regression line. It is also known as the coefficient of determination, or the coefficient of multiple determination for multiple regression. In other words, we can say it explains as to how much of the variance of the target variable is explained.
- III. We have shown both train and test data results, the main reason behind showing both the results is to check whether our data is overfitted or not.

Below table shows the model results before applying hyper tuning:

Model Name	RMSE		R Squared	
	Train	Test	Train	Test
Linear Regression	0.27	0.25	0.74	0.77
Decision Tree	0.30	0.28	0.70	0.70
Random Forest model	0.09	0.23	0.96	0.79
Gradient Boosting	0.22	0.22	0.82	0.81

Below table shows results post using hyper parameter tuning techniques:

<u>Model Name</u>	<u>Parameter</u>	<u>RMSE (Test)</u>	<u>R Squared (Test)</u>
<b>Random Search CV</b>	Random Forest	0.24	0.79
	Gradient Boosting	0.25	0.77
<b>Grid Search CV</b>	Random Forest	0.23	0.80
	Gradient Boosting	0.24	0.79

Above table shows the results after tuning the parameters of our two best suited models i.e. Random Forest and Gradient Boosting. For tuning the parameters, we have used Random Search CV and Grid Search CV under which we have given the range of n\_estimators, depth and CV folds.

## 5.2 Model Selection

On the basis RMSE and R Squared results a good model should have least RMSE and max R Squared value. So, from above tables we can see:


- From the observation of all RMSE Value and R-Squared Value we have concluded that, Both the models- Gradient Boosting Default and Random Forest perform comparatively well while comparing their RMSE and R-Squared value.
- After this, I chose Random Forest CV and Grid Search CV to apply cross validation technique and see changes brought about by that.
- After applying tunings Random forest model shows best results compared to gradient boosting.
- So finally, we can say that Random forest model is the best method to make prediction for this project with highest explained variance of the target variables and lowest error chances with parameter tuning technique Grid Search CV.

**Finally, I used this method to predict the target variable for the test data file shared in the problem statement. Results that I found are attached with my submissions.**

## 5.3 Some more visualization facts:


### 1. Number of passengers and fare

We can see in below graph that single passengers are the most frequent travelers, and the highest fare also seems to come from cabs which carry just 1 passenger.

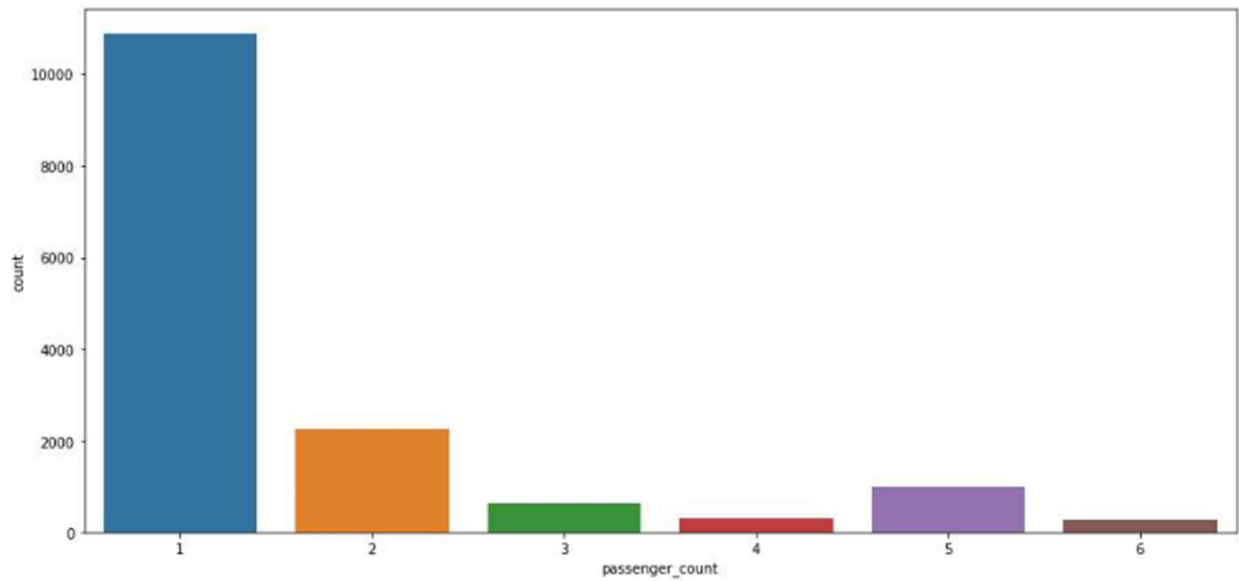



## 2. Date of month and fares

The fares throughout the month mostly seem uniform.

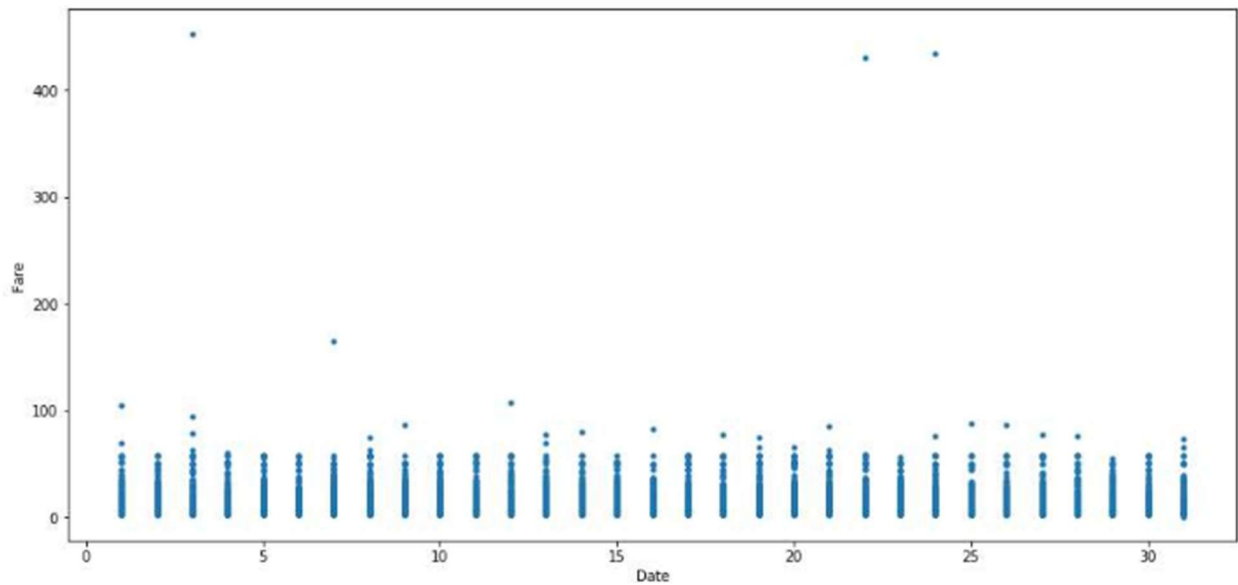


### 3. Hours and Fares

- During hours 6 PM to 11PM the frequency of cab boarding is very due to peak hours
- Fare prices during 2PM to 8PM is bit high compared to all other time might be due to high demands.

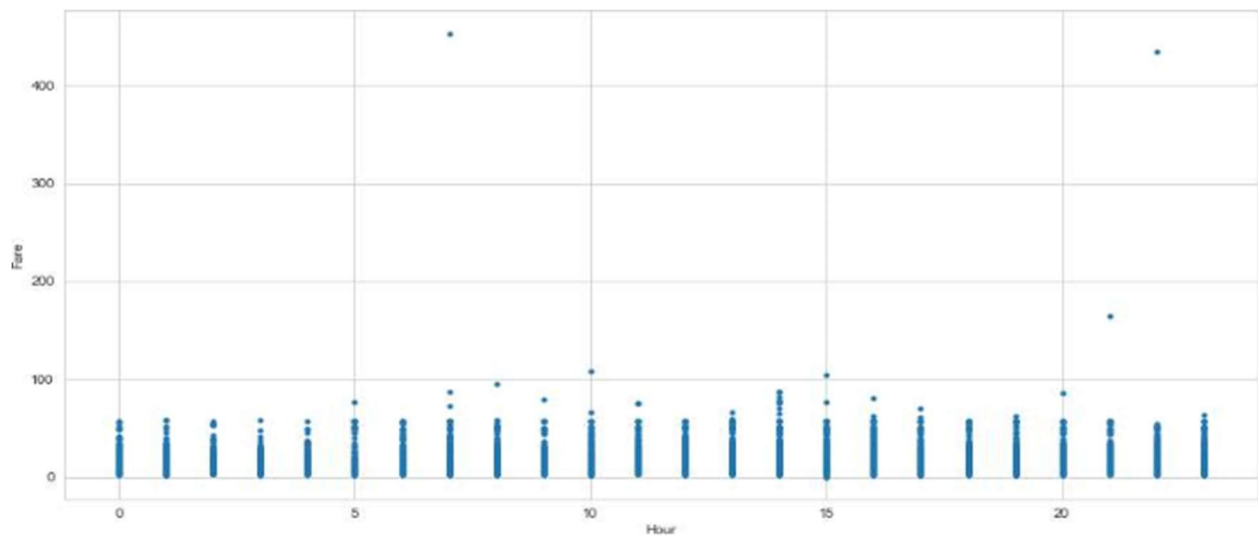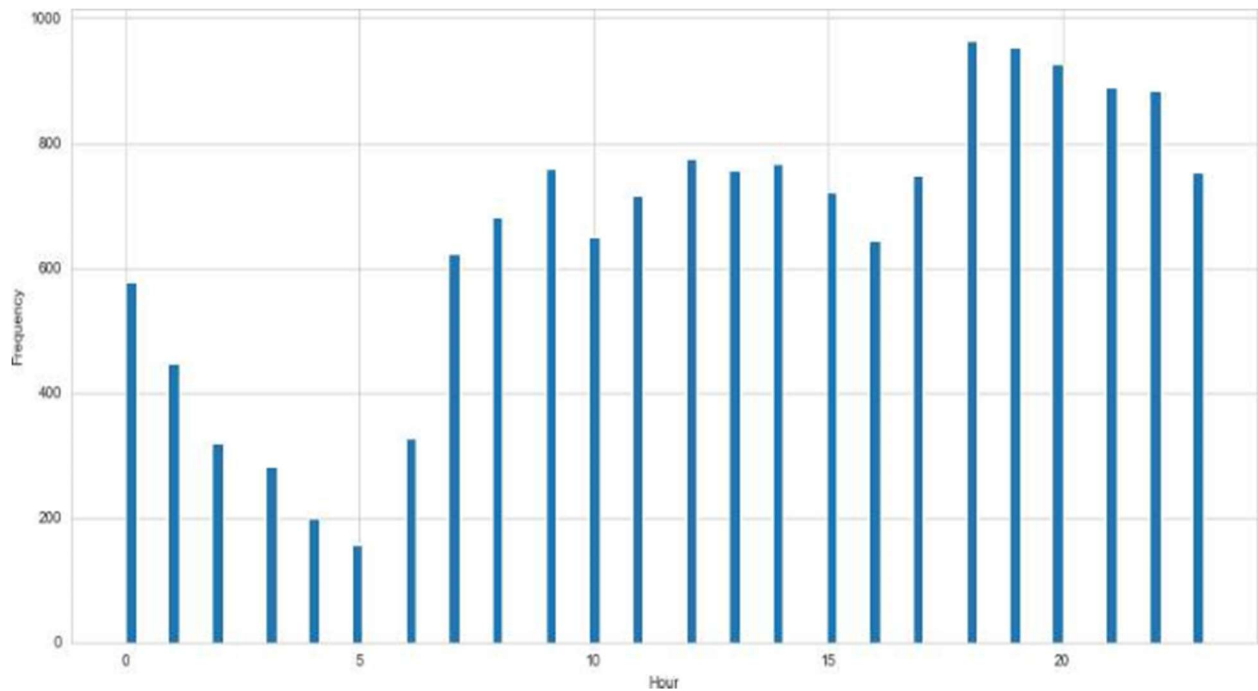

#### 4. Week Day and fare

- Cab fare is high on Friday, Saturday and Monday, may be during weekend and first day of the working day they charge high fares because of high demands of cabs.

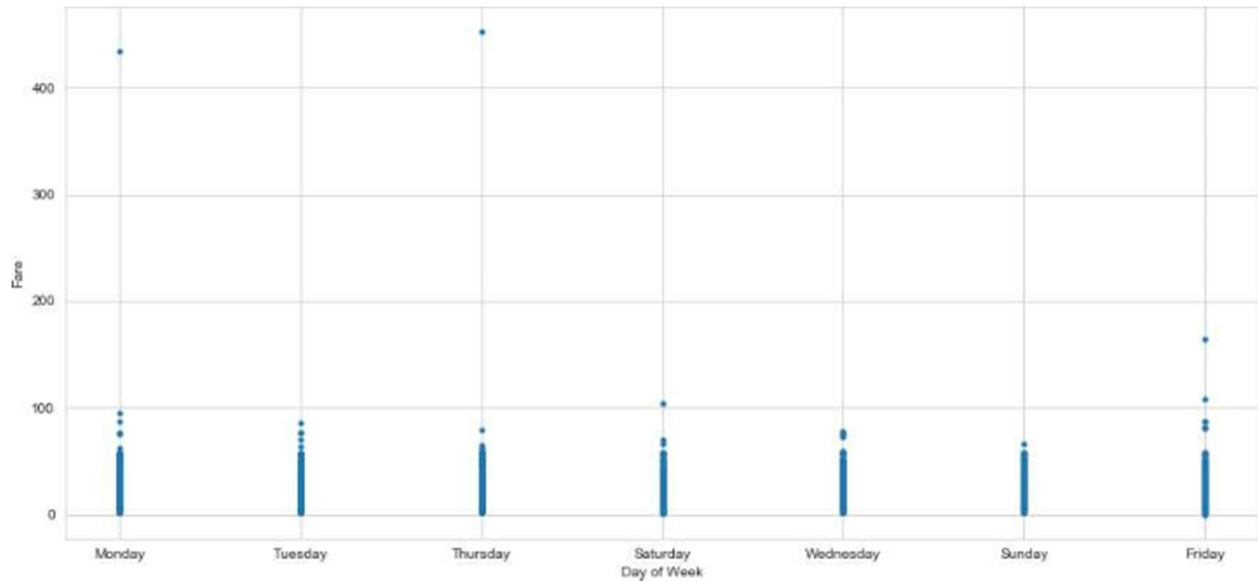

#### 5. Impact of Day on the Number of Cab rides :



Observation : The day of the week does not seem to have much influence on the number of cabs ride

**END OF REPORT**



## REFERENCES

1. For Data Cleaning and Model Development - <https://edvisor.com/career-data-scientist>
2. For other code related queries - <https://www.analyticsvidhya.com/blog/2016/03/practical-guide-principal-component-analysis-python/>
3. For Visualization
  - <https://www.udemy.com/python-for-data-science-and-machine-learning-bootcamp/>
  - <https://towardsdatascience.com/>
  - <https://stackoverflow.com/>

## Appendix

R code:

```
rm(list = ls())
```

```
setwd("F:/Data/Edwisor/Project/Sample Reports")
```

```
getwd()
```

```
# #loading Libraries
```

```
x = c("ggplot2", "corrgram", "DMwR", "caret", "randomForest", "e1071", "geosphere",
```

```
"DataCombine", "pROC", "doSNOW", "class", "readxl", "ROSE", "dplyr", "plyr",  
"reshape", "xlsx",
```

```
"pbapply", "unbalanced", "dummies", "MASS", "gbm", "Information", "rpart", "tidyr",  
"miscTools")
```

```
# #install.packages if not
```

```
lapply(x, install.packages)
```

```
# #load libraries
```

```
lapply(x, require, character.only = TRUE)
```

```
rm(x)
```

```
#Input Data Source
```

```
df = data.frame(read.csv('train_cab.csv'))
```

```
df2 = data.frame(read.csv('test.csv'))
```

```
#####
```

```
#EXPLORING DATA #
```

```
#####
```

```
#viewing the data
```

```
head(df)
```

```
#####
```

```
##### #####
```

```
#structure of data or data types
```

```
str(df)
```

```
#Summary of data
```

```
summary(df)
```

```
#unique value of each count
```

```
apply(df, 2,function(x) length(table(x)))
```

```
df$pickup_datetime <- gsub('\\ UTC',"",df$pickup_datetime)
```

```
#Splitting Date and time
```

```
df$Date <- as.Date(df$pickup_datetime)
```

```
df$Year <- substr(as.character(df$Date),1,4)
```

```
df$Month <- substr(as.character(df$Date),6,7)
```

```
df$Weekday <- weekdays(as.POSIXct(df$Date), abbreviate = F)
```

```
df$Date <- substr(as.character(df$Date),9,10)
```

```
df$Time <- substr(as.factor(df$pickup_datetime),12,13)
```

```
#Now we can drop the column pickup_datetime as we have different columns
```

```
df = subset(df, select = -c(pickup_datetime))
```

```
#####

#Checking Missing data #

#####

apply(df, 2, function(x) {sum(is.na(x))}) # in R, 1 = Row & 2 = Col

#Creating dataframe with missing values present in each variable

null_val = data.frame(apply(df,2,function(x){sum(is.na(x))}))

null_val$Columns = row.names(null_val)

names(null_val)[1] = "null_percentage"

#Calculating percentage missing value

null_val$null_percentage = (null_val$null_percentage/nrow(df)) * 100

# Sorting null_val in Descending order

null_val = null_val[order(-null_val$null_percentage),]

row.names(null_val) = NULL

# Reordering columns

null_val = null_val[,c(2,1)]

#viewing the % of missing data for all variables

null_val

#We have seen that null values are very less in our data set i.e. less than 1%.

#So we can delete the columns having missing values

df <- DropNA(df)

#Verifying missing values after deletion

sum(is.na(df))

names(df)

# Convert degrees to radians- Our data is already in radians, so skipping this step

#deg2rad <- function(deg) return(deg*pi/180)
```

```

# Calculates the geodesic distance between two points specified by
# radian latitude/longitude using the Haversine formula

lat1 = df['pickup_latitude']
lat2 = df['dropoff_latitude']

long1 = df['pickup_longitude']
long2 = df['dropoff_longitude']

##### Function to calculate distance #####

gcd_hf <- function(long1, lat1, long2, lat2) {
  R <- 6371.145 # Earth mean radius [km]

  delta.long <- (long2 - long1)
  delta.lat <- (lat2 - lat1)

  a <- sin(delta.lat/2)^2 + cos(lat1) * cos(lat2) * sin(delta.long/2)^2
  c <- 2 * atan2(sqrt(a),sqrt(1-a))

  d = R * c

  return(d) # Distance in km
}

#Running the function for all rows in dataframe

for (i in 1:nrow(df))
{
  df$distance[i]= gcd_hf(df$pickup_longitude[i], df$pickup_latitude[i], df$dropoff_longitude[i],
  df$dropoff_latitude[i])
}

```

```

#Now we can drop the columns for latitude/longitude as we have new column- Distance

df = subset(df, select = -c(pickup_latitude,dropoff_latitude,pickup_longitude,dropoff_longitude))

#We have seen that fare_amount has negative values which should be removed

df$fare_amount[df$fare_amount<=0] <- NA

df$fare_amount[df$fare_amount>500] <- NA

sum(is.na(df))

#So we can delete the columns having missing values

df <- DropNA(df)

#Verifying missing values after deletion

sum(is.na(df))

summary(df)

###removing passangers count more than 6

df$passenger_count[df$passenger_count<1] <- NA

df$passenger_count[df$passenger_count>6] <- NA

sum(is.na(df))

df <- DropNA(df)

sum(is.na(df))

summary(df)

###removing outliers in distance

df$distance[df$distance <= 0] <- NA

df$distance[df$distance > 500] <- NA

sum(is.na(df))

df <- DropNA(df)

sum(is.na(df))

summary(df)

```

```
# From the above EDA and problem statement categorizing data in 2 categories "continuous"
and "categorical"
```

```
#Fare_amount being our target variable is excluded from the list.
```

```
cont = c( 'distance')
```

```
cata = c('Weekday', 'Month', 'Year' , 'Time', 'Date' , 'passenger_count')
```

```
#####
```

```
#Visualizing the data #
```

```
#####
```

```
#library(ggplot2)
```

```
#Plot fare amount Vs. the days of the week.
```

```
ggplot(data = df, aes(x = reorder(Weekday,-fare_amount), y = fare_amount))+
```

```
geom_bar(stat = "identity")+
```

```
labs(title = "Fare Amount Vs. days", x = "Days of the week", y = "Fare")+
```

```
theme(plot.title = element_text(hjust = 0.5, face = "bold"))+
```

```
theme(axis.text.x = element_text( color="black", size=6, angle=45))
```

```
#Plot Fare amount Vs. months
```

```
ggplot(df,aes(x = reorder(Month,-fare_amount), y = fare_amount))+
```

```
geom_bar(stat = "identity")+
```

```
#ylim = c(0,1000) +
```

```
labs(title = "Fare Amount Vs. Month", x = "Month", y = "Fare")+
```

```
theme(axis.text.x = element_text( color="#993333", size=8))
```

```
#####

#Outlier Analysis #

#####

#We have done manual updation so we will skip this step

#####

#Feature Selection #

#####

## Dimension Reduction

#We have already excluded the below columns that were redundant:

#pickup_datetime,

#pickup_latitude,

#dropoff_latitude,

#pickup_longitude,

#dropoff_longitude

#pickup_datetime

#We will remove Time column also as it is not required

##df = subset(df, select = -c(Time))

#####

#Feature Scaling #

#####

#We will go for Normalization.

#Viewing data before Normalization.

head(df)

signedlog10 = function(x) {

ifelse(abs(x) <= 1, 0, sign(x)*log10(abs(x))) }
```



```
df$fare_amount = signedlog10(df$fare_amount)

df$distance = signedlog10(df$distance)

##checking distribution

hist(df$fare_amount)

hist(df$distance)

#Normalization

for(i in cont)

{

print(i)

df[,i] = (df[,i] -min(df[,i]))/(max(df[,i])-min(df[,i]))

}

hist(df$distance)

#Viewing data after Normalization.

head(df)

#Creating dummy variables for categorical variables

library(mlr)

df1 = dummy.data.frame(df, cata)

#Viewing data after adding dummies

head(df1)

#df1 = df
```

```
#####
```

```
#Sampling of Data #
```

```
#####
```

```
# #Divide data into trainset and testset using stratified sampling method
```

```
#install.packages('caret')
```

```
library(caret)
```

```
set.seed(101)
```

```
split_index = createDataPartition(df1$fare_amount, p = 0.7, list = FALSE)
```

```
trainset = df1[split_index,]
```

```
testset = df1[-split_index,]
```

```
#Checking df Set Target Class
```

```
table(trainset$fare_amount)
```

```
#####FUNCTION to calculate MAPE####
```

```
MAPE = function(y, yhat){
```

```
mean(abs((y - yhat)/y))*100
```

```
}
```

```
#####  
#####
```

## Basic approach for ML - Models

## We will first get a basic idea of how different models perform on our preprocessed data and then select the best model and make it more efficient for our Dataset

#-----Decision tree-----#

#Develop Model on training data

```
fit_DT = rpart(fare_amount ~., data = trainset, method = "anova")
```

#Variable importance

```
fit_DT$variable.importance
```

#distance Time05 passenger\_count

```
##725793.64246 431.82787 13.85704
```

#Lets predict for test data

```
pred_DT_test = predict(fit_DT, testset)
```

# For test data

```
print(postResample(pred = pred_DT_test, obs = testset$fare_amount))
```

#Compute  $R^2$

```
dt_r2 = rSquared(testset$fare_amount, testset$fare_amount - pred_DT_test)
```

```
print(dt_r2)
```

#Compute MSE

```
dt_mse = mean((testset$fare_amount - pred_DT_test)^2)
```

```
print(dt_mse)
```

#Compute MAPE

```
dt_mape = MAPE(testset$fare_amount, pred_DT_test)
```

```
print(dt_mape)
```

#RMSE Rsquared MAE

```
# 0.12 0.59 0.01
```

```

#-----Linear Regression-----#

#Develop Model on training data

fit_LR = lm(fare_amount ~ ., data = trainset)

#Lets predict for test data

pred_LR_test = predict(fit_LR, testset)

# For test data

print(postResample(pred = pred_LR_test, obs = testset$fare_amount))

#Compute R^2

lr_r2 = rSquared(testset$fare_amount, testset$fare_amount - pred_LR_test)

print(lr_r2)

#Compute MSE

lr_mse = mean((testset$fare_amount - pred_LR_test)^2)

print(lr_mse)

#Compute MAPE

lr_mape = MAPE(testset$fare_amount, pred_LR_test)

print(lr_mape)

##RMSE Rsquared MAE

##0.13    0.53    0.01

```

```

#-----Random Forest-----#

#Develop Model on training data

fit_RF = randomForest(fare_amount~., data = trainset)

#Lets predict for test data

pred_RF_test = predict(fit_RF, testset)

# For test data

print(postResample(pred = pred_RF_test, obs = testset$fare_amount))

#Compute R^2

rf_r2 = rSquared(testset$fare_amount, testset$fare_amount - pred_RF_test)

print(rf_r2)

#Compute MSE

rf_mse = mean((testset$fare_amount - pred_RF_test)^2)

print(rf_mse)

#Compute MAPE

rf_mape = MAPE(testset$fare_amount, pred_RF_test)

print(rf_mape)

#RMSE Rsquared MAE

#

#R2

#

#MSE

#

#MAPE

#

```

```

#-----XGBoost-----#

#### for xgboost it is required to make date variable as factor.

trainset$Date <- as.factor(trainset$Date)

#Develop Model on training data

fit_XGB = gbm(fare_amount~., data = trainset, n.trees = 500, interaction.depth = 2)

#Lets predict for test data

pred_XGB_test = predict(fit_XGB, testset, n.trees = 500)

# For test data

print(postResample(pred = pred_XGB_test, obs = testset$fare_amount))

#Compute R^2

xgb_r2 = rSquared(testset$fare_amount, testset$fare_amount - pred_XGB_test)

print(xgb_r2)

#Compute MSE

xgb_mse = mean((testset$fare_amount - pred_XGB_test)^2)

print(xgb_mse)

#Compute MAPE

xgb_mape = MAPE(testset$fare_amount, pred_XGB_test)

print(xgb_mape)

#RMSE Rsquared MAE

#

#R2

#

#MSE

#

#MAPE

```

-----Viewing summary of all models-----

```
# Create variables
```

```
MSE <- c(dt_mse, lr_mse, rf_mse, xgb_mse)
```

```
r2 <- c(dt_r2, lr_r2, rf_r2, xgb_r2)
```

```
MAPE <- c(dt_mape, lr_mape, rf_mape, xgb_mape)
```

```
# Join the variables to create a data frame
```

```
results <- data.frame(MSE,r2,MAPE)
```

```
results
```

```
#MSE r2 MAPE
```

```
#1
```

```
#2
```

```
#3
```

```
#4
```

```
#####  
#####
```

```
#Saving output to file #
```

```
#####  
#####
```

```
#write.csv(submit,file = 'C:/Users/Click/Desktop/Bike rental/Finalcount_R.csv',row.names = F)
```

```
#rm(list = ls())
```

## Python Code :

```
#Importing required libraries
import os #getting access to input files
import pandas as pd # Importing pandas for performing EDA
import numpy as np # Importing numpy for Linear Algebraic operations
import matplotlib.pyplot as plt # Importing for Data Visualization
import seaborn as sns # Importing for Data Visualization
from collections import Counter
from sklearn.tree import DecisionTreeRegressor
from sklearn.ensemble import RandomForestRegressor
from sklearn.ensemble import GradientBoostingRegressor
from sklearn.linear_model import LinearRegression #ML algorithm
from sklearn.model_selection import train_test_split #splitting dataset
from sklearn.metrics import mean_squared_error
from sklearn.metrics import r2_score
from pprint import pprint
from sklearn.model_selection import GridSearchCV

%matplotlib inline
```

```
#Setting the working directory

os.chdir("E:/edWisor/Cab Fare Prediction")
print(os.getcwd())
```

```
#Loading the data:
train = pd.read_csv("train_cab.csv",na_values={"pickup_datetime":"43"})
test = pd.read_csv("test.csv")
```

```
train.head() #checking first five rows of the training dataset
```

```
test.head() #checking first five rows of the test dataset
print("shape of training data is: ",train.shape) #checking the number of rows and columns in training data
print("shape of test data is: ",test.shape) #checking the number of rows and columns in test data
```

```
train.dtypes #checking the data-types in training dataset
```

```
test.dtypes #checking the data-types in test dataset
```

```
train.describe()
```

```
test.describe()
```

```
#Convert fare_amount from object to numeric
```



```
train["fare_amount"] = pd.to_numeric(train["fare_amount"], errors = "coerce")  
#Using errors='coerce'. It will replace all non-numeric values with NaN.
```

```
train.dtypes
```

```
train.shape
```

```
train.dropna(subset= ["pickup_datetime"]) #dropping NA values in datetime column
```

```
# Here pickup_datetime variable is in object so we need to change its data type to datetime  
train['pickup_datetime'] = pd.to_datetime(train['pickup_datetime'], format='%Y-%m-%d %H:%M:%S UTC')
```

```
### we will saperate the Pickup_datetime column into separate field like year, month, day of the week, etc
```

```
train['year'] = train['pickup_datetime'].dt.year  
train['Month'] = train['pickup_datetime'].dt.month  
train['Date'] = train['pickup_datetime'].dt.day  
train['Day'] = train['pickup_datetime'].dt.dayofweek  
train['Hour'] = train['pickup_datetime'].dt.hour  
train['Minute'] = train['pickup_datetime'].dt.minute
```

```
train.dtypes #Re-checking datatypes after conversion
```

```
test["pickup_datetime"] = pd.to_datetime(test["pickup_datetime"], format= "%Y-%m-%d %H:%M:%S UTC")  
### we will saperate the Pickup_datetime column into separate field like year, month, day of the week, etc
```

```
test['year'] = test['pickup_datetime'].dt.year  
test['Month'] = test['pickup_datetime'].dt.month  
test['Date'] = test['pickup_datetime'].dt.day  
test['Day'] = test['pickup_datetime'].dt.dayofweek  
test['Hour'] = test['pickup_datetime'].dt.hour  
test['Minute'] = test['pickup_datetime'].dt.minute
```

```
test.dtypes #Re-checking test datatypes after conversion
```

```
#removing datetime missing values rows  
train = train.drop(train[train['pickup_datetime'].isnull()].index, axis=0)  
print(train.shape)  
print(train['pickup_datetime'].isnull().sum())
```

```
train["passenger_count"].describe()
```

```
train = train.drop(train[train["passenger_count"]> 6 ].index, axis=0)
```

```
#Also removing the values with passenger count of 0.
```

```
train = train.drop(train[train["passenger_count"] == 0 ].index, axis=0)
```

```
train["passenger_count"].describe()
```

```
train["passenger_count"].sort_values(ascending= True)
```

```
#removing passenger_count missing values rows
```

```
train = train.drop(train[train['passenger_count'].isnull()].index, axis=0)
```

```
print(train.shape)
```

```
print(train['passenger_count'].isnull().sum())
```

```
train = train.drop(train[train["passenger_count"] == 0.12 ].index, axis=0)  
train.shape
```

```
##finding decending order of fare to get to know whether the outliers are  
present or not
```

```
train["fare_amount"].sort_values(ascending=False)
```

```
Counter(train["fare_amount"]<0)
```

```
train = train.drop(train[train["fare_amount"]<0].index, axis=0)
```

```
train.shape
```

```
##make sure there is no negative values in the fare_amount variable column  
train["fare_amount"].min()
```

```
#Also remove the row where fare amount is zero
```

```
train = train.drop(train[train["fare_amount"]<1].index, axis=0)
```

```
train.shape
```

```
#Now we can see that there is a huge difference in 1st 2nd and 3rd position  
in decending order of fare amount
```

```
# so we will remove the rows having fare amounting more than 454 as considering  
them as outliers
```

```
train = train.drop(train[train["fare_amount"]> 454 ].index, axis=0)
```

```
train.shape
```

```
# eliminating rows for which value of "fare_amount" is missing
```

```
train = train.drop(train[train['fare_amount'].isnull()].index, axis=0)
```

```
print(train.shape)
print(train['fare_amount'].isnull().sum())
```

```
train["fare_amount"].describe()
```

```
#Latitude----(-90 to 90)
#Longitude----(-180 to 180)

# we need to drop the rows having pickup latitude and longitude out the
range mentioned above

train = train.drop(train[train['pickup_latitude']<-90])
train[train['pickup_latitude']<-90]
train[train['pickup_latitude']>90]
```

```
#Hence dropping one value of >90
train = train.drop((train[train['pickup_latitude']<-90]).index, axis=0)
train = train.drop((train[train['pickup_latitude']>90]).index, axis=0)

train[train['pickup_longitude']<-180]
train[train['pickup_longitude']>180]
```

```
train[train['dropoff_latitude']<-90]
train[train['dropoff_latitude']>90]
```

```
train[train['dropoff_longitude']<-180]
train[train['dropoff_longitude']>180]
```

```
train.shape
```

```
train.isnull().sum()
```

```
test.isnull().sum()
```

```
#As we know that we have given pickup longitude and latitude values and same for drop.
#So we need to calculate the distance Using the haversine formula and we will create a new variable called distance
from math import radians, cos, sin, asin, sqrt

def haversine(a):
    lon1=a[0]
    lat1=a[1]
    lon2=a[2]
    lat2=a[3]
    """
    Calculate the great circle distance between two points
```

```

on the earth (specified in decimal degrees)
"""
# convert decimal degrees to radians
lon1, lat1, lon2, lat2 = map(radians, [lon1, lat1, lon2, lat2])

# haversine formula
dlon = lon2 - lon1
dlat = lat2 - lat1
a = sin(dlat/2)**2 + cos(lat1) * cos(lat2) * sin(dlon/2)**2
c = 2 * asin(sqrt(a))
# Radius of earth in kilometers is 6371
km = 6371 * c
return km
# 1min

```

```

train['distance'] = train[['pickup_longitude', 'pickup_latitude', 'dropoff_longitude', 'dropoff_latitude']].apply(haversine, axis=1)

```

```

test['distance'] = test[['pickup_longitude', 'pickup_latitude', 'dropoff_longitude', 'dropoff_latitude']].apply(haversine, axis=1)

```

```

train.head()

```

```

test.head()

```

```

train.nunique()

```

```

test.nunique()

```

```

##finding decending order of fare to get to know whether the outliers are presented or not
train['distance'].sort_values(ascending=False)

```

```

Counter(train['distance'] == 0)

```

```

Counter(test['distance'] == 0)

```

```

Counter(train['fare_amount'] == 0)

```

```

###we will remove the rows whose distance value is zero

```

```

train = train.drop(train[train['distance']== 0].index, axis=0)
train.shape

```

```
#we will remove the rows whose distance values is very high which is more than 129kms
train = train.drop(train[train['distance'] > 130 ].index, axis=0)
train.shape
```

```
train.head()
```

```
drop = ['pickup_datetime', 'pickup_longitude', 'pickup_latitude', 'dropoff_longitude', 'dropoff_latitude', 'Minute']
train = train.drop(drop, axis = 1)
```

```
train.head()
```

```
train['passenger_count'] = train['passenger_count'].astype('int64')
train['year'] = train['year'].astype('int64')
train['Month'] = train['Month'].astype('int64')
train['Date'] = train['Date'].astype('int64')
train['Day'] = train['Day'].astype('int64')
train['Hour'] = train['Hour'].astype('int64')
```

```
train.dtypes
```

```
drop_test = ['pickup_datetime', 'pickup_longitude', 'pickup_latitude', 'dropoff_longitude', 'dropoff_latitude', 'Minute']
test = test.drop(drop_test, axis = 1)
```

```
test.head()
```

```
test.dtypes
```

```
# Count plot on passenger count
plt.figure(figsize=(15,7))
sns.countplot(x="passenger_count", data=train)
```

```
#Relationship between number of passengers and Fare
```

```
plt.figure(figsize=(15,7))
plt.scatter(x=train['passenger_count'], y=train['fare_amount'], s=10)
plt.xlabel('No. of Passengers')
plt.ylabel('Fare')
plt.show()
```

```
#Relationship between date and Fare
plt.figure(figsize=(15,7))
plt.scatter(x=train['Date'], y=train['fare_amount'], s=10)
plt.xlabel('Date')
```

```
plt.ylabel('Fare')
plt.show()
```

```
plt.figure(figsize=(15,7))
train.groupby(train["Hour"])["Hour"].count().plot(kind="bar")
plt.show()
```

```
#Relationship between Time and Fare
plt.figure(figsize=(15,7))
plt.scatter(x=train['Hour'], y=train['fare_amount'], s=10)
plt.xlabel('Hour')
plt.ylabel('Fare')
plt.show()
```

```
#impact of Day on the number of cab rides
plt.figure(figsize=(15,7))
sns.countplot(x="Day", data=train)
```

```
#Relationships between day and Fare
plt.figure(figsize=(15,7))
plt.scatter(x=train['Day'], y=train['fare_amount'], s=10)
plt.xlabel('Day')
plt.ylabel('Fare')
plt.show()
```

```
#Relationship between distance and fare
plt.figure(figsize=(15,7))
plt.scatter(x = train['distance'], y = train['fare_amount'], c = "g")
plt.xlabel('Distance')
plt.ylabel('Fare')
plt.show()
```

```
#Normality check of training data is uniformly distributed or not-
```

```
for i in ['fare_amount', 'distance']:
    print(i)
    sns.distplot(train[i], bins='auto', color='green')
    plt.title("Distribution for Variable "+i)
    plt.ylabel("Density")
    plt.show()
```

```
#since skewness of target variable is high, apply log transform to reduce the skewness-
```

```
train['fare_amount'] = np.log1p(train['fare_amount'])
```

```
#since skewness of distance variable is high, apply log transform to reduce the skewness-
```

```
train['distance'] = np.log1p(train['distance'])
```

```
#Normality Re-check to check data is uniformly distributed or not after log transform
```

```
for i in ['fare_amount', 'distance']:
    print(i)
    sns.distplot(train[i],bins='auto',color='green')
    plt.title("Distribution for Variable "+i)
    plt.ylabel("Density")
    plt.show()
```

```
#Normality check for test data is uniformly distributed or not-
```

```
sns.distplot(test['distance'],bins='auto',color='green')
plt.title("Distribution for Variable "+i)
plt.ylabel("Density")
plt.show()
```

```
#since skewness of distance variable is high, apply log transform to reduce the skewness-
test['distance'] = np.log1p(test['distance'])
```

```
#rechecking the distribution for distance
sns.distplot(test['distance'],bins='auto',color='green')
plt.title("Distribution for Variable "+i)
plt.ylabel("Density")
plt.show()
```

## Applying ML Algorithms:

```
##train test split for further modelling
X_train, X_test, y_train, y_test = train_test_split( train.iloc[:, train.columns != 'fare_amount'],train.iloc[:, 0], test_size = 0.20, random_state = 1)
```

```
print(X_train.shape)
print(X_test.shape)
```

Linear Regression Model :

```
# Building model on top of training dataset
fit_LR = LinearRegression().fit(X_train , y_train)
```

```
#prediction on train data
pred_train_LR = fit_LR.predict(X_train)
```

```
#prediction on test data
pred_test_LR = fit_LR.predict(X_test)
```

```
##calculating RMSE for test data
RMSE_test_LR = np.sqrt(mean_squared_error(y_test, pred_test_LR))
```

```
##calculating RMSE for train data
RMSE_train_LR= np.sqrt(mean_squared_error(y_train, pred_train_LR))
```

```
print("Root Mean Squared Error For Training data = "+str(RMSE_train_LR))
print("Root Mean Squared Error For Test data = "+str(RMSE_test_LR))
```

```
#calculate R^2 for train data
from sklearn.metrics import r2_score
r2_score(y_train, pred_train_LR)
```

```
r2_score(y_test, pred_test_LR)
```

## Decision tree Model :

```
fit_DT = DecisionTreeRegressor(max_depth = 2).fit(X_train,y_train)
```

```
#prediction on train data
pred_train_DT = fit_DT.predict(X_train)
```

```
#prediction on test data
pred_test_DT = fit_DT.predict(X_test)
```

```
##calculating RMSE for train data
RMSE_train_DT = np.sqrt(mean_squared_error(y_train, pred_train_DT))
```

```
##calculating RMSE for test data
RMSE_test_DT = np.sqrt(mean_squared_error(y_test, pred_test_DT))
```

```
print("Root Mean Squared Error For Training data = "+str(RMSE_train_DT))
```



```
print("Root Mean Squared Error For Test data = "+str(RMSE_test_DT))
```

```
## R^2 calculation for train data  
r2_score(y_train, pred_train_DT)
```

```
## R^2 calculation for test data  
r2_score(y_test, pred_test_DT)
```

## Random Forest Model :

```
fit_RF = RandomForestRegressor(n_estimators = 200).fit(X_train,y_train)
```

```
#prediction on train data  
pred_train_RF = fit_RF.predict(X_train)  
#prediction on test data  
pred_test_RF = fit_RF.predict(X_test)
```

```
##calculating RMSE for train data  
RMSE_train_RF = np.sqrt(mean_squared_error(y_train, pred_train_RF))  
##calculating RMSE for test data  
RMSE_test_RF = np.sqrt(mean_squared_error(y_test, pred_test_RF))  
print("Root Mean Squared Error For Training data = "+str(RMSE_train_RF))  
print("Root Mean Squared Error For Test data = "+str(RMSE_test_RF))
```

```
## calculate R^2 for train data  
  
r2_score(y_train, pred_train_RF)
```

```
#calculate R^2 for test data  
r2_score(y_test, pred_test_RF)
```

## Gradient Boosting :

```
fit_GB = GradientBoostingRegressor().fit(X_train, y_train)
```

```
#prediction on train data  
pred_train_GB = fit_GB.predict(X_train)
```

```
#prediction on test data  
pred_test_GB = fit_GB.predict(X_test)
```

```
##calculating RMSE for train data  
RMSE_train_GB = np.sqrt(mean_squared_error(y_train, pred_train_GB))  
##calculating RMSE for test data  
RMSE_test_GB = np.sqrt(mean_squared_error(y_test, pred_test_GB))  
  
print("Root Mean Squared Error For Training data = "+str(RMSE_train_GB))
```

```

print("Root Mean Squared Error For Test data = "+str(RMSE_test_GB))

#calculate R^2 for test data
r2_score(y_test, pred_test_GB)

#calculate R^2 for train data
r2_score(y_train, pred_train_GB)

from sklearn.ensemble import RandomForestRegressor
rf = RandomForestRegressor(random_state = 42)
from pprint import pprint
# Look at parameters used by our current forest
print('Parameters currently in use:\n')
pprint(rf.get_params())

##Random Hyperparameter Grid

from sklearn.model_selection import train_test_split,RandomizedSearchCV

##Random Search CV on Random Forest Model

RRF = RandomForestRegressor(random_state = 0)
n_estimator = list(range(1,20,2))
depth = list(range(1,100,2))

# Create the random grid
rand_grid = {'n_estimators': n_estimator,
             'max_depth': depth}

randomcv_rf = RandomizedSearchCV(RRF, param_distributions = rand_grid, n_i
ter = 5, cv = 5, random_state=0)
randomcv_rf = randomcv_rf.fit(X_train,y_train)
predictions_RRF = randomcv_rf.predict(X_test)

view_best_params_RRF = randomcv_rf.best_params_

best_model = randomcv_rf.best_estimator_

predictions_RRF = best_model.predict(X_test)

#R^2
RRF_r2 = r2_score(y_test, predictions_RRF)
#Calculating RMSE
RRF_rmse = np.sqrt(mean_squared_error(y_test,predictions_RRF))

print('Random Search CV Random Forest Regressor Model Performance:')
print('Best Parameters = ',view_best_params_RRF)
print('R-squared = {:.0.2}'.format(RRF_r2))
print('RMSE = ',RRF_rmse)

gb = GradientBoostingRegressor(random_state = 42)
from pprint import pprint
# Look at parameters used by our current forest
print('Parameters currently in use:\n')
pprint(gb.get_params())

```

```

##Random Search CV on gradient boosting model

gb = GradientBoostingRegressor(random_state = 0)
n_estimator = list(range(1,20,2))
depth = list(range(1,100,2))

# Create the random grid
rand_grid = {'n_estimators': n_estimator,
             'max_depth': depth}

randomcv_gb = RandomizedSearchCV(gb, param_distributions = rand_grid, n_iter = 5, cv = 5, random_state=0)
randomcv_gb = randomcv_gb.fit(X_train,y_train)
predictions_gb = randomcv_gb.predict(X_test)

view_best_params_gb = randomcv_gb.best_params_

best_model = randomcv_gb.best_estimator_

predictions_gb = best_model.predict(X_test)

#R^2
gb_r2 = r2_score(y_test, predictions_gb)
#Calculating RMSE
gb_rmse = np.sqrt(mean_squared_error(y_test,predictions_gb))

print('Random Search CV Gradient Boosting Model Performance:')
print('Best Parameters = ',view_best_params_gb)
print('R-squared = {:0.2}'.format(gb_r2))
print('RMSE = ', gb_rmse)


from sklearn.model_selection import GridSearchCV
## Grid Search CV for random Forest model
regr = RandomForestRegressor(random_state = 0)
n_estimator = list(range(11,20,1))
depth = list(range(5,15,2))

# Create the grid
grid_search = {'n_estimators': n_estimator,
              'max_depth': depth}

## Grid Search Cross-Validation with 5 fold CV
gridcv_rf = GridSearchCV(regr, param_grid = grid_search, cv = 5)
gridcv_rf = gridcv_rf.fit(X_train,y_train)
view_best_params_GRF = gridcv_rf.best_params_

#Apply model on test data
predictions_GRF = gridcv_rf.predict(X_test)

#R^2
GRF_r2 = r2_score(y_test, predictions_GRF)
#Calculating RMSE
GRF_rmse = np.sqrt(mean_squared_error(y_test,predictions_GRF))

print('Grid Search CV Random Forest Regressor Model Performance:')

```

```

print('Best Parameters = ',view_best_params_GRF)
print('R-squared = {:0.2}.'.format(GRF_r2))
print('RMSE = ', (GRF_rmse))

## Grid Search CV for gradinet boosting
gb = GradientBoostingRegressor(random_state = 0)
n_estimator = list(range(11,20,1))
depth = list(range(5,15,2))

# Create the grid
grid_search = {'n_estimators': n_estimator,
               'max_depth': depth}

## Grid Search Cross-Validation with 5 fold CV
gridcv_gb = GridSearchCV(gb, param_grid = grid_search, cv = 5)
gridcv_gb = gridcv_gb.fit(X_train,y_train)
view_best_params_Ggb = gridcv_gb.best_params_

#Apply model on test data
predictions_Ggb = gridcv_gb.predict(X_test)

#R^2
Ggb_r2 = r2_score(y_test, predictions_Ggb)
#Calculating RMSE
Ggb_rmse = np.sqrt(mean_squared_error(y_test,predictions_Ggb))

print('Grid Search CV Gradient Boosting regression Model Performance:')
print('Best Parameters = ',view_best_params_Ggb)
print('R-squared = {:0.2}.'.format(Ggb_r2))
print('RMSE = ', (Ggb_rmse))

```

## Prediction of fare from provided test dataset :

```

## Grid Search CV for random Forest model
regr = RandomForestRegressor(random_state = 0)
n_estimator = list(range(11,20,1))
depth = list(range(5,15,2))

# Create the grid
grid_search = {'n_estimators': n_estimator,
               'max_depth': depth}

## Grid Search Cross-Validation with 5 fold CV
gridcv_rf = GridSearchCV(regr, param_grid = grid_search, cv = 5)
gridcv_rf = gridcv_rf.fit(X_train,y_train)
view_best_params_GRF = gridcv_rf.best_params_

#Apply model on test data
predictions_GRF_test_Df = gridcv_rf.predict(test)

predictions_GRF_test_Df

test['Predicted_fare'] = predictions_GRF_test_Df

```

```
test.head()
```

```
test.to_csv('test.csv')
```