

Core Java SE 9 for the Impatient

Second Edition

Cay S. Horstmann

 Addison-Wesley

Visit us on the Web: informit.com/aw

Library of Congress Control Number: 2017947587

Copyright © 2018 Pearson Education, Inc.

ISBN-13: 978-0-13-469472-6

ISBN-10: 0-13-469472-4

Contents

Preface xxi

Acknowledgments xxiii

About the Author xxv

I FUNDAMENTAL PROGRAMMING STRUCTURES 1

1.1 Our First Program 2

 1.1.1 Dissecting the “Hello, World” Program 2

 1.1.2 Compiling and Running a Java Program 3

 1.1.3 Method Calls 6

 1.1.4 JShell 7

1.2 Primitive Types 10

 1.2.1 Signed Integer Types 10

 1.2.2 Floating-Point Types 12

 1.2.3 The `char` Type 13

 1.2.4 The `boolean` Type 14

1.3 Variables 14

 1.3.1 Variable Declarations 14

 1.3.2 Names 14

	1.3.3	Initialization	15
	1.3.4	Constants	15
1.4	Arithmetic Operations		17
	1.4.1	Assignment	18
	1.4.2	Basic Arithmetic	18
	1.4.3	Mathematical Methods	19
	1.4.4	Number Type Conversions	20
	1.4.5	Relational and Logical Operators	22
	1.4.6	Big Numbers	23
1.5	Strings		24
	1.5.1	Concatenation	24
	1.5.2	Substrings	25
	1.5.3	String Comparison	25
	1.5.4	Converting Between Numbers and Strings	27
	1.5.5	The String API	28
	1.5.6	Code Points and Code Units	30
1.6	Input and Output		32
	1.6.1	Reading Input	32
	1.6.2	Formatted Output	33
1.7	Control Flow		36
	1.7.1	Branches	36
	1.7.2	Loops	38
	1.7.3	Breaking and Continuing	39
	1.7.4	Local Variable Scope	41
1.8	Arrays and Array Lists		43
	1.8.1	Working with Arrays	43
	1.8.2	Array Construction	44
	1.8.3	Array Lists	45
	1.8.4	Wrapper Classes for Primitive Types	46
	1.8.5	The Enhanced <code>for</code> Loop	47
	1.8.6	Copying Arrays and Array Lists	47
	1.8.7	Array Algorithms	49
	1.8.8	Command-Line Arguments	49
	1.8.9	Multidimensional Arrays	50

1.9	Functional Decomposition	52
1.9.1	Declaring and Calling Static Methods	53
1.9.2	Array Parameters and Return Values	53
1.9.3	Variable Arguments	53
Exercises		54
2	OBJECT-ORIENTED PROGRAMMING	59
2.1	Working with Objects	60
2.1.1	Accessor and Mutator Methods	62
2.1.2	Object References	63
2.2	Implementing Classes	65
2.2.1	Instance Variables	65
2.2.2	Method Headers	65
2.2.3	Method Bodies	66
2.2.4	Instance Method Invocations	66
2.2.5	The <code>this</code> Reference	67
2.2.6	Call by Value	68
2.3	Object Construction	69
2.3.1	Implementing Constructors	69
2.3.2	Overloading	70
2.3.3	Calling One Constructor from Another	71
2.3.4	Default Initialization	71
2.3.5	Instance Variable Initialization	72
2.3.6	Final Instance Variables	73
2.3.7	The Constructor with No Arguments	73
2.4	Static Variables and Methods	74
2.4.1	Static Variables	74
2.4.2	Static Constants	75
2.4.3	Static Initialization Blocks	76
2.4.4	Static Methods	77
2.4.5	Factory Methods	78
2.5	Packages	78
2.5.1	Package Declarations	79
2.5.2	The <code>jar</code> Command	80

2.5.3	The Class Path	81
2.5.4	Package Access	83
2.5.5	Importing Classes	83
2.5.6	Static Imports	85
2.6	Nested Classes	85
2.6.1	Static Nested Classes	85
2.6.2	Inner Classes	87
2.6.3	Special Syntax Rules for Inner Classes	89
2.7	Documentation Comments	90
2.7.1	Comment Insertion	90
2.7.2	Class Comments	91
2.7.3	Method Comments	92
2.7.4	Variable Comments	92
2.7.5	General Comments	92
2.7.6	Links	93
2.7.7	Package, Module, and Overview Comments	94
2.7.8	Comment Extraction	94
	Exercises	95

3 INTERFACES AND LAMBDA EXPRESSIONS 99

3.1	Interfaces	100
3.1.1	Declaring an Interface	100
3.1.2	Implementing an Interface	101
3.1.3	Converting to an Interface Type	103
3.1.4	Casts and the <code>instanceof</code> Operator	103
3.1.5	Extending Interfaces	104
3.1.6	Implementing Multiple Interfaces	105
3.1.7	Constants	105
3.2	Static, Default, and Private Methods	105
3.2.1	Static Methods	105
3.2.2	Default Methods	106
3.2.3	Resolving Default Method Conflicts	107
3.2.4	Private Methods	109

3.3	Examples of Interfaces	109
3.3.1	The Comparable Interface	109
3.3.2	The Comparator Interface	111
3.3.3	The Runnable Interface	112
3.3.4	User Interface Callbacks	112
3.4	Lambda Expressions	113
3.4.1	The Syntax of Lambda Expressions	114
3.4.2	Functional Interfaces	115
3.5	Method and Constructor References	116
3.5.1	Method References	117
3.5.2	Constructor References	118
3.6	Processing Lambda Expressions	119
3.6.1	Implementing Deferred Execution	119
3.6.2	Choosing a Functional Interface	120
3.6.3	Implementing Your Own Functional Interfaces	123
3.7	Lambda Expressions and Variable Scope	124
3.7.1	Scope of a Lambda Expression	124
3.7.2	Accessing Variables from the Enclosing Scope	124
3.8	Higher-Order Functions	127
3.8.1	Methods that Return Functions	127
3.8.2	Methods That Modify Functions	128
3.8.3	Comparator Methods	128
3.9	Local and Anonymous Classes	129
3.9.1	Local Classes	129
3.9.2	Anonymous Classes	130
	Exercises	131
4	INHERITANCE AND REFLECTION	135
4.1	Extending a Class	136
4.1.1	Super- and Subclasses	136
4.1.2	Defining and Inheriting Subclass Methods	137
4.1.3	Method Overriding	137
4.1.4	Subclass Construction	139

4.1.5	Superclass Assignments	139
4.1.6	Casts	140
4.1.7	Final Methods and Classes	141
4.1.8	Abstract Methods and Classes	141
4.1.9	Protected Access	142
4.1.10	Anonymous Subclasses	143
4.1.11	Inheritance and Default Methods	144
4.1.12	Method Expressions with <code>super</code>	145
4.2	<code>Object</code> : The Cosmic Superclass	145
4.2.1	The <code>toString</code> Method	146
4.2.2	The <code>equals</code> Method	148
4.2.3	The <code>hashCode</code> Method	150
4.2.4	Cloning Objects	151
4.3	Enumerations	154
4.3.1	Methods of Enumerations	155
4.3.2	Constructors, Methods, and Fields	156
4.3.3	Bodies of Instances	157
4.3.4	Static Members	157
4.3.5	Switching on an Enumeration	158
4.4	Runtime Type Information and Resources	159
4.4.1	The <code>Class</code> Class	159
4.4.2	Loading Resources	162
4.4.3	Class Loaders	163
4.4.4	The Context Class Loader	164
4.4.5	Service Loaders	166
4.5	Reflection	168
4.5.1	Enumerating Class Members	168
4.5.2	Inspecting Objects	169
4.5.3	Invoking Methods	171
4.5.4	Constructing Objects	171
4.5.5	JavaBeans	172
4.5.6	Working with Arrays	174
4.5.7	Proxies	175
	Exercises	177

5	EXCEPTIONS, ASSERTIONS, AND LOGGING	181
5.1	Exception Handling	182
5.1.1	Throwing Exceptions	182
5.1.2	The Exception Hierarchy	183
5.1.3	Declaring Checked Exceptions	185
5.1.4	Catching Exceptions	186
5.1.5	The Try-with-Resources Statement	187
5.1.6	The <code>finally</code> Clause	189
5.1.7	Rethrowing and Chaining Exceptions	190
5.1.8	Uncaught Exceptions and the Stack Trace	192
5.1.9	The <code>Objects.requireNonNull</code> Method	193
5.2	Assertions	193
5.2.1	Using Assertions	194
5.2.2	Enabling and Disabling Assertions	194
5.3	Logging	195
5.3.1	Using Loggers	195
5.3.2	Loggers	196
5.3.3	Logging Levels	197
5.3.4	Other Logging Methods	197
5.3.5	Logging Configuration	199
5.3.6	Log Handlers	200
5.3.7	Filters and Formatters	202
	Exercises	203

6	GENERIC PROGRAMMING	207
6.1	Generic Classes	208
6.2	Generic Methods	209
6.3	Type Bounds	210
6.4	Type Variance and Wildcards	211
6.4.1	Subtype Wildcards	212
6.4.2	Supertype Wildcards	213
6.4.3	Wildcards with Type Variables	214
6.4.4	Unbounded Wildcards	215
6.4.5	Wildcard Capture	216

6.5	Generics in the Java Virtual Machine	216
6.5.1	Type Erasure	217
6.5.2	Cast Insertion	217
6.5.3	Bridge Methods	218
6.6	Restrictions on Generics	220
6.6.1	No Primitive Type Arguments	220
6.6.2	At Runtime, All Types Are Raw	220
6.6.3	You Cannot Instantiate Type Variables	221
6.6.4	You Cannot Construct Arrays of Parameterized Types	223
6.6.5	Class Type Variables Are Not Valid in Static Contexts	224
6.6.6	Methods May Not Clash after Erasure	224
6.6.7	Exceptions and Generics	225
6.7	Reflection and Generics	226
6.7.1	The <code>Class<T></code> Class	227
6.7.2	Generic Type Information in the Virtual Machine	227
	Exercises	229

7	COLLECTIONS	235
7.1	An Overview of the Collections Framework	236
7.2	Iterators	240
7.3	Sets	242
7.4	Maps	243
7.5	Other Collections	247
7.5.1	Properties	247
7.5.2	Bit Sets	248
7.5.3	Enumeration Sets and Maps	250
7.5.4	Stacks, Queues, Deques, and Priority Queues	250
7.5.5	Weak Hash Maps	251
7.6	Views	252
7.6.1	Small Collections	252
7.6.2	Ranges	253

7.6.3	Unmodifiable Views	254
Exercises		255
8	STREAMS	259
8.1	From Iterating to Stream Operations	260
8.2	Stream Creation	261
8.3	The <code>filter</code> , <code>map</code> , and <code>flatMap</code> Methods	263
8.4	Extracting Substreams and Combining Streams	264
8.5	Other Stream Transformations	265
8.6	Simple Reductions	266
8.7	The Optional Type	267
8.7.1	How to Work with Optional Values	267
8.7.2	How Not to Work with Optional Values	269
8.7.3	Creating Optional Values	269
8.7.4	Composing Optional Value Functions with <code>flatMap</code>	269
8.7.5	Turning an Optional Into a Stream	270
8.8	Collecting Results	271
8.9	Collecting into Maps	273
8.10	Grouping and Partitioning	274
8.11	Downstream Collectors	275
8.12	Reduction Operations	277
8.13	Primitive Type Streams	279
8.14	Parallel Streams	280
Exercises		283
9	PROCESSING INPUT AND OUTPUT	287
9.1	Input/Output Streams, Readers, and Writers	288
9.1.1	Obtaining Streams	288
9.1.2	Reading Bytes	289
9.1.3	Writing Bytes	290
9.1.4	Character Encodings	290
9.1.5	Text Input	293
9.1.6	Text Output	294
9.1.7	Reading and Writing Binary Data	295

9.1.8	Random-Access Files	296
9.1.9	Memory-Mapped Files	297
9.1.10	File Locking	297
9.2	Paths, Files, and Directories	298
9.2.1	Paths	298
9.2.2	Creating Files and Directories	300
9.2.3	Copying, Moving, and Deleting Files	301
9.2.4	Visiting Directory Entries	302
9.2.5	ZIP File Systems	305
9.3	HTTP Connections	306
9.3.1	The <code>URLConnection</code> and <code>HttpURLConnection</code> Classes	306
9.3.2	The HTTP Client API	307
9.4	Regular Expressions	310
9.4.1	The Regular Expression Syntax	310
9.4.2	Finding One Match	314
9.4.3	Finding All Matches	315
9.4.4	Groups	316
9.4.5	Splitting along Delimiters	317
9.4.6	Replacing Matches	317
9.4.7	Flags	318
9.5	Serialization	319
9.5.1	The <code>Serializable</code> Interface	319
9.5.2	Transient Instance Variables	321
9.5.3	The <code>readObject</code> and <code>writeObject</code> Methods	321
9.5.4	The <code>readResolve</code> and <code>writeReplace</code> Methods	322
9.5.5	Versioning	324
	Exercises	325

10 CONCURRENT PROGRAMMING 329

10.1	Concurrent Tasks	330
10.1.1	Running Tasks	330
10.1.2	Futures	333
10.2	Asynchronous Computations	335
10.2.1	CompletableFuture	335

10.2.2	Composing Completable Futures	337
10.2.3	Long-Running Tasks in User-Interface Callbacks	340
10.3	Thread Safety	341
10.3.1	Visibility	342
10.3.2	Race Conditions	344
10.3.3	Strategies for Safe Concurrency	346
10.3.4	Immutable Classes	347
10.4	Parallel Algorithms	348
10.4.1	Parallel Streams	348
10.4.2	Parallel Array Operations	349
10.5	Threadsafe Data Structures	350
10.5.1	Concurrent Hash Maps	350
10.5.2	Blocking Queues	352
10.5.3	Other Threadsafe Data Structures	354
10.6	Atomic Counters and Accumulators	354
10.7	Locks and Conditions	357
10.7.1	Locks	357
10.7.2	The <code>synchronized</code> Keyword	358
10.7.3	Waiting on Conditions	360
10.8	Threads	362
10.8.1	Starting a Thread	363
10.8.2	Thread Interruption	364
10.8.3	Thread-Local Variables	365
10.8.4	Miscellaneous Thread Properties	366
10.9	Processes	366
10.9.1	Building a Process	367
10.9.2	Running a Process	368
10.9.3	Process Handles	370
	Exercises	371

II ANNOTATIONS 377

11.1	Using Annotations	378
11.1.1	Annotation Elements	378
11.1.2	Multiple and Repeated Annotations	380

11.1.3	Annotating Declarations	380
11.1.4	Annotating Type Uses	381
11.1.5	Making Receivers Explicit	382
11.2	Defining Annotations	383
11.3	Standard Annotations	386
11.3.1	Annotations for Compilation	387
11.3.2	Annotations for Managing Resources	388
11.3.3	Meta-Annotations	389
11.4	Processing Annotations at Runtime	391
11.5	Source-Level Annotation Processing	394
11.5.1	Annotation Processors	394
11.5.2	The Language Model API	395
11.5.3	Using Annotations to Generate Source Code	395
	Exercises	398

I2 THE DATE AND TIME API 401

12.1	The Time Line	402
12.2	Local Dates	404
12.3	Date Adjusters	407
12.4	Local Time	409
12.5	Zoned Time	410
12.6	Formatting and Parsing	413
12.7	Interoperating with Legacy Code	416
	Exercises	417

I3 INTERNATIONALIZATION 421

13.1	Locales	422
13.1.1	Specifying a Locale	423
13.1.2	The Default Locale	426
13.1.3	Display Names	426
13.2	Number Formats	427
13.3	Currencies	428
13.4	Date and Time Formatting	429
13.5	Collation and Normalization	431

13.6	Message Formatting	433
13.7	Resource Bundles	435
	13.7.1 Organizing Resource Bundles	435
	13.7.2 Bundle Classes	437
13.8	Character Encodings	438
13.9	Preferences	439
	Exercises	441

I4 COMPIILING AND SCRIPTING 443

14.1	The Compiler API	444
	14.1.1 Invoking the Compiler	444
	14.1.2 Launching a Compilation Task	444
	14.1.3 Reading Source Files from Memory	445
	14.1.4 Writing Byte Codes to Memory	446
	14.1.5 Capturing Diagnostics	447
14.2	The Scripting API	448
	14.2.1 Getting a Scripting Engine	448
	14.2.2 Bindings	449
	14.2.3 Redirecting Input and Output	449
	14.2.4 Calling Scripting Functions and Methods	450
	14.2.5 Compiling a Script	452
14.3	The Nashorn Scripting Engine	452
	14.3.1 Running Nashorn from the Command Line	452
	14.3.2 Invoking Getters, Setters, and Overloaded Methods	453
	14.3.3 Constructing Java Objects	454
	14.3.4 Strings in JavaScript and Java	455
	14.3.5 Numbers	456
	14.3.6 Working with Arrays	457
	14.3.7 Lists and Maps	458
	14.3.8 Lambdas	458
	14.3.9 Extending Java Classes and Implementing Java Interfaces	459
	14.3.10 Exceptions	461

14.4	Shell Scripting with Nashorn	461
14.4.1	Executing Shell Commands	462
14.4.2	String Interpolation	462
14.4.3	Script Inputs	463
	Exercises	464
I5	THE JAVA PLATFORM MODULE SYSTEM	469
15.1	The Module Concept	470
15.2	Naming Modules	472
15.3	The Modular “Hello, World!” Program	472
15.4	Requiring Modules	474
15.5	Exporting Packages	476
15.6	Modules and Reflective Access	479
15.7	Modular JARs	482
15.8	Automatic Modules and the Unnamed Module	484
15.9	Command-Line Flags for Migration	485
15.10	Transitive and Static Requirements	487
15.11	Qualified Exporting and Opening	489
15.12	Service Loading	490
15.13	Tools for Working with Modules	491
	Exercises	494
	Index	497

Preface

Java is now over twenty years old, and the classic book, *Core Java*, covers, in meticulous detail, not just the language but all core libraries and a multitude of changes between versions, spanning two volumes and well over 2,000 pages. However, if you just want to be productive with modern Java, there is a much faster, easier pathway for learning the language and core libraries. In this book, I don't retrace history and don't dwell on features of past versions. I show you the good parts of Java as it exists today, with Java 9, so you can put your knowledge to work quickly.

As with my previous "Impatient" books, I quickly cut to the chase, showing you what you need to know to solve a programming problem without lecturing about the superiority of one paradigm over another. I also present the information in small chunks, organized so that you can quickly retrieve it when needed.

Assuming you are proficient in some other programming language, such as C++, JavaScript, Objective C, PHP, or Ruby, with this book you will learn how to become a competent Java programmer. I cover all aspects of Java that a developer needs to know, including the powerful concepts of lambda expressions and streams. I tell you where to find out more about old-fashioned concepts that you might still see in legacy code, but I don't dwell on them.

A key reason to use Java is to tackle concurrent programming. With parallel algorithms and threadsafe data structures readily available in the Java library,

the way application programmers should handle concurrent programming has completely changed. I provide fresh coverage, showing you how to use the powerful library features instead of error-prone low-level constructs.

Traditionally, books on Java have focused on user interface programming—but nowadays, few developers produce user interfaces on desktop computers. If you intend to use Java for server-side programming or Android programming, you will be able to use this book effectively without being distracted by desktop GUI code.

Finally, this book is written for application programmers, not for a college course and not for systems wizards. The book covers issues that application programmers need to wrestle with, such as logging and working with files—but you won't learn how to implement a linked list by hand or how to write a web server.

I hope you enjoy this rapid-fire introduction into modern Java, and I hope it will make your work with Java productive and enjoyable.

If you find errors or have suggestions for improvement, please visit <http://horstmann.com/javaimpatient> and leave a comment. On that page, you will also find a link to an archive file containing all code examples from the book.

Fundamental Programming Structures

Topics in This Chapter

- 1.1 Our First Program — page 2
- 1.2 Primitive Types — page 10
- 1.3 Variables — page 14
- 1.4 Arithmetic Operations — page 17
- 1.5 Strings — page 24
- 1.6 Input and Output — page 32
- 1.7 Control Flow — page 36
- 1.8 Arrays and Array Lists — page 43
- 1.9 Functional Decomposition — page 52
- Exercises — page 54

Chapter

I

In this chapter, you will learn about the basic data types and control structures of the Java language. I assume that you are an experienced programmer in some other language and that you are familiar with concepts such as variables, loops, function calls, and arrays, but perhaps with a different syntax. This chapter will get you up to speed on the Java way. I will also give you some tips on the most useful parts of the Java API for manipulating common data types.

The key points of this chapter are:

1. In Java, all methods are declared in a class. You invoke a nonstatic method on an object of the class to which the method belongs.
2. Static methods are not invoked on objects. Program execution starts with the static `main` method.
3. Java has eight primitive types: four signed integral types, two floating-point types, `char`, and `boolean`.
4. The Java operators and control structures are very similar to those of C or JavaScript.
5. The `Math` class provides common mathematical functions.
6. `String` objects are sequences of characters or, more precisely, Unicode code points in the UTF-16 encoding.

7. With the `System.out` object, you can display output in a terminal window. A `Scanner` tied to `System.in` lets you read terminal input.
8. Arrays and collections can be used to collect elements of the same type.

1.1 Our First Program

When learning any new programming language, it is traditional to start with a program that displays the message “Hello, World!”. That is what we will do in the following sections.

1.1.1 Dissecting the “Hello, World” Program

Without further ado, here is the “Hello, World” program in Java.

```
package ch01.sec01;

// Our first Java program

public class HelloWorld {
    public static void main(String[] args) {
        System.out.println("Hello, World!");
    }
}
```

Let’s examine this program:

- Java is an object-oriented language. In your program, you manipulate (mostly) *objects* by having them do work. Each object that you manipulate belongs to a specific *class*, and we say that the object is an *instance* of that class. A class defines what an object’s state can be and what it can do. In Java, all code is defined inside classes. We will look at objects and classes in detail in Chapter 2. This program is made up of a single class `HelloWorld`.
- `main` is a *method*, that is, a function declared inside a class. The `main` method is the first method that is called when the program runs. It is declared as `static` to indicate that the method does not operate on any objects. (When `main` gets called, there are only a handful of predefined objects, and none of them are instances of the `HelloWorld` class.) The method is declared as `void` to indicate that it does not return any value. See Section 1.8.8, “Command-Line Arguments” (page 49) for the meaning of the parameter declaration `String[] args`.
- In Java, you can declare many features as `public` or `private`, and there are a couple of other visibility levels as well. Here, we declare the `HelloWorld`

class and the `main` method as `public`, which is the most common arrangement for classes and methods.

- A *package* is a set of related classes. It is a good idea to place each class in a package so you can group related classes together and avoid conflicts when multiple classes have the same name. In this book, we'll use chapter and section numbers as package names. The full name of our class is `ch01.sec01.HelloWorld`. Chapter 2 has more to say about packages and package naming conventions.
- The line starting with `//` is a comment. All characters between `//` and the end of the line are ignored by the compiler and are meant for human readers only.
- Finally, we come to the body of the `main` method. In our example, it consists of a single line with a command to print a message to `System.out`, an object representing the “standard output” of the Java program.

As you can see, Java is not a scripting language that can be used to quickly dash off a few commands. It is squarely intended as a language for larger programs that benefit from being organized into classes, packages, and modules. (Modules are introduced in Chapter 15.)

Java is also quite simple and uniform. Some languages have global variables and functions as well as variables and methods inside classes. In Java, everything is declared inside a class. This uniformity can lead to somewhat verbose code, but it makes it easy to understand the meaning of a program.



NOTE: You have just seen a `//` comment that extends to the end of the line. You can also have multiline comments between `/*` and `*/` delimiters, such as

```
/*
    This is the first sample program in Core Java for the Impatient.
    The program displays the traditional greeting "Hello, World!".
*/
```

There is a third comment style, called *documentation comment*, with `/**` and `*/` as delimiters, that you will see in the next chapter.

1.1.2 Compiling and Running a Java Program

To compile and run this program, you need to install the Java Development Kit (JDK) and, optionally, an integrated development environment (IDE). You should also download the sample code, which you will find at the companion website for this book, <http://horstmann.com/javaimpatient>. Since instructions for

installing software don't make for interesting reading, I put them on the companion website as well.

Once you have installed the JDK, open a terminal window, change to the directory containing the ch01 directory, and run the commands

```
javac ch01/sec01/HelloWorld.java  
java ch01.sec01.HelloWorld
```

The familiar greeting will appear in the terminal window (see Figure 1-1).

Note that two steps were involved to execute the program. The `javac` command *compiles* the Java source code into an intermediate machine-independent representation, called *byte codes*, and saves them in *class files*. The `java` command launches a *virtual machine* that loads the class files and executes the byte codes.

Once compiled, byte codes can run on any Java virtual machine, whether on your desktop computer or on a device in a galaxy far, far away. The promise of "write once, run anywhere" was an important design criterion for Java.

A screenshot of a terminal window titled "Terminal". The window shows the following command-line session:

```
$ cd books/cji/code  
~/books/cji/code$ javac ch01/sec01/HelloWorld.java  
~/books/cji/code$ ls ch01/sec01  
HelloWorld.class HelloWorld.java MethodDemo.java  
~/books/cji/code$ java ch01.sec01.HelloWorld  
Hello, World!  
~/books/cji/code$
```

Two red arrows point from the text "Program output" and "Class file" to the terminal window. The arrow labeled "Program output" points to the line "Hello, World!". The arrow labeled "Class file" points to the file "HelloWorld.class".

Figure 1-1 Running a Java program in a terminal window



NOTE: The `javac` compiler is invoked with the name of a *file*, with slashes separating the path segments, and an extension `.java`. The Java virtual machine launcher is invoked with the name of a *class*, with dots separating the package segments, and no extension.

To run the program in an IDE, you need to first make a project, as described in the installation instructions. Then, select the `HelloWorld` class and tell the IDE to run it. Figure 1-2 shows how this looks in Eclipse. Eclipse is a popular IDE, but there are many other excellent choices. As you get more comfortable with Java programming, you should try out a few and pick one that you like.

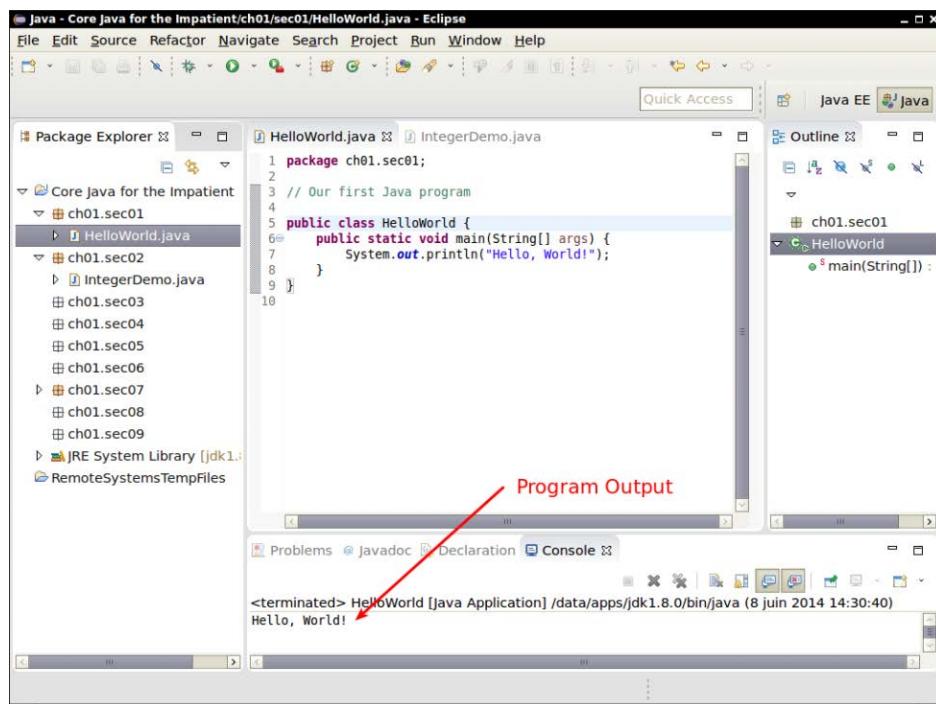


Figure 1-2 Running a Java program inside the Eclipse IDE

Congratulations! You have just followed the time-honored ritual of running the “Hello, World!” program in Java. Now we are ready to examine the basics of the Java language.

1.1.3 Method Calls

Let us have a closer look at the single statement of the `main` method:

```
System.out.println("Hello, World!");
```

`System.out` is an object. It is an *instance* of a class called `PrintStream`. The `PrintStream` class has methods `println`, `print`, and so on. These methods are called *instance methods* because they operate on objects, or instances, of the class.

To invoke an instance method on an object, you use the *dot notation*

```
object.methodName(arguments)
```

In this case, there is just one argument, the string "Hello, World!".

Let's try it with another example. Strings such as "Hello, World!" are instances of the `String` class. The `String` class has a method `length` that returns the length of a `String` object. To call the method, you again use the dot notation:

```
"Hello, World!".length()
```

The `length` method is invoked on the object "Hello, World!", and it has no arguments. Unlike the `println` method, the `length` method returns a result. One way of using that result is to print it:

```
System.out.println("Hello, World!".length());
```

Give it a try. Make a Java program with this statement and run it to see how long the string is.

In Java, you need to *construct* most objects (unlike the `System.out` and "Hello, World!" objects, which are already there, ready for you to use). Here is a simple example.

An object of the `Random` class can generate random numbers. You construct a `Random` object with the `new` operator:

```
new Random()
```

After the class name is the list of construction arguments, which is empty in this example.

You can call a method on the constructed object. The call

```
new Random().nextInt()
```

yields the next integer that the newly constructed random number generator has to offer.

If you want to invoke more than one method on an object, store it in a variable (see Section 1.3, "Variables," page 14). Here we print two random numbers:

```
Random generator = new Random();
System.out.println(generator.nextInt());
System.out.println(generator.nextInt());
```



NOTE: The `Random` class is declared in the `java.util` package. To use it in your program, add an `import` statement, like this:

```
package ch01.sec01;

import java.util.Random;

public class MethodDemo {
    ...
}
```

We will look at packages and the `import` statement in more detail in Chapter 2.

1.1.4 JShell

In Section 1.1.2, “Compiling and Running a Java Program” (page 3), you saw how to compile and run a Java program. Java 9 introduces another way of working with Java. The JShell program provides a “read-evaluate-print loop” (REPL) where you type a Java expression, JShell evaluates your input, prints the result, and waits for your next input. To start JShell, simply type `jshell` in a terminal window (Figure 1-3).

JShell starts with a greeting, followed by a prompt:

```
| Welcome to JShell -- Version 9-ea
| For an introduction type: /help intro

jshell>
```

Now type any Java expression, such as

```
"Hello, World!".length()
```

JShell responds with the result and another prompt.

```
$1 ==> 13
```

```
jshell>
```

Note that you do *not* type `System.out.println`. JShell automatically prints the value of every expression that you enter.

The `$1` in the output indicates that the result is available in further calculations. For example, if you type

```
3 * $1 + 3
```

A screenshot of a terminal window titled "Terminal". The window shows the Java JShell environment. The user has typed several commands and their results:

```
~$ jshell
| Welcome to JShell -- Version 9-ea
| For an introduction type: /help intro

jshell> "Hello, World!".length()
$1 ==> 13

jshell> new Random().nextInt()
$2 ==> -1416186035

jshell> Random generator = new Random(42)
generator ==> java.util.Random@4cf777e8

jshell> generator.nextInt()
$4 ==> -1170105035

jshell> generator.nextInt()
$5 ==> 234785527

jshell> generator.next
nextBoolean()    nextBytes()      nextDouble()      nextFloat()
nextGaussian()   nextInt()       nextLong()

jshell> generator.next
```

The cursor is currently positioned at the end of the last command line.

Figure 1–3 Running JShell

the response is

```
$2 ==> 42
```

If you need a variable many times, you can give it a more memorable name. You have to follow the Java syntax and specify both the type and the name (see Section 1.3, “Variables,” page 14). For example,

```
jshell> int answer = 42
answer ==> 42
```

You can have JShell fill in the type for you. Type an expression and instead of hitting the Enter key, hit Shift+Tab and then the V key. For example, when you type

```
new Random()
```

followed by Shift+Tab and the V key, you get

```
jshell> Random = new Random()
```

with the cursor positioned just before the = symbol. Now type a variable name and hit Enter:

```
jshell> Random generator = new Random()
generator ==> java.util.Random@3fee9989
```

Another useful feature is tab completion. Type generator.

followed by the Tab key. You get a list of all methods that you can invoke on the generator variable:

```
jshell> generator.
doubles(      equals(      getClass()      hashCode()
ints(        longs(      nextBoolean()    nextBytes(
nextDouble()   nextFloat()   nextGaussian()  nextInt(
nextLong()    notify()     notifyAll()    setSeed(
toString()    wait()
```

Now type ne and hit the Tab key again. The method name is completed to next, and you get a shorter list:

```
jshell> generator.next
nextBoolean()  nextBytes(      nextDouble()    nextFloat()
nextGaussian() nextInt(      nextLong()
```

Type a D and Tab again, and now the only completion, nextDouble(), is filled in. Hit Enter to accept it:

```
jshell> generator.nextDouble()
$8 ==> 0.9560346568377398
```



NOTE: Note that in the autocompletion list, methods that require an argument are only followed by a left parenthesis, such as nextInt(), but methods without arguments have both parentheses, such as nextBoolean().

To repeat a command, hit the ↑ key until you see the line that you want to reissue or edit. You can move the cursor in the line with the ← and → keys, and add or delete characters. Hit Enter when you are done. For example, hit ↑ and replace Double with Int, then hit Enter:

```
jshell> generator.nextInt()
$9 ==> -352355569
```

By default, JShell imports the following packages:

```
java.io
java.math
java.net
java.nio.file
java.util
java.util.concurrent
java.util.function
java.util.prefs
java.util.regex
java.util.stream
```

That's why you can use the `Random` class in JShell without any import statements. If you need to import another class, you can type the import statement at the JShell prompt. Or, more conveniently, you can have JShell search for it, by typing Shift+Tab and the I key. For example, type `Duration` followed by Shift+Tab and the I key. You get a list of potential actions:

```
jshell> Duration
0: Do nothing
1: import: java.time.Duration
2: import: javafx.util.Duration
3: import: javax.xml.datatype.Duration
Choice:
```

Type 1, and you receive a confirmation:

```
Imported: java.time.Duration
```

followed by

```
jshell> Duration
```

so that you can pick up where you left off, but with the import in place.

These commands are enough to get you started with JShell. To get help, type `/help` and Enter. To exit, type `/exit` and Enter, or simply Ctrl+D.

JShell makes it easy and fun to learn about the Java language and library, without having to launch a heavy-duty development environment, and without fussing with `public static void main`.

1.2 Primitive Types

Even though Java is an object-oriented programming language, not all Java values are objects. Instead, some values belong to *primitive types*. Four of these types are signed integer types, two are floating-point number types, one is the character type `char` that is used in the encoding for strings, and one is the `boolean` type for truth values. We will look at these types in the following sections.

1.2.1 Signed Integer Types

The signed integer types are for numbers without fractional parts. Negative values are allowed. Java provides the four signed integer types shown in Table 1-1.

Table 1-1 Java Signed Integer Types

Type	Storage requirement	Range (inclusive)
byte	1 byte	-128 to 127
short	2 bytes	-32,768 to 32,767
int	4 bytes	-2,147,483,648 to 2,147,483,647 (just over 2 billion)
long	8 bytes	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807



NOTE: The constants `Integer.MIN_VALUE` and `Integer.MAX_VALUE` are the smallest and largest `int` values. The `Long`, `Short`, and `Byte` classes also have `MIN_VALUE` and `MAX_VALUE` constants.

In most situations, the `int` type is the most practical. If you want to represent the number of inhabitants of our planet, you'll need to resort to a `long`. The `byte` and `short` types are mainly intended for specialized applications, such as low-level file handling, or for large arrays when storage space is at a premium.



NOTE: If the `long` type is not sufficient, use the `BigInteger` class. See Section 1.4.6, "Big Numbers" (page 23) for details.

In Java, the ranges of the integer types do not depend on the machine on which you will be running your program. After all, Java is designed as a "write once, run anywhere" language. In contrast, the integer types in C and C++ programs depend on the processor for which a program is compiled.

You write `long` integer literals with a suffix `L` (for example, `4000000000L`). There is no syntax for literals of type `byte` or `short`. Use the cast notation (see Section 1.4.4, "Number Type Conversions," page 20), for example, `(byte) 127`.

Hexadecimal literals have a prefix `0x` (for example, `0xCAFEBADE`). Binary values have a prefix `0b`. For example, `0b1001` is `9`.



CAUTION: Octal numbers have a prefix `0`. For example, `011` is `9`. This can be confusing, so it seems best to stay away from octal literals and leading zeroes.

You can add underscores to number literals, such as `1_000_000` (or `0b1111_0100_0010_0100_0000`) to denote one million. The underscores are for human eyes only, the Java compiler simply removes them.



NOTE: If you work with integer values that can never be negative and you really need an additional bit, you can, with some care, interpret signed integer values as unsigned. For example, a byte value `b` represents the range from `-128` to `127`. If you want a range from `0` to `255`, you can still store it in a byte. Due to the nature of binary arithmetic, addition, subtraction, and multiplication will all work, provided they don't overflow. For other operations, call `Byte.toUnsignedInt(b)` to get an `int` value between `0` and `255`, then process the integer value, and cast the result back to byte. The `Integer` and `Long` classes have methods for unsigned division and remainder.

1.2.2 Floating-Point Types

The floating-point types denote numbers with fractional parts. The two floating-point types are shown in Table 1-2.

Table 1-2 Floating-Point Types

Type	Storage requirement	Range
<code>float</code>	4 bytes	Approximately $\pm 3.40282347E+38F$ (6–7 significant decimal digits)
<code>double</code>	8 bytes	Approximately $\pm 1.79769313486231570E+308$ (15 significant decimal digits)

Many years ago, when memory was a scarce resource, four-byte floating-point numbers were in common use. But seven decimal digits don't go very far, and nowadays, "double precision" numbers are the default. It only makes sense to use `float` when you need to store a large number of them.

Numbers of type `float` have a suffix `F` (for example, `3.14F`). Floating-point literals without an `F` suffix (such as `3.14`) have type `double`. You can optionally supply the `D` suffix (for example, `3.14D`).



NOTE: You can specify floating-point literals in hexadecimal. For example, $0.0009765625 = 2^{-10}$ can be written as $0x1.0p-10$. In hexadecimal notation, you use a `p`, not an `e`, to denote the exponent. (An `e` is a hexadecimal digit.) Note that, even though the digits are written in hexadecimal, the exponent (that is, the power of 2) is written in decimal.

There are special floating-point values `Double.POSITIVE_INFINITY` for ∞ , `Double.NEGATIVE_INFINITY` for $-\infty$, and `Double.NaN` for “not a number.” For example, the result of computing $1.0 / 0.0$ is positive infinity. Computing $0.0 / 0.0$ or the square root of a negative number yields `NaN`.



CAUTION: All “not a number” values are considered to be distinct from each other. Therefore, you cannot use the test `if (x == Double.NaN)` to check whether `x` is a `NaN`. Instead, call `if (Double.isNaN(x))`. There are also methods `Double.isInfinite` to test for $\pm\infty$, and `Double.isFinite` to check that a floating-point number is neither infinite nor a `NaN`.

Floating-point numbers are not suitable for financial calculations in which roundoff errors cannot be tolerated. For example, the command `System.out.println(2.0 - 1.1)` prints `0.8999999999999999`, not `0.9` as you would expect. Such roundoff errors are caused by the fact that floating-point numbers are represented in the binary number system. There is no precise binary representation of the fraction $1/10$, just as there is no accurate representation of the fraction $1/3$ in the decimal system. If you need precise numerical computations with arbitrary precision and without roundoff errors, use the `BigDecimal` class, introduced in Section 1.4.6, “Big Numbers” (page 23).

1.2.3 The `char` Type

The `char` type describes “code units” in the UTF-16 character encoding used by Java. The details are rather technical—see Section 1.5, “Strings” (page 24). You probably won’t use the `char` type very much.

Occasionally, you may encounter character literals, enclosed in single quotes. For example, `'J'` is a character literal with value 74 (or hexadecimal 4A), the code unit for denoting the Unicode character “U+004A Latin Capital Letter J.” A code unit can be expressed in hexadecimal, with the `\u` prefix. For example, `'\u004A'` is the same as `'J'`. A more exotic example is `'\u263A'`, the code unit for `☺`, “U+263A White Smiling Face.”

The special codes '\n', '\r', '\t', '\b' denote a line feed, carriage return, tab, and backspace.

Use a backslash to escape a single quote '\'' and a backslash '\\'.

1.2.4 The boolean Type

The boolean type has two values, false and true.

In Java, the boolean type is not a number type. There is no relationship between boolean values and the integers 0 and 1.

1.3 Variables

In the following sections, you will learn how to declare and initialize variables and constants.

1.3.1 Variable Declarations

Java is a strongly typed language. Each variable can only hold values of a specific type. When you declare a variable, you need to specify the type, the name, and an optional initial value. For example,

```
int total = 0;
```

You can declare multiple variables of the same type in a single statement:

```
int total = 0, count; // count is an uninitialized integer
```

Most Java programmers prefer to use separate declarations for each variable.

Consider this variable declaration:

```
Random generator = new Random();
```

Here, the name of the object's class occurs twice. The first Random is the type of the variable generator. The second Random is a part of the new expression for constructing an object of that class.

1.3.2 Names

The name of a variable (as well as a method or class) must begin with a letter. It can consist of any letters, digits, and the symbols _ and \$. However, the \$ symbol is intended for automatically generated names, and you should not use it in your names. Finally, the _ by itself is not a valid variable name.

Here, letters and digits can be from *any* alphabet, not just the Latin alphabet. For example, `π` and `élevatiōn` are valid variable names. Letter case is significant: `count` and `Count` are different names.

You cannot use spaces or symbols in a name. Finally, you cannot use a keyword such as `double` as a name.

By convention, names of variables and methods start with a lowercase letter, and names of classes start with an uppercase letter. Java programmers like “camel case,” where uppercase letters are used when names consist of multiple words, like `countOfInvalidInputs`.

1.3.3 Initialization

When you declare a variable in a method, you must initialize it before you can use it. For example, the following code results in a compile-time error:

```
int count;
count++; // Error—uses an uninitialized variable
```

The compiler must be able to verify that a variable has been initialized before it has been used. For example, the following code is also an error:

```
int count;
if (total == 0) {
    count = 0;
} else {
    count++; // Error—count might not be initialized
}
```

You are allowed to declare a variable anywhere within a method. It is considered good style to declare a variable as late as possible, just before you need it for the first time. For example,

```
Scanner in = new Scanner(System.in); // See Section 1.6.1 for reading input
System.out.println("How old are you?");
int age = in.nextInt();
```

The variable is declared at the point at which its initial value is available.

1.3.4 Constants

The `final` keyword denotes a value that cannot be changed once it has been assigned. In other languages, one would call such a value a *constant*. For example,

```
final int DAYS_PER_WEEK = 7;
```

By convention, uppercase letters are used for names of constants.

You can also declare a constant outside a method, using the `static` keyword:

```
public class Calendar {  
    public static final int DAYS_PER_WEEK = 7;  
    ...  
}
```

Then the constant can be used in multiple methods. Inside `Calendar`, you refer to the constant as `DAYS_PER_WEEK`. To use the constant in another class, prepend the class name: `Calendar.DAYS_PER_WEEK`.



NOTE: The `System` class declares a constant

```
public static final PrintStream out
```

that you can use anywhere as `System.out`. This is one of the few examples of a constant that is not written in uppercase.

It is legal to defer the initialization of a `final` variable, provided it is initialized exactly once before it is used for the first time. For example, the following is legal:

```
final int DAYS_IN_FEBRUARY;  
if (leapYear) {  
    DAYS_IN_FEBRUARY = 29;  
} else {  
    DAYS_IN_FEBRUARY = 28;  
}
```

That is the reason for calling them “final” variables. Once a value has been assigned, it is final and can never be changed.



NOTE: Sometimes, you need a set of related constants, such as

```
public static final int MONDAY = 0;  
public static final int TUESDAY = 1;  
...
```

In this case, you can define an *enumerated type* like this:

```
enum Weekday { MONDAY, TUESDAY, WEDNESDAY, THURSDAY, FRIDAY,  
    SATURDAY, SUNDAY };
```

Then, `Weekday` is a type with values `Weekday.MONDAY` and so on. Here is how you declare and initialize a `Weekday` variable:

```
Weekday startDay = Weekday.MONDAY;
```

We will discuss enumerated types in Chapter 4.

1.4 Arithmetic Operations

Java uses the familiar operators of any C-based language (see Table 1-3). We will review them in the following sections.

Table 1-3 Java Operators

Operators	Associativity
<code>[] . ()</code> (method call)	Left
<code>! ~ ++ -- + (unary) - (unary) ()</code> (cast) <code>new</code>	Right
<code>* / %</code> (modulus)	Left
<code>+ -</code>	Left
<code><< >> >>></code> (arithmetic shift)	Left
<code>< > <= >= instanceof</code>	Left
<code>== !=</code>	Left
<code>&</code> (bitwise and)	Left
<code>^</code> (bitwise exclusive or)	Left
<code> </code> (bitwise or)	Left
<code>&&</code> (logical and)	Left
<code> </code> (logical or)	Left
<code>? :</code> (conditional)	Left
<code>= += -= *= /= %= <<= >>= >>>= &= ^= =</code>	Right



NOTE: In this table, operators are listed by decreasing *precedence*. For example, since `+` has a higher precedence than `<<`, the value of `3 + 4 << 5` is `(3 + 4) << 5`. An operator is *left-associative* when it is grouped left to right. For example, `3 - 4 - 5` means `(3 - 4) - 5`. But `--` is right-associative, and `i -= j -= k` means `i -= (j -= k)`.

1.4.1 Assignment

The last row in Table 1-3 shows the assignment operators. The statement

```
x = expression;
```

sets `x` to the value of the right-hand side, replacing the previous value. When `=` is preceded by an operator, the operator combines the left- and right-hand sides and the result is assigned. For example,

```
amount -= 10;
```

is the same as

```
amount = amount - 10;
```

1.4.2 Basic Arithmetic

Addition, subtraction, multiplication, and division are denoted by `+` `-` `*` `/`. For example, `2 * n + 1` means to multiply 2 and `n` and add 1.

You need to be careful with the `/` operator. If both operands are integer types, it denotes integer division, discarding the remainder. For example, `17 / 5` is 3, whereas `17.0 / 5` is 3.4.

An integer division by zero gives rise to an exception which, if not caught, will terminate your program. (See Chapter 5 for more information on exception handling.) A floating-point division by zero yields an infinite value or NaN (see Section 1.2.2, “Floating-Point Types,” page 12), without causing an exception.

The `%` operator yields the remainder. For example, `17 % 5` is 2, the amount that remains from 17 after subtracting 15 (the largest integer multiple of 5 that “fits” into 17). If the remainder of `a % b` is zero, then `a` is an integer multiple of `b`.

A common use is to test whether an integer is even. The expression `n % 2` is 0 if `n` is even. What if `n` is odd? Then `n % 2` is 1 if `n` is positive or -1 if `n` is negative. That handling of negative numbers is unfortunate in practice. Always be careful using `%` with potentially negative operands.

Consider this problem. You compute the position of the hour hand of a clock. An adjustment is applied, and you want to normalize to a number between 0 and 11. That is easy: `(position + adjustment) % 12`. But what if adjustment makes the position negative? Then you might get a negative number. So you have to introduce a branch, or use `((position + adjustment) % 12 + 12) % 12`. Either way, it is a hassle.



TIP: In this case, it is easier to use the `Math.floorMod` method:

`Math.floorMod(position + adjustment, 12)` always yields a value between 0 and 11.

Sadly, `floorMod` gives negative results for negative divisors, but that situation doesn't often occur in practice.

Java has increment and decrement operators:

```
n++; // Adds one to n  
n--; // Subtracts one from n
```

As in other C-based languages, there is also a prefix form of these operators. Both `n++` and `++n` increment the variable `n`, but they have different values when they are used inside an expression. The first form yields the value before the increment, and the second the value after the increment. For example,

```
String arg = args[n++];
```

sets `arg` to `args[n]`, and *then* increments `n`. This made sense thirty years ago when compilers didn't do a good job optimizing code. Nowadays, there is no performance drawback in using two separate statements, and many programmers find the explicit form easier to read.



NOTE: One of the stated goals of the Java programming language is portability. A computation should yield the same results no matter which virtual machine executes it. However, many modern processors use floating-point registers with more than 64 bit to add precision and reduce the risk of overflow in intermediate steps of a computation. Java allows these optimizations, since otherwise floating-point operations would be slower and less accurate. For the small set of users who care about this issue, there is a `strictfp` modifier. When added to a method, all floating-point operations in the method are strictly portable.

1.4.3 Mathematical Methods

There is no operator for raising numbers to a power. Instead, call the `Math.pow` method: `Math.pow(x, y)` yields x^y . To compute the square root of `x`, call `Math.sqrt(x)`.

These are *static* methods that don't operate on objects. Like with static constants, you prepend the name of the class in which they are declared.

Also useful are `Math.min` and `Math.max` for computing the minimum and maximum of two values.

In addition, the `Math` class provides trigonometric and logarithmic functions as well as the constants `Math.PI` and `Math.E`.



NOTE: The `Math` class provides several methods to make integer arithmetic safer. The mathematical operators quietly return wrong results when a computation overflows. For example, one billion times three (`100000000 * 3`) evaluates to `-1294967296` because the largest `int` value is just over two billion. If you call `Math.multiplyExact(100000000, 3)` instead, an exception is generated. You can catch that exception or let the program terminate rather than quietly continue with a wrong result. There are also methods `addExact`, `subtractExact`, `incrementExact`, `decrementExact`, `negateExact`, all with `int` and `long` parameters.

A few mathematical methods are in other classes. For example, there are methods `compareUnsigned`, `divideUnsigned`, and `remainderUnsigned` in the `Integer` and `Long` classes to work with `unsigned` values.

As discussed in the preceding section, some users require strictly reproducible floating-point computations even if they are less efficient. The `StrictMath` class provides strict implementations of mathematical methods.

1.4.4 Number Type Conversions

When an operator combines operands of different number types, the numbers are converted to a common type before they are combined. Conversion occurs in this order:

1. If either of the operands is of type `double`, the other one is converted to `double`.
2. If either of the operands is of type `float`, the other one is converted to `float`.
3. If either of the operands is of type `long`, the other one is converted to `long`.
4. Otherwise, both operands are converted to `int`.

For example, if you compute `3.14 + 42`, the second operand is converted to `42.0`, and then the sum is computed, yielding `45.14`.

If you compute `'J' + 1`, the `char` value `'J'` is converted to the `int` value `74`, and the result is the `int` value `75`. Read on to find out how to convert that value back to a `char`.

When you assign a value of a numeric type to a variable, or pass it as an argument to a method, and the types don't match, the value must be converted.

For example, in the assignment

```
double x = 42;
```

the value 42 is converted from int to double.

In Java, conversion is always legal if there is no loss of information:

- From byte to short, int, long, or double
- From short and char to int, long, or double
- From int to long or double

Conversion from an integer type to a floating-point type is always legal.



CAUTION: The following conversions are legal, but they may lose information:

- From int to float
- From long to float or double

For example, consider the assignment

```
float f = 123456789;
```

Because a float only has about seven significant digits, f is actually 1.23456792E8.

To make a conversion that is not among these permitted ones, use a **cast operator**: the name of the target type in parentheses. For example,

```
double x = 3.75;
int n = (int) x;
```

In this case, the fractional part is discarded, and n is set to 3.

If you want to round to the nearest integer instead, use the `Math.round` method. That method returns a long. If you know the answer fits into an int, call

```
int n = (int) Math.round(x);
```

In our example, where x is 3.75, n is set to 4.

To convert an integer type to another one with fewer bytes, also use a cast:

```
int n = 1;
char next = (char)('J' + n); // Converts 75 to 'K'
```

In such a cast, only the last bytes are retained.

```
int n = (int) 3000000000L; // Sets n to -1294967296
```



NOTE: If you worry that a cast can silently throw away important parts of a number, use the `Math.toIntExact` method instead. When it cannot convert a `long` to an `int`, an exception occurs.

1.4.5 Relational and Logical Operators

The `==` and `!=` operators test for equality. For example, `n != 0` is true when `n` is not zero.

There are also the usual `<` (less than), `>` (greater than), `<=` (less than or equal), and `>=` (greater than or equal) operators.

You can combine expressions of type `boolean` with the `&&` (and), `||` (or), and `!` (not) operators. For example,

```
0 <= n && n < length
```

is true if `n` lies between zero (inclusive) and `length` (exclusive).

If the first condition is false, the second condition is not evaluated. This “short circuit” evaluation is useful when the second condition could cause an error. Consider the condition

```
n != 0 && s + (100 - s) / n < 50
```

If `n` is zero, then the second condition, which contains a division by `n`, is never evaluated, and no error occurs.

Short circuit evaluation is also used for “or” operations, but then the evaluation stops as soon as an operand is true. For example, the computation of

```
n == 0 || s + (100 - s) / n >= 50
```

yields true if `n` is zero, again without evaluating the second condition.

Finally, the *conditional* operator takes three operands: a condition and two values. The result is the first of the values if the condition is true, the second otherwise. For example,

```
time < 12 ? "am" : "pm"
```

yields the string `"am"` if `time < 12` and the string `"pm"` otherwise.



NOTE: There are *bitwise* operators `&` (and), `|` (or), and `^` (xor) that are related to the logical operators. They operate on the bit patterns of integers. For example, since `0xF` has binary digits `0...01111`, `n & 0xF` yields the lowest four bits in `n`, `n = n | 0xF` sets the lowest four bits to 1, and `n = n ^ 0xF` flips them. The analog to the `!` operator is `~`, which flips all bits of its argument: `~0xF` is `1...10000`.

There are also operators which shift a bit pattern to left or right. For example, `0xF << 2` has binary digits `0...0111100`. There are two right shift operators: `>>` extends the sign bit into the top bits, and `>>>` fills the top bits with zero. If you do bit-fiddling in your programs, you know what that means. If not, you won't need these operators.



CAUTION: The right-hand side argument of the shift operators is reduced modulo 32 if the left hand side is an `int`, or modulo 64 if the left hand side is a `long`. For example, the value of `1 << 35` is the same as `1 << 3` or `8`.



TIP: The `&` (and) and `|` (or) operators, when applied to `boolean` values, force evaluation of both operands before combining the results. This usage is very uncommon. Provided that the right hand side doesn't have a side effect, they act just like `&&` and `||`, except they are less efficient. If you really need to force evaluation of the second operand, assign it to a `boolean` variable so that the flow of execution is plainly visible.

1.4.6 Big Numbers

If the precision of the primitive integer and floating-point types is not sufficient, you can turn to the `BigInteger` and `BigDecimal` classes in the `java.math` package. Objects of these classes represent numbers with an arbitrarily long sequence of digits. The `BigInteger` class implements arbitrary-precision integer arithmetic, and `BigDecimal` does the same for floating-point numbers.

The static `valueOf` method turns a `long` into a `BigInteger`:

```
BigInteger n = BigInteger.valueOf(876543210123456789L);
```

You can also construct a `BigInteger` from a string of digits:

```
BigInteger k = new BigInteger("9876543210123456789");
```

There are predefined constants `BigInteger.ZERO`, `BigInteger.ONE`, `BigInteger.TWO`, and `BigInteger.TEN`.

Java does not permit the use of operators with objects, so you must use method calls to work with big numbers.

```
BigInteger r = BigInteger.valueOf(5).multiply(n.add(k)); // r = 5 * (n + k)
```

In Section 1.2.2, “Floating-Point Types” (page 12), you saw that the result of the floating-point subtraction $2.0 - 1.1$ is 0.8999999999999999 . The `BigDecimal` class can compute the result accurately.

The call `BigDecimal.valueOf(n, e)` returns a `BigDecimal` instance with value $n \times 10^{-e}$. The result of

```
BigDecimal.valueOf(2, 0).subtract(BigDecimal.valueOf(11, 1))
```

is exactly 0.9.

1.5 Strings

A string is a sequence of characters. In Java, a string can contain any Unicode characters. For example, the string "Java™" or "Java\u2122" consists of the five characters J, a, v, a, and ™. The last character is "U+2122 Trade Mark Sign."

1.5.1 Concatenation

Use the `+` operator to concatenate two strings. For example,

```
String location = "Java";
String greeting = "Hello " + location;
```

sets `greeting` to the string "Hello Java". (Note the space at the end of the first operand.)

When you concatenate a string with another value, that value is converted to a string.

```
int age = 42;
String output = age + " years";
```

Now `output` is "42 years".



CAUTION: If you mix concatenation and addition, then you may get unexpected results. For example,

```
"Next year, you will be " + age + 1 // Error
```

first concatenates `age` and then 1. The result is "Next year, you will be 421". In such cases, use parentheses:

```
"Next year, you will be " + (age + 1) // OK
```

To combine several strings, separated with a delimiter, use the `join` method:

```
String names = String.join(", ", "Peter", "Paul", "Mary");
// Sets names to "Peter, Paul, Mary"
```

The first argument is the separator string, followed by the strings you want to join. There can be any number of them, or you can supply an array of strings. (Arrays are covered in Section 1.8, “Arrays and Array Lists,” page 43.)

It is somewhat inefficient to concatenate a large number of strings if all you need is the final result. In that case, use a `StringBuilder` instead:

```
StringBuilder builder = new StringBuilder();
while (more strings) {
    builder.append(next string);
}
String result = builder.toString();
```

1.5.2 Substrings

To take strings apart, use the `substring` method. For example,

```
String greeting = "Hello, World!";
String location = greeting.substring(7, 12); // Sets location to "World"
```

The first argument of the `substring` method is the starting position of the substring to extract. Positions start at 0.

The second argument is the first position that should not be included in the substring. In our example, position 12 of `greeting` is the !, which we do not want. It may seem curious to specify an unwanted position, but there is an advantage: the difference 12 - 7 is the length of the substring.

Sometimes, you want to extract all substrings from a string that are separated by a delimiter. The `split` method carries out that task, returning an array of substrings.

```
String names = "Peter, Paul, Mary";
String[] result = names.split(", ");
// An array of three strings ["Peter", "Paul", "Mary"]
```

The separator can be any regular expression (see Chapter 9). For example, `input.split("\\s+")` splits `input` at white space.

1.5.3 String Comparison

To check whether two strings are equal, use the `equals` method. For example,

```
location.equals("World")
```

yields true if `location` is in fact the string "World".



CAUTION: Never use the `==` operator to compare strings. The comparison

```
location == "World" // Don't do that!
```

returns true only if `location` and "World" are *the same object in memory*. In the virtual machine, there is only one instance of each literal string, so `"World" == "World"` will be true. But if `location` was computed, for example, as

```
String location = greeting.substring(7, 12);
```

then the result is placed into a separate `String` object, and the comparison `location == "World"` will return false!

Like any object variable, a `String` variable can be `null`, which indicates that the variable does not refer to any object at all, not even an empty string.

```
String middleName = null;
```

To test whether an object is `null`, you do use the `==` operator:

```
if (middleName == null) ...
```

Note that `null` is not the same as an empty string `""`. An empty string is a string of length zero, whereas `null` isn't any string at all.



CAUTION: Invoking any method on `null` causes a “null pointer exception.”

Like all exceptions, it terminates your program if you don't explicitly handle it.



TIP: When comparing a string against a literal string, it is a good idea to put the literal string first:

```
if ("World".equals(location)) ...
```

This test works correctly even when `location` is `null`.

To compare two strings without regard to case, use the `equalsIgnoreCase` method. For example,

```
"world".equalsIgnoreCase(location);
```

returns true if `location` is "World", "world", "WORLD", and so on.

Sometimes, one needs to put strings in order. The `compareTo` method tells you whether one string comes before another in dictionary order. The call

```
first.compareTo(second)
```

returns a negative integer (not necessarily -1) if first comes before second, a positive integer (not necessarily 1) if first comes after second, and 0 if they are equal.

The strings are compared character at a time, until one of them runs out of characters or a mismatch is found. For example, when comparing "word" and "world", the first three characters match. Since d has a Unicode value that is less than that of l, "word" comes first. The call "word".compareTo("world") returns -8, the difference between the Unicode values of d and l.

This comparison can be unintuitive to humans because it depends on the Unicode values of characters. "blue/green" comes before "bluegreen" because / happens to have a lower Unicode value than g.



TIP: When sorting human-readable strings, use a `Collator` object that knows about language-specific sorting rules. See Chapter 13 for more information.

1.5.4 Converting Between Numbers and Strings

To turn an integer into a string, call the static `Integer.toString` method:

```
int n = 42;
String str = Integer.toString(n); // Sets str to "42"
```

A variant of this method has a second parameter, a radix (between 2 and 36):

```
String str2 = Integer.toString(n, 2); // Sets str2 to "101010"
```



NOTE: An even simpler way of converting an integer to a string is to concatenate with the empty string: "" + n. Some people find this ugly, and it is slightly less efficient.

Conversely, to convert a string containing an integer to the number, use the `Integer.parseInt` method:

```
String str = "101010";
int n = Integer.parseInt(str); // Sets n to 101010
```

You can also specify a radix:

```
int n2 = Integer.parseInt(str, 2); // Sets n2 to 42
```

For floating-point numbers, use `Double.toString` and `Double.parseDouble`:

```
String str = Double.toString(3.14); // Sets str to "3.14"
double x = Double.parseDouble(str); // Sets x to 3.14
```

1.5.5 The String API

As you might expect, the `String` class has a large number of methods. Some of the more useful ones are shown in Table 1-4.

Table 1-4 Useful String Methods

Method	Purpose
<code>boolean startsWith(String str)</code> <code>boolean endsWith(String str)</code> <code>boolean contains(CharSequence str)</code>	Checks whether a string starts with, ends with, or contains a given string.
<code>int indexOf(String str)</code> <code>int lastIndexOf(String str)</code> <code>int indexOf(String str, int fromIndex)</code> <code>int lastIndexOf(String str, int fromIndex)</code>	Gets the position of the first or last occurrence of <code>str</code> , searching the entire string or the substring starting at <code>fromIndex</code> . Returns -1 if no match is found.
<code>String replace(CharSequence oldString,</code> <code>CharSequence newString)</code>	Returns a string that is obtained by replacing all occurrences of <code>oldString</code> with <code>newString</code> .
<code>String toUpperCase()</code> <code>String toLowerCase()</code>	Returns a string consisting of all characters of the original string converted to upper- or lowercase.
<code>String trim()</code>	Returns a string obtained by removing all leading and trailing white space.

Note that in Java, the `String` class is *immutable*. That is, none of the `String` methods modify the string on which they operate. For example,

```
greeting.toUpperCase()
```

returns a *new* string "HELLO, WORLD!" without changing `greeting`.

Also note that some methods have parameters of type `CharSequence`. This is a common supertype of `String`, `StringBuilder`, and other sequences of characters.

For a detailed description of each method, turn to the online Java API documentation at <http://docs.oracle.com/javase/9/docs/api>. Type the class name into the search box and select the matching type (in this case, `java.lang.String`), as shown in Figure 1-4.

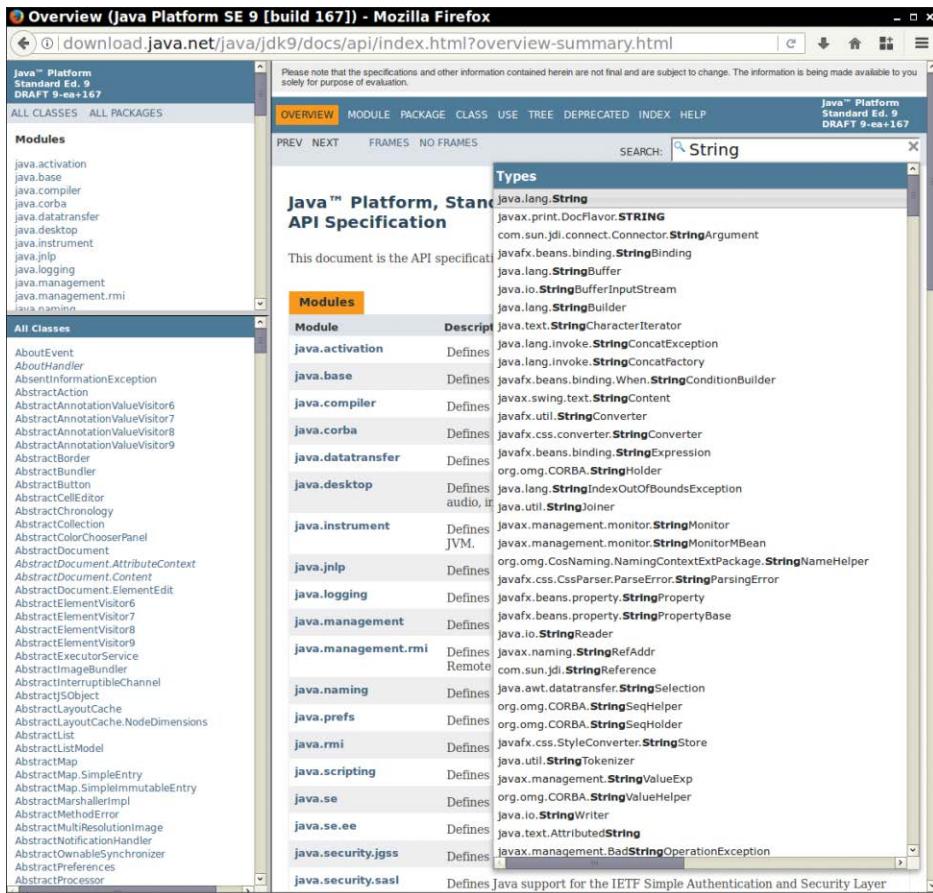


Figure 1-4 Searching the API Documentation

You then get a page that documents each method (Figure 1-5). If you happen to know the name of a method, you can type its name into the search box.

In this book, I do not present the API in minute detail since it is easier to browse the API documentation. If you are not always connected to the Internet, you can download and unzip the documentation for offline browsing.

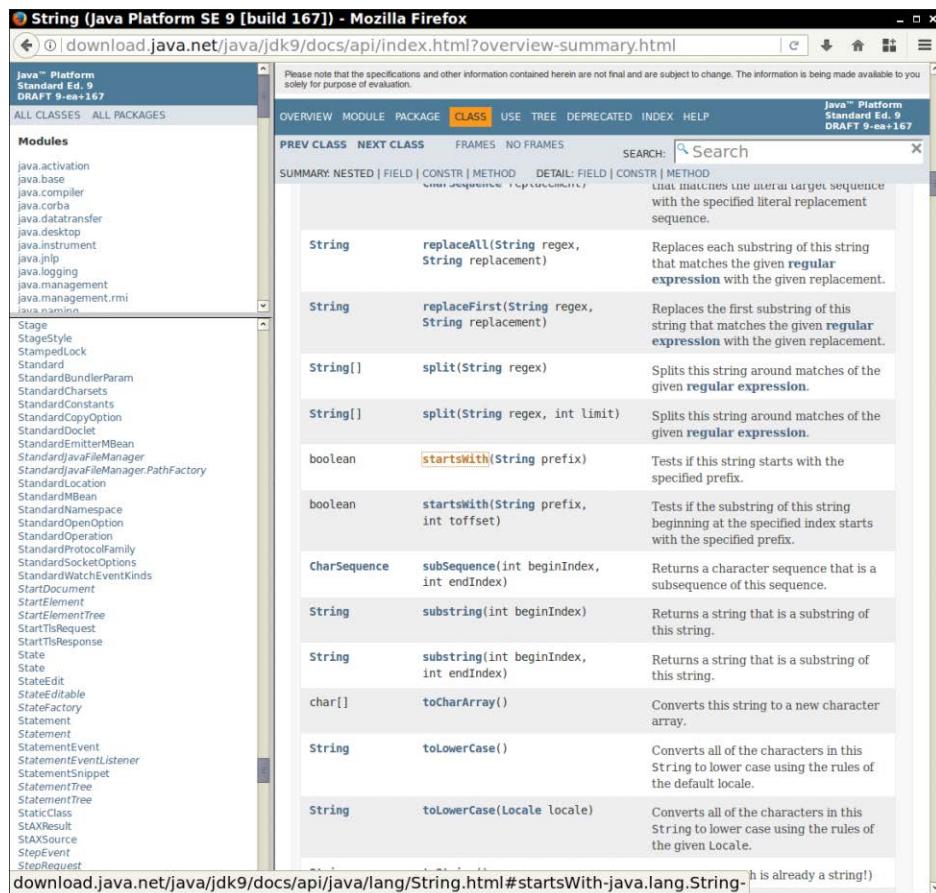


Figure 1–5 The `String` methods in the API Documentation

1.5.6 Code Points and Code Units

When Java was first created, it proudly embraced the Unicode standard that had been developed shortly before. The Unicode standard had been developed to solve a vexing issue of character encodings. Prior to Unicode, there were many incompatible character encodings. For English, there was near-universal agreement on the 7-bit ASCII standard that assigned codes between 0 and 127 to all English letters, the decimal digits, and many symbols. In Western Europe, ASCII was extended to an 8-bit code that contained accented characters such as ä and é. But in Russia, ASCII was extended to hold Cyrillic characters in the positions 128 to 255. In Japan, a variable-length encoding

was used to encode English and Japanese characters. Every other country did something similar. Exchanging files with different encodings was a major problem.

Unicode set out to fix all that by assigning each character in all of the writing systems ever devised a unique 16-bit code between 0 and 65535. In 1991, Unicode 1.0 was released, using slightly less than half of the available 65536 code values. Java was designed from the ground up to use 16-bit Unicode characters, which was a major advance over other programming languages that used 8-bit characters. But then something awkward happened. There turned out to be many more characters than previously estimated—mostly Chinese ideographs. This pushed Unicode well beyond a 16-bit code.

Nowadays, **Unicode requires 21 bits. Each valid Unicode value is called a *code point*.** For example, the code point for the letter A is U+0041, and the mathematical symbol \odot for the set of octonions (<http://math.ucr.edu/home/baez/octonions>) has code point U+1D546.

There is a variable-length backwards-compatible encoding, called UTF-16, that represents all “classic” Unicode characters with a single 16-bit value and the ones beyond U+FFFF as pairs of 16-bit values taken from a special region of the code space called “surrogate characters.” In this encoding, the letter A is \u0041 and \odot is \ud835\udd46.

Java suffers from having been born at the time between the transition from 16 to 21 bits. Instead of having strings that are pristine sequences of Unicode characters or code points, Java strings are sequences of *code units*, the 16-bit quantities of the UTF-16 encoding.

If you don’t need to worry about Chinese ideographs and are willing to throw special characters such as \odot under the bus, then you can live with the fiction that a String is a sequence of Unicode characters. In that case, you can get the *i*th character as

```
char ch = str.charAt(i);
```

and the length of a string as

```
int length = str.length();
```

But if you want to handle strings properly, you have to work harder.

To get the *i*th Unicode code point, call

```
int codePoint = str.codePointAt(str.offsetByCodePoints(0, i));
```

The total number of code points is

```
int length = str.codePointCount(0, str.length());
```

This loop extracts the code points sequentially:

```
int i = 0;
while (i < s.length()) {
    int j = s.offsetByCodePoints(i, 1);
    String codePoint = str.substring(i, j);
    ...
    i = j;
}
```

Alternatively, you can use the `codePoints` method that yields a *stream* of `int` values, one for each code point. We will discuss streams in Chapter 8. You can turn the stream into an array like this:

```
int[] codePoints = str.codePoints().toArray();
```



NOTE: In the past, strings were always internally represented in the UTF-16 encoding, as arrays of `char` values. Nowadays, `String` objects use a byte array of ISO-8859-1 characters when possible. A future version of Java may switch to using UTF-8 internally.

1.6 Input and Output

To make our sample programs more interesting, they should be able to interact with the user. In the following sections, you will see how to read terminal input and how to produce formatted output.

1.6.1 Reading Input

When you call `System.out.println`, output is sent to the “standard output stream” and shows up in a terminal window. Reading from the “standard input stream” isn’t quite as simple because the corresponding `System.in` object only has methods to read individual bytes. To read strings and numbers, construct a `Scanner` that is attached to `System.in`:

```
Scanner in = new Scanner(System.in);
```

The `nextLine` method reads a line of input.

```
System.out.println("What is your name?");
String name = in.nextLine();
```

Here, it makes sense to use the `nextLine` method because the input might contain spaces. To read a single word (delimited by whitespace), call

```
String firstName = in.next();
```

To read an integer, use the `nextInt` method.

```
System.out.println("How old are you?");
int age = in.nextInt();
```

Similarly, the `nextDouble` method reads the next floating-point number.

You can use the `hasNextLine`, `hasNext`, `hasNextInt`, and `hasNextDouble` methods to check that there is another line, word, integer, or floating-point number available.

```
if (in.hasNextInt()) {
    int age = in.nextInt();
    ...
}
```

The `Scanner` class is located in the `java.util` package. In order to use the class, add the line

```
import java.util.Scanner
```

to the top of your program file.



TIP: To read a password, you do not want to use the `Scanner` class since the input is visible in the terminal. Instead, use the `Console` class:

```
Console terminal = System.console();
String username = terminal.readline("User name: ");
char[] passwd = terminal.readPassword("Password: ");
```

The password is returned in an array of characters. This is marginally more secure than storing the password in a `String` because you can overwrite the array when you are done.



TIP: If you want to read input from a file or write output to a file, you can use the redirection syntax of your shell:

```
java mypackage.MainClass < input.txt > output.txt
```

Now `System.in` reads from `input.txt` and `System.out` writes to `output.txt`. You will see in Chapter 9 how to carry out more general file input and output.

1.6.2 Formatted Output

You have already seen the `println` method of the `System.out` object for writing a line of output. There is also a `print` method that does not start a new line. That method is often used for input prompts:

```
System.out.print("Your age: "); // Not println
int age = in.nextInt();
```

Then the cursor rests after the prompt instead of the next line.

When you print a fractional number with `print` or `println`, all of its digits except trailing zeroes will be displayed. For example,

```
System.out.print(1000.0 / 3.0);
```

prints

```
333.3333333333333
```

That is a problem if you want to display, for example, dollars and cents. To limit the number of digits, use the `printf` method:

```
System.out.printf("%8.2f", 1000.0 / 3.0);
```

The *format string* "%8.2f" indicates that a floating-point number is printed with a *field width* of 8 and 2 digits of *precision*. That is, the printout contains two leading spaces and six characters:

```
333.33
```

You can supply multiple parameters to `printf`. For example:

```
System.out.printf("Hello, %s. Next year, you'll be %d.\n", name, age);
```

Each of the *format specifiers* that start with a % character is replaced with the corresponding argument. The *conversion character* that ends a format specifier indicates the type of the value to be formatted: f is a floating-point number, s a string, and d a decimal integer. Table 1-5 shows all conversion characters.

Table 1-5 Conversion Characters for Formatted Output

Conversion Character	Purpose	Example
d	Decimal integer	159
x or X	Hexadecimal integer	9f or 9F
o	Octal integer	237
f	Fixed floating-point	15.9
e or E	Exponential floating-point	1.59e+01 or 1.59E+01
g or G	General floating-point: e/E if the exponent is greater than the precision or < -4, f/F otherwise	15.9000 at the default precision of 6, 2e+01 at precision 1
a or A	Hexadecimal floating-point	0x1.fccdp3 or 0X1.FCCDP3
s or S	String	Java or JAVA
c or C	Character	j or J

(Continues)

Table 1-5 Conversion Characters for Formatted Output (*Continued*)

Conversion Character	Purpose	Example
b or B	boolean	false or FALSE
h or H	Hash code (see Chapter 4)	42628b2 or 42628B2
t or T	Date and time (obsolete; see Chapter 12 instead)	—
%	The percent symbol	%
n	The platform-dependent line separator	—

In addition, you can specify flags to control the appearance of the formatted output. Table 1-6 shows all flags. For example, the comma flag adds grouping separators, and + yields a sign for positive numbers. The statement

```
System.out.printf("%,.2f", 100000.0 / 3.0);
```

prints

```
+33,333.33
```

You can use the `String.format` method to create a formatted string without printing it:

```
String message = String.format("Hello, %s. Next year, you'll be %d.\n", name, age);
```

Table 1-6 Flags for Formatted Output

Flag	Purpose	Example
+	Prints sign for positive and negative numbers	+3333.33
space	Adds a space before positive numbers	_3333.33
-	Left-justifies field	3333.33___
0	Adds leading zeroes	003333.33
(Encloses negative values in parentheses	(3333.33)
,	Uses group separators	3,333.33
# (for f format)	Always includes a decimal point	3333.
# (for x or o format)	Adds 0x or 0 prefix	0xcafe

(Continues)

Table 1–6 Flags for Formatted Output (*Continued*)

Flag	Purpose	Example
\$	Specifies the index of the argument to be formatted; for example, %1\$d %1\$x prints the first argument in decimal and hexadecimal.	159 9f
<	Formats the same value as the previous specification; for example, %d %%x prints the same number in decimal and hexadecimal.	159 9f

1.7 Control Flow

In the following sections, you will see how to implement branches and loops. The Java syntax for control flow statements is very similar to that of other commonly used languages, in particular C/C++ and JavaScript.

1.7.1 Branches

The `if` statement has a condition in parentheses, followed by either one statement or a group of statements enclosed in braces.

```
if (count > 0) {
    double average = sum / count;
    System.out.println(average);
}
```

You can have an `else` branch that runs if the condition is not fulfilled.

```
if (count > 0) {
    double average = sum / count;
    System.out.println(average);
} else {
    System.out.println(0);
}
```

The statement in the `else` branch may be another `if` statement:

```
if (count > 0) {
    double average = sum / count;
    System.out.println(average);
} else if (count == 0) {
    System.out.println(0);
} else {
    System.out.println("Huh?");
}
```

When you need to test an expression against a finite number of constant values, use the `switch` statement.

```
switch (count) {  
    case 0:  
        output = "None";  
        break;  
    case 1:  
        output = "One";  
        break;  
    case 2:  
    case 3:  
    case 4:  
    case 5:  
        output = Integer.toString(count);  
        break;  
    default:  
        output = "Many";  
        break;  
}
```

Execution starts at the matching `case` label or, if there is no match, at the `default` label (if it is present). All statements are executed until a `break` or the end of the `switch` statement is reached.



CAUTION: It is a common error to forget a `break` at the end of an alternative. Then execution “falls through” to the next alternative. You can direct the compiler to be on the lookout for such bugs with a command-line option:

```
javac -Xlint:fallthrough mypackage/MainClass.java
```

With this option, the compiler will issue a warning message whenever an alternative does not end with a `break` or `return` statement.

If you actually want to use the `fallthrough` behavior, tag the surrounding method with the annotation `@SuppressWarnings("fallthrough")`. Then no warnings will be generated for that method. (An annotation supplies information to the compiler or another tool. You will learn all about annotations in Chapter 11.)

In the preceding example, the `case` labels were integers. You can use values of any of the following types:

- A constant expression of type `char`, `byte`, `short`, or `int` (or their corresponding wrapper classes `Character`, `Byte`, `Short`, and `Integer` that will be introduced in Section 1.8.3, “Array Lists,” page 45)

- A string literal
- A value of an enumeration (see Chapter 4)

1.7.2 Loops

The `while` loop keeps executing its body while more work needs to be done, as determined by a condition.

For example, consider the task of summing up numbers until the sum has reached a target. For the source of numbers, we will use a random number generator, provided by the `Random` class in the `java.util` package.

```
Random generator = new Random();
```

This call gets a random integer between 0 and 9:

```
int next = generator.nextInt(10);
```

Here is the loop for forming the sum:

```
while (sum < target) {  
    int next = generator.nextInt(10);  
    sum += next;  
    count++;  
}
```

This is a typical use of a `while` loop. While the sum is less than the target, the loop keeps executing.

Sometimes, you need to execute the loop body before you can evaluate the condition. Suppose you want to find out how long it takes to get a particular value. Before you can test that condition, you need to enter the loop and get the value. In this case, use a `do/while` loop:

```
int next;  
do {  
    next = generator.nextInt(10);  
    count++;  
} while (next != target);
```

The loop body is entered, and `next` is set. Then the condition is evaluated. As long as it is fulfilled, the loop body is repeated.

In the preceding examples, the number of loop iterations was not known. However, in many loops that occur in practice, the number of iterations is fixed. In those situations, it is best to use the `for` loop.

This loop computes the sum of a fixed number of random values:

```
for (int i = 1; i <= 20; i++) {  
    int next = generator.nextInt(10);  
    sum += next;  
}
```

This loop runs 20 times, with `i` set to 1, 2, ..., 20 in each loop iteration.

You can rewrite any `for` loop as a `while` loop. The loop above is equivalent to

```
int i = 1;  
while (i <= 20) {  
    int next = generator.nextInt(10);  
    sum += next;  
    i++;  
}
```

However, with the `while` loop, the initialization, test, and update of the variable `i` are scattered in different places. With the `for` loop, they stay neatly together.

The initialization, test, and update can take on arbitrary forms. For example, you can double a value while it is less than the target:

```
for (int i = 1; i < target; i *= 2) {  
    System.out.println(i);  
}
```

Instead of declaring a variable in the header of the `for` loop, you can initialize an existing variable:

```
for (i = 1; i <= target; i++) // Uses existing variable i
```

You can declare or initialize multiple variables and provide multiple updates, separated by commas. For example,

```
for (int i = 0, j = n - 1; i < j; i++, j--)
```

If no initialization or update is required, leave them blank. If you omit the condition, it is deemed to always be true.

```
for (;;) // An infinite loop
```

You will see in the next section how you can break out of such a loop.

1.7.3 Breaking and Continuing

If you want to exit a loop in the middle, you can use the `break` statement. For example, suppose you want to process words until the user enters the letter Q. Here is a solution that uses a boolean variable to control the loop:

```
boolean done = false;
while (!done) {
    String input = in.next();
    if ("Q".equals(input)) {
        done = true;
    } else {
        Process input
    }
}
```

This loop carries out the same task with a `break` statement:

```
while (true) {
    String input = in.next();
    if (input.equals("Q")) break; // Exits loop
    Process input
}
// break jumps here
```

When the `break` statement is reached, the loop is exited immediately.

The `continue` statement is similar to `break`, but instead of jumping to the end of the loop, it jumps to the end of the current loop iteration. You might use it to skip unwanted inputs like this:

```
while (in.hasNextInt()) {
    int input = in.nextInt();
    if (input < 0) continue; // Jumps to test of in.hasNextInt()
    Process input
}
```

In a `for` loop, the `continue` statement jumps to the next update statement:

```
for (int i = 1; i <= target; i++) {
    int input = in.nextInt();
    if (n < 0) continue; // Jumps to i++
    Process input
}
```

The `break` statement only breaks out of the immediately enclosing loop or switch. If you want to jump to the end of another enclosing statement, use a *labeled* `break` statement. Label the statement that should be exited, and provide the label with the `break` like this:

```
outer:  
while (...) {  
    ...  
    while (...) {  
        ...  
        if (...) break outer;  
        ...  
    }  
    ...  
}  
// Labeled break jumps here
```

The label can be any name.



CAUTION: You label the top of the statement, but the `break` statement jumps to the *end*.

A regular `break` can only be used to exit a loop or `switch`, but a labeled `break` can transfer control to the end of any statement, even a block statement:

```
exit: {  
    ...  
    if (...) break exit;  
    ...  
}  
// Labeled break jumps here
```

There is also a labeled `continue` statement that jumps to the next iteration of a labeled loop.



TIP: Many programmers find the `break` and `continue` statements confusing. These statements are entirely optional—you can always express the same logic without them. In this book, I never use `break` or `continue`.

1.7.4 Local Variable Scope

Now that you have seen examples of nested blocks, it is a good idea to go over the rules for variable scope. A *local variable* is any variable that is declared in a method, including the method's parameter variables. The *scope* of a variable is the part of the program where you can access the variable. The scope of a local variable extends from the point where it is declared to the end of the enclosing block.

```
while (...) {
    System.out.println(...);
    String input = in.next(); // Scope of input starts here
    ...
    // Scope of input ends here
}
```

In other words, a new copy of `input` is created for each loop iteration, and the variable does not exist outside the loop.

The scope of a parameter variable is the entire method.

```
public static void main(String[] args) { // Scope of args starts here
    ...
    // Scope of args ends here
}
```

Here is a situation where you need to understand scope rules. This loop counts how many tries it takes to get a particular random digit:

```
int next;
do {
    next = generator.nextInt(10);
    count++;
} while (next != target);
```

The variable `next` had to be declared outside the loop so it is available in the condition. Had it been declared inside the loop, its scope would only reach to the end of the loop body.

When you declare a variable in a `for` loop, its scope extends to the end of the loop, including the test and update statements.

```
for (int i = 0; i < n; i++) { // i is in scope for the test and update
    ...
}
// i not defined here
```

If you need the value of `i` after the loop, declare the variable outside:

```
int i;
for (i = 0; !found && i < n; i++) {
    ...
}
// i still available
```

In Java, you cannot have local variables with the same name in overlapping scopes.

```
int i = 0;
while (...) {
    String i = in.next(); // Error to declare another variable i
    ...
}
```

However, if the scopes do not overlap, you can reuse the same variable name:

```
for (int i = 0; i < n / 2; i++) { ... }  
for (int i = n / 2; i < n; i++) { ... } // OK to redefine i
```

1.8 Arrays and Array Lists

Arrays are a fundamental programming construct for collecting multiple items of the same type. Java has array types built into the language, and it also supplies an `ArrayList` class for arrays that grow and shrink on demand. The `ArrayList` class is a part of a larger collections framework that is covered in Chapter 7.

1.8.1 Working with Arrays

For every type, there is a corresponding array type. An array of integers has type `int[]`, an array of `String` objects has type `String[]`, and so on. Here is a variable that can hold an array of strings:

```
String[] names;
```

The variable isn't yet initialized. Let's initialize it with a new array. For that, we need the `new` operator:

```
names = new String[100];
```

Of course, you can combine these two statements:

```
String[] names = new String[100];
```

Now `names` refers to an array with 100 elements, which you can access as `names[0]` ... `names[99]`.



CAUTION: If you try to access an element that does not exist, such as `names[-1]` or `names[100]`, an `ArrayIndexOutOfBoundsException` occurs.

The length of an array can be obtained as `array.length`. For example, this loop fills the array with empty strings:

```
for (int i = 0; i < names.length; i++) {  
    names[i] = "";  
}
```



NOTE: It is legal to use the C syntax for declaring an array variable, with the [] following the variable name:

```
int numbers[];
```

However, this syntax is unfortunate since it intertwines the name `numbers` and the type `int[]`. Few Java programmers use it.

1.8.2 Array Construction

When you construct an array with the `new` operator, it is filled with a default value.

- Arrays of numeric type (including `char`) are filled with zeroes.
- Arrays of `boolean` are filled with `false`.
- Arrays of objects are filled with `null` references.



CAUTION: Whenever you construct an array of objects, you need to fill it with objects. Consider this declaration:

```
BigInteger[] numbers = new BigInteger[100];
```

At this point, you do not have any `BigInteger` objects yet, just an array of 100 `null` references. You need to replace them with references to `BigInteger` objects:

```
for (int i = 0; i < 100; i++)
    numbers[i] = BigInteger.valueOf(i);
```

You can fill an array with values by writing a loop, as you saw in the preceding section. However, sometimes you know the values that you want, and you can just list them inside braces:

```
int[] primes = { 2, 3, 5, 7, 11, 13 };
```

You don't use the `new` operator, and you don't specify the array length. A trailing comma is allowed, which can be convenient for an array to which you keep adding values over time:

```
String[] authors = {
    "James Gosling",
    "Bill Joy",
    "Guy Steele",
    // Add more names here and put a comma after each name
};
```

Use a similar initialization syntax if you don't want to give the array a name—for example, to assign it to an existing array variable:

```
primes = new int[] { 17, 19, 23, 29, 31 };
```



NOTE: It is legal to have arrays of length 0. You can construct such an array as `new int[0]` or `new int[] {}`. For example, if a method returns an array of matches, and there weren't any for a particular input, return an array of length 0. Note that this is not the same as `null`: If `a` is an array of length 0, then `a.length` is 0; if `a` is `null`, then `a.length` causes a `NullPointerException`.

1.8.3 Array Lists

When you construct an array, you need to know its length. Once constructed, the length can never change. That is inconvenient in many practical applications. A remedy is to use the `ArrayList` class in the `java.util` package. An `ArrayList` object manages an array internally. When that array becomes too small or is insufficiently utilized, another internal array is automatically created, and the elements are moved into it. This process is invisible to the programmer using the array list.

The syntax for arrays and array lists is completely different. Arrays use a special syntax—the `[]` operator for accessing elements, the `Type[]` syntax for array types, and the `new Type[n]` syntax for constructing arrays. In contrast, array lists are classes, and you use the normal syntax for constructing instances and invoking methods.

However, unlike the classes that you have seen so far, the `ArrayList` class is a *generic class*—a class with a type parameter. Chapter 6 covers generic classes in detail.

To declare an array list variable, you use the syntax for generic classes and specify the type in angle brackets:

```
ArrayList<String> friends;
```

As with arrays, this only declares the variable. You now need to construct an array list:

```
friends = new ArrayList<>();  
// or new ArrayList<String>()
```

Note the empty `<>`. The compiler infers the type parameter from the type of the variable. (This shortcut is called the *diamond syntax* because the empty angle brackets have the shape of a diamond.)

There are no construction arguments in this call, but it is still necessary to supply the () at the end.

The result is an array list of size 0. You can add elements to the end with the `add` method:

```
friends.add("Peter");
friends.add("Paul");
```

Unfortunately, there is no initializer syntax for array lists. The best you can do is construct an array list like this:

```
ArrayList<String> friends = new ArrayList<>(List.of("Peter", "Paul"));
```

The `List.of` method yields an unmodifiable list of the given elements which you then use to construct an `ArrayList`.

You can add and remove elements anywhere in the `ArrayList`.

```
friends.remove(1);
friends.add(0, "Paul"); // Adds before index 0
```

To access elements, use method calls, not the [] syntax. The `get` method reads an element, and the `set` method replaces an element with another:

```
String first = friends.get(0);
friends.set(1, "Mary");
```

The `size` method yields the current size of the list. Use the following loop to traverse all elements:

```
for (int i = 0; i < friends.size(); i++) {
    System.out.println(friends.get(i));
}
```

1.8.4 Wrapper Classes for Primitive Types

There is one unfortunate limitation of generic classes: You cannot use primitive types as type parameters. For example, an `ArrayList<int>` is illegal. The remedy is to use a *wrapper class*. For each primitive type, there is a corresponding wrapper class: `Integer`, `Byte`, `Short`, `Long`, `Character`, `Float`, `Double`, and `Boolean`. To collect integers, use an `ArrayList<Integer>`:

```
ArrayList<Integer> numbers = new ArrayList<>();
numbers.add(42);
int first = numbers.get(0);
```

Conversion between primitive types and their corresponding wrapper types is automatic. In the call to `add`, an `Integer` object holding the value 42 was automatically constructed in a process called *autoboxing*.

In the last line of the code segment, the call to `get` returned an `Integer` object. Before assigning to the `int` variable, the object was *unboxed* to yield the `int` value inside.



CAUTION: Conversion between primitive types and wrappers is almost completely transparent to programmers, with one exception. The `==` and `!=` operators compare object references, not the contents of objects. A condition `if (numbers.get(i) == numbers.get(j))` does not test whether the numbers at index `i` and `j` are the same. Just like with strings, you need to remember to call the `equals` method with wrapper objects.

1.8.5 The Enhanced for Loop

Very often, you want to visit all elements of an array. For example, here is how you compute the sum of all elements in an array of numbers:

```
int sum = 0;
for (int i = 0; i < numbers.length; i++) {
    sum += numbers[i];
}
```

As this loop is so common, there is a convenient shortcut, called the *enhanced for loop*:

```
int sum = 0;
for (int n : numbers) {
    sum += n;
}
```

The loop variable of the enhanced for loop traverses the elements of the array, not the index values. The variable `n` is assigned to `numbers[0]`, `numbers[1]`, and so on.

You can also use the enhanced for loop with array lists. If `friends` is an array list of strings, you can print them all with the loop

```
for (String name : friends) {
    System.out.println(name);
}
```

1.8.6 Copying Arrays and Array Lists

You can copy one array variable into another, but then both variables will refer to the same array, as shown in Figure 1-6.

```
int[] numbers = primes;
numbers[5] = 42; // Now primes[5] is also 42
```

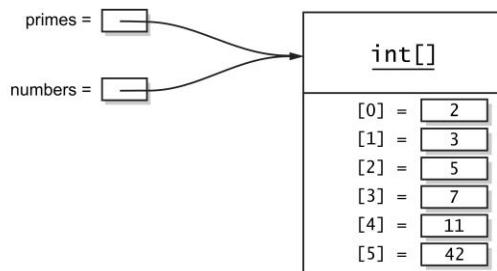


Figure 1–6 Two variables referencing the same array

If you don't want this sharing, you need to make a copy of the array. Use the static `Arrays.copyOf` method.

```
int[] copiedPrimes = Arrays.copyOf(primes, primes.length);
```

This method constructs a new array of the desired length and copies the elements of the original array into it.

ArrayList references work the same way:

```
ArrayList<String> people = friends;
people.set(0, "Mary"); // Now friends.get(0) is also "Mary"
```

To copy an array list, construct a new array list from the existing one:

```
ArrayList<String> copiedFriends = new ArrayList<>(friends);
```

That constructor can also be used to copy an array into an array list. Wrap the array into an immutable list, using the `List.of` method, and then construct an `ArrayList`:

```
String[] names = ...;
ArrayList<String> friends = new ArrayList<>(List.of(names));
```

You can also copy an array list into an array. For depressing reasons of backward compatibility that I will explain in Chapter 6, you must supply an array of the correct type.

```
String[] names = friends.toArray(new String[0]);
```



NOTE: There is no easy way to convert between primitive type arrays and the corresponding array lists of wrapper classes. For example, to convert between an `int[]` and an `ArrayList<Integer>`, you need an explicit loop or an `IntStream` (see Chapter 8).

1.8.7 Array Algorithms

The `Arrays` and `Collections` classes provide implementations of common algorithms for arrays and array lists. Here is how to fill an array or an array list:

```
Arrays.fill(numbers, 0); // int[] array  
Collections.fill(friends, ""); // ArrayList<String>
```

To sort an array or array list, use the `sort` method:

```
Arrays.sort(names);  
Collections.sort(friends);
```



NOTE: For arrays (but not array lists), you can use the `parallelSort` method that distributes the work over multiple processors if the array is large.

The `Arrays.toString` method yields a string representation of an array. This is particularly useful to print an array for debugging.

```
System.out.println(Arrays.toString(primes));  
// Prints [2, 3, 5, 7, 11, 13]
```

Array lists have a `toString` method that yields the same representation.

```
String elements = friends.toString();  
// Sets elements to "[Peter, Paul, Mary]"
```

For printing, you don't even need to call it—the `println` method takes care of that.

```
System.out.println(friends);  
// Calls friends.toString() and prints the result
```

There are a couple of useful algorithms for array lists that have no counterpart for arrays.

```
Collections.reverse(names); // Reverses the elements  
Collections.shuffle(names); // Randomly shuffles the elements
```

1.8.8 Command-Line Arguments

As you have already seen, the `main` method of every Java program has a parameter that is a string array:

```
public static void main(String[] args)
```

When a program is executed, this parameter is set to the arguments specified on the command line.

For example, consider this program:

```
public class Greeting {  
    public static void main(String[] args) {  
        for (int i = 0; i < args.length; i++) {  
            String arg = args[i];  
            if (arg.equals("-h")) arg = "Hello";  
            else if (arg.equals("-g")) arg = "Goodbye";  
            System.out.println(arg);  
        }  
    }  
}
```

If the program is called as

```
java Greeting -g cruel world
```

then `args[0]` is `"-g"`, `args[1]` is `"cruel"`, and `args[2]` is `"world"`.

Note that neither `"java"` nor `"Greeting"` are passed to the `main` method.

1.8.9 Multidimensional Arrays

Java does not have true multidimensional arrays. They are implemented as arrays of arrays. For example, here is how you declare and implement a two-dimensional array of integers:

```
int[][] square = {  
    { 16, 3, 2, 13 },  
    { 5, 10, 11, 8 },  
    { 9, 6, 7, 12 },  
    { 4, 15, 14, 1 }  
};
```

Technically, this is a one-dimensional array of `int[]` arrays—see Figure 1-7.

To access an element, use two bracket pairs:

```
int element = square[1][2]; // Sets element to 11
```

The first index selects the row array `square[1]`. The second index picks the element from that row.

You can even swap rows:

```
int[] temp = square[0];  
square[0] = square[1];  
square[1] = temp;
```

If you do not provide an initial value, you must use the `new` operator and specify the number of rows and columns.

```
int[][] square = new int[4][4]; // First rows, then columns
```

Behind the scenes, an array of rows is filled with an array for each row.

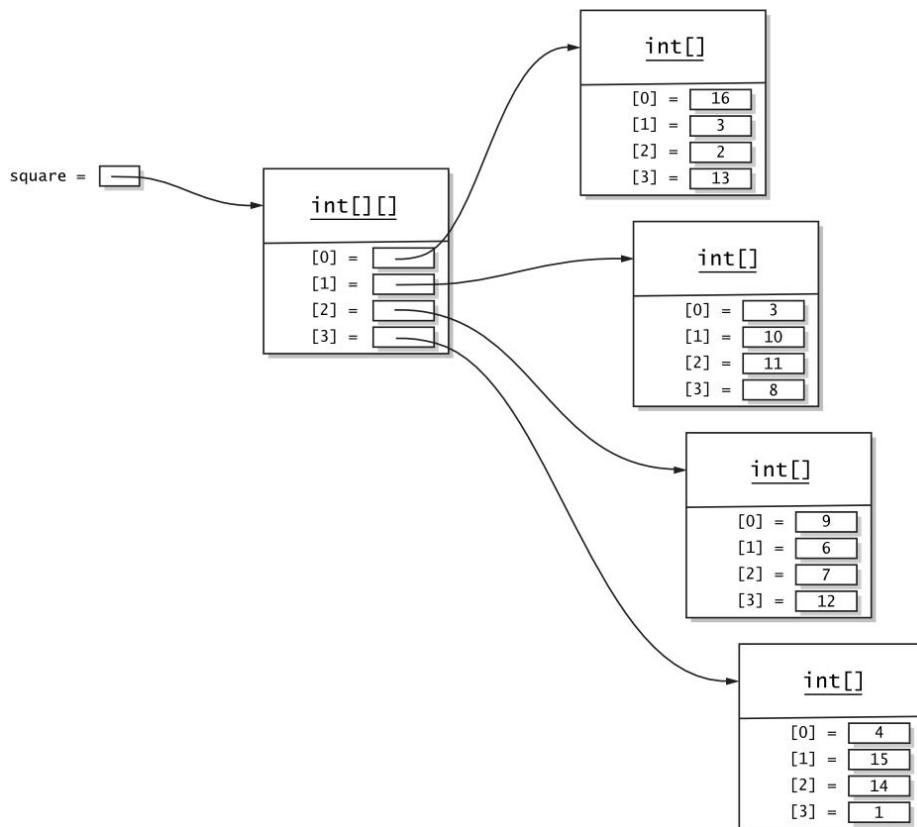


Figure 1-7 A two-dimensional array

There is no requirement that the row arrays have equal length. For example, you can store the Pascal triangle:

```
1
1 1
1 2 1
1 3 3 1
1 4 6 4 1
...
```

First construct an array of n rows:

```
int[][] triangle = new int[n][];
```

Then construct each row in a loop and fill it.

```
for (int i = 0; i < n; i++) {  
    triangle[i] = new int[i + 1];  
    triangle[i][0] = 1;  
    triangle[i][i] = 1;  
    for (int j = 1; j < i; j++) {  
        triangle[i][j] = triangle[i - 1][j - 1] + triangle[i - 1][j];  
    }  
}
```

To traverse a two-dimensional array, you need two loops, one for the rows and one for the columns:

```
for (int r = 0; r < triangle.length; r++) {  
    for (int c = 0; c < triangle[r].length; c++) {  
        System.out.printf("%4d", triangle[r][c]);  
    }  
    System.out.println();  
}
```

You can also use two enhanced for loops:

```
for (int[] row : triangle) {  
    for (int element : row) {  
        System.out.printf("%4d", element);  
    }  
    System.out.println();  
}
```

These loops work for square arrays as well as arrays with varying row lengths.



TIP: To print out a list of the elements of a two-dimensional array for debugging, call

```
System.out.println(Arrays.deepToString(triangle));  
// Prints [[1], [1, 1], [1, 2, 1], [1, 3, 3, 1], [1, 4, 6, 4, 1], ...]
```



NOTE: There are no two-dimensional array lists, but you can declare a variable of type `ArrayList<ArrayList<Integer>>` and build up the rows yourself.

1.9 Functional Decomposition

If your `main` method gets too long, you can decompose your program into multiple classes, as you will see in Chapter 2. However, for simple programs, you can place your program's code into separate methods in the same class. For reasons that will become clear in Chapter 2, these methods must be declared with the `static` modifier, just as the `main` method itself.

1.9.1 Declaring and Calling Static Methods

When you declare a method, provide the type of the return value (or `void` if the method doesn't return anything), the method name, and the types and names of the parameters in the *method header*. Then provide the implementation in the *method body*. Use a `return` statement to return the result.

```
public static double average(double x, double y) {  
    double sum = x + y;  
    return sum / 2;  
}
```

Place the method in the same class as the `main` method. It doesn't matter if it's above or below `main`. Then, call it like this:

```
public static void main(String[] args) {  
    double a = ...;  
    double b = ...;  
    double result = average(a, b);  
    ...  
}
```

1.9.2 Array Parameters and Return Values

You can pass arrays into methods. The method simply receives a reference to the array, through which it can modify it. This method swaps two elements in an array:

```
public static void swap(int[] values, int i, int j) {  
    int temp = values[i];  
    values[i] = values[j];  
    values[j] = temp;  
}
```

Methods can return arrays. This method returns an array consisting of the first and last values of a given array (which is not modified):

```
public static int[] firstLast(int[] values) {  
    if (values.length == 0) return new int[0];  
    else return new int[] { values[0], values[values.length - 1] };  
}
```

1.9.3 Variable Arguments

Some methods allow the caller to supply a variable number of arguments. You have already seen such a method: `printf`. For example, the calls

```
System.out.printf("%d", n);
```

and

```
System.out.printf("%d %s", n, "widgets");
```

both call the same method, even though one call has two arguments and the other has three.

Let us define an average method that works the same way, so we can call average with as many arguments as we like, for example, average(3, 4.5, -5, 0). Declare a “varargs” parameter with ... after the type:

```
public static double average(double... values)
```

The parameter is actually an array of type double. When the method is called, an array is created and filled with the arguments. In the method body, you use it as you would any other array.

```
public static double average(double... values) {  
    double sum = 0;  
    for (double v : values) sum += v;  
    return values.length == 0 ? 0 : sum / values.length;  
}
```

Now you can call

```
double avg = average(3, 4.5, -5, 0);
```

If you already have the arguments in an array, you don’t have to unpack them. You can pass the array instead of the list of arguments:

```
double[] scores = { 3, 4.5, -5, 0 };  
double avg = average(scores);
```

The variable parameter must be the *last* parameter of the method, but you can have other parameters before it. For example, this method ensures that there is at least one argument:

```
public static double max(double first, double... rest) {  
    double result = first;  
    for (double v : rest) result = Math.max(v, result);  
    return result;  
}
```

Exercises

1. Write a program that reads an integer and prints it in binary, octal, and hexadecimal. Print the reciprocal as a hexadecimal floating-point number.
2. Write a program that reads an integer angle (which may be positive or negative) and normalizes it to a value between 0 and 359 degrees. Try it first with the % operator, then with floorMod.

3. Using only the conditional operator, write a program that reads three integers and prints the largest. Repeat with `Math.max`.
4. Write a program that prints the smallest and largest positive `double` values.
Hint: Look up `Math.nextUp` in the Java API.
5. What happens when you cast a `double` to an `int` that is larger than the largest possible `int` value? Try it out.
6. Write a program that computes the factorial $n! = 1 \times 2 \times \dots \times n$, using `BigInteger`. Compute the factorial of 1000.
7. Write a program that reads in two integers between 0 and 4294967295, stores them in `int` variables, and computes and displays their unsigned sum, difference, product, quotient, and remainder. Do not convert them to `long` values.
8. Write a program that reads a string and prints all of its nonempty substrings.
9. Section 1.5.3, "String Comparison" (page 25) has an example of two strings `s` and `t` so that `s.equals(t)` but `s != t`. Come up with a different example that doesn't use `substring`).
10. Write a program that produces a random string of letters and digits by generating a random `long` value and printing it in base 36.
11. Write a program that reads a line of text and prints all characters that are not ASCII, together with their Unicode values.
12. The Java Development Kit includes a file `src.zip` with the source code of the Java library. Unzip and, with your favorite text search tool, find usages of the labeled `break` and `continue` sequences. Take one and rewrite it without a labeled statement.
13. Write a program that prints a lottery combination, picking six distinct numbers between 1 and 49. To pick six distinct numbers, start with an array list filled with `1...49`. Pick a random index and remove the element. Repeat six times. Print the result in sorted order.
14. Write a program that reads a two-dimensional array of integers and determines whether it is a magic square (that is, whether the sum of all rows, all columns, and the diagonals is the same). Accept lines of input that you break up into individual integers, and stop when the user enters a blank line. For example, with the input

```
16 3 2 13  
5 10 11 8  
9 6 7 12  
4 15 14 1  
(Blank line)
```

your program should respond affirmatively.

15. Write a program that stores Pascal's triangle up to a given n in an `ArrayList<ArrayList<Integer>>`.
16. Improve the average method so that it is called with at least one parameter.

Object-Oriented Programming

Topics in This Chapter

- 2.1 Working with Objects – page 60
- 2.2 Implementing Classes – page 65
- 2.3 Object Construction – page 69
- 2.4 Static Variables and Methods – page 74
- 2.5 Packages – page 78
- 2.6 Nested Classes – page 85
- 2.7 Documentation Comments – page 90
- Exercises – page 95

Chapter



In object-oriented programming, work is carried out by collaborating objects whose behavior is defined by the classes to which they belong. Java was one of the first mainstream programming languages to fully embrace object-oriented programming. As you have already seen, in Java every method is declared in a class and, except for a few primitive types, every value is an object. In this chapter, you will learn how to implement your own classes and methods.

The key points of this chapter are:

1. Mutator methods change the state of an object; accessor methods don't.
2. In Java, variables don't hold objects; they hold references to objects.
3. Instance variables and method implementations are declared inside the class declaration.
4. An instance method is invoked on an object, which is accessible through the `this` reference.
5. A constructor has the same name as the class. A class can have multiple (overloaded) constructors.
6. Static variables don't belong to any objects. Static methods are not invoked on objects.
7. Classes are organized into packages. Use import declarations so that you don't have to use the package name in your programs.

8. Classes can be nested in other classes.
9. An inner class is a nonstatic nested class. Its instances have a reference to the object of the enclosing class that constructed it.
10. The `javadoc` utility processes source files, producing HTML files with declarations and programmer-supplied comments.

2.1 Working with Objects

In ancient times, before objects were invented, you wrote programs by calling *functions*. When you call a function, it returns a result that you use without worrying how it was computed. Functions have an important benefit: they allow work to be shared. You can call a function that someone else wrote without having to know how it does its task.

Objects add another dimension. Each object can have its own *state*. The state affects the results that you get from calling a method. For example, if `in` is a `Scanner` object and you call `in.next()`, the object remembers what was read before and gives you the next input token.

When you use objects that someone else implemented and invoke methods on them, you do not need to know what goes on under the hood. This principle, called *encapsulation*, is a key concept of object-oriented programming.

At some point, you may want to make your work available for other programmers by providing them with objects they can use. In Java, you provide a *class*—a mechanism for creating and using objects with the same behavior.

Consider a common task: manipulation of calendar dates. Calendars are somewhat messy, with varying month lengths and leap years, not to mention leap seconds. It makes sense to have experts who figure out those messy details and who provide implementations that other programmers can use. In this situation, objects arise naturally. A date is an object whose methods can provide information such as “on what weekday does this date fall” and “what date is tomorrow.”

In Java, experts who understand date computations provided classes for dates and other date-related concepts such as weekdays. If you want to do computations with dates, use one of those classes to create date objects and invoke methods on them, such as a method that yields the weekday or the next date.

Few of us want to ponder the details of date arithmetic, but you are probably an expert in some other area. To enable other programmers to leverage your knowledge, you can provide them with classes. And even if you are not

enabling other programmers, you will find it useful in your own work to use classes so that your programs are structured in a coherent way.

Before learning how to declare your own classes, let us run through a nontrivial example of using objects.

The Unix program `cal` prints a calendar for a given month and year, in a format similar to the following:

Mon	Tue	Wed	Thu	Fri	Sat	Sun
					1	
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30						

How can you implement such a program? With the standard Java library, you use the `LocalDate` class to express a date at some unspecified location. We need an object of that class representing the first of the month. Here is how you get one:

```
LocalDate date = LocalDate.of(year, month, 1);
```

To advance the date, you call `date.plusDays(1)`. The result is a newly constructed `LocalDate` object that is one day further. In our application, we simply reassign the result to the `date` variable:

```
date = date.plusDays(1);
```

You apply methods to obtain information about a date, such as the month on which it falls. We need that information so that we can keep printing while we are still in the same month.

```
while (date.getMonthValue() == month) {  
    System.out.printf("%4d", date.getDayOfMonth());  
    date = date.plusDays(1);  
    ...  
}
```

Another method yields the weekday on which a date falls.

```
DayOfWeek weekday = date.getDayOfWeek();
```

You get back an object of another class `DayOfWeek`. In order to compute the indentation of the first day of the month in the calendar, we need know the numerical value of the weekday. There is a method for that:

```
int value = weekday.getValue();  
for (int i = 1; i < value; i++)  
    System.out.print("    ");
```

The `getValue` method follows the international convention where the weekend comes at the end of the week, returning 1 for Monday, 2 for Tuesday, and so on. Sunday has value 7.



NOTE: You can *chain* method calls, like this:

```
int value = date.getDayOfWeek().getValue();
```

The first method call is applied to the `date` object, and it returns a `DayOfWeek` object. The `getValue` method is then invoked on the returned object.

You will find the complete program in the book's companion code. It was easy to solve the problem of printing a calendar because the designers of the `LocalDate` class provided us with a useful set of methods. In this chapter, you will learn how to implement methods for your own classes.

2.1.1 Accessor and Mutator Methods

Consider again the method call `date.plusDays(1)`. There are two ways in which the designers of the `LocalDate` class could have implemented the `plusDays` method. They could make it change the state of the `date` object and return no result. Or they could leave `date` unchanged and return a newly constructed `LocalDate` object. As you can see, they chose to do the latter.

We say that a method is a *mutator* if it changes the object on which it was invoked. It is an *accessor* if it leaves the object unchanged. The `plusDays` method of the `LocalDate` class is an accessor.

In fact, *all* methods of the `LocalDate` class are accessors. This situation is increasingly common because mutation can be risky, particularly if two computations mutate an object simultaneously. Nowadays, most computers have multiple processing units, and safe concurrent access is a serious issue. One way to address this issue is to make objects *immutable* by providing only accessor methods.

Still, there are many situations where mutation is desirable. The `add` method of the `ArrayList` class is an example of a mutator. After calling `add`, the array list object is changed.

```
ArrayList<String> friends = new ArrayList<>();
    // friends is empty
friends.add("Peter");
    // friends has size 1
```

2.1.2 Object References

In some programming languages (such as C++), a variable can actually hold the object—that is, the bits that make up the object’s state. In Java, that is not the case. A variable can only hold a *reference* to an object. The actual object is elsewhere, and the reference is some implementation-dependent way of locating the object (see Figure 2-1).



NOTE: References behave like pointers in C and C++, except that they are perfectly safe. In C and C++, you can modify pointers and use them to overwrite arbitrary memory locations. With a Java reference, you can only access a specific object.

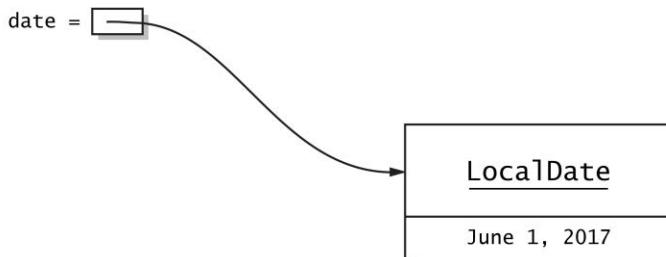


Figure 2-1 An object reference

When you assign a variable holding an object reference to another, you have two references to the same object.

```
ArrayList<String> people = friends;  
// Now people and friends refer to the same object
```

If you mutate the shared object, the mutation is observable through both references. Consider the call

```
people.add("Paul");
```

Now the array list `people` has size 2, and so does `friends` (see Figure 2-2). (Of course, it isn’t technically true that `people` or `friends` “have” size 2. After all, `people` and `friends` are not objects. They are references to an object, namely an array list with size 2.)

Most of the time, this sharing of objects is efficient and convenient, but you have to be aware that it is possible to mutate a shared object through any of its references.

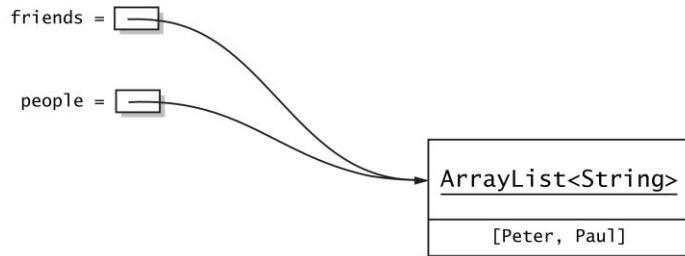


Figure 2–2 Two references to the same object

However, if a class has no mutator methods (such as `String` or `LocalDate`), you don't have to worry. Since nobody can change such an object, you can freely give out references to it.

It is possible for an object variable to refer to no object at all, by setting it to the special value `null`.

```
LocalDate date = null; // Now date doesn't refer to any object
```

This can be useful if you don't yet have an object for `date` to refer to, or if you want to indicate a special situation, such as an unknown date.



CAUTION: Null values can be dangerous when they are not expected. Invoking a method on `null` causes a `NullPointerException` (which should really have been called a `NullReferenceException`). For that reason, it is not recommended to use `null` for optional values. Use the `Optional` type instead (see Chapter 8).

Finally, have another look at the assignments

```
date = LocalDate.of(year, month, 1);  
date = date.plusDays(1);
```

After the first assignment, `date` refers to the first day of the month. The call to `plusDays` yields a new `LocalDate` object, and after the second assignment, the `date` variable refers to the new object. What happens to the first one?

There is no reference to the first object, so it is no longer needed. Eventually, the *garbage collector* will recycle the memory and make it available for reuse. In Java, this process is completely automatic, and programmers never need to worry about deallocating memory.

2.2 Implementing Classes

Now let us turn to implementing our own classes. To show the various language rules, I use the classic example of an `Employee` class. An employee has a name and a salary. In this example, the name can't change, but ever so often an employee can get a well-deserved raise.

2.2.1 Instance Variables

From the description of employee objects, you can see that the state of such an object is described by two values: name and salary. In Java, you use *instance variables* to describe the state of an object. They are declared in a class like this:

```
public class Employee {  
    private String name;  
    private double salary;  
    ...  
}
```

That means that every instance of the `Employee` class has these two variables. In Java, instance variables are usually declared as `private`. That means that only methods of the same class can access them. There are a couple of reasons why this protection is desirable: You control which parts of your program can modify the variables, and you can decide at any point to change the internal representation. For example, you might store the employees in a database and only leave the primary key in the object. As long as you reimplement the methods so they work the same as before, the users of your class won't care.

2.2.2 Method Headers

Now let's turn to implementing the methods of the `Employee` class. When you declare a method, you provide its name, the types and names of its parameters, and the return type, like this:

```
public void raiseSalary(double byPercent)
```

This method receives a parameter of type `double` and doesn't return any value, as indicated by the return type `void`.

The `getName` method has a different signature:

```
public String getName()
```

The method has no parameters and returns a `String`.



NOTE: Most methods are declared as `public`, which means anyone can call such a method. Sometimes, a helper method is declared as `private`, which restricts it to being used only in other methods of the same class. You should do that for methods that are not relevant to class users, particularly if they depend on implementation details. You can safely change or remove private methods if the implementation changes.

2.2.3 Method Bodies

Following the method header, you provide the body:

```
public void raiseSalary(double byPercent) {  
    double raise = salary * byPercent / 100;  
    salary += raise;  
}
```

Use the `return` keyword if the method yields a value:

```
public String getName() {  
    return name;  
}
```

Place the method declarations inside the class declaration:

```
public class Employee {  
    private String name;  
    private double salary;  
  
    public void raiseSalary(double byPercent) {  
        double raise = salary * byPercent / 100;  
        salary += raise;  
    }  
  
    public String getName() {  
        return name;  
    }  
    ...  
}
```

2.2.4 Instance Method Invocations

Consider this example of a method call:

```
fred.raiseSalary(5);
```

In this call, the argument 5 is used to initialize the parameter variable `byPercent`, equivalent to the assignment

```
double byPercent = 5;
```

Then the following actions occur:

```
double raise = fred.salary * byPercent / 100;  
fred.salary += raise;
```

Note that the salary instance variable is applied to the instance on which the method is invoked.

Unlike the methods that you have seen at the end of the preceding chapter, a method such as `raiseSalary` operates on an instance of a class. Therefore, such a method is called an *instance method*. In Java, all methods that are not declared as `static` are instance methods.

As you can see, two values are passed to the `raiseSalary` method: a reference to the object on which the method is invoked, and the argument of the call. Technically, both of these are parameters of the method, but in Java, as in other object-oriented languages, the first one takes on a special role. It is sometimes called the *receiver* of the method call.

2.2.5 The `this` Reference

When a method is called on an object, `this` is set to that object. If you like, you can use the `this` reference in the implementation:

```
public void raiseSalary(double byPercent) {  
    double raise = this.salary * byPercent / 100;  
    this.salary += raise;  
}
```

Some programmers prefer that style because it clearly distinguishes between local and instance variables—it is now obvious that `raise` is a local variable and `salary` is an instance variable.

It is very common to use the `this` reference when you don't want to come up with different names for parameter variables. For example,

```
public void setSalary(double salary) {  
    this.salary = salary;  
}
```

When an instance variable and a local variable have the same name, the unqualified name (such as `salary`) denotes the local variable, and `this.salary` is the instance variable.



NOTE: In some programming languages, instance variables are decorated in some way, for example `_name` and `_salary`. This is legal in Java but is not commonly done.



NOTE: If you like, you can even declare this as a parameter of a method (but not a constructor):

```
public void setSalary(Employee this, double salary) {  
    this.salary = salary;  
}
```

However, this syntax is very rarely used. It exists so that you can annotate the receiver of the method—see Chapter 11.

2.2.6 Call by Value

When you pass an object to a method, the method obtains a copy of the object reference. Through this reference, it can access or mutate the parameter object. For example,

```
public class EvilManager {  
    private Random generator;  
    ...  
    public void giveRandomRaise(Employee e) {  
        double percentage = 10 * generator.nextGaussian();  
        e.raiseSalary(percentage);  
    }  
}
```

Consider the call

```
boss.giveRandomRaise(fred);
```

The reference `fred` is copied into the parameter variable `e` (see Figure 2-3). The method mutates the object that is shared by the two references.

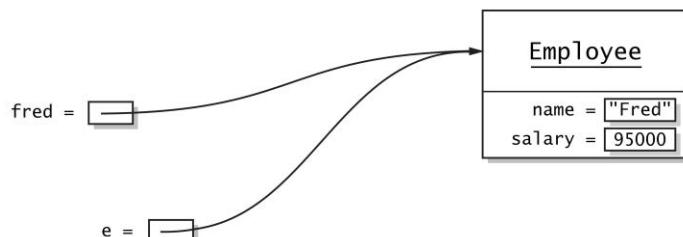


Figure 2-3 A parameter variable holding a copy of an object reference

In Java, you can never write a method that updates primitive type parameters. A method that tries to increase a `double` value won't work:

```
public void increaseRandomly(double x) { // Won't work
    double amount = x * generator.nextDouble();
    x += amount;
}
```

If you call

```
boss.increaseRandomly(sales);
```

then sales is copied into x. Then x is increased, but that doesn't change sales. The parameter variable then goes out of scope, and the increase leaves no useful effect.

For the same reason, it is not possible to write a method that changes an object reference to something different. For example, this method does not work as presumably intended:

```
public class EvilManager {
    ...
    public void replaceWithZombie(Employee e) {
        e = new Employee("", 0);
    }
}
```

In the call

```
boss.replaceWithZombie(fred);
```

the reference fred is copied into the variable e which is then set to a different reference. When the method exits, e goes out of scope. At no point was fred changed.



NOTE: Some people say that Java uses “call by reference” for objects.

As you can see from the second example, that is not true. In a language that supports call by reference, a method can replace the contents of variables passed to it. In Java, all parameters—object references as well as primitive type values—are passed by value.

2.3 Object Construction

One step remains to complete the Employee class: We need to provide a constructor, as detailed in the following sections.

2.3.1 Implementing Constructors

Declaring a constructor is similar to declaring a method. However, the name of the constructor is the same as the class name, and there is *no return type*.

```
public Employee(String name, double salary) {  
    this.name = name;  
    this.salary = salary;  
}
```



NOTE: This constructor is public. It can also be useful to have private constructors. For example, the `LocalDate` class has no public constructors. Instead, users of the class obtain objects from “factory methods” such as `now` and `of`. These methods call a private constructor.



CAUTION: If you accidentally specify a return type, such as

```
public void Employee(String name, double salary)
```

then you declare a method named `Employee`, not a constructor!

A constructor executes when you use the `new` operator. For example, the expression

```
new Employee("James Bond", 500000)
```

allocates an object of the `Employee` class and invokes the constructor body, which sets the instance variables to the arguments supplied in the constructor.

The `new` operator returns a reference to the constructed object. You will normally want to save that reference in a variable:

```
Employee james = new Employee("James Bond", 500000);
```

or pass it to a method:

```
ArrayList<Employee> staff = new ArrayList<>();  
staff.add(new Employee("James Bond", 500000));
```

2.3.2 Overloading

You can supply more than one version of a constructor. For example, if you want to make it easy to model nameless worker bees, supply a second constructor that only accepts a salary.

```
public Employee(double salary) {  
    this.name = "";  
    this.salary = salary;  
}
```

Now the `Employee` class has two constructors. Which one is called depends on the arguments.

```
Employee james = new Employee("James Bond", 500000);
// calls Employee(String, double) constructor
Employee anonymous = new Employee(40000);
// calls Employee(double) constructor
```

In this case, we say that the constructor is *overloaded*.



NOTE: A method is overloaded if there are multiple versions with the same name but different parameters. For example, there are overloaded versions of the `println` method with parameters `int`, `double`, `String`, and so on. Since you have no choice how to name a constructor, it is common to overload constructors.

2.3.3 Calling One Constructor from Another

When there are multiple constructors, they usually have some work in common, and it is best not to duplicate that code. It is often possible to put that common initialization into one constructor.

You can call one constructor from another, but only as the *first statement* of the constructor body. Somewhat surprisingly, you don't use the name of the constructor for the call but the keyword `this`:

```
public Employee(double salary) {
    this("", salary); // Calls Employee(String, double)
    // Other statements can follow
}
```



NOTE: Here, `this` is *not* a reference to the object that is being constructed. Instead, it is a special syntax that is only used for invoking another constructor of the same class.

2.3.4 Default Initialization

If you don't set an instance variable explicitly in a constructor, it is automatically set to a default value: numbers to `0`, boolean values to `false`, and object references to `null`.

For example, you could supply a constructor for unpaid interns.

```
public Employee(String name) {
    // salary automatically set to zero
    this.name = name;
}
```



NOTE: In this regard, instance variables are very different from local variables. Recall that you must always explicitly initialize local variables.

For numbers, the initialization with zero is often convenient. But for object references, it is a common source of errors. Suppose we didn't set the `name` variable to the empty string in the `Employee(double)` constructor:

```
public Employee(double salary) {  
    // name automatically set to null  
    this.salary = salary;  
}
```

If anyone called the `getName` method, they would get a null reference that they probably don't expect. A condition such as

```
if (e.getName().equals("James Bond"))
```

would then cause a null pointer exception.

2.3.5 Instance Variable Initialization

You can specify an initial value for any instance variables, like this:

```
public class Employee {  
    private String name = "";  
    ...  
}
```

This initialization occurs after the object has been allocated and before a constructor runs. Therefore, the initial value is present in all constructors. Of course, some of them may choose to overwrite it.

In addition to initializing an instance variable when you declare it, you can include arbitrary *initialization blocks* in the class declaration.

```
public class Employee() {  
    private String name = "";  
    private int id;  
    private double salary;  
  
    { // An initialization block  
        Random generator = new Random();  
        id = 1 + generator.nextInt(1_000_000);  
    }  
  
    public Employee(String name, double salary) {  
        ...  
    }  
}
```



NOTE: This is not a commonly used feature. Most programmers place lengthy initialization code into a helper method and invoke that method from the constructors.

Instance variable initializations and initialization blocks are executed in the order in which they appear in the class declaration, and before the body of the constructor.

2.3.6 Final Instance Variables

You can declare an instance variable as final. Such a variable must be initialized by the end of every constructor. Afterwards, the variable may not be modified again. For example, the `name` variable of the `Employee` class may be declared as final because it never changes after the object is constructed—there is no `setName` method.

```
public class Employee {  
    private final String name;  
    ...  
}
```



NOTE: When used with a reference to a mutable object, the `final` modifier merely states that the reference will never change. It is perfectly legal to mutate the object.

```
public class Person {  
    private final ArrayList<Person> friends = new ArrayList<>();  
    // OK to add elements to this array list  
    ...  
}
```

Methods may mutate the array list to which `friends` refers, but they can never replace it with another. In particular, it can never become `null`.

2.3.7 The Constructor with No Arguments

Many classes contain a constructor with no arguments that creates an object whose state is set to an appropriate default. For example, here is a constructor with no arguments for the `Employee` class:

```
public Employee() {  
    name = "";  
    salary = 0;  
}
```

Just like an indigent defendant is provided with a public defender, a class with no constructors is automatically given a constructor with no arguments that does nothing at all. All instance variables stay at their default values (zero, false, or null) unless they have been explicitly initialized.

Thus, every class has at least one constructor.



NOTE: If a class already has a constructor, it does *not* automatically get another constructor with no arguments. If you supply a constructor and also want a no-argument constructor, you have to write it yourself.



NOTE: In the preceding sections, you saw what happens when an object is constructed. In some programming languages, notably C++, it is common to specify what happens when an object is destroyed. Java does have a mechanism for “finalizing” an object when it is reclaimed by the garbage collector. But this happens at unpredictable times, so you should not use it. However, as you will see in Chapter 5, there is a mechanism for closing resources such as files.

2.4 Static Variables and Methods

In all sample programs that you have seen, the main method is tagged with the static modifier. In the following sections, you will learn what this modifier means.

2.4.1 Static Variables

If you declare a variable in a class as static, then there is only one such variable per class. In contrast, each object has its own copy of an instance variable. For example, suppose we want to give each employee a distinct ID number. Then we can share the last ID that was given out.

```
public class Employee {  
    private static int lastId = 0;  
    private int id;  
    ...  
    public Employee() {  
        lastId++;  
        id = lastId;  
    }  
}
```

Every `Employee` object has its own instance variable `id`, but there is only one `lastId` variable that belongs to the class, not to any particular instance of the class.

When a new `Employee` object is constructed, the shared `lastId` variable is incremented and the `id` instance variable is set to that value. Thus, every employee gets a distinct `id` value.



CAUTION: This code will not work if `Employee` objects can be constructed concurrently in multiple threads. Chapter 10 shows how to remedy that problem.



NOTE: You may wonder why a variable that belongs to the class, and not to individual instances, is named “static.” The term is a meaningless holdover from C++ which borrowed the keyword from an unrelated use in the C language instead of coming up with something more appropriate. A more descriptive term is “class variable.”

2.4.2 Static Constants

Mutable static variables are rare, but static constants (that is, `static final` variables) are quite common. For example, the `Math` class declares a static constant:

```
public class Math {  
    ...  
    public static final double PI = 3.14159265358979323846;  
    ...  
}
```

You can access this constant in your programs as `Math.PI`.

Without the `static` keyword, `PI` would have been an instance variable of the `Math` class. That is, you would need an object of the class to access `PI`, and every `Math` object would have its own copy of `PI`.

Here is an example of a `static final` variable that is an object, not a number. It is both wasteful and insecure to construct a new random number generator each time you want a random number. You are better off sharing a single generator among all instances of a class.

```
public class Employee {  
    private static final Random generator = new Random();  
    private int id;  
    ...  
    public Employee() {  
        id = 1 + generator.nextInt(1_000_000);  
    }  
}
```

Another example of a static constant is `System.out`. It is declared in the `System` class like this:

```
public class System {  
    public static final PrintStream out;  
    ...  
}
```



CAUTION: Even though `out` is declared as `final` in the `System` class, there is a method `setOut` that sets `System.out` to a different stream. This method is a “native” method, not implemented in Java, which can bypass the access control mechanisms of the Java language. This is a very unusual situation from the early days of Java, and not something you are likely to encounter elsewhere.

2.4.3 Static Initialization Blocks

In the preceding sections, static variables were initialized as they were declared. Sometimes, you need to do additional initialization work. You can put it into a *static initialization block*.

```
public class CreditCardForm {  
    private static final ArrayList<Integer> expirationYear = new ArrayList<>();  
    static {  
        // Add the next twenty years to the array list  
        int year = LocalDate.now().getYear();  
        for (int i = year; i <= year + 20; i++) {  
            expirationYear.add(i);  
        }  
    }  
    ...  
}
```

Static initialization occurs when the class is first loaded. Like instance variables, static variables are `0`, `false`, or `null` unless you explicitly set them to another value. All static variable initializations and static initialization blocks are executed in the order in which they occur in the class declaration.

2.4.4 Static Methods

Static methods are methods that do not operate on objects. For example, the `pow` method of the `Math` class is a static method. The expression

```
Math.pow(x, a)
```

computes the power x^a . It does not use any `Math` object to carry out its task.

As you have already seen in Chapter 1, a static method is declared with the `static` modifier:

```
public class Math {  
    public static double pow(double base, double exponent) {  
        ...  
    }  
}
```

Why not make `pow` into an instance method? It can't be an instance method of `double` since, in Java, primitive types are not classes. One could make it an instance method of the `Math` class, but then you would need to construct a `Math` object in order to call it.

Another common reason for static methods is to provide added functionality to classes that you don't own. For example, wouldn't it be nice to have a method that yields a random integer in a given range? You can't add a method to the `Random` class in the standard library. But you can provide a static method:

```
public class RandomNumbers {  
    public static int nextInt(Random generator, int low, int high) {  
        return low + generator.nextInt(high - low + 1);  
    }  
}
```

Call this method as

```
int dieToss = RandomNumbers.nextInt(gen, 1, 6);
```



NOTE: It is legal to invoke a static method on an object. For example, instead of calling `LocalDate.now()` to get today's date, you can call `date.now()` on an object `date` of the `LocalDate` class. But that does not make a lot of sense. The `now` method doesn't look at the `date` object to compute the result. Most Java programmers would consider this poor style.

Since static methods don't operate on objects, you cannot access instance variables from a static method. However, static methods can access the static variables in their class. For example, in the `RandomNumbers.nextInt` method, we can make the random number generator into a static variable:

```
public class RandomNumbers {  
    private static Random generator = new Random();  
    public static int nextInt(int low, int high) {  
        return low + generator.nextInt(high - low + 1);  
        // OK to access the static generator variable  
    }  
}
```

2.4.5 Factory Methods

A common use for static methods is a *factory method*, a static method that returns new instances of the class. For example, the `NumberFormat` class uses factory methods that yield formatter objects for various styles.

```
NumberFormat currencyFormatter = NumberFormat.getCurrencyInstance();  
NumberFormat percentFormatter = NumberFormat.getPercentInstance();  
double x = 0.1;  
System.out.println(currencyFormatter.format(x)); // Prints $0.10  
System.out.println(percentFormatter.format(x)); // Prints 10%
```

Why not use a constructor instead? The only way to distinguish two constructors is by their parameter types. You cannot have two constructors with no arguments.

Moreover, a constructor `new NumberFormat(...)` yields a `NumberFormat`. A factory method can return an object of a subclass. In fact, these factory methods return instances of the `DecimalFormat` class. (See Chapter 4 for more information about subclasses.)

A factory method can also return a shared object, instead of unnecessarily constructing new ones. For example, the call `Collections.emptyList()` returns a shared immutable empty list.

2.5 Packages

In Java, you place related classes into a package. Packages are convenient for organizing your work and for separating it from code libraries provided by others. As you have seen, the standard Java library is distributed over a number of packages, including `java.lang`, `java.util`, `java.math`, and so on.

One reason for using packages is to guarantee the uniqueness of class names. Suppose two programmers come up with the bright idea of supplying an `Element` class. (In fact, at least five developers had that bright idea in the Java

API alone.) As long as all of them place their classes into different packages, there is no conflict.

In the following sections, you will learn how to work with packages.

2.5.1 Package Declarations

A package name is a dot-separated list of identifiers such as `java.util.regex`.

To guarantee unique package names, it is a good idea to use an Internet domain name (which is known to be unique) written in reverse. For example, I own the domain name `horstmann.com`. For my projects, I use package names such as `com.horstmann.corejava`. A major exception to this rule is the standard Java library whose package names start with `java` or `javax`.



NOTE: In Java, packages do not nest. For example, the packages `java.util` and `java.util.regex` have nothing to do with each other. Each is its own independent collection of classes.

To place a class in a package, you add a `package` statement as the first statement of the source file:

```
package com.horstmann.corejava;  
  
public class Employee {  
    ...  
}
```

Now the `Employee` class is in the `com.horstmann.corejava` package, and its *fully qualified name* is `com.horstmann.corejava.Employee`.

There is also a *default package* with no name that you can use for simple programs. To add a class to the default package, don't provide a `package` statement. However, the use of the default package is not recommended.

When class files are read from a file system, the path name needs to match the package name. For example, the file `Employee.class` must be in a subdirectory `com/horstmann/corejava`.

If you arrange the source files in the same way and compile from the directory that contains the initial package names, then the class files are automatically put in the correct place. Suppose the `EmployeeDemo` class makes use of `Employee` objects, and you compile it as

```
javac com/horstmann/corejava/EmployeeDemo.java
```

The compiler generates class files `com/horstmann/corejava/EmployeeDemo.class` and `com/horstmann/corejava/Employee.class`. You run the program by specifying the fully qualified class name:

```
java com.horstmann.corejava.EmployeeDemo
```



CAUTION: If a source file is not in a subdirectory that matches its package name, the javac compiler will not complain and will generate a class file, but you will need to put the class file in the right place. This can be quite confusing—see Exercise 12.



TIP: It is a good idea to run javac with the `-d` option. Then the class files are generated in a separate directory, without cluttering up the source tree, and they have the correct subdirectory structure.

2.5.2 The jar Command

Instead of storing class files in the file system, you can place them into one or more archive files called JAR files. You can make such an archive with the `jar` utility that is a part of the JDK. Its command-line options are similar to those of the Unix `tar` program.

```
jar --create --verbose --file library.jar com/mycompany/*.class
```

or, with short options,

```
jar -c -v -f library.jar com/mycompany/*.class
```

or, with tar-style options,

```
jar cvf library.jar com/mycompany/*.class
```

JAR files are commonly used to package libraries.



TIP: You can use JAR files to package a program, not just a library. Generate the JAR file with

```
jar -c -f program.jar -e com.mycompany.MainClass com/mycompany/*.class
```

Then run the program as

```
java -jar program.jar
```



CAUTION: The options of commands in the Java development kit have traditionally used single dashes followed by multi-letter option names, such as `java -jar`. The exception was the `jar` command, which followed the classic option format of the `tar` command without dashes. Java 9 is moving towards the more common option format where multi-letter option names are preceded by double dashes, such as `--create`, with single-letter shortcuts for common options, such as `-c`.

This has created a muddle that will hopefully get cleaned up over time. Right now, `java -jar` works as always, but `java --jar` doesn't. You can combine some single-letter options but not others. For example, `jar -cvf filename` works, but `jar -cv -f filename` doesn't. Long argument options can follow a space or `=`, and short argument options can follow with or without a space. However, this is not fully implemented: `jar -c --file=filename` works, but `jar -c -ffilename` doesn't.

2.5.3 The Class Path

When you use library JAR files in a project, you need to tell the compiler and the virtual machine where these files are by specifying the *class path*. A class path can contain

- Directories containing class files (in subdirectories that match their package names)
- JAR files
- Directories containing JAR files

The `javac` and `java` programs have an option `-cp` (with a verbose version `--class-path` or, for backwards compatibility, `-classpath`). For example,

```
java -cp ../../libs/lib1.jar:../../libs/lib2.jar com.mycompany.MainClass
```

This class path has three elements: the current directory `(.)` and two JAR files in the directory `../../libs`.



NOTE: In Windows, use semicolons instead of colons to separate the path elements:

```
java -cp ..\libs\lib1.jar;..\libs\lib2.jar com.mycompany.MainClass
```

If you have many JAR files, put them all in a directory and use a wildcard to include them all:

```
java -cp ../../libs/* com.mycompany.MainClass
```



NOTE: In Unix, the * must be escaped to prevent shell expansion.



CAUTION: The javac compiler always looks for files in the current directory, but the java program only looks into the current directory if the “.” directory is on the class path. If you have no class path set, this is not a problem—the default class path consists of the “.” directory. But if you have set the class path and forgot to include the “.” directory, your programs will compile without error but won’t run.



CAUTION: The wildcard option for the class path is convenient, but it only works reliably if the JAR files are well structured. It is possible (but not a good idea) to have two versions of the same class in different JAR files. In such a situation, the first encountered class wins. The wildcard syntax does not guarantee the ordering in which the JAR files are processed, and you should not use it if you require a particular ordering of the JAR files. (Such “JAR file hell” is a problem that the Java platform module system aims to prevent—see Chapter 15.)

Using the -cp option is the preferred approach for setting the class path. An alternate approach is the CLASSPATH environment variable. The details depend on your shell. If you use bash, use a command such as

```
export CLASSPATH=.:~/home/username/project/libs/*
```

In Windows, it is

```
SET CLASSPATH=.;C:\Users\username\project\libs\*
```



CAUTION: You can set the CLASSPATH environment variable globally (for example, in .bashrc or the Windows control panel). However, many programmers have regretted this when they forgot the global setting and were surprised that their classes were not found.



NOTE: As you will see in Chapter 15, you can group packages together into *modules*. Modules provide strong encapsulation, hiding all packages except those that you make visible. You will see in Chapter 15 how to use the *module path* to specify the locations of the modules that your programs use.

2.5.4 Package Access

You have already encountered the access modifiers `public` and `private`. Features tagged as `public` can be used by any class. Private features can be used only by the class that declares them. If you don't specify either `public` or `private`, the feature (that is, the class, method, or variable) can be accessed by all methods in the same package.

Package access is useful for utility classes and methods that are needed by the methods of a package but are not of interest to the users of the package. Another common use case is for testing. You can place test classes in the same package, and then they can access internals of the classes being tested.



NOTE: A source file can contain multiple classes, but at most one of them can be declared `public`. If a source file has a `public` class, its name must match the class name.

For variables, it is unfortunate that package access is the default. It is a common mistake to forget the `private` modifier and accidentally make an instance variable accessible to the entire package. Here is an example from the `Window` class in the `java.awt` package:

```
public class Window extends Container {  
    String warningString;  
    ...  
}
```

Since the `warningString` variable is not private, the methods of all classes in the `java.awt` package can access it. Actually, no method other than those of the `Window` class itself does that, so it seems likely that the programmer simply forgot the `private` modifier.

This can be a security issue because packages are open ended. Any class can add itself to a package by providing the appropriate `package` statement.

If you are concerned about this openness of packages, you are not alone. A remedy is to place your package into a module—see Chapter 15. When a package is in a module, it is not possible to add classes to the package. All packages in the Java library are grouped into modules, so you cannot access the `Window.warningString` variable simply by crafting a class in the `java.awt` package.

2.5.5 Importing Classes

The `import` statement lets you use classes without the fully qualified name. For example, when you use

```
import java.util.Random;
```

then you can write `Random` instead of `java.util.Random` in your code.



NOTE: Import declarations are a convenience, not a necessity. You could drop all import declarations and use fully qualified class names everywhere.

```
java.util.Random generator = new java.util.Random();
```

Place `import` statements above the first class declaration in the source file, but below the `package` statement.

You can import all classes from a package with a wildcard:

```
import java.util.*;
```

The wildcard can only import classes, not packages. You cannot use `import java.*;` to obtain all packages whose name starts with `java`.

When you import multiple packages, it is possible to have a name conflict. For example, the packages `java.util` and `java.sql` both contain a `Date` class. Suppose you import both packages:

```
import java.util.*;
import java.sql.*;
```

If your program doesn't use the `Date` class, this is not a problem. But if you refer to `Date`, without the package name, the compiler complains.

In that case, you can import the specific class that you want:

```
import java.util.*;
import java.sql.*;
import java.sql.Date;
```

If you really need both classes, you must use the fully qualified name for at least one of them.



NOTE: The `import` statement is a convenience for programmers. Inside class files, all class names are fully qualified.



NOTE: The `import` statement is very different from the `#include` directive in C and C++. That directive includes header files for compilation. Imports do not cause files to be recompiled. They just shorten names, like the C++ `using` statement.

2.5.6 Static Imports

A form of the `import` statement permits the importing of static methods and variables. For example, if you add the directive

```
import static java.lang.Math.*;
```

to the top of your source file, you can use the static methods and static variables of the `Math` class without the class name prefix:

```
r = sqrt(pow(x, 2) + pow(y, 2)); // i.e., Math.sqrt, Math.pow
```

You can also import a specific static method or variable:

```
import static java.lang.Math.sqrt;
import static java.lang.Math.PI;
```



NOTE: As you will see in Chapters 3 and 8, it is common to use static import declarations with `java.util.Comparator` and `java.util.stream.Collectors`, which provide a large number of static methods.

2.6 Nested Classes

In the preceding section, you have seen how to organize classes into packages. Alternatively, you can place a class inside another class. Such a class is called a *nested class*. This can be useful to restrict visibility, or to avoid cluttering up a package with generic names such as `Element`, `Node`, or `Item`. Java has two kinds of nested classes, with somewhat different behavior. Let us examine both in the following sections.

2.6.1 Static Nested Classes

Consider an `Invoice` class that bills for items, each of which has a description, quantity, and unit price. We can make `Item` into a nested class:

```
public class Invoice {
    private static class Item { // Item is nested inside Invoice
        String description;
        int quantity;
        double unitPrice;

        double price() { return quantity * unitPrice; }
    }

    private ArrayList<Item> items = new ArrayList<>();
    ...
}
```

It won't be clear until the next section why this inner class is declared static. For now, just accept it.

There is nothing special about the `Item` class, except for access control. The class is private in `Invoice`, so only `Invoice` methods can access it. For that reason, I did not bother making the instance variables of the inner class private.

Here is an example of a method that constructs an object of the inner class:

```
public class Invoice {  
    ...  
    public void addItem(String description, int quantity, double unitPrice) {  
        Item newItem = new Item();  
        newItem.description = description;  
        newItem.quantity = quantity;  
        newItem.unitPrice = unitPrice;  
        items.add(newItem);  
    }  
}
```

A class can make a nested class public. In that case, one would want to use the usual encapsulation mechanism.

```
public class Invoice {  
    public static class Item { // A public nested class  
        private String description;  
        private int quantity;  
        private double unitPrice;  
  
        public Item(String description, int quantity, double unitPrice) {  
            this.description = description;  
            this.quantity = quantity;  
            this.unitPrice = unitPrice;  
        }  
        public double price() { return quantity * unitPrice; }  
        ...  
    }  
  
    private ArrayList<Item> items = new ArrayList<>();  
  
    public void add(Item item) { items.add(item); }  
    ...  
}
```

Now anyone can construct `Item` objects by using the qualified name `Invoice.Item`:

```
Invoice.Item newItem = new Invoice.Item("Blackwell Toaster", 2, 19.95);  
myInvoice.add(newItem);
```

There is essentially no difference between this `Invoice.Item` class and a class `InvoiceItem` declared outside any other class. Nesting the class just makes it obvious that the `Item` class represents items in an invoice.

2.6.2 Inner Classes

In the preceding section, you saw a nested class that was declared as static. In this section, you will see what happens if you drop the static modifier. Such classes are called *inner classes*.

Consider a social network in which each member has friends that are also members.

```
public class Network {  
    public class Member { // Member is an inner class of Network  
        private String name;  
        private ArrayList<Member> friends;  
  
        public Member(String name) {  
            this.name = name;  
            friends = new ArrayList<>();  
        }  
        ...  
    }  
    ...  
  
    private ArrayList<Member> members = new ArrayList<>();  
    ...  
}
```

With the static modifier dropped, there is an essential difference. A `Member` object knows to which network it belongs. Let's see how this works.

First, here is a method to add a member to the network:

```
public class Network {  
    ...  
    public Member enroll(String name) {  
        Member newMember = new Member(name);  
        members.add(newMember);  
        return newMember;  
    }  
}
```

So far, nothing much seems to be happening. We can add a member and get a reference to it.

```
Network myFace = new Network();  
Network.Member fred = myFace.enroll("Fred");
```

Now let's assume Fred feels this isn't the hottest social network anymore, so he wants to deactivate his membership.

```
fred.deactivate();
```

Here is the implementation of the `deactivate` method:

```
public class Network {  
    public class Member {  
        ...  
        public void deactivate() {  
            members.remove(this);  
        }  
    }  
  
    private ArrayList<Member> members;  
    ...  
}
```

As you can see, a method of an inner class can access instance variables of its outer class. In this case, they are the instance variables of the outer class object that created it, the unpopular `myFace` network.

This is what makes an inner class different from a static nested class. Each inner class object has a reference to an object of the enclosing class. For example, the method

```
members.remove(this);
```

actually means

```
outer.members.remove(this);
```

where I use `outer` to denote the hidden reference to the enclosing class.

A static nested class does not have such a reference (just like a static method does not have the `this` reference). Use a static nested class when the instances of the nested class don't need to know to which instance of the enclosing class they belong. Use an inner class only if this information is important.

An inner class can also invoke methods of the outer class through its outer class instance. For example, suppose the outer class had a method to unenroll a member. Then the `deactivate` method can call it:

```
public class Network {  
    public class Member {  
        ...  
        public void deactivate() {  
            unenroll(this);  
        }  
    }  
  
    private ArrayList<Member> members;  
  
    public Member enroll(String name) { ... }  
    public void unenroll(Member m) { ... }  
    ...  
}
```

In this case,

```
unenroll(this);
```

actually means

```
outer.unenroll(this);
```

2.6.3 Special Syntax Rules for Inner Classes

In the preceding section, I explained the outer class reference of an inner class object by calling it *outer*. The actual syntax for the outer reference is a bit more complex. The expression

```
OuterClass.this
```

denotes the outer class reference. For example, you can write the `deactivate` method of the `Member` inner class as

```
public void deactivate() {  
    Network.this.members.remove(this);  
}
```

In this case, the `Network.this` syntax was not necessary. Simply referring to `members` implicitly uses the outer class reference. But sometimes, you need the outer class reference explicitly. Here is a method to check whether a `Member` object belongs to a particular network:

```
public class Network {  
    public class Member {  
        ...  
        public boolean belongsTo(Network n) {  
            return Network.this == n;  
        }  
    }  
}
```

When you construct an inner class object, it remembers the enclosing class object that constructed it. In the preceding section, a new member was created by this method:

```
public class Network {  
    ...  
    Member enroll(String name) {  
        Member newMember = new Member(name);  
        ...  
    }  
}
```

That is a shortcut for

```
Member newMember = this.new Member(name);
```

You can invoke an inner class constructor on any instance of an outer class:

```
Network.Member wilma = myFace.new Member("Wilma");
```



NOTE: Inner classes cannot declare static members other than compile-time constants. There would be an ambiguity about the meaning of “static.” Does it mean there is only one instance in the virtual machine? Or only one instance per outer object? The language designers decided not to tackle this issue.



NOTE: By historical accident, inner classes were added to the Java language at a time when the virtual machine specification was considered complete, so they are translated into regular classes with a hidden instance variable referring to the enclosing instance. Exercise 14 invites you to explore this translation.



NOTE: *Local classes* are another variant of inner classes that we will discuss in Chapter 3.

2.7 Documentation Comments

The JDK contains a very useful tool, called `javadoc`, that generates HTML documentation from your source files. In fact, the online API documentation that we described in Chapter 1 is simply the result of running `javadoc` on the source code of the standard Java library.

If you add comments that start with the special delimiter `/**` to your source code, you too can easily produce professional-looking documentation. This is a very nice approach because it lets you keep your code and documentation in one place. In the bad old days, programmers often put their documentation into a separate file, and it was just a question of time for the code and the comments to diverge. When documentation comments are in the same file as the source code, it is an easy matter to update both and run `javadoc` again.

2.7.1 Comment Insertion

The `javadoc` utility extracts information for the following items:

- Public classes and interfaces
- Public and protected constructors and methods

- Public and protected variables
- Packages and modules

Interfaces are introduced in Chapter 3 and protected features in Chapter 4.

You can (and should) supply a comment for each of these features. Each comment is placed immediately above the feature it describes. A comment starts with `/**` and ends with `*/`.

Each `/** ... */` documentation comment contains free-form text followed by tags. A tag starts with an `@`, such as `@author` or `@param`.

The *first sentence* of the free-form text should be a summary statement. The `javadoc` utility automatically generates summary pages that extract these sentences.

In the free-form text, you can use HTML modifiers such as `...` for emphasis, `<code>...</code>` for a monospaced “typewriter” font, `...` for boldface, and even `` to include an image. You should, however, stay away from headings `<h1>` or rules `<hr>` because they can interfere with the formatting of the documentation.



NOTE: If your comments contain links to other files such as images (for example, diagrams or images of user interface components), place those files into a subdirectory of the directory containing the source file, named `doc-files`. The `javadoc` utility will copy the `doc-files` directories and their contents from the source directory to the documentation directory. You need to specify the `doc-files` directory in your link, for example ``.

2.7.2 Class Comments

The class comment must be placed directly before the class declaration. You may want to document the author and version of a class with the `@author` and `@version` tags. There can be multiple authors.

Here is an example of a class comment:

```
/**  
 * An <code>Invoice</code> object represents an invoice with  
 * line items for each part of the order.  
 * @author Fred Flintstone  
 * @author Barney Rubble  
 * @version 1.1  
 */
```

```
public class Invoice {  
    ...  
}
```



NOTE: There is no need to put a * in front of every line. However, most IDEs supply the asterisks automatically, and some even rearrange them when the line breaks change.

2.7.3 Method Comments

Place each method comment immediately before its method. Document the following features:

- Each parameter, with a comment `@param variable description`
- The return value, if not `void`: `@return description`
- Any thrown exceptions (see Chapter 5): `@throws ExceptionClass description`

Here is an example of a method comment:

```
/**  
 * Raises the salary of an employee.  
 * @param byPercent the percentage by which to raise the salary (e.g., 10 means 10%)  
 * @return the amount of the raise  
 */  
public double raiseSalary(double byPercent) {  
    double raise = salary * byPercent / 100;  
    salary += raise;  
    return raise;  
}
```

2.7.4 Variable Comments

You only need to document public variables—generally that means static constants. For example:

```
/**  
 * The number of days per year on Earth (excepting leap years)  
 */  
public static final int DAYS_PER_YEAR = 365;
```

2.7.5 General Comments

In all documentation comments, you can use the `@since` tag to describe the version in which this feature became available:

```
@since version 1.7.1
```

The `@deprecated` tag adds a comment that the class, method, or variable should no longer be used. The text should suggest a replacement. For example,

```
@deprecated Use <code>setVisible(true)</code> instead
```



NOTE: There is also a `@Deprecated` annotation that compilers use to issue warnings when deprecated items are used—see Chapter 11. The annotation does not have a mechanism for suggesting a replacement, so you should supply both the annotation and the Javadoc comment for deprecated items.

2.7.6 Links

You can add hyperlinks to other relevant parts of the javadoc documentation or to external documents with the `@see` and `@link` tags.

The tag `@see reference` adds a hyperlink in the “see also” section. It can be used with both classes and methods. Here, `reference` can be one of the following:

- `package.Class#feature label`
- `label`
- `"text"`

The first case is the most useful. You supply the name of a class, method, or variable, and javadoc inserts a hyperlink to its documentation. For example,

```
@see com.horstmann.corejava.Employee#raiseSalary(double)
```

makes a link to the `raiseSalary(double)` method in the `com.horstmann.corejava.Employee` class. You can omit the name of the package, or both the package and class name. Then, the feature will be located in the current package or class.

Note that you must use a `#`, not a period, to separate the class from the method or variable name. The Java compiler itself is highly skilled in guessing the various meanings of the period character as a separator between packages, subpackages, classes, inner classes, and their methods and variables. But the javadoc utility isn’t quite as clever, so you have to help it along.

If the `@see` tag is followed by a `<` character, you’re specifying a hyperlink. You can link to any URL you like. For example: `@see Leap years`.

In each of these cases, you can specify an optional label that will appear as the link anchor. If you omit the label, the user will see the target code name or URL as the anchor.

If the `@see` tag is followed by a " character, the text in quotes is displayed in the “see also” section. For example:

```
@see "Core Java for the Impatient"
```

You can add multiple `@see` tags for one feature but you must keep them all together.

If you like, you can place hyperlinks to other classes or methods anywhere in any of your documentation comments. Insert a tag of the form

```
{@link package.class#feature label}
```

anywhere in a comment. The feature description follows the same rules as for the `@see` tag.

2.7.7 Package, Module, and Overview Comments

The class, method, and variable comments are placed directly into the Java source files, delimited by `/** ... */`. However, to generate package comments, you need to add a separate file in each package directory.

Supply a Java file named `package-info.java`. The file must contain an initial javadoc comment, delimited with `/**` and `*/`, followed by a package statement. It should contain no further code or comments.

To document a module, place your comments into `module-info.java`. You can include the `@moduleGraph` directive to include a module dependency graph. (See Chapter 15 about modules and the `module-info.java` file.)

You can also supply an overview comment for all source files. Place it in a file called `overview.html`, located in the parent directory that contains all the source files. All text between the tags `<body>...</body>` is extracted. This comment is displayed when the user selects “Overview” from the navigation bar.

2.7.8 Comment Extraction

Here, `docDirectory` is the name of the directory where you want the HTML files to go. Follow these steps:

1. Change to the directory that contains the source files you want to document. If you have nested packages to document, such as `com.horstmann.corejava`, you must be working in the directory that contains the subdirectory `com`. (This is the directory that contains the `overview.html` file, if you supplied one.)
2. Run the command

```
javadoc -d docDirectory package1 package2 ...
```

If you omit the `-d docDirectory` option, the HTML files are extracted to the current directory. That can get messy, so I don't recommend it.

The `javadoc` program can be fine-tuned by numerous command-line options. For example, you can use the `-author` and `-version` options to include the `@author` and `@version` tags in the documentation. (By default, they are omitted.)

Another useful option is `-link` to include hyperlinks to standard classes. For example, if you run the command

```
javadoc -link http://docs.oracle.com/javase/9/docs/api *.java
```

all standard library classes are automatically linked to the documentation on the Oracle website.

If you use the `-linksouce` option, each source file is converted to HTML, and each class and method name turns into a hyperlink to the source.

Exercises

1. Change the calendar printing program so it starts the week on a Sunday. Also make it print a newline at the end (but only one).
2. Consider the `nextInt` method of the `Scanner` class. Is it an accessor or mutator? Why? What about the `nextInt` method of the `Random` class?
3. Can you ever have a mutator method return something other than `void`? Can you ever have an accessor method return `void`? Give examples when possible.
4. Why can't you implement a Java method that swaps the contents of two `int` variables? Instead, write a method that swaps the contents of two `IntHolder` objects. (Look up this rather obscure class in the API documentation.) Can you swap the contents of two `Integer` objects?
5. Implement an immutable class `Point` that describes a point in the plane. Provide a constructor to set it to a specific point, a no-arg constructor to set it to the origin, and methods `getX`, `getY`, `translate`, and `scale`. The `translate` method moves the point by a given amount in *x*- and *y*-direction. The `scale` method scales both coordinates by a given factor. Implement these methods so that they return new points with the results. For example,

```
Point p = new Point(3, 4).translate(1, 3).scale(0.5);
```

should set `p` to a point with coordinates (2, 3.5).
6. Repeat the preceding exercise, but now make `translate` and `scale` into mutators.

7. Add javadoc comments to both versions of the `Point` class from the preceding exercises.
8. In the preceding exercises, providing the constructors and getter methods of the `Point` class was rather repetitive. Most IDEs have shortcuts for writing the boilerplate code. What does your IDE offer?
9. Implement a class `Car` that models a car traveling along the *x*-axis, consuming gas as it moves. Provide methods to drive by a given number of miles, to add a given number of gallons to the gas tank, and to get the current distance from the origin and fuel level. Specify the fuel efficiency (in miles/gallons) in the constructor. Should this be an immutable class? Why or why not?
10. In the `RandomNumbers` class, provide two static methods `randomElement` that get a random element from an array or array list of integers. (Return zero if the array or array list is empty.) Why couldn't you make these methods into instance methods of `int[]` or `ArrayList<Integer>`?
11. Rewrite the `Cal` class to use static imports for the `System` and `LocalDate` classes.
12. Make a file `HelloWorld.java` that declares a class `HelloWorld` in a package `ch01.sec01`. Put it into some directory, but *not* in a `ch01/sec01` subdirectory. From that directory, run `javac HelloWorld.java`. Do you get a class file? Where? Then run `java HelloWorld`. What happens? Why? (Hint: Run `javap HelloWorld` and study the warning message.) Finally, try `javac -d . HelloWorld.java`. Why is that better?
13. Download the JAR file for OpenCSV from <http://opencsv.sourceforge.net>. Write a class with a `main` method that reads a CSV file of your choice and prints some of the content. There is sample code on the OpenCSV website. You haven't yet learned to deal with exceptions. Just use the following header for the `main` method:

```
public static void main(String[] args) throws Exception
```

The point of this exercise is not to do anything useful with CSV files, but to practice using a library that is delivered as a JAR file.
14. Compile the `Network` class. Note that the inner class file is named `Network$Member.class`. Use the `javap` program to spy on the generated code. The command

```
javap -private Classname
```

displays the methods and instance variables. Where do you see the reference to the enclosing class? (In Linux/Mac OS, you need to put a \ before the \$ symbol when running javap.)

15. Fully implement the `Invoice` class in Section 2.6.1, “Static Nested Classes” (page 85). Provide a method that prints the invoice and a demo program that constructs and prints a sample invoice.
16. Implement a class `Queue`, an unbounded queue of strings. Provide methods `add`, adding at the tail, and `remove`, removing at the head of the queue. Store elements as a linked list of nodes. Make `Node` a nested class. Should it be static or not?
17. Provide an *iterator*—an object that yields the elements of the queue in turn—for the queue of the preceding class. Make `Iterator` a nested class with methods `next` and `hasNext`. Provide a method `iterator()` of the `Queue` class that yields a `Queue.Iterator`. Should `Iterator` be static or not?

Interfaces and Lambda Expressions

Topics in This Chapter

- 3.1 Interfaces — page 100
- 3.2 Static, Default, and Private Methods — page 105
- 3.3 Examples of Interfaces — page 109
- 3.4 Lambda Expressions — page 113
- 3.5 Method and Constructor References — page 116
- 3.6 Processing Lambda Expressions — page 119
- 3.7 Lambda Expressions and Variable Scope — page 124
- 3.8 Higher-Order Functions — page 127
- 3.9 Local and Anonymous Classes — page 129
- Exercises — page 131

Chapter



3

Java was designed as an object-oriented programming language in the 1990s when object-oriented programming was the principal paradigm for software development. Interfaces are a key feature of object-oriented programming: They let you specify what should be done, without having to provide an implementation.

Long before there was object-oriented programming, there were functional programming languages, such as Lisp, in which functions and not objects are the primary structuring mechanism. Recently, functional programming has risen in importance because it is well suited for concurrent and event-driven (or “reactive”) programming. Java supports function expressions that provide a convenient bridge between object-oriented and functional programming. In this chapter, you will learn about interfaces and lambda expressions.

The key points of this chapter are:

1. An interface specifies a set of methods that an implementing class must provide.
2. An interface is a supertype of any class that implements it. Therefore, one can assign instances of the class to variables of the interface type.
3. An interface can contain static methods. All variables of an interface are automatically public, static, and final.

4. An interface can contain default methods that an implementing class can inherit or override.
5. An interface can contain private methods that cannot be called or overridden by implementing classes.
6. The Comparable and Comparator interfaces are used for comparing objects.
7. A functional interface is an interface with a single abstract method.
8. A lambda expression denotes a block of code that can be executed at a later point in time.
9. Lambda expressions are converted to functional interfaces.
10. Method and constructor references refer to methods or constructors without invoking them.
11. Lambda expressions and local classes can access effectively final variables from the enclosing scope.

3.1 Interfaces

An *interface* is a mechanism for spelling out a contract between two parties: the supplier of a service and the classes that want their objects to be usable with the service. In the following sections, you will see how to define and use interfaces in Java.

3.1.1 Declaring an Interface

Consider a service that works on sequences of integers, reporting the average of the first n values:

```
public static double average(IntSequence seq, int n)
```

Such sequences can take many forms. Here are some examples:

- A sequence of integers supplied by a user
- A sequence of random integers
- The sequence of prime numbers
- The sequence of elements in an integer array
- The sequence of code points in a string
- The sequence of digits in a number

We want to implement a *single mechanism* for dealing with all these kinds of sequences.

First, let us spell out what is common between integer sequences. At a minimum, one needs two methods for working with a sequence:

- Test whether there is a next element
- Get the next element

To declare an interface, you provide the method headers, like this:

```
public interface IntSequence {  
    boolean hasNext();  
    int next();  
}
```

You need not implement these methods, but you can provide default implementations if you like—see Section 3.2.2, “Default Methods” (page 106). If no implementation is provided, we say that the method is *abstract*.



NOTE: All methods of an interface are automatically `public`. Therefore, it is not necessary to declare `hasNext` and `next` as `public`. Some programmers do it anyway for greater clarity.

The methods in the interface suffice to implement the average method:

```
public static double average(IntSequence seq, int n) {  
    int count = 0;  
    double sum = 0;  
    while (seq.hasNext() && count < n) {  
        count++;  
        sum += seq.next();  
    }  
    return count == 0 ? 0 : sum / count;  
}
```

3.1.2 Implementing an Interface

Now let’s look at the other side of the coin: the classes that want to be usable with the average method. They need to *implement* the `IntSequence` interface. Here is such a class:

```
public class SquareSequence implements IntSequence {  
    private int i;  
  
    public boolean hasNext() {  
        return true;  
    }
```

```
public int next() {
    i++;
    return i * i;
}
```

There are infinitely many squares, and an object of this class delivers them all, one at a time. (To keep the example simple, we ignore integer overflow—see Exercise 6.)

The `implements` keyword indicates that the `SquareSequence` class intends to conform to the `IntSequence` interface.



CAUTION: The implementing class must declare the methods of the interface as `public`. Otherwise, they would default to package access. Since the interface requires public access, the compiler would report an error.

This code gets the average of the first 100 squares:

```
SquareSequence squares = new SquareSequence();
double avg = average(squares, 100);
```

There are many classes that can implement the `IntSequence` interface. For example, this class yields a finite sequence, namely the digits of a positive integer starting with the least significant one:

```
public class DigitSequence implements IntSequence {
    private int number;

    public DigitSequence(int n) {
        number = n;
    }

    public boolean hasNext() {
        return number != 0;
    }

    public int next() {
        int result = number % 10;
        number /= 10;
        return result;
    }

    public int rest() {
        return number;
    }
}
```

An object `new DigitSequence(1729)` delivers the digits 9 2 7 1 before `hasNext` returns `false`.



NOTE: The `SquareSequence` and `DigitSequence` classes implement all methods of the `IntSequence` interface. If a class only implements some of the methods, then it must be declared with the `abstract` modifier. See Chapter 4 for more information on abstract classes.

3.1.3 Converting to an Interface Type

This code fragment computes the average of the digit sequence values:

```
IntSequence digits = new DigitSequence(1729);
double avg = average(digits, 100);
// Will only look at the first four sequence values
```

Look at the `digits` variable. Its type is `IntSequence`, not `DigitSequence`. A variable of type `IntSequence` refers to an object of some class that implements the `IntSequence` interface. You can always assign an object to a variable whose type is an implemented interface, or pass it to a method expecting such an interface.

Here is a bit of useful terminology. A type s is a *supertype* of the type t (the *subtype*) when any value of the subtype can be assigned to a variable of the supertype without a conversion. For example, the `IntSequence` interface is a supertype of the `DigitSequence` class.



NOTE: Even though it is possible to declare variables of an interface type, you can never have an object whose type is an interface. All objects are instances of classes.

3.1.4 Casts and the `instanceof` Operator

Occasionally, you need the opposite conversion—from a supertype to a subtype. Then you use a *cast*. For example, if you happen to know that the object stored in an `IntSequence` is actually a `DigitSequence`, you can convert the type like this:

```
IntSequence sequence = ...;
DigitSequence digits = (DigitSequence) sequence;
System.out.println(digits.rest());
```

In this scenario, the cast was necessary because `rest` is a method of `DigitSequence` but not `IntSequence`.

See Exercise 2 for a more compelling example.

You can only cast an object to its actual class or one of its supertypes. If you are wrong, a compile-time error or class cast exception will occur:

```
String digitString = (String) sequence;
    // Cannot possibly work—IntSequence is not a supertype of String
RandomSequence randoms = (RandomSequence) sequence;
    // Could work, throws a class cast exception if not
```

To avoid the exception, you can first test whether the object is of the desired type, using the `instanceof` operator. The expression

`object instanceof Type`

returns `true` if `object` is an instance of a class that has `Type` as a supertype. It is a good idea to make this check before using a cast.

```
if (sequence instanceof DigitSequence) {
    DigitSequence digits = (DigitSequence) sequence;
    ...
}
```



NOTE: The `instanceof` operator is `null`-safe: The expression `obj instanceof Type` is `false` if `obj` is `null`. After all, `null` cannot possibly be a reference to an object of any given type.

3.1.5 Extending Interfaces

An interface can *extend* another, requiring or providing additional methods on top of the original ones. For example, `Closeable` is an interface with a single method:

```
public interface Closeable {
    void close();
}
```

As you will see in Chapter 5, this is an important interface for closing resources when an exception occurs.

The `Channel` interface extends this interface:

```
public interface Channel extends Closeable {
    boolean isOpen();
}
```

A class that implements the `Channel` interface must provide both methods, and its objects can be converted to both interface types.

3.1.6 Implementing Multiple Interfaces

A class can implement any number of interfaces. For example, a `FileSequence` class that reads integers from a file can implement the `Closeable` interface in addition to `IntSequence`:

```
public class FileSequence implements IntSequence, Closeable {  
    ...  
}
```

Then the `FileSequence` class has both `IntSequence` and `Closeable` as supertypes.

3.1.7 Constants

Any variable defined in an interface is automatically `public static final`.

For example, the `SwingConstants` interface defines constants for compass directions:

```
public interface SwingConstants {  
    int NORTH = 1;  
    int NORTH_EAST = 2;  
    int EAST = 3;  
    ...  
}
```

You can refer to them by their qualified name, `SwingConstants.NORTH`. If your class chooses to implement the `SwingConstants` interface, you can drop the `SwingConstants` qualifier and simply write `NORTH`. However, this is not a common idiom. It is far better to use enumerations for a set of constants; see Chapter 4.



NOTE: You cannot have instance variables in an interface. An interface specifies behavior, not object state.

3.2 Static, Default, and Private Methods

In earlier versions of Java, all methods of an interface had to be abstract—that is, without a body. Nowadays you can add three kinds of methods with a concrete implementation: static, default, and private methods. The following sections describe these methods.

3.2.1 Static Methods

There was never a technical reason why an interface could not have static methods, but they did not fit into the view of interfaces as abstract

specifications. That thinking has now evolved. In particular, factory methods make a lot of sense in interfaces. For example, the `IntSequence` interface can have a static method `digitsOf` that generates a sequence of digits of a given integer:

```
IntSequence digits = IntSequence.digitsOf(1729);
```

The method yields an instance of some class implementing the `IntSequence` interface, but the caller need not care which one it is.

```
public interface IntSequence {  
    ...  
    static IntSequence digitsOf(int n) {  
        return new DigitSequence(n);  
    }  
}
```



NOTE: In the past, it had been common to place static methods in a companion class. You find pairs of interfaces and utility classes, such as `Collection/Collections` or `Path/Paths`, in the Java API. This split is no longer necessary.

3.2.2 Default Methods

You can supply a *default* implementation for any interface method. You must tag such a method with the `default` modifier.

```
public interface IntSequence {  
    default boolean hasNext() { return true; }  
        // By default, sequences are infinite  
    int next();  
}
```

A class implementing this interface can choose to override the `hasNext` method or to inherit the default implementation.



NOTE: Default methods put an end to the classic pattern of providing an interface and a companion class that implements most or all of its methods, such as `Collection/AbstractCollection` or `WindowListener/WindowAdapter` in the Java API. Nowadays you should just implement the methods in the interface.

An important use for default methods is *interface evolution*. Consider for example the `Collection` interface that has been a part of Java for many years. Suppose that way back when, you provided a class

```
public class Bag implements Collection
```

Later, in Java 8, a `stream` method was added to the interface.

Suppose the `stream` method was not a default method. Then the `Bag` class no longer compiles since it doesn't implement the new method. Adding a nondefault method to an interface is not *source-compatible*.

But suppose you don't recompile the class and simply use an old JAR file containing it. The class will still load, even with the missing method. Programs can still construct `Bag` instances, and nothing bad will happen. (Adding a method to an interface is *binary-compatible*.) However, if a program calls the `stream` method on a `Bag` instance, an `AbstractMethodError` occurs.

Making the method a `default` method solves both problems. The `Bag` class will again compile. And if the class is loaded without being recompiled and the `stream` method is invoked on a `Bag` instance, the `Collection.stream` method is called.

3.2.3 Resolving Default Method Conflicts

If a class implements two interfaces, one of which has a default method and the other a method (default or not) with the same name and parameter types, then you must resolve the conflict. This doesn't happen very often, and it is usually easy to deal with the situation.

Let's look at an example. Suppose we have an interface `Person` with a `getId` method:

```
public interface Person {  
    String getName();  
    default int getId() { return 0; }  
}
```

And suppose there is an interface `Identified`, also with such a method.

```
public interface Identified {  
    default int getId() { return Math.abs(hashCode()); }  
}
```

You will see what the `hashCode` method does in Chapter 4. For now, all that matters is that it returns some integer that is derived from the object.

What happens if you form a class that implements both of them?

```
public class Employee implements Person, Identified {  
    ...  
}
```

The class inherits two `getId` methods provided by the `Person` and `Identified` interfaces. There is no way for the Java compiler to choose one over the other. The compiler reports an error and leaves it up to you to resolve the ambiguity.

Provide a `getId` method in the `Employee` class and either implement your own ID scheme, or delegate to one of the conflicting methods, like this:

```
public class Employee implements Person, Identified {  
    public int getId() { return Identified.super.getId(); }  
    ...  
}
```



NOTE: The `super` keyword lets you call a supertype method. In this case, we need to specify which supertype we want. The syntax may seem a bit odd, but it is consistent with the syntax for invoking a superclass method that you will see in Chapter 4.

Now assume that the `Identified` interface does not provide a default implementation for `getId`:

```
interface Identified {  
    int getId();  
}
```

Can the `Employee` class inherit the default method from the `Person` interface? At first glance, this might seem reasonable. But how does the compiler know whether the `Person.getId` method actually does what `Identified.getId` is expected to do? After all, it might return the level of the person's Freudian id, not an ID number.

The Java designers decided in favor of safety and uniformity. It doesn't matter how two interfaces conflict; if at least one interface provides an implementation, the compiler reports an error, and it is up to the programmer to resolve the ambiguity.



NOTE: If neither interface provides a default for a shared method, then there is no conflict. An implementing class has two choices: implement the method, or leave it unimplemented and declare the class as abstract.



NOTE: If a class extends a superclass (see Chapter 4) and implements an interface, inheriting the same method from both, the rules are easier. In that case, only the superclass method matters, and any default method from the interface is simply ignored. This is actually a more common case than conflicting interfaces. See Chapter 4 for the details.

3.2.4 Private Methods

As of Java 9, methods in an interface can be private. A private method can be static or an instance method, but it cannot be a default method since that can be overridden. As private methods can only be used in the methods of the interface itself, their use is limited to being helper methods for the other methods of the interface.

For example, suppose the `IntSequence` class provides methods

```
static of(int a)
static of(int a, int b)
static of(int a, int b, int c)
```

Then each of these methods could call a helper method

```
private static IntSequence makeFiniteSequence(int... values) { ... }
```

3.3 Examples of Interfaces

At first glance, interfaces don't seem to do very much. An interface is just a set of methods that a class promises to implement. To make the importance of interfaces more tangible, the following sections show you four examples of commonly used interfaces from the Java API.

3.3.1 The Comparable Interface

Suppose you want to sort an array of objects. A sorting algorithm repeatedly compares elements and rearranges them if they are out of order. Of course, the rules for doing the comparison are different for each class, and the sorting algorithm should just call a method supplied by the class. As long as all classes can agree on what that method is called, the sorting algorithm can do its job. That is where interfaces come in.

If a class wants to enable sorting for its objects, it should implement the `Comparable` interface. There is a technical point about this interface. We want to compare strings against strings, employees against employees, and so on. For that reason, the `Comparable` interface has a type parameter.

```
public interface Comparable<T> {
    int compareTo(T other);
}
```

For example, the `String` class implements `Comparable<String>` so that its `compareTo` method has the signature

```
int compareTo(String other)
```



NOTE: A type with a type parameter such as Comparable or ArrayList is a *generic* type. You will learn all about generic types in Chapter 6.

When calling `x.compareTo(y)`, the `compareTo` method returns an integer value to indicate whether `x` or `y` should come first. A positive return value (not necessarily 1) indicates that `x` should come after `y`. A negative integer (not necessarily -1) is returned when `x` should come before `y`. If `x` and `y` are considered equal, the returned value is 0.

Note that the return value can be any integer. That flexibility is useful because it allows you to return a difference of integers. That is handy, provided the difference cannot produce integer overflow.

```
public class Employee implements Comparable<Employee> {  
    ...  
    public int compareTo(Employee other) {  
        return getId() - other.getId(); // Ok if IDs always ≥ 0  
    }  
}
```



CAUTION: Returning a difference of integers does not always work. The difference can overflow for large operands of opposite sign. In that case, use the `Integer.compare` method that works correctly for all integers. However, if you know that the integers are non-negative, or their absolute value is less than `Integer.MAX_VALUE / 2`, then the difference works fine.

When comparing floating-point values, you cannot just return the difference. Instead, use the static `Double.compare` method. It does the right thing, even for $\pm\infty$ and NaN.

Here is how the `Employee` class can implement the `Comparable` interface, ordering employees by salary:

```
public class Employee implements Comparable<Employee> {  
    ...  
    public int compareTo(Employee other) {  
        return Double.compare(salary, other.salary);  
    }  
}
```



NOTE: It is perfectly legal for the `compare` method to access `other.salary`. In Java, a method can access private features of *any* object of its class.

The `String` class, as well as over a hundred other classes in the Java library, implements the `Comparable` interface. You can use the `Arrays.sort` method to sort an array of `Comparable` objects:

```
String[] friends = { "Peter", "Paul", "Mary" };
Arrays.sort(friends); // friends is now ["Mary", "Paul", "Peter"]
```



NOTE: Strangely, the `Arrays.sort` method does not check at compile time whether the argument is an array of `Comparable` objects. Instead, it throws an exception if it encounters an element of a class that doesn't implement the `Comparable` interface.

3.3.2 The Comparator Interface

Now suppose we want to sort strings by increasing length, not in dictionary order. We can't have the `String` class implement the `compareTo` method in two ways—and at any rate, the `String` class isn't ours to modify.

To deal with this situation, there is a second version of the `Arrays.sort` method whose parameters are an array and a *comparator*—an instance of a class that implements the `Comparator` interface.

```
public interface Comparator<T> {
    int compare(T first, T second);
}
```

To compare strings by length, define a class that implements `Comparator<String>`:

```
class LengthComparator implements Comparator<String> {
    public int compare(String first, String second) {
        return first.length() - second.length();
    }
}
```

To actually do the comparison, you need to make an instance:

```
Comparator<String> comp = new LengthComparator();
if (comp.compare(words[i], words[j]) > 0) ...
```

Contrast this call with `words[i].compareTo(words[j])`. The `compareTo` method is called on the comparator object, not the string itself.



NOTE: Even though the `LengthComparator` object has no state, you still need to make an instance of it. You need the instance to call the `compare` method—it is not a static method.

To sort an array, pass a `LengthComparator` object to the `Arrays.sort` method:

```
String[] friends = { "Peter", "Paul", "Mary" };
Arrays.sort(friends, new LengthComparator());
```

Now the array is either `["Paul", "Mary", "Peter"]` or `["Mary", "Paul", "Peter"]`.

You will see in Section 3.4.2, “Functional Interfaces” (page 115) how to use a `Comparator` much more easily, using a lambda expression.

3.3.3 The Runnable Interface

At a time when just about every processor has multiple cores, you want to keep those cores busy. You may want to run certain tasks in a separate thread, or give them to a thread pool for execution. To define the task, you implement the `Runnable` interface. This interface has just one method.

```
class HelloTask implements Runnable {
    public void run() {
        for (int i = 0; i < 1000; i++) {
            System.out.println("Hello, World!");
        }
    }
}
```

If you want to execute this task in a new thread, create the thread from the `Runnable` and start it.

```
Runnable task = new HelloTask();
Thread thread = new Thread(task);
thread.start();
```

Now the `run` method executes in a separate thread, and the current thread can proceed with other work.



NOTE: In Chapter 10, you will see other ways of executing a `Runnable`.



NOTE: There is also a `Callable<T>` interface for tasks that return a result of type `T`.

3.3.4 User Interface Callbacks

In a graphical user interface, you have to specify actions to be carried out when the user clicks a button, selects a menu option, drags a slider, and so on. These actions are often called *callbacks* because some code gets called back when a user action occurs.

In Java-based GUI libraries, interfaces are used for callbacks. For example, in JavaFX, the following interface is used for reporting events:

```
public interface EventHandler<T> {  
    void handle(T event);  
}
```

This too is a generic interface where `T` is the type of event that is being reported, such as an `ActionEvent` for a button click.

To specify the action, implement the interface:

```
class CancelAction implements EventHandler<ActionEvent> {  
    public void handle(ActionEvent event) {  
        System.out.println("Oh noes!");  
    }  
}
```

Then, make an object of that class and add it to the button:

```
Button cancelButton = new Button("Cancel");  
cancelButton.setOnAction(new CancelAction());
```



NOTE: Since Oracle positions JavaFX as the successor to the Swing GUI toolkit, I use JavaFX in these examples. (Don't worry—you need not know any more about JavaFX than the couple of statements you just saw.) The details don't matter; in every user interface toolkit, be it Swing, JavaFX, or Android, you give a button some code that you want to run when the button is clicked.

Of course, this way of defining a button action is rather tedious. In other languages, you just give the button a function to execute, without going through the detour of making a class and instantiating it. The next section shows how you can do the same in Java.

3.4 Lambda Expressions

A *lambda expression* is a block of code that you can pass around so it can be executed later, once or multiple times. In the preceding sections, you have seen many situations where it is useful to specify such a block of code:

- To pass a comparison method to `Arrays.sort`
- To run a task in a separate thread
- To specify an action that should happen when a button is clicked

However, Java is an object-oriented language where (just about) everything is an object. There are no function types in Java. Instead, functions are expressed as objects, instances of classes that implement a particular interface. Lambda expressions give you a convenient syntax for creating such instances.

3.4.1 The Syntax of Lambda Expressions

Consider again the sorting example from Section 3.3.2, “The Comparator Interface” (page 111). We pass code that checks whether one string is shorter than another. We compute

```
first.length() - second.length()
```

What are `first` and `second`? They are both strings. Java is a strongly typed language, and we must specify that as well:

```
(String first, String second) -> first.length() - second.length()
```

You have just seen your first *lambda expression*. Such an expression is simply a block of code, together with the specification of any variables that must be passed to the code.

Why the name? Many years ago, before there were any computers, the logician Alonzo Church wanted to formalize what it means for a mathematical function to be effectively computable. (Curiously, there are functions that are known to exist, but nobody knows how to compute their values.) He used the Greek letter lambda (λ) to mark parameters, somewhat like

```
 $\lambda$ first.  $\lambda$ second. first.length() - second.length()
```



NOTE: Why the letter λ ? Did Church run out of letters of the alphabet? Actually, the venerable *Principia Mathematica* (see <http://plato.stanford.edu/entries/principia-mathematica>) used the \wedge accent to denote function parameters, which inspired Church to use an uppercase lambda Λ . But in the end, he switched to the lowercase version. Ever since, an expression with parameter variables has been called a lambda expression.

If the body of a lambda expression carries out a computation that doesn’t fit in a single expression, write it exactly like you would have written a method: enclosed in {} and with explicit return statements. For example,

```
(String first, String second) -> {
    int difference = first.length() < second.length();
    if (difference < 0) return -1;
    else if (difference > 0) return 1;
    else return 0;
}
```

If a lambda expression has no parameters, supply empty parentheses, just as with a parameterless method:

```
Runnable task = () -> { for (int i = 0; i < 1000; i++) doWork(); }
```

If the parameter types of a lambda expression can be inferred, you can omit them. For example,

```
Comparator<String> comp
    = (first, second) -> first.length() - second.length();
    // Same as (String first, String second)
```

Here, the compiler can deduce that `first` and `second` must be strings because the lambda expression is assigned to a string comparator. (We will have a closer look at this assignment in the next section.)

If a method has a single parameter with inferred type, you can even omit the parentheses:

```
EventHandler<ActionEvent> listener = event ->
    System.out.println("Oh noes!");
    // Instead of (event) -> or (ActionEvent event) ->
```

You never specify the result type of a lambda expression. However, the compiler infers it from the body and checks that it matches the expected type. For example, the expression

```
(String first, String second) -> first.length() - second.length()
```

can be used in a context where a result of type `int` is expected (or a compatible type such as `Integer`, `long`, or `double`).

3.4.2 Functional Interfaces

As you already saw, there are many interfaces in Java that express actions, such as `Runnable` or `Comparator`. Lambda expressions are compatible with these interfaces.

You can supply a lambda expression whenever an object of an interface with a *single abstract method* is expected. Such an interface is called a *functional interface*.

To demonstrate the conversion to a functional interface, consider the `Arrays.sort` method. Its second parameter requires an instance of `Comparator`, an interface with a single method. Simply supply a lambda:

```
Arrays.sort(words,
    (first, second) -> first.length() - second.length());
```

Behind the scenes, the second parameter variable of the `Arrays.sort` method receives an object of some class that implements `Comparator<String>`. Invoking the `compare` method on that object executes the body of the lambda expression. The management of these objects and classes is completely implementation-dependent and highly optimized.

In most programming languages that support function literals, you can declare function types such as `(String, String) -> int`, declare variables of those types, put functions into those variables, and invoke them. In Java, there is *only one thing* you can do with a lambda expression: put it in a variable whose type is a functional interface, so that it is converted to an instance of that interface.



NOTE: You cannot assign a lambda expression to a variable of type `Object`, the common supertype of all classes in Java (see Chapter 4). `Object` is a class, not a functional interface.

The Java API provides a large number of functional interfaces (see Section 3.6.2, “Choosing a Functional Interface,” page 120). One of them is

```
public interface Predicate<T> {
    boolean test(T t);
    // Additional default and static methods
}
```

The `ArrayList` class has a `removeIf` method whose parameter is a `Predicate`. It is specifically designed for receiving a lambda expression. For example, the following statement removes all `null` values from an array list:

```
list.removeIf(e -> e == null);
```

3.5 Method and Constructor References

Sometimes, there is already a method that carries out exactly the action that you’d like to pass on to some other code. There is special syntax for a *method reference* that is even shorter than a lambda expression calling the method. A similar shortcut exists for constructors. You will see both in the following sections.

3.5.1 Method References

Suppose you want to sort strings regardless of letter case. You could call

```
Arrays.sort(strings, (x, y) -> x.compareToIgnoreCase(y));
```

Instead, you can pass this method expression:

```
Arrays.sort(strings, String::compareToIgnoreCase);
```

The expression `String::compareToIgnoreCase` is a *method reference* that is equivalent to the lambda expression `(x, y) -> x.compareToIgnoreCase(y)`.

Here is another example. The `Objects` class defines a method `isNull`. The call `Objects.isNull(x)` simply returns the value of `x == null`. It seems hardly worth having a method for this case, but it was designed to be passed as a method expression. The call

```
list.removeIf(Objects::isNull);
```

removes all `null` values from a list.

As another example, suppose you want to print all elements of a list. The `ArrayList` class has a method `forEach` that applies a function to each element. You could call

```
list.forEach(x -> System.out.println(x));
```

It would be nicer, however, if you could just pass the `println` method to the `forEach` method. Here is how to do that:

```
list.forEach(System.out::println);
```

As you can see from these examples, the `::` operator separates the method name from the name of a class or object. There are three variations:

1. `Class::instanceMethod`
2. `Class::staticMethod`
3. `object::instanceMethod`

In the first case, the first parameter becomes the receiver of the method, and any other parameters are passed to the method. For example, `String::compareToIgnoreCase` is the same as `(x, y) -> x.compareToIgnoreCase(y)`.

In the second case, all parameters are passed to the static method. The method expression `Objects::isNull` is equivalent to `x -> Objects.isNull(x)`.

In the third case, the method is invoked on the given object, and the parameters are passed to the instance method. Therefore, `System.out::println` is equivalent to `x -> System.out.println(x)`.



NOTE: When there are multiple overloaded methods with the same name, the compiler will try to find from the context which one you mean. For example, there are multiple versions of the `println` method. When passed to the `forEach` method of an `ArrayList<String>`, the `println(String)` method is picked.

You can capture the `this` parameter in a method reference. For example, `this::equals` is the same as `x -> this.equals(x)`.



NOTE: In an inner class, you can capture the `this` reference of an enclosing class as `EnclosingClass.this::method`. You can also capture `super`—see Chapter 4.

3.5.2 Constructor References

Constructor references are just like method references, except that the name of the method is `new`. For example, `Employee::new` is a reference to an `Employee` constructor. If the class has more than one constructor, then it depends on the context which constructor is chosen.

Here is an example for using such a constructor reference. Suppose you have a list of strings

```
List<String> names = ...;
```

You want a list of employees, one for each name. As you will see in Chapter 8, you can use streams to do this without a loop: Turn the list into a stream, and then call the `map` method. It applies a function and collects all results.

```
Stream<Employee> stream = names.stream().map(Employee::new);
```

Since `names.stream()` contains `String` objects, the compiler knows that `Employee::new` refers to the constructor `Employee(String)`.

You can form constructor references with array types. For example, `int[]::new` is a constructor reference with one parameter: the length of the array. It is equivalent to the lambda expression `n -> new int[n]`.

Array constructor references are useful to overcome a limitation of Java: It is not possible to construct an array of a generic type. (See Chapter 6 for details.) For that reason, methods such as `Stream.toArray` return an `Object` array, not an array of the element type:

```
Object[] employees = stream.toArray();
```

But that is unsatisfactory. The user wants an array of employees, not objects. To solve this problem, another version of `toArray` accepts a constructor reference:

```
Employee[] buttons = stream.toArray(Employee[]::new);
```

The `toArray` method invokes this constructor to obtain an array of the correct type. Then it fills and returns the array.

3.6 Processing Lambda Expressions

Up to now, you have seen how to produce lambda expressions and pass them to a method that expects a functional interface. In the following sections, you will see how to write your own methods that can consume lambda expressions.

3.6.1 Implementing Deferred Execution

The point of using lambdas is *deferred execution*. After all, if you wanted to execute some code right now, you'd do that, without wrapping it inside a lambda. There are many reasons for executing code later, such as:

- Running the code in a separate thread
- Running the code multiple times
- Running the code at the right point in an algorithm (for example, the comparison operation in sorting)
- Running the code when something happens (a button was clicked, data has arrived, and so on)
- Running the code only when necessary

Let's look at a simple example. Suppose you want to repeat an action n times. The action and the count are passed to a `repeat` method:

```
repeat(10, () -> System.out.println("Hello, World!"));
```

To accept the lambda, we need to pick (or, in rare cases, provide) a functional interface. In this case, we can just use `Runnable`:

```
public static void repeat(int n, Runnable action) {  
    for (int i = 0; i < n; i++) action.run();  
}
```

Note that the body of the lambda expression is executed when `action.run()` is called.

Now let's make this example a bit more sophisticated. We want to tell the action in which iteration it occurs. For that, we need to pick a functional interface that has a method with an `int` parameter and a `void` return. Instead of rolling your own, I strongly recommend that you use one of the standard ones described in the next section. The standard interface for processing `int` values is

```
public interface IntConsumer {  
    void accept(int value);  
}
```

Here is the improved version of the `repeat` method:

```
public static void repeat(int n, IntConsumer action) {  
    for (int i = 0; i < n; i++) action.accept(i);  
}
```

And here is how you call it:

```
repeat(10, i -> System.out.println("Countdown: " + (9 - i)));
```

3.6.2 Choosing a Functional Interface

In most functional programming languages, function types are *structural*. To specify a function that maps two strings to an integer, you use a type that looks something like `Function2<String, String, Integer>` or `(String, String) -> int`. In Java, you instead declare the intent of the function using a functional interface such as `Comparator<String>`. In the theory of programming languages this is called *nominal* typing.

Of course, there are many situations where you want to accept “any function” without particular semantics. There are a number of generic function types for that purpose (see Table 3-1), and it’s a very good idea to use one of them when you can.

For example, suppose you write a method to process files that match a certain criterion. Should you use the descriptive `java.io.FileFilter` class or a `Predicate<File>`? I strongly recommend that you use the standard `Predicate<File>`. The only reason not to do so would be if you already have many useful methods producing `FileFilter` instances.

Table 3-1 Common Functional Interfaces

Functional Interface	Parameter types	Return type	Abstract method name	Description	Other methods
Runnable	none	void	run	Runs an action without arguments or return value	
Supplier<T>	none	T	get	Supplies a value of type T	
Consumer<T>	T	void	accept	Consumes a value of type T	andThen
BiConsumer<T, U>	T, U	void	accept	Consumes values of types T and U	andThen
Function<T, R>	T	R	apply	A function with argument of type T	compose, andThen, identity
BiFunction<T, U, R>	T, U	R	apply	A function with arguments of types T and U	andThen
UnaryOperator<T>	T	T	apply	A unary operator on the type T	compose, andThen, identity
BinaryOperator<T>	T, T	T	apply	A binary operator on the type T	andThen, maxBy, minBy
Predicate<T>	T	boolean	test	A boolean-valued function	and, or, negate, isEqual
BiPredicate<T, U>	T, U	boolean	test	A boolean-valued function with two arguments	and, or, negate



NOTE: Most of the standard functional interfaces have nonabstract methods for producing or combining functions. For example, `Predicate isEqual(a)` is the same as `a::equals`, but it also works if `a` is `null`. There are default methods `and`, `or`, `negate` for combining predicates. For example,

```
Predicate isEqual(a).or(Predicate isEqual(b))
```

is the same as

```
x -> a.equals(x) || b.equals(x)
```

Table 3-2 lists the 34 available specializations for primitive types `int`, `long`, and `double`. It is a good idea to use these specializations to reduce autoboxing. For that reason, I used an `IntConsumer` instead of a `Consumer<Integer>` in the example of the preceding section.

Table 3-2 Functional Interfaces for Primitive Types

p, q is `int`, `long`, `double`; *P, Q* is `Int`, `Long`, `Double`

Functional Interface	Parameter types	Return type	Abstract method name
<code>BooleanSupplier</code>	none	<code>boolean</code>	<code>getAsBoolean</code>
<code>PSupplier</code>	none	<i>p</i>	<code>getAsP</code>
<code>PConsumer</code>	<i>p</i>	<code>void</code>	<code>accept</code>
<code>ObjPConsumer<T></code>	<code>T, p</code>	<code>void</code>	<code>accept</code>
<code>PFunction<T></code>	<i>p</i>	<code>T</code>	<code>apply</code>
<code>PToQFunction</code>	<i>p</i>	<i>q</i>	<code>applyAsQ</code>
<code>ToPFunction<T></code>	<code>T</code>	<i>p</i>	<code>applyAsP</code>
<code>ToPBiFunction<T, U></code>	<code>T, U</code>	<i>p</i>	<code>applyAsP</code>
<code>PUnaryOperator</code>	<i>p</i>	<i>p</i>	<code>applyAsP</code>
<code>PBinaryOperator</code>	<i>p, p</i>	<i>p</i>	<code>applyAsP</code>
<code>PPredicate</code>	<i>p</i>	<code>boolean</code>	<code>test</code>

3.6.3 Implementing Your Own Functional Interfaces

Ever so often, you will be in a situation where none of the standard functional interfaces work for you. Then you need to roll your own.

Suppose you want to fill an image with color patterns, where the user supplies a function yielding the color for each pixel. There is no standard type for a mapping `(int, int) -> Color`. You could use `BiFunction<Integer, Integer, Color>`, but that involves autoboxing.

In this case, it makes sense to define a new interface

```
@FunctionalInterface  
public interface PixelFunction {  
    Color apply(int x, int y);  
}
```



NOTE: It is a good idea to tag functional interfaces with the `@FunctionalInterface` annotation. This has two advantages. First, the compiler checks that the annotated entity is an interface with a single abstract method. Second, the javadoc page includes a statement that your interface is a functional interface.

Now you are ready to implement a method:

```
BufferedImage createImage(int width, int height, PixelFunction f) {  
    BufferedImage image = new BufferedImage(width, height,  
        BufferedImage.TYPE_INT_RGB);  
  
    for (int x = 0; x < width; x++) {  
        for (int y = 0; y < height; y++) {  
            Color color = f.apply(x, y);  
            image.setRGB(x, y, color.getRGB());  
        }  
    }  
    return image;  
}
```

To call it, supply a lambda expression that yields a color value for two integers:

```
BufferedImage frenchFlag = createImage(150, 100,  
    (x, y) -> x < 50 ? Color.BLUE : x < 100 ? Color.WHITE : Color.RED);
```

3.7 Lambda Expressions and Variable Scope

In the following sections, you will learn how variables work inside lambda expressions. This information is somewhat technical but essential for working with lambda expressions.

3.7.1 Scope of a Lambda Expression

The body of a lambda expression has *the same scope as a nested block*. The same rules for name conflicts and shadowing apply. It is illegal to declare a parameter or a local variable in the lambda that has the same name as a local variable.

```
int first = 0;
Comparator<String> comp = (first, second) -> first.length() - second.length();
// Error: Variable first already defined
```

Inside a method, you can't have two local variables with the same name, therefore you can't introduce such variables in a lambda expression either.

As another consequence of the “same scope” rule, the `this` keyword in a lambda expression denotes the `this` parameter of the method that creates the lambda. For example, consider

```
public class Application() {
    public void doWork() {
        Runnable runner = () -> { ...; System.out.println(this.toString()); ... };
        ...
    }
}
```

The expression `this.toString()` calls the `toString` method of the `Application` object, *not* the `Runnable` instance. There is nothing special about the use of `this` in a lambda expression. The scope of the lambda expression is nested inside the `doWork` method, and `this` has the same meaning anywhere in that method.

3.7.2 Accessing Variables from the Enclosing Scope

Often, you want to access variables from an enclosing method or class in a lambda expression. Consider this example:

```
public static void repeatMessage(String text, int count) {
    Runnable r = () -> {
        for (int i = 0; i < count; i++) {
            System.out.println(text);
        }
    };
    new Thread(r).start();
}
```

Note that the lambda expression accesses the parameter variables defined in the enclosing scope, not in the lambda expression itself.

Consider a call

```
repeatMessage("Hello", 1000); // Prints Hello 1000 times in a separate thread
```

Now look at the variables `count` and `text` inside the lambda expression. If you think about it, something nonobvious is going on here. The code of the lambda expression may run long after the call to `repeatMessage` has returned and the parameter variables are gone. How do the `text` and `count` variables stay around when the lambda expression is ready to execute?

To understand what is happening, we need to refine our understanding of a lambda expression. A lambda expression has three ingredients:

1. A block of code
2. Parameters
3. Values for the *free* variables—that is, the variables that are not parameters and not defined inside the code

In our example, the lambda expression has two free variables, `text` and `count`. The data structure representing the lambda expression must store the values for these variables—in our case, "Hello" and 1000. We say that these values have been *captured* by the lambda expression. (It's an implementation detail how that is done. For example, one can translate a lambda expression into an object with a single method, so that the values of the free variables are copied into instance variables of that object.)



NOTE: The technical term for a block of code together with the values of free variables is a *closure*. In Java, lambda expressions are closures.

As you have seen, a lambda expression can capture the value of a variable in the enclosing scope. To ensure that the captured value is well defined, there is an important restriction. In a lambda expression, you can only reference variables whose value doesn't change. This is sometimes described by saying that lambda expressions capture values, not variables. For example, the following is a compile-time error:

```
for (int i = 0; i < n; i++) {  
    new Thread(() -> System.out.println(i)).start();  
    // Error—cannot capture i  
}
```

The lambda expression tries to capture `i`, but this is not legal because `i` changes. There is no single value to capture. The rule is that a lambda

expression can only access local variables from an enclosing scope that are *effectively final*. An effectively final variable is never modified—it either is or could be declared as `final`.



NOTE: The same rule applies to variables captured by local classes (see Section 3.9, “Local and Anonymous Classes,” page 129). In the past, the rule was more draconian and required captured variables to actually be declared `final`. This is no longer the case.



NOTE: The variable of an enhanced for loop is effectively final since its scope is a single iteration. The following is perfectly legal:

```
for (String arg : args) {  
    new Thread(() -> System.out.println(arg)).start();  
    // OK to capture arg  
}
```

A new variable `arg` is created in each iteration and assigned the next value from the `args` array. In contrast, the scope of the variable `i` in the preceding example was the entire loop.

As a consequence of the “effectively final” rule, a lambda expression cannot mutate any captured variables. For example,

```
public static void repeatMessage(String text, int count, int threads) {  
    Runnable r = () -> {  
        while (count > 0) {  
            count--; // Error: Can't mutate captured variable  
            System.out.println(text);  
        }  
    };  
    for (int i = 0; i < threads; i++) new Thread(r).start();  
}
```

This is actually a good thing. As you will see in Chapter 10, if two threads update `count` at the same time, its value is undefined.



NOTE: Don’t count on the compiler to catch all concurrent access errors. The prohibition against mutation only holds for local variables. If `count` is an instance variable or static variable of an enclosing class, then no error is reported even though the result is just as undefined.



CAUTION: One can circumvent the check for inappropriate mutations by using an array of length 1:

```
int[] counter = new int[1];
button.setOnAction(event -> counter[0]++);
```

The counter variable is effectively final—it is never changed since it always refers to the same array, so you can access it in the lambda expression.

Of course, code like this is not threadsafe. Except possibly for a callback in a single-threaded UI, this is a terrible idea. You will see how to implement a threadsafe shared counter in Chapter 10.

3.8 Higher-Order Functions

In a functional programming language, functions are first-class citizens. Just like you can pass numbers to methods and have methods that produce numbers, you can have arguments and return values that are functions. Functions that process or return functions are called *higher-order functions*. This sounds abstract, but it is very useful in practice. Java is not quite a functional language because it uses functional interfaces, but the principle is the same. In the following sections, we will look at some examples and examine the higher-order functions in the Comparator interface.

3.8.1 Methods that Return Functions

Suppose sometimes we want to sort an array of strings in ascending order and other times in descending order. We can make a method that produces the correct comparator:

```
public static Comparator<String> compareInDirection(int direction) {
    return (x, y) -> direction * x.compareTo(y);
}
```

The call `compareInDirection(1)` yields an ascending comparator, and the call `compareInDirection(-1)` a descending comparator.

The result can be passed to another method (such as `Arrays.sort`) that expects such an interface.

```
Arrays.sort(friends, compareInDirection(-1));
```

In general, don't be shy to write methods that produce functions (or, technically, instances of classes that implement a functional interface). This is useful to generate custom functions that you pass to methods with functional interfaces.

3.8.2 Methods That Modify Functions

In the preceding section, you saw a method that yields an increasing or decreasing string comparator. We can generalize this idea by reversing any comparator:

```
public static Comparator<String> reverse(Comparator<String> comp) {  
    return (x, y) -> comp.compare(y, x);  
}
```

This method operates on functions. It receives a function and returns a modified function. To get case-insensitive descending order, use

```
reverse(String::compareToIgnoreCase)
```



NOTE: The `Comparator` interface has a default method `reversed` that produces the reverse of a given comparator in just this way.

3.8.3 Comparator Methods

The `Comparator` interface has a number of useful static methods that are higher-order functions generating comparators.

The `comparing` method takes a “key extractor” function that maps a type T to a comparable type (such as `String`). The function is applied to the objects to be compared, and the comparison is then made on the returned keys. For example, suppose a `Person` class has a method `getLastName`. Then you can sort an array of `Person` objects by last name like this:

```
Arrays.sort(people, Comparator.comparing(Person::getLastName));
```

You can chain comparators with the `thenComparing` method to break ties. For example, sort an array of people by last name, then use the first name for people with the same last name:

```
Arrays.sort(people, Comparator  
.comparing(Person::getLastName)  
.thenComparing(Person::getFirstName));
```

There are a few variations of these methods. You can specify a comparator to be used for the keys that the `comparing` and `thenComparing` methods extract. For example, here we sort people by the length of their names:

```
Arrays.sort(people, Comparator.comparing(Person::getLastName,  
(s, t) -> s.length() - t.length()));
```

Moreover, both the `comparing` and `thenComparing` methods have variants that avoid boxing of `int`, `long`, or `double` values. An easier way of sorting by name length would be

```
Arrays.sort(people, Comparator.comparing(p -> p.getLastName().length()));
```

If your key function can return `null`, you will like the `nullsFirst` and `nullsLast` adapters. These static methods take an existing comparator and modify it so that it doesn't throw an exception when encountering `null` values but ranks them as smaller or larger than regular values. For example, suppose `getMiddleName` returns a `null` when a person has no middle name. Then you can use `Comparator.comparing(Person::getMiddleName(), Comparator.nullsFirst(...))`.

The `nullsFirst` method needs a comparator—in this case, one that compares two strings. The `naturalOrder` method makes a comparator for any class implementing `Comparable`. Here is the complete call for sorting by potentially null middle names. I use a static import of `java.util.Comparator.*` to make the expression more legible. Note that the type for `naturalOrder` is inferred.

```
Arrays.sort(people, comparing(Person::getMiddleName,
    nullsFirst(naturalOrder())));
```

The static `reverseOrder` method gives the reverse of the natural order.

3.9 Local and Anonymous Classes

Long before there were lambda expressions, Java had a mechanism for concisely defining classes that implement an interface (functional or not). For functional interfaces, you should definitely use lambda expressions, but once in a while, you may want a concise form for an interface that isn't functional. You will also encounter the classic constructs in legacy code.

3.9.1 Local Classes

You can define a class inside a method. Such a class is called a *local class*. You would do this for classes that are just tactical. This occurs often when a class implements an interface and the caller of the method only cares about the interface, not the class.

For example, consider a method

```
public static IntSequence randomInts(int low, int high)
```

that generates an infinite sequence of random integers with the given bounds.

Since `IntSequence` is an interface, the method must return an object of some class implementing that interface. The caller doesn't care about the class, so it can be declared inside the method:

```
private static Random generator = new Random();

public static IntSequence randomInts(int low, int high) {
    class RandomSequence implements IntSequence {
        public int next() { return low + generator.nextInt(high - low + 1); }
        public boolean hasNext() { return true; }
    }
    return new RandomSequence();
}
```



NOTE: A local class is not declared as `public` or `private` since it is never accessible outside the method.

There are two advantages of making a class local. First, its name is hidden in the scope of the method. Second, the methods of the class can access variables from the enclosing scope, just like the variables of a lambda expression.

In our example, the `next` method captures three variables: `low`, `high`, and `generator`. If you turned `RandomInt` into a nested class, you would have to provide an explicit constructor that receives these values and stores them in instance variables (see Exercise 16).

3.9.2 Anonymous Classes

In the example of the preceding section, the name `RandomSequence` was used exactly once: to construct the return value. In this case, you can make the class *anonymous*:

```
public static IntSequence randomInts(int low, int high) {
    return new IntSequence() {
        public int next() { return low + generator.nextInt(high - low + 1); }
        public boolean hasNext() { return true; }
    }
}
```

The expression

```
new Interface() { methods }
```

means: Define a class implementing the interface that has the given methods, and construct one object of that class.



NOTE: As always, the `()` in the `new` expression indicate the construction arguments. A default constructor of the anonymous class is invoked.

Before Java had lambda expressions, anonymous inner classes were the most concise syntax available for providing runnables, comparators, and other functional objects. You will often see them in legacy code.

Nowadays, they are only necessary when you need to provide two or more methods, as in the preceding example. If the `IntSequence` interface has a default `hasNext` method, as in Exercise 16, you can simply use a lambda expression:

```
public static IntSequence randomInts(int low, int high) {  
    return () -> low + generator.nextInt(high - low + 1);  
}
```

Exercises

1. Provide an interface `Measurable` with a method `double getMeasure()` that measures an object in some way. Make `Employee` implement `Measurable`. Provide a method `double average(Measurable[] objects)` that computes the average measure. Use it to compute the average salary of an array of employees.
2. Continue with the preceding exercise and provide a method `Measurable largest(Measurable[] objects)`. Use it to find the name of the employee with the largest salary. Why do you need a cast?
3. What are all the supertypes of `String`? Of `Scanner`? Of `ImageOutputStream`? Note that each type is its own supertype. A class or interface without declared supertype has supertype `Object`.
4. Implement a static `of` method of the `IntSequence` class that yields a sequence with the arguments. For example, `IntSequence.of(3, 1, 4, 1, 5, 9)` yields a sequence with six values. Extra credit if you return an instance of an anonymous inner class.
5. Add a static method with the name `constant` of the `IntSequence` class that yields an infinite constant sequence. For example, `IntSequence.constant(1)` yields values `1 1 1 ...`, ad infinitum. Extra credit if you do this with a lambda expression.
6. The `SquareSequence` class doesn't actually deliver an infinite sequence of squares due to integer overflow. Specifically, how does it behave? Fix the problem by defining a `Sequence<T>` interface and a `SquareSequence` class that implements `Sequence<BigInteger>`.
7. In this exercise, you will try out what happens when a method is added to an interface. In Java 7, implement a class `DigitSequence` that implements `Iterator<Integer>`, not `IntSequence`. Provide methods `hasNext`, `next`, and a do-nothing `remove`. Write a program that prints the elements of an instance.

In Java 8, the `Iterator` class gained another method, `forEachRemaining`. Does your code still compile when you switch to Java 8? If you put your Java 7 class in a JAR file and don't recompile, does it work in Java 8? What if you call the `forEachRemaining` method? Also, the `remove` method has become a default method in Java 8, throwing an `UnsupportedOperationException`. What happens when `remove` is called on an instance of your class?

8. Implement the method `void luckySort(ArrayList<String> strings, Comparator<String> comp)` that keeps calling `Collections.shuffle` on the array list until the elements are in increasing order, as determined by the comparator.
9. Implement a class `Greeter` that implements `Runnable` and whose `run` method prints `n` copies of "Hello, " + target, where `n` and `target` are set in the constructor. Construct two instances with different messages and execute them concurrently in two threads.
10. Implement methods

```
public static void runTogether(Runnable... tasks)
public static void runInOrder(Runnable... tasks)
```

The first method should run each task in a separate thread and then return. The second method should run all methods in the current thread and return when the last one has completed.

11. Using the `listFiles(FileFilter)` and `isDirectory` methods of the `java.io.File` class, write a method that returns all subdirectories of a given directory. Use a lambda expression instead of a `FileFilter` object. Repeat with a method expression and an anonymous inner class.
12. Using the `list(FilenameFilter)` method of the `java.io.File` class, write a method that returns all files in a given directory with a given extension. Use a lambda expression, not a `FilenameFilter`. Which variable from the enclosing scope does it capture?
13. Given an array of `File` objects, sort it so that directories come before files, and within each group, elements are sorted by path name. Use a lambda expression to specify the `Comparator`.
14. Write a method that takes an array of `Runnable` instances and returns a `Runnable` whose `run` method executes them in order. Return a lambda expression.
15. Write a call to `Arrays.sort` that sorts employees by salary, breaking ties by name. Use `Comparator.thenComparing`. Then do this in reverse order.
16. Implement the `RandomSequence` in Section 3.9.1, "Local Classes" (page 129) as a nested class, outside the `randomInts` method.

Inheritance and Reflection

Topics in This Chapter

- 4.1 Extending a Class — page 136
- 4.2 Object: The Cosmic Superclass — page 145
- 4.3 Enumerations — page 154
- 4.4 Runtime Type Information and Resources — page 159
- 4.5 Reflection — page 168
- Exercises — page 177

Chapter



The preceding chapters introduced you to classes and interfaces. In this chapter, you will learn about another fundamental concept of object-oriented programming: inheritance. Inheritance is the process of creating new classes that are built on existing classes. When you inherit from an existing class, you reuse (or inherit) its methods, and you can add new methods and fields.



NOTE: Instance variables and static variables are collectively called *fields*. The fields, methods, and nested classes/interfaces inside a class are collectively called its *members*.

This chapter also covers reflection, the ability to find out more about classes and their members in a running program. Reflection is a powerful feature, but it is undeniably complex. Since reflection is of greater interest to tool builders than to application programmers, you can probably glance over that part of the chapter upon first reading and come back to it later.

The key points of this chapter are:

1. A subclass can inherit or override methods from the superclass, provided they are not private.
2. Use the `super` keyword to invoke a superclass method or constructor.
3. A `final` method cannot be overridden; a `final` class cannot be extended.

4. An abstract method has no implementation; an abstract class cannot be instantiated.
5. A protected member of a superclass is accessible in a subclass method, but only when applied to objects of the same subclass. It is also accessible in its package.
6. Every class is a subclass of `Object` which provides the `toString`, `equals`, `hashCode`, and `clone` methods.
7. Each enumerated type is a subclass of `Enum` which provides instance methods `toString` and `compareTo`, and a static `valueOf` method.
8. The `Class` class provides information about a Java type, which can be a class, array, interface, primitive type, or `void`.
9. You can use a `Class` object to load resources that are placed alongside class files.
10. You can load classes from locations other than the class path by using a class loader.
11. The `ServiceLoader` class provides a mechanism for locating and selecting service implementations.
12. The reflection library enables programs to discover members of objects, access variables, and invoke methods.
13. Proxy objects dynamically implement arbitrary interfaces, routing all method invocations to a handler.

4.1 Extending a Class

Let's return to the `Employee` class that we discussed in Chapter 2. Suppose (alas) you work for a company at which managers are treated differently from other employees. Managers are, of course, just like employees in many respects. Both employees and managers are paid a salary. However, while employees are expected to complete their assigned tasks in return for their salary, managers get bonuses if they actually achieve what they are supposed to do. This is the kind of situation that can be modeled with inheritance.

4.1.1 Super- and Subclasses

Let's define a new class, `Manager`, retaining some functionality of the `Employee` class but specifying how managers are different.

```
public class Manager extends Employee {  
    added fields  
    added or overriding methods  
}
```

The keyword `extends` indicates that you are making a new class that derives from an existing class. The existing class is called the *superclass* and the new class is called the *subclass*. In our example, the `Employee` class is the superclass and the `Manager` class is the subclass. Note that the superclass is not “superior” to its subclass. The opposite is true: Subclasses have more functionality than their superclasses. The super/sub terminology comes from set theory. The set of managers is a subset of the set of employees.

4.1.2 Defining and Inheriting Subclass Methods

Our `Manager` class has a new instance variable to store the bonus and a new method to set it:

```
public class Manager extends Employee {  
    private double bonus;  
    ...  
    public void setBonus(double bonus) {  
        this.bonus = bonus;  
    }  
}
```

When you have a `Manager` object, you can of course apply the `setBonus` method, as well as nonprivate methods from the `Employee` class. Those methods are *inherited*.

```
Manager boss = new Manager(...);  
boss.setBonus(10000); // Defined in subclass  
boss.raiseSalary(5); // Inherited from superclass
```

4.1.3 Method Overriding

Sometimes, a superclass method needs to be modified in a subclass. For example, suppose that the `getSalary` method is expected to report the total salary of an employee. Then the inherited method is not sufficient for the `Manager` class. Instead, you need to *override* the method so that it returns the sum of the base salary and the bonus.

```
public class Manager extends Employee {  
    ...  
    public double getSalary() { // Overrides superclass method  
        return super.getSalary() + bonus;  
    }  
}
```

This method invokes the superclass method, which retrieves the base salary, and adds the bonus. Note that a subclass method cannot access the private instance variables of the superclass directly. That is why the `Manager.getSalary` method calls the public `Employee.getSalary` method. The `super` keyword is used for invoking a superclass method.



NOTE: Unlike this, `super` is not a reference to an object, but a directive to bypass dynamic method lookup (see Section 4.1.5, “Superclass Assignments,” page 139) and invoke a specific method instead.

It is not required to call the superclass method when overriding a method, but it is common to do so.

When you override a method, you must be careful to match the parameter types exactly. For example, suppose that the `Employee` class has a method

```
public boolean worksFor(Employee supervisor)
```

If you override this method in the `Manager` class, you cannot change the parameter type, even though surely no manager would report to a mere employee. Suppose you defined a method

```
public class Manager extends Employee {  
    ...  
    public boolean worksFor(Manager supervisor) {  
        ...  
    }  
}
```

This is simply a new method, and now `Manager` has two separate `worksFor` methods. You can protect yourself against this type of error by tagging methods that are intended to override superclass methods with the `@Override` annotation:

```
@Override public boolean worksFor(Employee supervisor)
```

If you made a mistake and are defining a new method, the compiler reports an error.

You can change the return type to a subtype when overriding a method. (In technical terms, *covariant return types* are permitted.) For example, if the `Employee` class has a method

```
public Employee getSupervisor()
```

then the `Manager` class can override it with the method

```
@Override public Manager getSupervisor()
```



CAUTION: When you override a method, the subclass method must be *at least as accessible* as the superclass method. In particular, if the superclass method is public, then the subclass method must also be declared public. It is a common error to accidentally omit the `public` modifier for the subclass method. The compiler then complains about the weaker access privilege.

4.1.4 Subclass Construction

Let us supply a constructor for the `Manager` class. Since the `Manager` constructor cannot access the private instance variables of the `Employee` class, it must initialize them through a superclass constructor.

```
public Manager(String name, double salary) {  
    super(name, salary);  
    bonus = 0;  
}
```

Here, the keyword `super` indicates a call to the constructor of the `Employee` superclass with `name` and `salary` as arguments. The superclass constructor call must be the *first statement* in the constructor for the subclass.

If the subclass does not explicitly call any superclass constructor, the superclass must have a no-argument constructor which is implicitly called.

4.1.5 Superclass Assignments

It is legal to assign an object from a subclass to a variable whose type is a superclass, for example:

```
Manager boss = new Manager(...);  
Employee empl = boss; // OK to assign to superclass variable
```

Now consider what happens when one invokes a method on the superclass variable.

```
double salary = empl.getSalary();
```

Even though the type of `empl` is `Employee`, the `Manager.getSalary` method is invoked. When invoking a method, the virtual machine looks at the actual class of the object and locates its version of the method. This process is called *dynamic method lookup*.

Why would you want to assign a `Manager` object to an `Employee` variable? It allows you to write code that works for *all* employees, be they managers or janitors or instances of another `Employee` subclass.

```
Employee[] staff = new Employee[...];
staff[0] = new Employee(...);
staff[1] = new Manager(...); // OK to assign to superclass variable
staff[2] = new Janitor(...);
...
double sum = 0;
for (Employee empl : staff)
    sum += empl.getSalary();
```

Thanks to dynamic method lookup, the call `empl.getSalary()` invokes the `getSalary` method belonging to the object to which `empl` refers, which may be `Employee.getSalary`, `Manager.getSalary`, and so on.



CAUTION: In Java, superclass assignment also works for arrays: You can assign a `Manager[]` array to an `Employee[]` variable. (The technical term is that Java arrays are *covariant*.) This is convenient, but it is also *unsound*—that is, a possible cause of type errors. Consider this example:

```
Manager[] bosses = new Manager[10];
Employee[] empls = bosses; // Legal in Java
empls[0] = new Employee(...); // Runtime error
```

The compiler accepts the last statement since it is generally legal to store an `Employee` in an `Employee[]` array. However, here `empls` and `bosses` reference the same `Manager[]` array, which cannot hold a lowly `Employee`. This mistake is only caught at runtime, when the virtual machine throws an `ArrayStoreException`.

4.1.6 Casts

In the preceding section, you saw how a variable `empl` of type `Employee` can refer to objects whose class is `Employee`, `Manager`, or another subclass of `Employee`. That is useful for code that deals with objects from multiple classes. There is just one drawback. You can only invoke methods that belong to the superclass. Consider, for example,

```
Employee empl = new Manager(...);
empl.setBonus(10000); // Compile-time error
```

Even though this call could succeed at runtime, it is a compile-time error. The compiler checks that you only invoke methods that exist for the receiver type. Here, `empl` is of type `Employee` and that class has no `setBonus` method.

As with interfaces, you can use the `instanceof` operator and a cast to turn a superclass reference to a subclass.

```
if (empl instanceof Manager) {  
    Manager mgr = (Manager) empl;  
    mgr.setBonus(10000);  
}
```

4.1.7 Final Methods and Classes

When you declare a method as `final`, no subclass can override it.

```
public class Employee {  
    ...  
    public final String getName() {  
        return name;  
    }  
}
```

A good example of a `final` method in the Java API is the `getClass` method of the `Object` class that you will see in Section 4.4.1, “The Class Class” (page 159). It does not seem wise to allow objects to lie about the class to which they belong, so this method can never be changed.

Some programmers believe that the `final` keyword is good for efficiency. This may have been true in the early days of Java, but it no longer is. Modern virtual machines will speculatively “inline” simple methods, such as the `getName` method above, even if they are not declared `final`. In the rare case when a subclass is loaded that overrides such a method, the inlining is undone.

Some programmers believe that most methods of a class should be declared `final`, and only methods specifically designed to be overridden should not be. Others find this too draconian since it prevents even harmless overriding, for example for logging or debugging purposes.

Occasionally, you may want to prevent someone from forming a subclass from one of your classes. Use the `final` modifier in the class definition to indicate this. For example, here is how to prevent others from subclassing the `Executive` class:

```
public final class Executive extends Manager {  
    ...  
}
```

There is a good number of final classes in the Java API, such as `String`, `LocalTime`, and `URL`.

4.1.8 Abstract Methods and Classes

A class can define a method without an implementation, forcing subclasses to implement it. Such a method, and the class containing it, are called *abstract*

and must be tagged with the `abstract` modifier. This is commonly done for very general classes, for example:

```
public abstract class Person {  
    private String name;  
  
    public Person(String name) { this.name = name; }  
    public final String getName() { return name; }  
  
    public abstract int getId();  
}
```

Any class extending `Person` must either supply an implementation of the `getId` method or be itself declared as `abstract`.

Note that an abstract class can have nonabstract methods, such as the `getName` method in the preceding example.



NOTE: Unlike an interface, an abstract class can have instance variables and constructors.

It is not possible to construct an instance of an abstract class. For example, the call

```
Person p = new Person("Fred"); // Error
```

would be a compile-time error.

However, you can have a variable whose type is an abstract class, provided it contains a reference to an object of a concrete subclass. Suppose the class `Student` is declared as

```
public class Student extends Person {  
    private int id;  
  
    public Student(String name, int id) { super(name); this.id = id; }  
    public int getId() { return id; }  
}
```

Then you can construct a `Student` and assign it to a `Person` variable.

```
Person p = new Student("Fred", 1729); // OK, a concrete subclass
```

4.1.9 Protected Access

There are times when you want to restrict a method to subclasses only or, less commonly, to allow subclass methods to access an instance variable of a superclass. For that, declare a class feature as `protected`.

For example, suppose the superclass `Employee` declares the instance variable `salary` as protected instead of private.

```
package com.horstmann.employees;

public class Employee {
    protected double salary;
    ...
}
```

All classes in the same package as `Employee` can access this field. Now consider a subclass from a different package:

```
package com.horstmann.managers;

import com.horstmann.employees.Employee;

public class Manager extends Employee {
    ...
    public double getSalary() {
        return salary + bonus; // OK to access protected salary variable
    }
}
```

The `Manager` class methods can peek inside the `salary` variable of `Manager` objects only, not of other `Employee` objects. This restriction is made so that you can't abuse the protected mechanism by forming subclasses just to gain access to protected features.

Of course, protected fields should be used with caution. Once provided, you cannot take them away without breaking classes that are using them.

Protected methods and constructors are more common. For example, the `clone` method of the `Object` class is protected since it is somewhat tricky to use (see Section 4.2.4, "Cloning Objects," page 151).



CAUTION: In Java, `protected` grants package-level access, and it only protects access from other packages.

4.1.10 Anonymous Subclasses

Just as you can have an anonymous class that implements an interface, you can have an anonymous class that extends a superclass. This can be handy for debugging:

```
ArrayList<String> names = new ArrayList<String>(100) {  
    public void add(int index, String element) {  
        super.add(index, element);  
        System.out.printf("Adding %s at %d\n", element, index);  
    }  
};
```

The arguments in the parentheses following the superclass name are passed to the superclass constructor. Here, we construct an anonymous subclass of `ArrayList<String>` that overrides the `add` method. The instance is constructed with an initial capacity of 100.

A trick called *double brace initialization* uses the inner class syntax in a rather bizarre way. Suppose you want to construct an array list and pass it to a method:

```
ArrayList<String> friends = new ArrayList<>();  
friends.add("Harry");  
friends.add("Sally");  
invite(friends);
```

If you won't ever need the array list again, it would be nice to make it anonymous. But then, how can you add the elements? Here is how:

```
invite(new ArrayList<String>() {{ add("Harry"); add("Sally"); }});
```

Note the double braces. The outer braces make an anonymous subclass of `ArrayList<String>`. The inner braces are an initialization block (see Chapter 2).

I am not recommending that you use this trick outside of Java trivia contests. There are several drawbacks beyond the confusing syntax. It is inefficient, and the constructed object can behave strangely in equality tests, depending on how the `equals` method is implemented.

4.1.11 Inheritance and Default Methods

Suppose a class extends a class and implements an interface, both of which happen to have a method of the same name.

```
public interface Named {  
    default String getName() { return ""; }  
}  
  
public class Person {  
    ...  
    public String getName() { return name; }  
}  
  
public class Student extends Person implements Named {  
    ...  
}
```

In this situation, the superclass implementation always wins over the interface implementation. There is no need for the subclass to resolve the conflict.

In contrast, as you saw in Chapter 3, you must resolve a conflict when the same default method is inherited from two interfaces.

The “classes win” rule ensures compatibility with Java 7. If you add default methods to an interface, it has no effect on code that worked before there were default methods.

4.1.12 Method Expressions with super

Recall from Chapter 3 that a method expression can have the form `object::instanceMethod`. It is also valid to use `super` instead of an object reference. The method expression

```
super::instanceMethod
```

uses this as the target and invokes the superclass version of the given method. Here is an artificial example that shows the mechanics:

```
public class Worker {  
    public void work() {  
        for (int i = 0; i < 100; i++) System.out.println("Working");  
    }  
}  
  
public class ConcurrentWorker extends Worker {  
    public void work() {  
        Thread t = new Thread(super::work);  
        t.start();  
    }  
}
```

The thread is constructed with a `Runnable` whose `run` method calls the `work` method of the superclass.

4.2 Object: The Cosmic Superclass

Every class in Java directly or indirectly extends the class `Object`. When a class has no explicit superclass, it implicitly extends `Object`. For example,

```
public class Employee { ... }
```

is equivalent to

```
public class Employee extends Object { ... }
```

The `Object` class defines methods that are applicable to any Java object (see Table 4-1). We will examine several of these methods in detail in the following sections.



NOTE: Arrays are classes. Therefore, it is legal to convert an array, even a primitive type array, to a reference of type `Object`.

Table 4-1 The Methods of the `java.lang.Object` Class

Method	Description
<code>String toString()</code>	Yields a string representation of this object, by default the name of the class and the hash code.
<code>boolean equals(Object other)</code>	Returns true if this object should be considered equal to <code>other</code> , false if <code>other</code> is null or different from <code>other</code> . By default, two objects are equal if they are identical. Instead of <code>obj.equals(other)</code> , consider the null-safe alternative <code>Objects.equals(obj, other)</code> .
<code>int hashCode()</code>	Yields a hash code for this object. Equal objects must have the same hash code. Unless overridden, the hash code is assigned in some way by the virtual machine.
<code>Class<?> getClass()</code>	Yields the <code>Class</code> object describing the class to which this object belongs.
<code>protected Object clone()</code>	Makes a copy of this object. By default, the copy is shallow.
<code>protected void finalize()</code>	This method is called when this object is reclaimed by the garbage collector. Don't override it.
<code>wait, notify, notifyAll</code>	See Chapter 10.

4.2.1 The `toString` Method

An important method in the `Object` class is the `toString` method that returns a string description of an object. For example, the `toString` method of the `Point` class returns a string like this:

```
java.awt.Point[x=10,y=20]
```

Many `toString` methods follow this format: the name of the class, followed by the instance variables enclosed in square brackets. Here is such an implementation of the `toString` method of the `Employee` class:

```
public String toString() {
    return getClass().getName() + "[name=" + name
        + ",salary=" + salary + "]";
}
```

By calling `getClass().getName()` instead of hardwiring the string "Employee", this method does the right thing for subclasses as well.

In a subclass, call `super.toString()` and add the instance variables of the subclass, in a separate pair of brackets:

```
public class Manager extends Employee {
    ...
    public String toString() {
        return super.toString() + "[bonus=" + bonus + "]";
    }
}
```

Whenever an object is concatenated with a string, the Java compiler automatically invokes the `toString` method on the object. For example:

```
Point p = new Point(10, 20);
String message = "The current position is " + p;
// Concatenates with p.toString()
```



TIP: Instead of writing `x.toString()`, you can write `" " + x`. This expression even works if `x` is `null` or a primitive type value.

The `Object` class defines the `toString` method to print the class name and the hash code (see Section 4.2.3, "The `hashCode` Method," page 150). For example, the call

```
System.out.println(System.out)
```

produces an output that looks like `java.io.PrintStream@2f6684` since the implementor of the `PrintStream` class didn't bother to override the `toString` method.



CAUTION: Arrays inherit the `toString` method from `Object`, with the added twist that the array type is printed in an archaic format. For example, if you have the array

```
int[] primes = { 2, 3, 5, 7, 11, 13 };
```

then `primes.toString()` yields a string such as `"[I@1a46e30"`. The prefix `[I` denotes an array of integers.

The remedy is to call `Arrays.toString(primes)` instead, which yields the string `"[2, 3, 5, 7, 11, 13]"`. To correctly print multidimensional arrays (that is, arrays of arrays), use `Arrays.deepToString`.

4.2.2 The equals Method

The `equals` method tests whether one object is considered equal to another. The `equals` method, as implemented in the `Object` class, determines whether two object references are identical. This is a pretty reasonable default—if two objects are identical, they should certainly be equal. For quite a few classes, nothing else is required. For example, it makes little sense to compare two `Scanner` objects for equality.

Override the `equals` method only for state-based equality testing, in which two objects are considered equal when they have the same contents. For example, the `String` class overrides `equals` to check whether two strings consist of the same characters.



CAUTION: Whenever you override the `equals` method, you *must* provide a compatible `hashCode` method as well—see Section 4.2.3, “The `hashCode` Method” (page 150).

Suppose we want to consider two objects of a class `Item` equal if their descriptions and prices match. Here is how you can implement the `equals` method:

```
public class Item {  
    private String description;  
    private double price;  
    ...  
    public boolean equals(Object otherObject) {  
        // A quick test to see if the objects are identical  
        if (this == otherObject) return true;  
  
        // Must return false if the parameter is null  
        if (otherObject == null) return false;  
        // Check that otherObject is an Item  
        if (getClass() != otherObject.getClass()) return false;  
        // Test whether the instance variables have identical values  
        Item other = (Item) otherObject;  
        return Objects.equals(description, other.description)  
            && price == other.price;  
    }  
  
    public int hashCode() { ... } // See Section 4.2.3  
}
```

There are a number of routine steps that you need to go through in an `equals` method:

1. It is common for equal objects to be identical, and that test is very inexpensive.

2. Every `equals` method is required to return `false` when comparing against `null`.
3. Since the `equals` method overrides `Object.equals`, its parameter is of type `Object`, and you need to cast it to the actual type so you can look at its instance variables. Before doing that, make a type check, either with the `getClass` method or with the `instanceof` operator.
4. Finally, compare the instance variables. Use `==` for primitive types. However, for `double` values, if you are concerned about $\pm\infty$ or `NaN`, use `Double.equals`. For objects, use `Objects.equals`, a null-safe version of the `equals` method. The call `Objects.equals(x, y)` returns `false` if `x` is `null`, whereas `x.equals(y)` would throw an exception.



TIP: If you have instance variables that are arrays, use the static `Arrays.equals` method to check that the arrays have equal length and the corresponding array elements are equal.

When you define the `equals` method for a subclass, first call `equals` on the superclass. If that test doesn't pass, the objects can't be equal. If the instance variables of the superclass are equal, then you are ready to compare the instance variables of the subclass.

```
public class DiscountedItem extends Item {  
    private double discount;  
    ...  
    public boolean equals(Object otherObject) {  
        if (!super.equals(otherObject)) return false;  
        DiscountedItem other = (DiscountedItem) otherObject;  
        return discount == other.discount;  
    }  
    public int hashCode() { ... }  
}
```

Note that the `getClass` test in the superclass fails if `otherObject` is not a `DiscountedItem`.

How should the `equals` method behave when comparing values that belong to different classes? This has been an area of some controversy. In the preceding example, the `equals` method returns `false` if the classes don't match exactly. But many programmers use an `instanceof` test instead:

```
if (!(otherObject instanceof Item)) return false;
```

This leaves open the possibility that `otherObject` can belong to a subclass. For example, you can compare an `Item` with a `DiscountedItem`.

However, that kind of comparison doesn't usually work. One of the requirements of the `equals` method is that it is *symmetric*: For non-null `x` and `y`, the calls `x.equals(y)` and `y.equals(x)` need to return the same value.

Now suppose `x` is an `Item` and `y` a `DiscountedItem`. Since `x.equals(y)` doesn't consider discounts, neither can `y.equals(x)`.



NOTE: The Java API contains over 150 implementations of `equals` methods, with a mixture of `instanceof` tests, calling `getClass`, catching a `ClassCastException`, or doing nothing at all. Check out the documentation of the `java.sql.Timestamp` class, where the implementors note with some embarrassment that the `Timestamp` class inherits from `java.util.Date`, whose `equals` method uses an `instanceof` test, and it is therefore impossible to override `equals` to be both symmetric and accurate.

There is one situation where the `instanceof` test makes sense: if the notion of equality is fixed in the superclass and never varies in a subclass. For example, this is the case if we compare employees by ID. In that case, make an `instanceof` test and declare the `equals` method as `final`.

```
public class Employee {  
    private int id;  
    ...  
    public final boolean equals(Object otherObject) {  
        if (this == otherObject) return true;  
        if (!(otherObject instanceof Employee)) return false;  
        Employee other = (Employee) otherObject;  
        return id == other.id;  
    }  
    public int hashCode() { ... }  
}
```

4.2.3 The `hashCode` Method

A *hash code* is an integer that is derived from an object. Hash codes should be scrambled—if `x` and `y` are two unequal objects, there should be a high probability that `x.hashCode()` and `y.hashCode()` are different. For example, `"Mary".hashCode()` is 2390779, and `"Myra".hashCode()` is 2413819.

The `String` class uses the following algorithm to compute the hash code:

```
int hash = 0;  
for (int i = 0; i < length(); i++)  
    hash = 31 * hash + charAt(i);
```

The `hashCode` and `equals` methods must be *compatible*: If `x.equals(y)`, then it must be the case that `x.hashCode() == y.hashCode()`. As you can see, this is the case for the `String` class since strings with equal characters produce the same hash code.

The `Object.hashCode` method derives the hash code in some implementation-dependent way. It can be derived from the object's memory location, or a number (sequential or pseudorandom) that is cached with the object, or a combination of both. Since `Object.equals` tests for identical objects, the only thing that matters is that identical objects have the same hash code.

If you redefine the `equals` method, you will also need to redefine the `hashCode` method to be compatible with `equals`. If you don't, and users of your class insert objects into a hash set or hash map, they might get lost!

In your `hashCode` method, simply combine the hash codes of the instance variables. For example, here is a `hashCode` method for the `Item` class:

```
class Item {  
    ...  
    public int hashCode() {  
        return Objects.hash(description, price);  
    }  
}
```

The `Objects.hash` varargs method computes the hash codes of its arguments and combines them. The method is null-safe.

If your class has instance variables that are arrays, compute their hash codes first with the static `Arrays.hashCode` method, which computes a hash code composed of the hash codes of the array elements. Pass the result to `Objects.hash`.



CAUTION: In an interface, you can never make a default method that redefines one of the methods in the `Object` class. In particular, an interface can't define a default method for `toString`, `equals`, or `hashCode`. As a consequence of the "classes win" rule (see Section 4.1.11, "Inheritance and Default Methods," page 144), such a method could never win against `Object.toString`, `Object.equals`, or `Object.hashCode`.

4.2.4 Cloning Objects

You have just seen the "big three" methods of the `Object` class that are commonly overridden: `toString`, `equals`, and `hashCode`. In this section, you will learn how to override the `clone` method. As you will see, this is complex, and it is also rarely necessary. Don't override `clone` unless you have a good reason to do so. Less than five percent of the classes in the standard Java library implement `clone`.

The purpose of the `clone` method is to make a “clone” of an object—a distinct object with the same state of the original. If you mutate one of the objects, the other stays unchanged.

```
Employee cloneOfFred = fred.clone();
cloneOfFred.raiseSalary(10); // fred unchanged
```

The `clone` method is declared as `protected` in the `Object` class, so you must override it if you want users of your class to clone instances.

The `Object.clone` method makes a *shallow copy*. It simply copies all instance variables from the original to the cloned object. That is fine if the variables are primitive or immutable. But if they aren’t, then the original and the clone share mutable state, which can be a problem.

Consider a class for email messages that has a list of recipients.

```
public final class Message {
    private String sender;
    private ArrayList<String> recipients;
    private String text;
    ...
    public void addRecipient(String recipient) { ... };
}
```

If you make a shallow copy of a `Message` object, both the original and the clone share the `recipients` list (see Figure 4-1):

```
Message specialOffer = ...;
Message cloneOfSpecialOffer = specialOffer.clone();
```

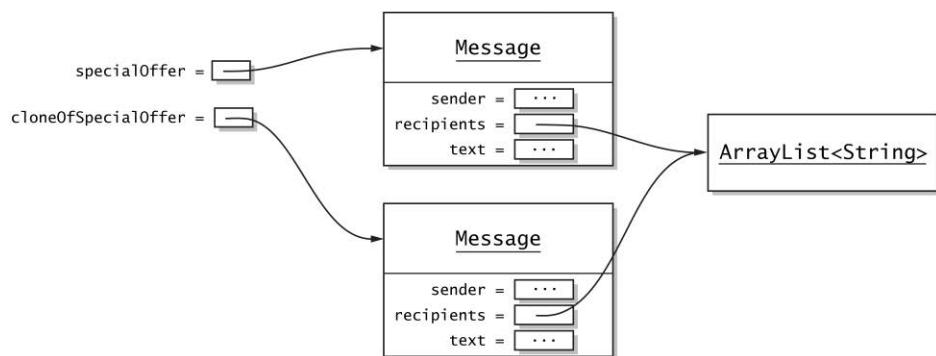


Figure 4-1 A shallow copy of an object

If either object changes the recipient list, the change is reflected in the other. Therefore, the `Message` class needs to override the `clone` method to make a *deep copy*.

It may also be that cloning is impossible or not worth the trouble. For example, it would be very challenging to clone a `Scanner` object.

In general, when you implement a class, you need to decide whether

1. You do not want to provide a `clone` method, or
2. The inherited `clone` method is acceptable, or
3. The `clone` method should make a deep copy.

For the first option, simply do nothing. Your class will inherit the `clone` method, but no user of your class will be able to call it since it is protected.

To choose the second option, your class must implement the `Cloneable` interface. This is an interface without any methods, called a *tagging* or *marker* interface. (Recall that the `clone` method is defined in the `Object` class.) The `Object.clone` method checks that this interface is implemented before making a shallow copy, and throws a `CloneNotSupportedException` otherwise.

You will also want to raise the scope of `clone` from `protected` to `public`, and change the return type.

Finally, you need to deal with the `CloneNotSupportedException`. This is a *checked* exception, and as you will see in Chapter 5, you must either declare or catch it. If your class is `final`, you can catch it. Otherwise, declare the exception since it is possible that a subclass might again want to throw it.

```
public class Employee implements Cloneable {  
    ...  
    public Employee clone() throws CloneNotSupportedException {  
        return (Employee) super.clone();  
    }  
}
```

The cast (`Employee`) is necessary since the return type of `Object.clone` is `Object`.

The third option for implementing the `clone` method, in which a class needs to make a deep copy, is the most complex case. You don't need to use the `Object.clone` method at all. Here is a simple implementation of `Message.clone`:

```
public Message clone() {  
    Message cloned = new Message(sender, text);  
    cloned.recipients = new ArrayList<>(recipients);  
    return cloned;  
}
```

Alternatively, you can call `clone` on the superclass and the mutable instance variables.

The `ArrayList` class implements the `clone` method, yielding a shallow copy. That is, the original and cloned list share the element references. That is fine in our case since the elements are strings. If not, we would have had to clone each element as well.

However, for historical reasons, the `ArrayList.clone` method has return type `Object`. You need to use a cast.

```
cloned.recipients = (ArrayList<String>) recipients.clone(); // Warning
```

Unhappily, as you will see in Chapter 6, that cast cannot be fully checked at runtime, and you will get a warning. You can suppress the warning with an annotation, but that annotation can only be attached to a declaration (see Chapter 12). Here is the complete method implementation:

```
public Message clone() {
    try {
        Message cloned = (Message) super.clone();
        @SuppressWarnings("unchecked") ArrayList<String> clonedRecipients
            = (ArrayList<String>) recipients.clone();
        cloned.recipients = clonedRecipients;
        return cloned;
    } catch (CloneNotSupportedException ex) {
        return null; // Can't happen
    }
}
```

In this case, the `CloneNotSupportedException` cannot happen since the `Message` class is `Cloneable` and `final`, and `ArrayList.clone` does not throw the exception.



NOTE: Arrays have a public `clone` method whose return type is the same as the type of the array. For example, if `recipients` had been an array, not an array list, you could have cloned it as

```
cloned.recipients = recipients.clone(); // No cast required
```

4.3 Enumerations

You saw in Chapter 1 how to define enumerated types. Here is a typical example, defining a type with exactly four instances:

```
public enum Size { SMALL, MEDIUM, LARGE, EXTRA_LARGE };
```

In the following sections, you will see how to work with enumerations.

4.3.1 Methods of Enumerations

Since each instance of an enumerated type is unique, you never need to use the `equals` method for values of enumerated types. Simply use `==` to compare them. (You can, if you like, call `equals` which makes the `==` test.)

You also don't need to provide a `toString` method. It is automatically provided to yield the name of the enumerated object—in our example, "SMALL", "MEDIUM", and so on.

The converse of `toString` is the static `valueOf` method that is synthesized for each enumerated type. For example, the statement

```
Size notMySize = Size.valueOf("SMALL");
```

sets `notMySize` to `Size.SMALL`. The `valueOf` method throws an exception if there is no instance with the given name.

Each enumerated type has a static `values` method that returns an array of all instances of the enumeration, in the order in which they were declared. The call

```
Size[] allValues = Size.values();
```

returns the array with elements `Size.SMALL`, `Size.MEDIUM`, and so on.



TIP: Use this method to traverse all instances of an enumerated type in an enhanced `for` loop:

```
for (Size s : Size.values()) { System.out.println(s); }
```

The `ordinal` method yields the position of an instance in the `enum` declaration, counting from zero. For example, `Size.MEDIUM.ordinal()` returns 1. Of course, you need to be careful with this method. The values shift if new constants are inserted.

Every enumerated type `E` automatically implements `Comparable<E>`, allowing comparisons only against its own objects. The comparison is by ordinal values.



NOTE: Technically, an enumerated type `E` extends the class `Enum<E>` from which it inherits the `compareTo` method as well as the other methods described in this section. Table 4-2 shows the methods of the `Enum` class.

Table 4-2 Methods of the `java.lang.Enum<E>` Class

Method	Description
<code>String toString()</code>	The name of this instance, as provided in the <code>enum</code> declaration. The <code>name</code> method is final.
<code>int ordinal()</code>	The position of this instance in the <code>enum</code> declaration.
<code>int compareTo(Enum<E> other)</code>	Compares this instance against <code>other</code> by ordinal value.
<code>static T valueOf(Class<T> type, String name)</code>	Returns the instance for a given name. Consider using the synthesized <code>valueOf</code> or <code>values</code> method of the enumeration type instead.
<code>Class<E> getDeclaringClass()</code>	Gets the class in which this instance was defined. (This differs from <code>getClass()</code> if the instance has a body.)
<code>int hashCode()</code> <code>protected void finalize()</code>	These methods call the corresponding <code>Object</code> methods and are final.
<code>protected Object clone()</code>	Throws a <code>CloneNotSupportedException</code> .

4.3.2 Constructors, Methods, and Fields

You can, if you like, add constructors, methods, and fields to an enumerated type. Here is an example:

```
public enum Size {
    SMALL("S"), MEDIUM("M"), LARGE("L"), EXTRA_LARGE("XL");

    private String abbreviation;

    Size(String abbreviation) {
        this.abbreviation = abbreviation;
    }

    public String getAbbreviation() { return abbreviation; }
}
```

Each instance of the enumeration is guaranteed to be constructed exactly once.



NOTE: The constructor of an enumeration is always private. You can omit the `private` modifier, as in the preceding example. It is a syntax error to declare an enum constructor as `public` or `protected`.

4.3.3 Bodies of Instances

You can add methods to each individual `enum` instance, but they have to override methods defined in the enumeration. For example, to implement a calculator, you might do this:

```
public enum Operation {  
    ADD {  
        public int eval(int arg1, int arg2) { return arg1 + arg2; }  
    },  
    SUBTRACT {  
        public int eval(int arg1, int arg2) { return arg1 - arg2; }  
    },  
    MULTIPLY {  
        public int eval(int arg1, int arg2) { return arg1 * arg2; }  
    },  
    DIVIDE {  
        public int eval(int arg1, int arg2) { return arg1 / arg2; }  
    };  
  
    public abstract int eval(int arg1, int arg2);  
}
```

In the loop of a calculator program, one would set a variable to one of these values, depending on user input, and then invoke `eval`:

```
Operation op = ...;  
int result = op.eval(first, second);
```



NOTE: Technically, each of these constants belongs to an anonymous subclass of `Operation`. Anything that you could place into an anonymous subclass body you can also add into the body of a member.

4.3.4 Static Members

It is legal for an enumeration to have static members. However, you have to be careful with construction order. The enumerated constants are constructed *before* the static members, so you cannot refer to any static members in an enumeration constructor. For example, the following would be illegal:

```
public enum Modifier {  
    PUBLIC, PRIVATE, PROTECTED, STATIC, FINAL, ABSTRACT;  
    private static int maskBit = 1;  
    private int mask;  
    Modifier() {  
        mask = maskBit; // Error—cannot access static variable in constructor  
        maskBit *= 2;  
    }  
    ...  
}
```

The remedy is to do the initialization in a static initializer:

```
public enum Modifier {  
    PUBLIC, PRIVATE, PROTECTED, STATIC, FINAL, ABSTRACT;  
    private int mask;  
  
    static {  
        int maskBit = 1;  
        for (Modifier m : Modifier.values()) {  
            m.mask = maskBit;  
            maskBit *= 2;  
        }  
    }  
    ...  
}
```

Once the constants have been constructed, static variable initializations and static initializers run in the usual top-to-bottom fashion.



NOTE: Enumerated types can be nested inside classes. Such nested enumerations are implicitly static nested classes—that is, their methods cannot reference instance variables of the enclosing class.

4.3.5 Switching on an Enumeration

You can use enumeration constants in a switch statement.

```
enum Operation { ADD, SUBTRACT, MULTIPLY, DIVIDE };  
  
public static int eval(Operation op, int arg1, int arg2) {  
    int result = 0;  
    switch (op) {  
        case ADD: result = arg1 + arg2; break;  
        case SUBTRACT: result = arg1 - arg2; break;  
        case MULTIPLY: result = arg1 * arg2; break;  
        case DIVIDE: result = arg1 / arg2; break;  
    }  
    return result;  
}
```

You use ADD, not Operation.ADD, inside the switch statement—the type is inferred from the type of the expression on which the switch is computed.



NOTE: According to the language specification, compilers are encouraged to give a warning if a switch on an enumeration is not exhaustive—that is, if there aren't cases for all constants and no default clause. The Oracle compiler does not produce such a warning.



TIP: If you want to refer to the instances of an enumeration by their simple name outside a switch, use a static import declaration. For example, with the declaration

```
import static com.horstmann.corejava.Size.*;
```

you can use SMALL instead of Size.SMALL.

4.4 Runtime Type Information and Resources

In Java, you can find out at runtime to which class a given object belongs. This is sometimes useful, for example in the implementation of the equals and `toString` methods. Moreover, you can find out how the class was loaded and load its associated data, called *resources*.

4.4.1 The Class Class

Suppose you have a variable of type `Object`, filled with some object reference, and you want to know more about the object, such as to which class it belongs.

The `getClass` method yields an object of a class called, not surprisingly, `Class`.

```
Object obj = ...;  
Class<?> cl = obj.getClass();
```



NOTE: See Chapter 6 for an explanation of the `<?>` suffix. For now, just ignore it. But don't omit it. If you do, not only does your IDE give you an unsightly warning, but you also turn off useful type checks in expressions involving the variable.

Once you have a `Class` object, you can find out the class name:

```
System.out.println("This object is an instance of " + cl.getName());
```

Alternatively, you can get a `Class` object by using the static `Class.forName` method:

```
String className = "java.util.Scanner";
Class<?> cl = Class.forName(className);
// An object describing the java.util.Scanner class
```



CAUTION: The `Class.forName` method, as well as many other methods used with reflection, throws checked exceptions when something goes wrong (for example, when there is no class with the given name). For now, tag the calling method with `throws ReflectiveOperationException`. You will see in Chapter 5 how to handle the exception.

The `Class.forName` method is intended for constructing `Class` objects for classes that may not be known at compile time. If you know in advance which class you want, use a *class literal* instead:

```
Class<?> cl = java.util.Scanner.class;
```

The `.class` suffix can be used to get information about other types as well:

```
Class<?> cl2 = String[].class; // Describes the array type String[]
Class<?> cl3 = Runnable.class; // Describes the Runnable interface
Class<?> cl4 = int.class; // Describes the int type
Class<?> cl5 = void.class; // Describes the void type
```

Arrays are classes in Java, but interfaces, primitive types, and `void` are not. The name `Class` is a bit unfortunate—`Type` would have been more accurate.



CAUTION: The `getName` method returns strange names for array types:

- `String[].class.getName()` returns "[Ljava.lang.String;"
- `int[].class.getName()` returns "[I"

This notation has been used since archaic times in the virtual machine. Use `getCanonicalName` instead to get names such as "`java.lang.String[]`" and "`int[]`". You need to use the archaic notation with the `Class.forName` method if you want to generate `Class` objects for arrays.

The virtual machine manages a unique `Class` object for each type. Therefore, you can use the `==` operator to compare `Class` objects. For example:

```
if (other.getClass() == Employee.class) ...
```

You have already seen this use of `Class` objects in Section 4.2.2, “The `equals` Method” (page 148).

In the following sections, you will see what you can do with `Class` objects. See Table 4-3 for a summary of useful methods.

Table 4-3 Useful Methods of the `java.lang.Class<T>` Class

Method	Description
<code>static Class<?> forName(String className)</code>	Gets the <code>Class</code> object describing <code>className</code> .
<code>String getCanonicalName()</code> <code>String getSimpleName()</code> <code>String getTypeName()</code> <code>String getName()</code> <code>String toString()</code> <code>String toGenericString()</code>	Gets the name of this class, with various idiosyncrasies for arrays, inner classes, generic classes, and modifiers (see Exercise 8).
<code>Class<? super T> getSuperclass()</code> <code>Class<?>[] getInterfaces()</code> <code>Package getPackage()</code> <code>int getModifiers()</code>	Gets the superclass, the implemented interfaces, package, and modifiers of this class. Table 4-4 shows how to analyze the value returned by <code>getModifiers</code> .
<code>boolean isPrimitive()</code> <code>boolean isArray()</code> <code>boolean isEnum()</code> <code>boolean isAnnotation()</code> <code>boolean isMemberClass()</code> <code>boolean isLocalClass()</code> <code>boolean isAnonymousClass()</code> <code>boolean isSynthetic()</code>	Tests whether the represented type is primitive or <code>void</code> , an array, an enumeration, an annotation (see Chapter 12), nested in another class, local to a method or constructor, anonymous, or synthetic (see Section 4.5.7).
<code>Class<?> getComponentType()</code> <code>Class<?> getDeclaringClass()</code> <code>Class<?> getEnclosingClass()</code> <code>Constructor getEnclosingConstructor()</code> <code>Method getEnclosingMethod()</code>	Gets the component type of an array, the class declaring a nested class, the class and constructor or method in which a local class is declared.
<code>boolean isAssignableFrom(Class<?> cls)</code> <code>boolean isInstance(Object obj)</code>	Tests whether the type <code>cls</code> or the class of <code>obj</code> is a subtype of this type.
<code>String getPackageName()</code>	Gets the fully qualified package name of this class or, if it is not a top-level class, its enclosing class.
<code>ClassLoader getClassLoader()</code>	Gets the class loader that loaded this class (see Section 4.4.3).
<code>InputStream getResourceAsStream(String path)</code> <code>URL getResource(String path)</code>	Loads the requested resource from the same location from which this class was loaded.

(Continues)

Table 4-3 Useful Methods of the `java.lang.Class<T>` Class (Continued)

Method	Description
<code>Field[] getFields()</code> <code>Method[] getMethods()</code> <code>Field getField(String name)</code> <code>Method getMethod(String name,</code> <code>Class<?>... parameterTypes)</code>	Gets all public fields or methods, or the specified field or method, from this class or a superclass.
<code>Field[] getDeclaredFields()</code> <code>Method[] getDeclaredMethods()</code> <code>Field getDeclaredField(String name)</code> <code>Method getDeclaredMethod(String name,</code> <code>Class<?>... parameterTypes)</code>	Gets all fields or methods, or the specified field or method, from this class.
<code>Constructor[] getConstructors()</code> <code>Constructor[] getDeclaredConstructors()</code> <code>Constructor getConstructor(Class<?>... parameterTypes)</code> <code>Constructor getDeclaredConstructor(Class<?>... parameterTypes)</code>	Gets all public constructors, or all constructors, or the specified public constructor, or the specified constructor, for this class.

Table 4-4 Methods of the `java.lang.reflect.Modifier` Class

Method	Description
<code>static String toString(int modifiers)</code>	Returns a string with the modifiers that correspond to the bits set in <code>modifiers</code> .
<code>static boolean is(Abstract Interface Native Private Protected Public Static Strict Synchronized Volatile)(int modifiers)</code>	Tests the bit in the <code>modifiers</code> argument that corresponds to the modifier in the method name.

4.4.2 Loading Resources

One useful service of the `Class` class is to locate resources that your program may need, such as configuration files or images. If you place a resource into the same directory as the class file, you can open an input stream to the file like this:

```
InputStream stream = MyClass.class.getResourceAsStream("config.txt");
Scanner in = new Scanner(stream);
```



NOTE: Some legacy methods such as `Applet.getAudioClip` and the `javax.swing.ImageIcon` constructor read data from a `URL` object. In that case, you can use the `getResource` method which returns a `URL` to the resource.

Resources can have subdirectories which can be relative or absolute. For example, `MyClass.class.getResourceAsStream("/config/menus.txt")` locates `config/menus.txt` in the directory that contains the root of the package to which `MyClass` belongs.

If you package classes into JAR files, zip up the resources together with the class files, and they will be located as well.

4.4.3 Class Loaders

Virtual machine instructions are stored in class files. Each class file contains the instructions for a single class or interface. A class file can be located on a file system, in a JAR file, at a remote location, or it can even be dynamically constructed in memory. A *class loader* is responsible for loading the bytes and turning them into a class or interface in the virtual machine.

The virtual machine loads class files on demand, starting with the class whose `main` method is to be invoked. That class will depend on other classes, such as `java.lang.System` and `java.util.Scanner`, which will be loaded together with the classes that they depend on.

When executing a Java program, at least three class loaders are involved.

The *bootstrap class loader* loads the most fundamental Java library classes. It is a part of the virtual machine.

The *platform class loader* loads other library classes. Unlike the classes loaded with the bootstrap class loader, platform class permissions can be configured with a security policy.

The *system class loader* loads the application classes. It locates classes in the directories and JAR files on the class path and module path.



CAUTION: In previous releases of the Oracle JDK, the platform and system class loaders were instances of the `URLClassLoader` class. This is no longer the case. Some programmers used the `getURLs` method of the `URLClassLoader` to find the class path. Use `System.getProperty("java.class.path")` instead.

You can load classes from a directory or JAR file that is not already on the class path, by creating your own `URLClassLoader` instance. This is commonly done to load plugins.

```
URL[] urls = {
    new URL("file:///path/to/directory/"),
    new URL("file:///path/to/jarfile.jar")
};

String className = "com.mycompany.plugins.Entry";
try (URLClassLoader loader = new URLClassLoader(urls)) {
    Class<?> cl = Class.forName(className, true, loader);
    // Now construct an instance of cl—see Section 4.5.4
    ...
}
```



CAUTION: The second parameter in the call `Class.forName(className, true, loader)` ensures that the static initialization of the class happens after loading. You definitely want that to happen.

Do not use the `ClassLoader.loadClass` method. It does not run the static initializers.



NOTE: The `URLClassLoader` loads classes from the file system. If you want to load a class from somewhere else, you need to write your own class loader. The only method you need to implement is `findClass`, like this:

```
public class MyClassLoader extends ClassLoader {
    ...
    @Override public Class<?> findClass(String name)
        throws ClassNotFoundException {
        byte[] bytes = the bytes of the class file
        return defineClass(name, bytes, 0, bytes.length);
    }
}
```

See Chapter 14 for an example in which classes are compiled into memory and then loaded.

4.4.4 The Context Class Loader

Most of the time you don't have to worry about the class loading process. Classes are transparently loaded as they are required by other classes. However, if a method loads classes dynamically, and that method is called from

a class that itself was loaded with another class loader, then problems can arise. Here is a specific example.

1. You provide a utility class that is loaded by the system class loader, and it has a method

```
public class Util {  
    Object createInstance(String className) {  
        Class<?> cl = Class.forName(className);  
        ...  
    }  
    ...  
}
```

2. You load a plugin with another class loader that reads classes from a plugin JAR.
3. The plugin calls `Util.createInstance("com.mycompany.plugins.MyClass")` to instantiate a class in the plugin JAR.

The author of the plugin expects that class to be loaded. However, `Util.createInstance` uses its own class loader to execute `Class.forName`, and that class loader won't look into the plugin JAR. This phenomenon is called *classloader inversion*.

One remedy is to pass the class loader to the utility method and then to the `forName` method.

```
public class Util {  
    public Object createInstance(String className, ClassLoader loader) {  
        Class<?> cl = Class.forName(className, true, loader);  
        ...  
    }  
    ...  
}
```

Another strategy is to use the *context class loader* of the current thread. The main thread's context class loader is the system class loader. When a new thread is created, its context class loader is set to the creating thread's context class loader. Thus, if you don't do anything, all threads will have their context class loaders set to the system class loader. However, you can set any class loader by calling

```
Thread t = Thread.currentThread();  
t.setContextClassLoader(loader);
```

The utility method can then retrieve the context class loader:

```
public class Util {  
    public Object createInstance(String className) {  
        Thread t = Thread.currentThread();  
        ClassLoader loader = t.getContextClassLoader();  
        Class<?> cl = Class.forName(className, true, loader);  
        ...  
    }  
    ...  
}
```

When invoking a method of a plugin class, the application should set the context class loader to the plugin class loader. Afterwards, it should restore the previous setting.



TIP: If you write a method that loads a class by name, don't simply use the class loader of the method's class. It is a good idea to offer the caller the choice between passing an explicit class loader and using the context class loader.

4.4.5 Service Loaders

Certain services need to be configurable when a program is assembled or deployed. One way to do this is to make different implementations of a service available, and have the program choose the most appropriate one among them. The `ServiceLoader` class makes it easy to load service implementations that conform to a common interface.

Define an interface (or, if you prefer, a superclass) with the methods that each instance of the service should provide. For example, suppose your service provides encryption.

```
package com.corejava.crypt;  
  
public interface Cipher {  
    byte[] encrypt(byte[] source, byte[] key);  
    byte[] decrypt(byte[] source, byte[] key);  
    int strength();  
}
```

The service provider supplies one or more classes that implement this service, for example

```
package com.corejava.crypt.impl;

public class CaesarCipher implements Cipher {
    public byte[] encrypt(byte[] source, byte[] key) {
        byte[] result = new byte[source.length];
        for (int i = 0; i < source.length; i++)
            result[i] = (byte)(source[i] + key[0]);
        return result;
    }
    public byte[] decrypt(byte[] source, byte[] key) {
        return encrypt(source, new byte[] { (byte) -key[0] });
    }
    public int strength() { return 1; }
}
```

The implementing classes can be in any package, not necessarily the same package as the service interface. Each of them must have a no-argument constructor.

Now add the names of the provider classes to a UTF-8 encoded text file in a `META-INF/services` directory that a class loader can find. In our example, the file `META-INF/services/com.corejava.crypt.Cipher` would contain the line

```
com.corejava.crypt.impl.CaesarCipher
```

With this preparation done, the program initializes a service loader as follows:

```
public static ServiceLoader<Cipher> cipherLoader = ServiceLoader.load(Cipher.class);
```

This should be done just once in the program.

The `iterator` method of the service loader provides an iterator through all provided implementations of the service. (See Chapter 7 for more information about iterators.) It is easiest to use an enhanced `for` loop to traverse them. In the loop, pick an appropriate object to carry out the service.

```
public static Cipher getCipher(int minStrength) {
    for (Cipher cipher : cipherLoader) // Implicitly calls iterator
        if (cipher.strength() >= minStrength) return cipher;
    return null;
}
```

Alternatively, you can use streams (see Chapter 8) to locate the desired service. The `stream` method yields a stream of `ServiceLoader.Provider` instances. That interface has methods `type` and `get` for getting the provider class and the provider instance. If you select a provider by type, then you just call `type` and no service instances are unnecessarily instantiated. In our example, we need to get the providers since we filter the stream for ciphers that have the required strength:

```
public static Optional<Cipher> getCipher2(int minStrength) {  
    return cipherLoader.stream()  
        .map(ServiceLoader.Provider::get)  
        .filter(c -> c.strength() >= minStrength)  
        .findFirst();  
}
```

If you are willing to take any implementation, simply call `findFirst`:

```
Optional<Cipher> cipher = cipherLoader.findFirst();
```

The `Optional` class is explained in Chapter 8.

4.5 Reflection

Reflection allows a program to inspect the contents of objects at runtime and to invoke arbitrary methods on them. This capability is useful for implementing tools such as object-relational mappers or GUI builders.

Since reflection is of interest mainly to tool builders, application programmers can safely skip this section and return to it as needed.

4.5.1 Enumerating Class Members

The three classes `Field`, `Method`, and `Constructor` in the `java.lang.reflect` package describe the fields, methods, and constructors of a class. All three classes have a method called `getName` that returns the name of the member. The `Field` class has a method `getType` that returns an object, again of type `Class`, that describes the field type. The `Method` and `Constructor` classes have methods to report the types of the parameters, and the `Method` class also reports the return type.

All three of these classes also have a method called `getModifiers` that returns an integer, with various bits turned on and off, that describes the modifiers used (such as `public` or `static`). You can use static methods such as `Modifier.isPublic` and `Modifier.isStatic` to analyze the integer that `getModifiers` returns. The `Modifier.toString` returns a string of all modifiers.

The `getFields`, `getMethods`, and `getConstructors` methods of the `Class` class return arrays of the *public* fields, methods, and constructors that the class supports; this includes public inherited members. The `getDeclaredFields`, `getDeclaredMethods`, and `getDeclaredConstructors` methods return arrays consisting of all fields, methods, and constructors that are declared in the class. This includes private, package, and protected members, but not members of superclasses.

The `getParameters` method of the `Executable` class, the common superclass of `Method` and `Constructor`, returns an array of `Parameter` objects describing the method parameters.



NOTE: The names of the parameters are only available at runtime if the class has been compiled with the `-parameters` flag.

For example, here is how you can print all methods of a class:

```
Class<?> cl = Class.forName(className);
while (cl != null) {
    for (Method m : cl.getDeclaredMethods()) {
        System.out.println(
            Modifier.toString(m.getModifiers()) + " " +
            m.getReturnType().getCanonicalName() + " " +
            m.getName() +
            Arrays.toString(m.getParameters()));
    }
    cl = cl.getSuperclass();
}
```

What is remarkable about this code is that it can analyze any class that the Java virtual machine can load—not just the classes that were available when the program was compiled.



CAUTION: As you will see in Chapter 15, the Java platform module system imposes significant restrictions on reflective access. By default, only classes in the same module can be analyzed through reflection. If you don't declare modules, all your classes belong to a single module, and they can all be accessed through reflection. However, the Java library classes belong to different modules, and reflective access to their non-public members is restricted.

4.5.2 Inspecting Objects

As you saw in the preceding section, you can get `Field` objects that describe the types and names of an object's fields. These `Field` objects can do more: They can access field values in objects that have the given field.

For example, here is how to enumerate the contents of all fields of an object:

```
Object obj = ...;
for (Field f : obj.getClass().getDeclaredFields()) {
    f.setAccessible(true);
    Object value = f.get(obj);
    System.out.println(f.getName() + ":" + value);
}
```

The key is the `get` method that reads the field value. If the field value is a primitive type value, a wrapper object is returned; in that case you can also call one of the methods `getInt`, `getDouble`, and so on.



NOTE: You must make private `Field` and `Method` objects “accessible” before you can use them. Calling `setAccessible(true)` “unlocks” the field or method for reflection. However, the module system or a security manager can block the request and protect objects from being accessed in this way. In that case, the `setAccessible` method throws an `InaccessibleObjectException` or `SecurityException`. Alternatively, you can call the `trySetAccessible` method which simply returns `false` if the field or method is not accessible.



CAUTION: As you will see in Chapter 15, the Java platform packages are contained in modules and their classes are protected from reflection. For example, if you call

```
Field f = String.class.getDeclaredField("value");
f.setAccessible(true);
```

an `InaccessibleObjectException` is thrown.

Once a field is accessible, you can also set it. This code will give a raise to `obj`, no matter to which class it belongs, provided that it has an accessible `salary` field of type `double` or `Double`.

```
Field f = obj.getClass().getDeclaredField("salary");
f.setAccessible(true);
double value = f.getDouble(obj);
f.setDouble(obj, value * 1.1);
```

4.5.3 Invoking Methods

Just like a `Field` object can be used to read and write fields of an object, a `Method` object can invoke the given method on an object.

```
Method m = ...;
Object result = m.invoke(obj, arg1, arg2, ...);
```

If the method is static, supply `null` for the initial argument.

To obtain a method, you can search through the array returned by `getMethods` or `getDeclaredMethods` that you saw in Section 4.5.1, “Enumerating Class Members” (page 168). Or you can call `getMethod` and supply the parameter types. For example, to get the `setName(String)` method on a `Person` object:

```
Person p = ...;
Method m = p.getClass().getMethod("setName", String.class);
m.invoke(obj, "*****");
```



CAUTION: Even though `clone` is a public method of all array types, it is not reported by `getMethod` when invoked on a `Class` object describing an array.

4.5.4 Constructing Objects

To construct an object, first find the `Constructor` object and then call its `newInstance` method. For example, suppose you know that a class has a public constructor whose parameter is an `int`. Then you can construct a new instance like this:

```
Constructor constr = cl.getConstructor(int.class);
Object obj = constr.newInstance(42);
```



CAUTION: The `Class` class has a `newInstance` method to construct an object of the given class with the no-argument constructor. That method is now deprecated because it has a curious flaw. If the no-argument constructor throws a checked exception, the `newInstance` method rethrows it even though it isn't declared, thereby completely defeating the compile-time checking of checked exceptions. Instead, you should call `cl.getConstructor().newInstance()`. Then any exception is wrapped inside an `InvocationTargetException`.

Table 4-5 summarizes the most important methods for working with `Field`, `Method`, and `Constructor` objects.

Table 4-5 Useful Classes and Methods in the `java.lang.reflect` Package

Class	Method	Notes
AccessibleObject	void setAccessible(boolean flag) static void setAccessible(AccessibleObject[] array, boolean flag)	AccessibleObject is a superclass of Field, Method, and Constructor. The methods set the accessibility of this member, or the given members.
Field	String getName() int getModifiers() Object get(Object obj) p getP(Object obj) void set(Object obj, Object newValue) void setP(Object obj, p newValue)	There is a get and set method for each primitive type p .
Method	Object invoke(Object obj, Object... args)	Invokes the method described by this object, passing the given arguments and returning the value that the method returns. For static methods, pass null for obj. Primitive type arguments and return values are wrapped.
Constructor	Object newInstance(Object... args)	Invokes the constructor described by this object, passing the given arguments and returning the constructed object.
Executable	String getName() int getModifiers() Parameters[] getParameters()	Executable is the superclass of Method and Constructor.
Parameter	boolean isNamePresent() String getName() Class<?> getType()	The getName method gets the name or a synthesized name such as arg0 if the name is not present.

4.5.5 JavaBeans

Many object-oriented programming languages support *properties*, mapping the expression `object.propertyName` to a call of a getter or setter method, depending

on whether the property is read or written. Java does not have this syntax, but it has a convention in which properties correspond to getter/setter pairs. A *JavaBean* is a class with a no-argument constructor, getter/setter pairs, and any number of other methods.

The getters and setters must follow the specific pattern

```
public Type getProperty()  
public void setProperty(Type newValue)
```

It is possible to have read-only and write-only properties by omitting the setter or getter.

The name of the property is the *decapitalized* form of the suffix after get/set. For example, a `getSalary`/`setSalary` pair gives rise to a property named `salary`. However, if the first *two* letters of the suffix are uppercase, then it is taken verbatim. For example, `getURL` yields a read-only property named `URL`.



NOTE: For Boolean properties, you may use either `getProperty` or `isProperty` for the getter, and the latter is preferred.

JavaBeans have their origin in GUI builders, and the JavaBeans specification has arcane rules that deal with property editors, property change events, and custom property discovery. These features are rarely used nowadays.

It is a good idea to use the standard classes for JavaBeans support whenever you need to work with arbitrary properties. Given a class, obtain a `BeanInfo` object like this:

```
Class<?> cl = ....;  
BeanInfo info = Introspector.getBeanInfo(cl);  
PropertyDescriptor[] props = info.getPropertyDescriptors();
```

For a given `PropertyDescriptor`, call `getName` and `get.PropertyType` to get the name and type of the property. The `getReadMethod` and `getWriteMethod` yield `Method` objects for the getter and setter.

Unfortunately, there is no method to get the descriptor for a given property name, so you'll have to traverse the array of descriptors:

```
String propertyName = ...;  
Object PropertyValue = null;  
for (PropertyDescriptor prop : props) {  
    if (prop.getName().equals(propertyName))  
        PropertyValue = prop.getReadMethod().invoke(obj);  
}
```

4.5.6 Working with Arrays

The `isArray` method checks whether a given `Class` object represents an array. If so, the `getComponentType` method yields the `Class` describing the type of the array elements. For further analysis, or to create arrays dynamically, use the `Array` class in the `java.lang.reflect` package. Table 4-6 shows its methods.

Table 4-6 Methods of the `java.lang.reflect.Array` Class

Method	Description
<code>static Object get(Object array, int index)</code> <code>static p getP(Object array, int index)</code> <code>static void set(Object array, int index, Object newValue)</code> <code>static void setP(Object array, int index, p newValue)</code>	Gets or sets an element of the array at the given index, where <code>p</code> is a primitive type.
<code>static int getLength(Object array)</code>	Gets the length of the given array.
<code>static Object newInstance(Class<?> componentType, int length)</code> <code>static Object newInstance(Class<?> componentType, int[] lengths)</code>	Returns a new array of the given component type with the given dimensions.

As an exercise, let us implement the `copyOf` method in the `Arrays` class. Recall how this method can be used to grow an array that has become full.

```
Person[] friends = new Person[100];
...
// Array is full
friends = Arrays.copyOf(friends, 2 * friends.length);
```

How can one write such a generic method? Here is a first attempt:

```
public static Object[] badCopyOf(Object[] array, int newLength) { // Not useful
    Object[] newArray = new Object[newLength];
    for (int i = 0; i < Math.min(array.length, newLength); i++)
        newArray[i] = array[i];
    return newArray;
}
```

However, there is a problem with actually using the resulting array. The type of array that this method returns is `Object[]`. An array of objects cannot be cast to a `Person[]` array. The point is, as we mentioned earlier, that a Java array remembers the type of its elements—that is, the type used in the `new` expression that created it. It is legal to cast a `Person[]` array temporarily to an `Object[]` array and then cast it back, but an array that started its life as an `Object[]` array can never be cast into a `Person[]` array.

In order to make a new array of the same type as the original array, you need the `newInstance` method of the `Array` class. Supply the component type and the desired length:

```
public static Object goodCopyOf(Object array, int newLength) {  
    Class<?> cl = array.getClass();  
    if (!cl.isArray()) return null;  
    Class<?> componentType = cl.getComponentType();  
    int length = Array.getLength(array);  
    Object newArray = Array.newInstance(componentType, newLength);  
    for (int i = 0; i < Math.min(length, newLength); i++)  
        Array.set(newArray, i, Array.get(array, i));  
    return newArray;  
}
```

Note that this `copyOf` method can be used to grow arrays of any type, not just arrays of objects.

```
int[] primes = { 2, 3, 5, 7, 11 };  
primes = (int[]) goodCopyOf(primes, 10);
```

The parameter type of `goodCopyOf` is `Object`, not `Object[]`. An `int[]` is an `Object` but not an array of objects.

4.5.7 Proxies

The `Proxy` class can create, at runtime, new classes that implement a given interface or set of interfaces. Such proxies are only necessary when you don't yet know at compile time which interfaces you need to implement.

A proxy class has all methods required by the specified interfaces, and all methods defined in the `Object` class (`toString`, `equals`, and so on). However, since you cannot define new code for these methods at runtime, you supply an *invocation handler*, an object of a class that implements the `InvocationHandler` interface. That interface has a single method:

```
Object invoke(Object proxy, Method method, Object[] args)
```

Whenever a method is called on the proxy object, the `invoke` method of the invocation handler gets called, with the `Method` object and parameters of the original call. The invocation handler must then figure out how to handle the call. There are many possible actions an invocation handler might take, such as routing calls to remote servers or tracing calls for debugging purposes.

To create a proxy object, use the `newProxyInstance` method of the `Proxy` class. The method has three parameters:

- A class loader (see Section 4.4.3, “Class Loaders,” page 163), or `null` to use the default class loader

- An array of class objects, one for each interface to be implemented
- The invocation handler

To show the mechanics of proxies, here is an example where an array is populated with proxies for `Integer` objects, forwarding calls to the original objects after printing trace messages:

```
Object[] values = new Object[1000];

for (int i = 0; i < values.length; i++) {
    Object value = new Integer(i);
    values[i] = Proxy.newProxyInstance(
        null,
        value.getClass().getInterfaces(),
        // Lambda expression for invocation handler
        (Object proxy, Method m, Object[] args) -> {
            System.out.println(value + " ." + m.getName() + Arrays.toString(args));
            return m.invoke(value, args);
    });
}
```

When calling

```
Arrays.binarySearch(values, new Integer(500));
```

the following output is produced:

```
499.compareTo[500]
749.compareTo[500]
624.compareTo[500]
561.compareTo[500]
530.compareTo[500]
514.compareTo[500]
506.compareTo[500]
502.compareTo[500]
500.compareTo[500]
```

You can see how the binary search algorithm homes in on the key by cutting the search interval in half in every step.

The point is that the `compareTo` method is invoked through the proxy, even though this was not explicitly mentioned in the code. All methods in any interfaces implemented by `Integer` are proxied.



CAUTION: When the invocation handler is called with a method call that has no parameters, the argument array is `null`, not an `Object[]` array of length `0`. That is utterly reprehensible and not something you should do in your own code.

Exercises

1. Define a class `Point` with a constructor `public Point(double x, double y)` and accessor methods `getX`, `getY`. Define a subclass `LabeledPoint` with a constructor `public LabeledPoint(String label, double x, double y)` and an accessor method `getLabel`.
2. Define `toString`, `equals`, and `hashCode` methods for the classes of the preceding exercise.
3. Make the instance variables `x` and `y` of the `Point` class in Exercise 1 `protected`. Show that the `LabeledPoint` class can access these variables only in `LabeledPoint` instances.
4. Define an abstract class `Shape` with an instance variable of class `Point`, a constructor, a concrete method `public void moveBy(double dx, double dy)` that moves the point by the given amount, and an abstract method `public Point getCenter()`. Provide concrete subclasses `Circle`, `Rectangle`, `Line` with constructors `public Circle(Point center, double radius)`, `public Rectangle(Point topLeft, double width, double height)`, and `public Line(Point from, Point to)`.
5. Define `clone` methods for the classes of the preceding exercise.
6. Suppose that in Section 4.2.2, “The `equals` Method” (page 148), the `Item.equals` method uses an `instanceof` test. Implement `DiscountedItem.equals` so that it compares only the superclass if `otherObject` is an `Item`, but also includes the discount if it is a `DiscountedItem`. Show that this method preserves symmetry but fails to be *transitive*—that is, find a combination of items and discounted items so that `x.equals(y)` and `y.equals(z)`, but not `x.equals(z)`.
7. Define an enumeration type for the eight combinations of primary colors `BLACK`, `RED`, `BLUE`, `GREEN`, `CYAN`, `MAGENTA`, `YELLOW`, `WHITE` with methods `getRed`, `getGreen`, and `getBlue`.
8. The `Class` class has six methods that yield a string representation of the type represented by the `Class` object. How do they differ when applied to arrays, generic types, inner classes, and primitive types?
9. Write a “universal” `toString` method that uses reflection to yield a string with all instance variables of an object. Extra credit if you can handle cyclic references.
10. Use the `MethodPrinter` program in Section 4.5.1, “Enumerating Class Members” (page 168) to enumerate all methods of the `int[]` class. Extra credit if you can identify the one method (discussed in this chapter) that is wrongly described.

11. Write the “Hello, World” program, using reflection to look up the `out` field of `java.lang.System` and using `invoke` to call the `println` method.
12. Measure the performance difference between a regular method call and a method call via reflection.
13. Write a method that prints a table of values for any `Method` representing a static method with a parameter of type `double` or `Double`. Besides the `Method` object, accept a lower bound, upper bound, and step size. Demonstrate your method by printing tables for `Math.sqrt` and `Double.toHexString`. Repeat, using a `DoubleFunction<Object>` instead of a `Method` (see Section 3.6.2, “Choosing a Functional Interface,” page 120). Contrast the safety, efficiency, and convenience of both approaches.

Exceptions, Assertions, and Logging

Topics in This Chapter

- 5.1 Exception Handling — page 182
- 5.2 Assertions — page 193
- 5.3 Logging — page 195
- Exercises — page 203

Chapter



In many programs, dealing with the unexpected can be more complex than implementing the “happy day” scenarios. Like most modern programming languages, Java has a robust exception-handling mechanism for transferring control from the point of failure to a competent handler. In addition, the assert statement provides a structured and efficient way of expressing internal assumptions. Finally, you will see how to use the logging API to keep a record of the various events, be they routine or suspicious, in the execution of your programs.

The key points of this chapter are:

1. When you throw an exception, control is transferred to the nearest handler of the exception.
2. In Java, checked exceptions are tracked by the compiler.
3. Use the try/catch construct to handle exceptions.
4. The try-with-resources statement automatically closes resources after normal execution or when an exception occurred.
5. Use the try/finally construct to deal with other actions that must occur whether or not execution proceeded normally.
6. You can catch and rethrow an exception, or chain it to another exception.
7. A stack trace describes all method calls that are pending at a point of execution.

8. An assertion checks a condition, provided that assertion checking is enabled for the class, and throws an error if the condition is not fulfilled.
9. Loggers are arranged in a hierarchy, and they can receive logging messages with levels ranging from `SEVERE` to `FINEST`.
10. Log handlers can send logging messages to alternate destinations, and formatters control the message format.
11. You can control logging properties with a log configuration file.

5.1 Exception Handling

What should a method do when it encounters a situation in which it cannot fulfill its contract? The traditional answer was that the method should return some error code. But that is cumbersome for the programmer calling the method. The caller is obliged to check for errors, and if it can't handle them, return an error code to its own caller. Not unsurprisingly, programmers didn't always check and propagate return codes, and errors went undetected, causing havoc later.

Instead of having error codes bubble up the chain of method calls, Java supports *exception handling* where a method can signal a serious problem by "throwing" an exception. One of the methods in the call chain, but not necessarily the direct caller, is responsible for handling the exception by "catching" it. The fundamental advantage of exception handling is that it decouples the processes of detecting and handling errors. In the following sections, you will see how to work with exceptions in Java.

5.1.1 Throwing Exceptions

A method may find itself in a situation where it cannot carry out the task at hand. Perhaps a required resource is missing, or it was supplied with inconsistent parameters. In such a case, it is best to throw an exception.

Suppose you implement a method that yields a random integer between two bounds:

```
public static int randInt(int low, int high) {  
    return low + (int) (Math.random() * (high - low + 1));  
}
```

What should happen if someone calls `randInt(10, 5)`? Trying to fix this is probably not a good idea because the caller might have been confused in more than one way. Instead, throw an appropriate exception:

```
if (low > high)
    throw new IllegalArgumentException(
        String.format("low should be <= high but low is %d and high is %d",
                     low, high));
```

As you can see, the `throw` statement is used to “throw” an object of a class—here, `IllegalArgumentException`. The object is constructed with a debugging message. You will see in the next section how to pick an appropriate exception class.

When a `throw` statement executes, the normal flow of execution is interrupted immediately. The `randInt` method stops executing and does not return a value to its caller. Instead, control is transferred to a handler, as you will see in Section 5.1.4, “Catching Exceptions” (page 186).

5.1.2 The Exception Hierarchy

Figure 5-1 shows the hierarchy of exceptions in Java. All exceptions are subclasses of the class `Throwable`. Subclasses of `Error` are exceptions that are thrown when something exceptional happens that the program cannot be expected to handle, such as memory exhaustion. There is not much you can do about errors other than giving a message to the user that things have gone very wrong.

Programmer-reported exceptions are subclasses of the class `Exception`. These exceptions fall into two categories:

- *Unchecked* exceptions are subclasses of `RuntimeException`.
- All other exceptions are *checked* exceptions.

As you will see in the next section, programmers must either catch checked exceptions or declare them in the method header. The compiler checks that these exceptions are handled properly.



NOTE: The name `RuntimeException` is unfortunate. Of course, all exceptions occur at runtime. However, the exceptions that are subclasses of `RuntimeException` are not checked during compilation.

Checked exceptions are used in situations where failure should be anticipated. One common reason for failure is input and output. Files may be damaged, and network connections may fail. A number of exception classes extend `IOException`, and you should use an appropriate one to report any errors that you encounter. For example, when a file that should be there turns out not to be, throw a `FileNotFoundException`.

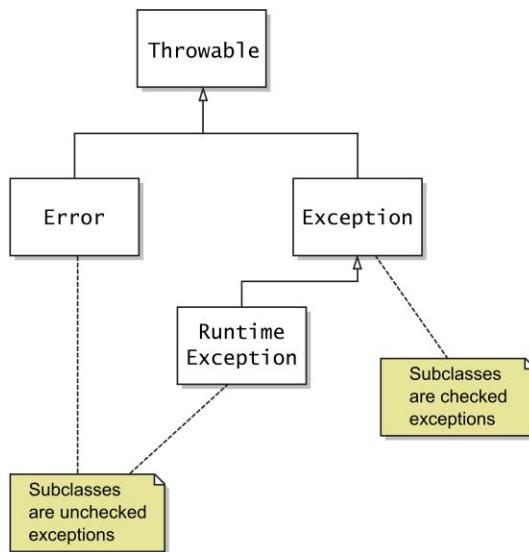


Figure 5-1 The exception hierarchy

Unchecked exceptions indicate logic errors caused by programmers, not by unavoidable external risks. For example, a `NullPointerException` is not checked. Just about any method might throw one, and programmers shouldn't spend time on catching them. Instead, they should make sure that no `null`s are dereferenced in the first place.

Sometimes, implementors need to use their judgment to make a distinction between checked and unchecked exceptions. Consider the call `Integer.parseInt(str)`. It throws an unchecked `NumberFormatException` when `str` doesn't contain a valid integer. On the other hand, `Class.forName(str)` throws a checked `ClassNotFoundException` when `str` doesn't contain a valid class name.

Why the difference? The reason is that it is possible to check whether a string is a valid integer before calling `Integer.parseInt`, but it is not possible to know whether a class can be loaded until you actually try to load it.

The Java API provides many exception classes, such as `IOException`, `IllegalArgumentException`, and so on. You should use these when appropriate. However, if none of the standard exception classes is suitable for your purpose, you can create your own by extending `Exception`, `RuntimeException`, or another existing exception class.

When you do so, it is a good idea to supply both a no-argument constructor and a constructor with a message string. For example,

```
public class FileFormatException extends IOException {  
    public FileFormatException() {}  
    public FileFormatException(String message) {  
        super(message);  
    }  
    // Also add constructors for chained exceptions—see Section 5.1.7  
}
```

5.1.3 Declaring Checked Exceptions

Any method that might give rise to a checked exception must declare it in the method header with a `throws` clause:

```
public void write(Object obj, String filename)  
    throws IOException, ReflectiveOperationException
```

List the exceptions that the method might throw, either because of a `throw` statement or because it calls another method with a `throws` clause.

In the `throws` clause, you can combine exceptions into a common superclass. Whether or not that is a good idea depends on the exceptions. For example, if a method can throw multiple subclasses of `IOException`, it makes sense to cover them all in a clause `throws IOException`. But if the exceptions are unrelated, don't combine them into `throws Exception`—that would defeat the purpose of exception checking.



TIP: Some programmers think it is shameful to admit that a method might throw an exception. Wouldn't it be better to handle it instead?

Actually, the opposite is true. You should allow each exception to find its way to a competent handler. The golden rule of exceptions is, “Throw early, catch late.”

When you override a method, it cannot throw more checked exceptions than those declared by the superclass method. For example, if you extend the `write` method from the beginning of this section, the overriding method can throw fewer exceptions:

```
public void write(Object obj, String filename)  
    throws FileNotFoundException
```

But if the method tried to throw an unrelated checked exception, such as an `InterruptedException`, it would not compile.



CAUTION: If the superclass method has no throws clause, then no overriding method can throw a checked exception.

You can use the javadoc @throws tag to document when a method throws a (checked or unchecked) exception. Most programmers only do this when there is something meaningful to document. For example, there is little value in telling users that an IOException is thrown when there is a problem with input/output. But comments such as the following can be meaningful:

```
@throws NullPointerException if filename is null  
@throws FileNotFoundException if there is no file with name filename
```



NOTE: You never specify the exception type of a lambda expression. However, if a lambda expression can throw a checked exception, you can only pass it to a functional interface whose method declares that exception. For example, the call

```
list.forEach(obj -> write(obj, "output.dat"));
```

is an error. The parameter of the forEach method is the functional interface

```
public interface Consumer<T> {  
    void accept(T t);  
}
```

The accept method is declared not to throw any checked exception.

5.1.4 Catching Exceptions

To catch an exception, set up a try block. In its simplest form, it looks like this:

```
try {  
    statements  
} catch (ExceptionClass ex) {  
    handler  
}
```

If an exception of the given class occurs as the statements in the try block are executed, control transfers to the handler. The exception variable (ex in our example) refers to the exception object which the handler can inspect if desired.

There are two modifications that you can make to this basic structure. You can have multiple handlers for different exception classes:

```
try {  
    statements  
} catch (ExceptionClass1 ex) {  
    handler1  
} catch (ExceptionClass2 ex) {  
    handler2  
} catch (ExceptionClass3 ex) {  
    handler3  
}
```

The catch clauses are matched top to bottom, so the most specific exception classes must come first.

Alternatively, you can share one handler among multiple exception classes:

```
try {  
    statements  
} catch (ExceptionClass1 | ExceptionClass2 | ExceptionClass3 ex) {  
    handler  
}
```

In that case, the handler can only call those methods on the exception variable that belong to all exception classes.

5.1.5 The Try-with-Resources Statement

One problem with exception handling is resource management. Suppose you write to a file and close it when you are done:

```
ArrayList<String> lines = ...;  
PrintWriter out = new PrintWriter("output.txt");  
for (String line : lines) {  
    out.println(line.toLowerCase());  
}  
out.close();
```

This code has a hidden danger. If any method throws an exception, the call to `out.close()` never happens. That is bad. Output could be lost, or if the exception is triggered many times, the system could run out of file handles.

A special form of the try statement can solve this issue. You can specify *resources* in the header of the try statement. A resource must belong to a class implementing the `AutoCloseable` interface. You can declare variables in the try block header:

```
ArrayList<String> lines = ...;  
try (PrintWriter out = new PrintWriter("output.txt")) { // Variable declaration  
    for (String line : lines)  
        out.println(line.toLowerCase());  
}
```

Alternatively, you can provide previously declared effectively final variables in the header:

```
PrintWriter out = new PrintWriter("output.txt");
try (out) { // Effectively final variable
    for (String line : lines)
        out.println(line.toLowerCase());
}
```

The `AutoCloseable` interface has a single method

```
public void close() throws Exception
```



NOTE: There is also a `Closeable` interface. It is a subinterface of `AutoCloseable`, also with a single `close` method. However, that method is declared to throw an `IOException`.

When the `try` block exits, either because its end is reached normally or because an exception is thrown, the `close` methods of the resource objects are invoked. For example:

```
try (PrintWriter out = new PrintWriter("output.txt")) {
    for (String line : lines) {
        out.println(line.toLowerCase());
    }
} // out.close() called here
```

You can declare multiple resources, separated by semicolons. Here is an example with two resource declarations:

```
try (Scanner in = new Scanner(Paths.get("/usr/share/dict/words"));
     PrintWriter out = new PrintWriter("output.txt")) {
    while (in.hasNext())
        out.println(in.next().toLowerCase());
}
```

The resources are closed in reverse order of their initialization—that is, `out.close()` is called before `in.close()`.

Suppose that the `PrintWriter` constructor throws an exception. Now `in` is already initialized but `out` is not. The `try` statement does the right thing: calls `in.close()` and propagates the exception.

Some `close` methods can throw exceptions. If that happens when the `try` block completed normally, the exception is thrown to the caller. However, if another exception had been thrown, causing the `close` methods of the resources to be called, and one of them throws an exception, that exception is likely to be of lesser importance than the original one.

In this situation, the original exception gets rethrown, and the exceptions from calling `close` are caught and attached as “suppressed” exceptions. This is a very useful mechanism that would be tedious to implement by hand (see Exercise 5). When you catch the primary exception, you can retrieve the secondary exceptions by calling the `getSuppressed` method:

```
try {  
    ...  
} catch (IOException ex) {  
    Throwable[] secondaryExceptions = ex.getSuppressed();  
    ...  
}
```

If you want to implement such a mechanism yourself in a (hopefully rare) situation when you can't use the `try-with-resources` statement, call `ex.addSuppressed(secondaryException)`.

A `try-with-resources` statement can optionally have `catch` clauses that catch any exceptions in the statement.

5.1.6 The `finally` Clause

As you have seen, the `try-with-resources` statement automatically closes resources whether or not an exception occurs. Sometimes, you need to clean up something that isn't an `AutoCloseable`. In that case, use the `finally` clause:

```
try {  
    Do work  
} finally {  
    Clean up  
}
```

The `finally` clause is executed when the `try` block comes to an end, either normally or due to an exception.

This pattern occurs whenever you need to acquire and release a lock, or increment and decrement a counter, or push something on a stack and pop it off when you are done. You want to make sure that these actions happen regardless of what exceptions might be thrown.

You should avoid throwing an exception in the `finally` clause. If the body of the `try` block was terminated due to an exception, it is masked by an exception in the `finally` clause. The suppression mechanism that you saw in the preceding section only works for `try-with-resources` statements.

Similarly, a `finally` clause should not contain a `return` statement. If the body of the `try` block also has a `return` statement, the one in the `finally` clause replaces the `return` value.

It is possible to form try statements with catch clauses followed by a finally clause. But you have to be careful with exceptions in the finally clause. For example, have a look at this try block adapted from an online tutorial:

```
BufferedReader in = null;
try {
    in = Files.newBufferedReader(path, StandardCharsets.UTF_8);
    Read from in
} catch (IOException ex) {
    System.err.println("Caught IOException: " + ex.getMessage());
} finally {
    if (in != null) {
        in.close(); // Caution—might throw an exception
    }
}
```

The programmer clearly thought about the case when the `Files.newBufferedReader` method throws an exception. It appears as if this code would catch and print all I/O exceptions, but it actually misses one: the one that might be thrown by `in.close()`. It is often better to rewrite a complex try/catch/finally statement as a try-with-resources statement or by nesting a try/finally inside a try/catch statement—see Exercise 6.

5.1.7 Rethrowing and Chaining Exceptions

When an exception occurs, you may not know what to do about it, but you may want to log the failure. In that case, rethrow the exception so that a competent handler can deal with it:

```
try {
    Do work
}
catch (Exception ex) {
    logger.log(level, message, ex);
    throw ex;
}
```



NOTE: Something subtle is going on when this code is inside a method that may throw a checked exception. Suppose the enclosing method is declared as

```
public void read(String filename) throws IOException
```

At first glance, it looks as if one would need to change the `throws` clause to `throws Exception`. However, the Java compiler carefully tracks the flow and realizes that `ex` could only have been an exception thrown by one of the statements in the try block, not an arbitrary `Exception`.

Sometimes, you want to change the class of a thrown exception. For example, you may need to report a failure of a subsystem with an exception class that makes sense to the user of the subsystem. Suppose you encounter a database error in a servlet. The code that executes the servlet may not want to know in detail what went wrong, but it definitely wants to know that the servlet is at fault. In this case, catch the original exception and chain it to a higher-level one:

```
try {  
    Access the database  
}  
catch (SQLException ex) {  
    throw new ServletException("database error", ex);  
}
```

When the `ServletException` is caught, the original exception can be retrieved as follows:

```
Throwable cause = ex.getCause();
```

The `ServletException` class has a constructor that takes as a parameter the cause of the exception. Not all exception classes do that. In that case, you have to call the `initCause` method, like this:

```
try {  
    Access the database  
}  
catch (SQLException ex) {  
    Throwable ex2 = new CruftyOldException("database error");  
    ex2.initCause(ex);  
    throw ex2;  
}
```

If you provide your own exception class, you should provide, in addition to the two constructors described in Section 5.1.2, “The Exception Hierarchy” (page 183), the following constructors:

```
public class FileFormatException extends IOException {  
    ...  
    public FileFormatException(Throwable cause) { initCause(cause); }  
    public FileFormatException(String message, Throwable cause) {  
        super(message);  
        initCause(cause);  
    }  
}
```



TIP: The chaining technique is also useful if a checked exception occurs in a method that is not allowed to throw a checked exception. You can catch the checked exception and chain it to an unchecked one.

5.1.8 Uncaught Exceptions and the Stack Trace

If an exception is not caught anywhere, a *stack trace* is displayed—a listing of all pending method calls at the point where the exception was thrown. The stack trace is sent to `System.err`, the stream for error messages.

If you want to save the exception somewhere else, perhaps for inspection by your tech support staff, set the default uncaught exception handler:

```
Thread.setDefaultUncaughtExceptionHandler((thread, ex) -> {  
    Record the exception  
});
```



NOTE: An uncaught exception terminates the thread in which it occurred.

If your application only has one thread (which is the case for the programs that you have seen so far), the program exits after invoking the uncaught exception handler.

Sometimes, you are forced to catch an exception and don't really know what to do with it. For example, the `Class.forName` method throws a checked exception that you need to handle. Instead of ignoring the exception, at least print the stack trace:

```
try {  
    Class<?> cl = Class.forName(className);  
    ...  
} catch (ClassNotFoundException ex) {  
    ex.printStackTrace();  
}
```

If you want to store the stack trace of an exception, you can put it into a string as follows:

```
ByteArrayOutputStream out = new ByteArrayOutputStream();  
ex.printStackTrace(new PrintWriter(out));  
String description = out.toString();
```



NOTE: If you need to process the stack trace in more detail, use the `StackWalker` class. For example, the following prints all stack frames:

```
StackWalker walker = StackWalker.getInstance();  
walker.forEach(frame -> System.err.println("Frame: " + frame));
```

You can also analyze the `StackWalker.StackFrame` instances in detail. See the API documentation for details.

5.1.9 The Objects.requireNonNull Method

The `Objects` class has a method for convenient null checks of parameters. Here is a sample usage:

```
public void process(String direction) {  
    this.direction = Objects.requireNonNull(direction);  
    ...  
}
```

If `direction` is `null`, a `NullPointerException` is thrown—which doesn't seem like a huge improvement at first. But consider working back from a stack trace. When you see a call to `requireNonNull` as the culprit, you know right away what you did wrong.

You can also supply a message string for the exception:

```
this.direction = Objects.requireNonNull(direction, "direction must not be null");
```

A variant of this method allows you to supply an alternate value instead of throwing an exception:

```
this.direction = Objects.requireNonNullElse(direction, "North");
```

If the default is costly to compute, use yet another variant:

```
this.direction = Objects.requireNonNullElseGet(direction,  
    () -> System.getProperty("com.horstmann.direction.default"));
```

The lambda expression is only evaluated if `direction` is `null`.

5.2 Assertions

Assertions are a commonly used idiom of defensive programming. Suppose you are convinced that a particular property is fulfilled, and you rely on that property in your code. For example, you may be computing

```
double y = Math.sqrt(x);
```

You are certain that `x` is not negative. Still, you want to double-check rather than have “not a number” floating-point values creep into your computation. You could, of course, throw an exception:

```
if (x < 0) throw new IllegalStateException(x + " < 0");
```

But this condition stays in the program, even after testing is complete, slowing it down. The assertion mechanism allows you to put in checks during testing and to have them automatically removed in the production code.



NOTE: In Java, assertions are intended as a debugging aid for validating internal assumptions, not as a mechanism for enforcing contracts. For example, if you want to report an inappropriate parameter of a public method, don't use an assertion but throw an `IllegalArgumentException`.

5.2.1 Using Assertions

There are two forms of the assertion statement in Java:

```
assert condition;  
assert condition : expression;
```

The `assert` statement evaluates the condition and throws an `AssertionError` if it is false. In the second form, the expression is turned into a string that becomes the message of the error object.



NOTE: If the expression is a `Throwable`, it is also set as the cause of the assertion error (see Section 5.1.7, “Rethrowing and Chaining Exceptions,” page 190).

For example, to assert that `x` is non-negative, you can simply use the statement

```
assert x >= 0;
```

Or you can pass the actual value of `x` into the `AssertionError` object so it gets displayed later:

```
assert x >= 0 : x;
```

5.2.2 Enabling and Disabling Assertions

By default, assertions are disabled. Enable them by running the program with the `-enableassertions` or `-ea` option:

```
java -ea MainClass
```

You do not have to recompile your program because enabling or disabling assertions is handled by the class loader. When assertions are disabled, the class loader strips out the assertion code so that it won't slow execution. You can even enable assertions in specific classes or in entire packages, for example:

```
java -ea:MyClass -ea:com.mycompany.mylib... MainClass
```

This command turns on assertions for the class `MyClass` and all classes in the `com.mycompany.mylib` package and its subpackages. The option `-ea...` turns on assertions in all classes of the default package.

You can also disable assertions in certain classes and packages with the `-disableassertions` or `-da` option:

```
java -ea:... -da:MyClass MainClass
```

When you use the `-ea` and `-da` switches to enable or disable all assertions (and not just specific classes or packages), they do not apply to the “system classes” that are loaded without class loaders. Use the `-enablesystemassertions/-esa` switch to enable assertions in system classes.

It is also possible to programmatically control the assertion status of class loaders with the following methods:

```
void ClassLoader.setDefaultAssertionStatus(boolean enabled);
void ClassLoader.setClassAssertionStatus(String className, boolean enabled);
void ClassLoader.setPackageAssertionStatus(String packageName, boolean enabled);
```

As with the `-enableassertions` command-line option, the `setPackageAssertionStatus` method sets the assertion status for the given package and its subpackages.

5.3 Logging

Every Java programmer is familiar with the process of inserting `System.out.println` calls into troublesome code to gain insight into program behavior. Of course, once you have figured out the cause of trouble, you remove the print statements—only to put them back in when the next problem surfaces. The logging API is designed to overcome this problem.

5.3.1 Using Loggers

Let’s get started with the simplest possible case. The logging system manages a default logger that you get by calling `Logger.getGlobal()`. Use the `info` method to log an information message:

```
Logger.getGlobal().info("Opening file " + filename);
```

The record is printed like this:

```
Aug 04, 2014 09:53:34 AM com.mycompany.MyClass read INFO: Opening file data.txt
```

Note that the time and the names of the calling class and method are automatically included.

However, if you call

```
Logger.getGlobal().setLevel(Level.OFF);
```

then calls to `info` have no effect.



NOTE: In the above example, the message "Opening file " + filename is created even if logging is disabled. If you are concerned about the cost of creating the message, you can use a lambda expression instead:

```
Logger.getGlobal().info(() -> "Opening file " + filename);
```

5.3.2 Loggers

In a professional application, you wouldn't want to log all records to a single global logger. Instead, you can define your own loggers.

When you request a logger with a given name for the first time, it is created.

```
Logger logger = Logger.getLogger("com.mycompany.myapp");
```

Subsequent calls to the same name yield the same logger object.

Similar to package names, logger names are hierarchical. In fact, they are more hierarchical than packages. There is no semantic relationship between a package and its parent, but logger parents and children share certain properties. For example, if you turn off messages to the logger "com.mycompany", then the child loggers are also deactivated.



NOTE: In this section, we introduce the java.util.logging framework that is a part of the JDK. This framework is not universally loved, and there are alternatives with better performance and more flexibility. Many projects use a logging façade such as SLF4J (<https://www.slf4j.org>) that lets users plug in the logging framework of their choice. Nevertheless, java.util.logging is fine for many use cases, and learning how it works will help you understand the alternatives.



NOTE: Even the JVM doesn't love java.util.logging, but for an entirely different reason. In order to have a minimal footprint, the most basic JVM modules don't want to depend on the java.logging module that contains the java.util.logging package. There is a lightweight System.Logger interface that some JVM modules use for logging. On a full JVM, these logs are redirected to java.util.logging, but they can also be redirected elsewhere. This is not a facility that is intended for application programmers, so you should use java.util.logging or a logging façade.

5.3.3 Logging Levels

There are seven logging levels: SEVERE, WARNING, INFO, CONFIG, FINE, FINER, FINEST. By default, the top three levels are actually logged. You can set a different threshold, for example:

```
logger.setLevel(Level.FINE);
```

Now `FINE` and all levels above it are logged.

You can also use `Level.ALL` to turn on logging for all levels or `Level.OFF` to turn all logging off.

There are logging methods corresponding to each level, such as

```
logger.warning(message);
logger.fine(message);
```

and so on. Alternatively, if the level is variable, you can use the `log` method and supply the level:

```
Level level = ....;
logger.log(level, message);
```



TIP: The default logging configuration logs all records with the level of `INFO` or higher. Therefore, you should use the levels `CONFIG`, `FINE`, `FINER`, and `FINEST` for debugging messages that are useful for diagnostics but meaningless to the user.



CAUTION: If you set the logging level to a value finer than `INFO`, you also need to change the log handler configuration. The default log handler suppresses messages below `INFO`. See Section 5.3.6, “Log Handlers” (page 200) for details.

5.3.4 Other Logging Methods

There are convenience methods for tracing execution flow:

```
void entering(String className, String methodName)
void entering(String className, String methodName, Object param)
void entering(String className, String methodName, Object[] params)
void exiting(String className, String methodName)
void exiting(String className, String methodName, Object result)
```

For example:

```
public int read(String file, String pattern) {  
    logger.entering("com.mycompany.mylib.Reader", "read",  
        new Object[] { file, pattern });  
    ...  
    logger.exiting("com.mycompany.mylib.Reader", "read", count);  
    return count;  
}
```

These calls generate log records of level FINER that start with the strings ENTRY and RETURN.



NOTE: Oddly enough, these methods have never been turned into methods with variable arguments.

A common use for logging is to log unexpected exceptions. Two convenience methods include a description of the exception in the log record.

```
void log(Level l, String message, Throwable t)  
void throwing(String className, String methodName, Throwable t)
```

Typical uses are

```
try {  
    ...  
}  
catch (IOException ex) {  
    logger.log(Level.SEVERE, "Cannot read configuration", ex);  
}
```

and

```
if (...) {  
    IOException ex = new IOException("Cannot read configuration");  
    logger.throwing("com.mycompany.mylib.Reader", "read", ex);  
    throw ex;  
}
```

The throwing call logs a record with level FINER and a message that starts with THROW.



NOTE: The default log record shows the name of the class and method that contain the logging call, as inferred from the call stack. However, if the virtual machine optimizes execution, accurate call information may not be available. You can use the `logp` method to give the precise location of the calling class and method. The method signature is

```
void logp(Level l, String className, String methodName, String message)
```



NOTE: If you want the logging messages to be understood by users in multiple languages, you can localize them with the methods

```
void logrb(Level level, ResourceBundle bundle,  
          String msg, Object... params)  
void logrb(Level level, ResourceBundle bundle,  
          String msg, Throwable thrown)
```

Resource bundles are described in Chapter 13.

5.3.5 Logging Configuration

You can change various properties of the logging system by editing a configuration file. The default configuration file is located at `jre/lib/logging.properties`. To use another file, set the `java.util.logging.config.file` property to the file location by starting your application with

```
java -Djava.util.logging.config.file=configFile MainClass
```



CAUTION: Calling `System.setProperty("java.util.logging.config.file", configFile)` in `main` has no effect because the log manager is initialized during VM startup, before `main` executes.

To change the default logging level, edit the configuration file and modify the line

```
.level=INFO
```

You can specify the logging levels for your own loggers by adding lines such as

```
com.mycompany.myapp.level=FINE
```

That is, append the `.level` suffix to the logger name.

As you will see in the next section, loggers don't actually send the messages to the console—that is the job of the handlers. Handlers also have levels. To see `FINE` messages on the console, you also need to set

```
java.util.logging.ConsoleHandler.level=FINE
```



CAUTION: The settings in the log manager configuration are not system properties. Starting a program with `-Dcom.mycompany.myapp.level=FINE` does not have any effect on the logger.

It is also possible to change logging levels in a running program by using the `jconsole` program. For details, see www.oracle.com/technetwork/articles/java/jconsole-1564139.html#LoggingControl for details.

5.3.6 Log Handlers

By default, loggers send records to a `ConsoleHandler` that prints them to the `System.err` stream. Specifically, the logger sends the record to the parent handler, and the ultimate ancestor (with name "") has a `ConsoleHandler`.

Like loggers, handlers have a logging level. For a record to be logged, its logging level must be above the threshold of both the logger and the handler. The log manager configuration file sets the logging level of the default console handler as

```
java.util.logging.ConsoleHandler.level=INFO
```

To log records with level `FINE`, change both the default logger level and the handler level in the configuration. Alternatively, you can bypass the configuration file altogether and install your own handler.

```
Logger logger = Logger.getLogger("com.mycompany.myapp");
logger.setLevel(Level.FINE);
logger.setUseParentHandlers(false);
Handler handler = new ConsoleHandler();
handler.setLevel(Level.FINE);
logger.addHandler(handler);
```

By default, a logger sends records both to its own handlers and the handlers of the parent. Our logger is a descendant of the ultimate ancestor "" that sends all records with level `INFO` and above to the console. We don't want to see those records twice, however, so we set the `useParentHandlers` property to `false`.

To send log records elsewhere, add another handler. The logging API provides two handlers for this purpose: a `FileHandler` and a `SocketHandler`. The `SocketHandler` sends records to a specified host and port. Of greater interest is the `FileHandler` that collects records in a file.

You can simply send records to a default file handler, like this:

```
FileHandler handler = new FileHandler();
logger.addHandler(handler);
```

The records are sent to a file `javan.log` in the user's home directory, where *n* is a number to make the file unique. By default, the records are formatted in XML. A typical log record has the form

```

<record>
    <date>2014-08-04T09:53:34</date>
    <millis>1407146014072</millis>
    <sequence>1</sequence>
    <logger>com.mycompany.myapp</logger>
    <level>INFO</level>
    <class>com.horstmann.corejava.Employee</class>
    <method>read</method>
    <thread>10</thread>
    <message>Opening file staff.txt</message>
</record>

```

You can modify the default behavior of the file handler by setting various parameters in the log manager configuration (see Table 5-1) or by using one of the following constructors:

```

FileHandler(String pattern)
FileHandler(String pattern, boolean append)
FileHandler(String pattern, int limit, int count)
FileHandler(String pattern, int limit, int count, boolean append)

```

See Table 5-1 for the meaning of the construction parameters.

You probably don't want to use the default log file name. Use a pattern such as %h/myapp.log (see Table 5-2 for an explanation of the pattern variables.)

If multiple applications (or multiple copies of the same application) use the same log file, you should turn the append flag on. Alternatively, use %u in the file name pattern so that each application creates a unique copy of the log.

It is also a good idea to turn file rotation on. Log files are kept in a rotation sequence, such as myapp.log.0, myapp.log.1, myapp.log.2, and so on. Whenever a file exceeds the size limit, the oldest log is deleted, the other files are renamed, and a new file with generation number 0 is created.

Table 5-1 File Handler Configuration Parameters

Configuration Property	Description	Default
java.util.logging.FileHandler.level	The handler level	Level.ALL
java.util.logging.FileHandler.append	When true, log records are appended to an existing file; otherwise, a new file is opened for each program run.	false

(Continues)

Table 5-1 File Handler Configuration Parameters (*Continued*)

Configuration Property	Description	Default
<code>java.util.logging.FileHandler.limit</code>	The approximate maximum number of bytes to write in a file before opening another (<code>0</code> = no limit).	<code>0</code> in the <code>FileHandler</code> class, <code>50000</code> in the default log manager configuration
<code>java.util.logging.FileHandler.pattern</code>	The file name pattern (see Table 5-2)	<code>%h/java%u.log</code>
<code>java.util.logging.FileHandler.count</code>	The number of logs in a rotation sequence	<code>1</code> (no rotation)
<code>java.util.logging.FileHandler.filter</code>	The filter for filtering log records (see Section 5.3.7)	No filtering
<code>java.util.logging.FileHandler.encoding</code>	The character encoding	The platform character encoding
<code>java.util.logging.FileHandler.formatter</code>	The formatter for each log record	<code>java.util.logging.XMLFormatter</code>

Table 5-2 Log File Pattern Variables

Variable	Description
<code>%h</code>	The user's home directory (the <code>user.home</code> property)
<code>%t</code>	The system's temporary directory
<code>%u</code>	A unique number
<code>%g</code>	The generation number for rotated logs (a <code>.%g</code> suffix is used if rotation is specified and the pattern doesn't contain <code>%g</code>)
<code>%%</code>	The percent character

5.3.7 Filters and Formatters

Besides filtering by logging levels, each logger and handler can have an additional filter that implements the `Filter` interface, a functional interface with a method

```
boolean isLoggable(LogRecord record)
```

To install a filter into a logger or handler, call the `setFilter` method. Note that you can have at most one filter at a time.

The `ConsoleHandler` and `FileHandler` classes emit the log records in text and XML formats. However, you can define your own formats as well. Extend the `Formatter` class and override the method

```
String format(LogRecord record)
```

Format the record in any way you like and return the resulting string. In your `format` method, you may want to call the method

```
String formatMessage(LogRecord record)
```

That method formats the message part of the record, substituting parameters and applying localization.

Many file formats (such as XML) require head and tail parts that surround the formatted records. To achieve this, override the methods

```
String getHead(Handler h)
String getTail(Handler h)
```

Finally, call the `setFormatter` method to install the formatter into the handler.

Exercises

1. Write a method `public ArrayList<Double> readValues(String filename)` throws ... that reads a file containing floating-point numbers. Throw appropriate exceptions if the file could not be opened or if some of the inputs are not floating-point numbers.
2. Write a method `public double sumOfValues(String filename)` throws ... that calls the preceding method and returns the sum of the values in the file. Propagate any exceptions to the caller.
3. Write a program that calls the preceding method and prints the result. Catch the exceptions and provide feedback to the user about any error conditions.
4. Repeat the preceding exercise, but don't use exceptions. Instead, have `readValues` and `sumOfValues` return error codes of some kind.
5. Implement a method that contains the code with a `Scanner` and a `PrintWriter` in Section 5.1.5, "The Try-with-Resources Statement" (page 187). But don't use the `try-with-resources` statement. Instead, just use `catch` clauses. Be sure to close both objects, provided they have been properly constructed. You need to consider the following conditions:

- The Scanner constructor throws an exception.
 - The PrintWriter constructor throws an exception.
 - hasNext, next, or println throw an exception.
 - out.close() throws an exception.
 - in.close() throws an exception.
6. Section 5.1.6, “The finally Clause” (page 189) has an example of a broken try statement with catch and finally clauses. Fix the code with (a) catching the exception in the finally clause, (b) a try/catch statement containing a try/finally statement, and (c) a try-with-resources statement with a catch clause.
7. Explain why

```
try (Scanner in = new Scanner(Paths.get("/usr/share/dict/words")));
    PrintWriter out = new PrintWriter(outputFile)) {
    while (in.hasNext())
        out.println(in.next().toLowerCase());
}
```

is better than

```
Scanner in = new Scanner(Paths.get("/usr/share/dict/words"));
PrintWriter out = new PrintWriter(outputFile);
try (in; out) {
    while (in.hasNext())
        out.println(in.next().toLowerCase());
}
```

8. For this exercise, you’ll need to read through the source code of the java.util.Scanner class. If input fails when using a Scanner, the Scanner class catches the input exception and closes the resource from which it consumes input. What happens if closing the resource throws an exception? How does this implementation interact with the handling of suppressed exceptions in the try-with-resources statement?
9. Design a helper method so that one can use a ReentrantLock in a try-with-resources statement. Call lock and return an AutoCloseable whose close method calls unlock and throws no exceptions.
10. The methods of the Scanner and PrintWriter classes do not throw checked exceptions to make them easier to use for beginning programmers. How do you find out whether errors occurred during reading or writing? Note that the constructors *can* throw checked exceptions. Why does that defeat the goal of making the classes easier to use for beginners?

11. Write a recursive factorial method in which you print all stack frames before you return the value. Construct (but don't throw) an exception object of any kind and get its stack trace, as described in Section 5.1.8, "Uncaught Exceptions and the Stack Trace" (page 192).
12. Compare the use of `Objects.requireNonNull(obj)` and `assert obj != null`. Give a compelling use for each.
13. Write a method `int min(int[] values)` that, just before returning the smallest value, asserts that it is indeed \leq all values in the array. Use a private helper method or, if you already peeked into Chapter 8, `Stream.allMatch`. Call the method repeatedly on a large array and measure the runtime with assertions enabled, disabled, and removed.
14. Implement and test a log record filter that filters out log records containing bad words such as sex, drugs, and C++.
15. Implement and test a log record formatter that produces an HTML file.

Generic Programming

Topics in This Chapter

- 6.1 Generic Classes — page 208
- 6.2 Generic Methods — page 209
- 6.3 Type Bounds — page 210
- 6.4 Type Variance and Wildcards — page 211
- 6.5 Generics in the Java Virtual Machine — page 216
- 6.6 Restrictions on Generics — page 220
- 6.7 Reflection and Generics — page 226
- Exercises — page 229

Chapter

6

You often need to implement classes and methods that work with multiple types. For example, an `ArrayList<T>` stores elements of an arbitrary class `T`. We say that the `ArrayList` class is *generic*, and `T` is a *type parameter*. The basic idea is very simple and incredibly useful. The first two sections of this chapter cover the simple part.

In any programming language with generic types, the details get tricky when you restrict or vary type parameters. For example, suppose you want to sort elements. Then you must specify that `T` provides an ordering. Furthermore, if the type parameter varies, what does that mean for the generic type? For example, what should be the relationship between `ArrayList<String>` to a method that expects an `ArrayList<Object>`? Sections 6.3, “Type Bounds” (page 210) and 6.4, “Type Variance and Wildcards” (page 211) show you how Java deals with these issues.

In Java, generic programming is more complex than it perhaps should be, because generics were added when Java had been around for a while, and they were designed to be backward-compatible. As a consequence, there are a number of unfortunate restrictions, some of which affect every Java programmer. Others are only of interest to implementors of generic classes. See Sections 6.5, “Generics in the Java Virtual Machine” (page 216) and 6.6, “Restrictions on Generics” (page 220) for the details. The final section covers generics and reflection, and you can safely skip it if you are not using reflection in your own programs.

The key points of this chapter are:

1. A generic class is a class with one or more type parameters.
2. A generic method is a method with type parameters.
3. You can require a type parameter to be a subtype of one or more types.
4. Generic types are invariant: When s is a subtype of t , there is no relationship between $G<s>$ and $G<t>$.
5. By using wildcards $G<? extends T>$ or $G<? super T>$, you can specify that a method can accept an instantiation of a generic type with a subclass or superclass argument.
6. Type parameters are erased when generic classes and methods are compiled.
7. Erasure puts many restrictions on generic types. In particular, you can't instantiate generic classes or arrays, cast to a generic type, or throw an object of a generic type.
8. The `Class<T>` class is generic, which is useful because methods such as `cast` are declared to produce a value of type T .
9. Even though generic classes and methods are erased in the virtual machine, you can find out at runtime how they were declared.

6.1 Generic Classes

A *generic class* is a class with one or more *type parameters*. As a simple example, consider this class for storing key/value pairs:

```
public class Entry<K, V> {  
    private K key;  
    private V value;  
  
    public Entry(K key, V value) {  
        this.key = key;  
        this.value = value;  
    }  
  
    public K getKey() { return key; }  
    public V getValue() { return value; }  
}
```

As you can see, the type parameters `K` and `V` are specified inside angle brackets after the name of the class. In the definitions of class members, they are used as types for instance variables, method parameters, and return values.

You *instantiate* the generic class by substituting types for the type variables. For example, `Entry<String, Integer>` is an ordinary class with methods `String getKey()` and `Integer getValue()`.



CAUTION: Type parameters cannot be instantiated with primitive types.
For example, `Entry<String, int>` is not valid in Java.

When you *construct* an object of a generic class, you can omit the type parameters from the constructor. For example,

```
Entry<String, Integer> entry = new Entry<>("Fred", 42);  
// Same as new Entry<String, Integer>("Fred", 42)
```

Note that you still provide an empty pair of angle brackets before the construction arguments. Some people call this empty bracket pair a *diamond*. When you use the diamond syntax, the type parameters for the constructor are inferred.

6.2 Generic Methods

Just like a generic class is a class with type parameters, a *generic method* is a method with type parameters. A generic method can be a method of a regular class or a generic class. Here is an example of a generic method in a class that is not generic:

```
public class Arrays {  
    public static <T> void swap(T[] array, int i, int j) {  
        T temp = array[i];  
        array[i] = array[j];  
        array[j] = temp;  
    }  
}
```

This `swap` method can be used to swap elements in an arbitrary array, as long as the array element type is not a primitive type.

```
String[] friends = ...;  
Arrays.swap(friends, 0, 1);
```

When you declare a generic method, the type parameter is placed after the modifiers (such as `public` and `static`) and before the return type:

```
public static <T> void swap(T[] array, int i, int j)
```

When calling a generic method, you do not need to specify the type parameter. It is inferred from the method parameter and return types. For example, in the call `Arrays.swap(friends, 0, 1)`, the type of `friends` is `String[]`, and the compiler can infer that `T` should be `String`.

You can, if you like, supply the type explicitly, before the method name, like this:

```
Arrays.<String>swap(friends, 0, 1);
```

One reason why you might want to do this is to get better error messages when something goes wrong—see Exercise 5.

Before plunging into the morass of technical details in the sections that follow, it is worth contemplating the examples of the `Entry` class and the `swap` method and to admire how useful and natural generic types are. With the `Entry` class, the key and value types can be arbitrary. With the `swap` method, the array type can be arbitrary. That is plainly expressed with type variables.

6.3 Type Bounds

Sometimes, the type parameters of a generic class or method need to fulfill certain requirements. You can specify a *type bound* to require that the type extends certain classes or implements certain interfaces.

Suppose, for example, you have an `ArrayList` of objects of a class that implements the `AutoCloseable` interface, and you want to close them all:

```
public static <T extends AutoCloseable> void closeAll(ArrayList<T> elems)
    throws Exception {
    for (T elem : elems) elem.close();
}
```

The type bound `extends AutoCloseable` ensures that the element type is a subtype of `AutoCloseable`. Therefore, the call `elem.close()` is valid. You can pass an `ArrayList<PrintStream>` to this method, but not an `ArrayList<String>`. Note that the `extends` keyword in a type bound actually means “subtype”—the Java designers just used the existing `extends` keyword instead of coming up with another keyword or symbol.

Exercise 14 has a more interesting variant of this method.



NOTE: In this example, we need a type bound because the parameter is of type `ArrayList`. If the method accepted an array, you wouldn't need a generic method. You could simply use a regular method

```
public static void closeAll(AutoCloseable[] elems) throws Exception
```

This works because an array type such as `PrintStream[]` is a subtype of `AutoCloseable[]`. However, as you will see in the following section, an `ArrayList<PrintStream>` is *not* a subtype of `ArrayList<AutoCloseable>`. Using a bounded type parameter solves this problem.

A type parameter can have multiple bounds, such as

```
T extends Runnable & AutoCloseable
```

This syntax is similar to that for catching multiple exceptions, the only difference being that the types are combined with an “and” operator, whereas multiple exceptions are combined with an “or” operator.

You can have as many interface bounds as you like, but at most one of the bounds can be a class. If you have a class as a bound, it must be the first one in the bounds list.

6.4 Type Variance and Wildcards

Suppose you need to implement a method that processes an array of objects that are subclasses of the class `Employee`. You simply declare the parameter to have type `Employee[]`:

```
public static void process(Employee[] staff) { ... }
```

If `Manager` is a subclass of `Employee`, you can pass a `Manager[]` array to the method since `Manager[]` is a subtype of `Employee[]`. This behavior is called *covariance*. Arrays vary in the same way as the element types.

Now, suppose you want to process an array list instead. However, there is a problem: The type `ArrayList<Manager>` is *not* a subtype of `ArrayList<Employee>`.

There is a reason for this restriction. If it were legal to assign an `ArrayList<Manager>` to a variable of type `ArrayList<Employee>`, you could corrupt the array list by storing nonmanagerial employees:

```
ArrayList<Manager> bosses = new ArrayList<>();
ArrayList<Employee> empls = bosses; // Not legal, but suppose it is ...
empls.add(new Employee(...)); // A nonmanager in bosses!
```

Since conversion from `ArrayList<Manager>` to `ArrayList<Employee>` is disallowed, this error cannot occur.



NOTE: Can you generate the same error with arrays, where the conversion from `Manager[]` to `Employee[]` is permitted? Sure you can, as you saw in Chapter 4. Java arrays are covariant, which is convenient but unsound. When you store a mere `Employee` in a `Manager[]` array, an `ArrayStoreException` is thrown. In contrast, all generic types in Java are *invariant*.

In Java, you use *wildcards* to specify how method parameter and return types should be allowed to vary. This mechanism is sometimes called *use-site variance*. You will see the details in the following sections.

6.4.1 Subtype Wildcards

In many situations it is perfectly safe to convert between different array lists. Suppose a method never writes to the array list, so it cannot corrupt its argument. Use a wildcard to express this fact:

```
public static void printNames(ArrayList<? extends Employee> staff) {  
    for (int i = 0; i < staff.size(); i++) {  
        Employee e = staff.get(i);  
        System.out.println(e.getName());  
    }  
}
```

The wildcard type `? extends Employee` indicates some unknown subtype of `Employee`. You can call this method with an `ArrayList<Employee>` or an array list of a subtype, such as `ArrayList<Manager>`.

The `get` method of the class `ArrayList<? extends Employee>` has return type `? extends Employee`. The statement

```
Employee e = staff.get(i);
```

is perfectly legal. Whatever type `?` denotes, it is a subtype of `Employee`, and the result of `staff.get(i)` can be assigned to the `Employee` variable `e`. (I didn't use an enhanced `for` loop in this example to show exactly how the elements are fetched from the array list.)

What happens if you try to store an element into an `ArrayList<? extends Employee>?` That would not work. Consider a call

```
staff.add(x);
```

The `add` method has parameter type `? extends Employee`, and there is *no object* that you can pass to this method. If you pass, say, a `Manager` object, the compiler will refuse. After all, `?` could refer to *any* subclass, perhaps `Janitor`, and you can't add a `Manager` to an `ArrayList<Janitor>`.



NOTE: You can, of course, pass `null`, but that's not an object.

In summary, you can convert from `? extends Employee` to `Employee`, but you can never convert anything to `? extends Employee`. This explains why you can read from an `ArrayList<? extends Employee>` but cannot write to it.

6.4.2 Supertype Wildcards

The wildcard type `? extends Employee` denotes an arbitrary subtype of `Employee`. The converse is the wildcard type `? super Employee` which denotes a supertype of `Employee`. These wildcards are often useful as parameters in functional objects. Here is a typical example. The `Predicate` interface has a method for testing whether an object of type `T` has a particular property:

```
public interface Predicate<T> {  
    boolean test(T arg);  
    ...  
}
```

This method prints the names of all employees with a given property:

```
public static void printAll(Employee[] staff, Predicate<Employee> filter) {  
    for (Employee e : staff)  
        if (filter.test(e))  
            System.out.println(e.getName());  
}
```

You can call this method with an object of type `Predicate<Employee>`. Since that is a functional interface, you can also pass a lambda expression:

```
printAll(employees, e -> e.getSalary() > 100000);
```

Now suppose you want to use a `Predicate<Object>` instead, for example

```
Predicate<Object> evenLength = e -> e.toString().length() % 2 == 0;  
printAll(employees, evenLength);
```

This should not be a problem. After all, every `Employee` is an `Object` with a `toString` method. However, like all generic types, the `Predicate` interface is invariant, and there is no relationship between `Predicate<Employee>` and `Predicate<Object>`.

The remedy is to allow any `Predicate<? super Employee>`:

```
public static void printAll(Employee[] staff, Predicate<? super Employee> filter) {  
    for (Employee e : staff)  
        if (filter.test(e))  
            System.out.println(e.getName());  
}
```

Have a close look at the call `filter.test(e)`. Since the parameter of `test` has a type that is some supertype of `Employee`, it is safe to pass an `Employee` object.

This situation is typical. Functions are naturally *contravariant* in their parameter types. For example, when a function is expected that can process employees, it is OK to give one that is willing to process arbitrary objects.

In general, when you specify a generic functional interface as a method parameter, you should use a super wildcard.



NOTE: Some programmers like the “PECS” mnemonic for wildcards:
producer extends, consumer super. An `ArrayList` from which you read
values is a producer, so you use an extends wildcard. A Predicate to
which you give values for testing is a consumer, and you use super.

6.4.3 Wildcards with Type Variables

Consider a generalization of the method of the preceding section that prints arbitrary elements fulfilling a condition:

```
public static <T> void printAll(T[] elements, Predicate<T> filter) {  
    for (T e : elements)  
        if (filter.test(e))  
            System.out.println(e.toString());  
}
```

This is a generic method that works for arrays of any type. The type parameter is the type of the array that is being passed. However, it suffers from the limitation that you saw in the preceding section. The type parameter of `Predicate` must exactly match the type parameter of the method.

The solution is the same that you already saw—but this time, the bound of the wildcard is a type variable:

```
public static <T> void printAll(T[] elements, Predicate<? super T> filter)
```

This method takes a filter for elements of type `T` or any supertype of `T`.

Here is another example. The `Collection<E>` interface, which you will see in detail in the following chapter, describes a collection of elements of type `E`. It has a method

```
public boolean addAll(Collection<? extends E> c)
```

You can add all elements from another collection whose element type is also `E` or some subtype. With this method, you can add a collection of managers to a collection of employees, but not the other way around.

To see how complex type declarations can get, consider the definition of the `Collections.sort` method:

```
public static <T extends Comparable<? super T>> void sort(List<T> list)
```

The `List` interface, covered in detail in the next chapter, describes a sequence of elements, such as a linked list or `ArrayList`. The `sort` method is willing to sort any `List<T>`, provided `T` is a subtype of `Comparable`. But the `Comparable` interface is again generic:

```
public interface Comparable<T> {  
    int compareTo(T other);  
}
```

Its type parameter specifies the argument type of the `compareTo` method. So, it would seem that `Collections.sort` could be declared as

```
public static <T extends Comparable<T>> void sort(List<T> list)
```

But that is too restrictive. Suppose that the `Employee` class implements `Comparable<Employee>`, comparing employees by salary. And suppose that the `Manager` class extends `Employee`. Note that it implements `Comparable<Employee>`, and *not* `Comparable<Manager>`. Therefore, `Manager` is *not* a subtype of `Comparable<Manager>`, but it is a subtype of `Comparable<? super Manager>`.



NOTE: In some programming languages (such as C# and Scala), you can declare type parameters to be covariant or contravariant. For example, by declaring the type parameter of `Comparable` to be contravariant, one doesn't have to use a wildcard for each `Comparable` parameter. This “declaration-site variance” is convenient, but it is less powerful than the “use-site variance” of Java wildcards.

6.4.4 Unbounded Wildcards

It is possible to have unbounded wildcards for situations where you only do very generic operations. For example, here is a method to check whether an `ArrayList` has any `null` elements:

```
public static boolean hasNulls(ArrayList<?> elements) {  
    for (Object e : elements) {  
        if (e == null) return true;  
    }  
    return false;  
}
```

Since the type parameter of the `ArrayList` doesn't matter, it makes sense to use an `ArrayList<?>`. One could equally well have made `hasNulls` into a generic method:

```
public static <T> boolean hasNulls(ArrayList<T> elements)
```

But the wildcard is easy to understand, so that's the preferred approach.

6.4.5 Wildcard Capture

Let's try to define a `swap` method using wildcards:

```
public static void swap(ArrayList<?> elements, int i, int j) {  
    ? temp = elements.get(i); // Won't work  
    elements.set(i, elements.get(j));  
    elements.set(j, temp);  
}
```

That won't work. You can use `?` as a type argument, but not as a type.

However, there is a workaround. Add a helper method, like this:

```
public static void swap(ArrayList<?> elements, int i, int j) {  
    swapHelper(elements, i, j);  
}  
  
private static <T> void swapHelper(ArrayList<T> elements, int i, int j) {  
    T temp = elements.get(i);  
    elements.set(i, elements.get(j));  
    elements.set(j, temp);  
}
```

The call to `swapHelper` is valid because of a special rule called *wildcard capture*. The compiler doesn't know what `?` is, but it stands for some type, so it is OK to call a generic method. The type parameter `T` of `swapHelper` "captures" the wildcard type. Since `swapHelper` is a generic method, not a method with wildcards in parameters, it can make use of the type variable `T` to declare variables.

What have we gained? The user of the API sees an easy-to-understand `ArrayList<?>` instead of a generic method.

6.5 Generics in the Java Virtual Machine

When generic types and methods were added to Java, the Java designers wanted the generic forms of classes to be compatible with their preexisting versions. For example, it should be possible to pass an `ArrayList<String>` to a method from pre-generic days that accepted the `ArrayList` class, which collects elements of type `Object`. The language designers decided on an implementation that "erases" the types in the virtual machine. This was very popular at the time since it enabled Java users to gradually migrate to using generics. As you can imagine, there are drawbacks to this scheme, and, as so often happens

with compromises made in the interest of compatibility, the drawbacks remain long after the migration has successfully completed.

In this section, you will see what goes on in the virtual machine, and the next section examines the consequences.

6.5.1 Type Erasure

When you define a generic type, it is compiled into a *raw* type. For example, the `Entry<K, V>` class of Section 6.1, “Generic Classes” (page 208) turns into

```
public class Entry {  
    private Object key;  
    private Object value;  
  
    public Entry(Object key, Object value) {  
        this.key = key;  
        this.value = value;  
    }  
  
    public Object getKey() { return key; }  
    public Object getValue() { return value; }  
}
```

Every `K` and `V` is replaced by `Object`.

If a type variable has bounds, it is replaced with the first bound. Suppose we declare the `Entry` class as

```
public class Entry<K extends Comparable<? super K> & Serializable,  
                    V extends Serializable>
```

Then it is erased to a class

```
public class Entry {  
    private Comparable key;  
    private Serializable value;  
    ...  
}
```

6.5.2 Cast Insertion

Erasure sounds somehow dangerous, but it is actually perfectly safe. Suppose for example, you used an `Entry<String, Integer>` object. When you construct the object, you must provide a key that is a `String` and a value that is an `Integer` or is converted to one. Otherwise, your program does not even compile. You are therefore guaranteed that the `getKey` method returns a `String`.

However, suppose your program compiled with “unchecked” warnings, perhaps because you used casts or mixed generic and raw `Entry` types. Then it is possible for an `Entry<String, Integer>` to have a key of a different type.

Therefore, it is also necessary to have safety checks at runtime. The compiler inserts a cast whenever one reads from an expression with erased type. Consider, for example,

```
Entry<String, Integer> entry = ...;
String key = entry.getKey();
```

Since the erased `getKey` method returns an `Object`, the compiler generates code equivalent to

```
String key = (String) entry.getKey();
```

6.5.3 Bridge Methods

In the preceding sections, you have seen the basics of what erasure does. It is simple and safe. Well, almost simple. When erasing method parameter and return types, it is sometimes necessary for the compiler to synthesize *bridge methods*. This is an implementation detail, and you don’t need to know about it unless you want to know why such a method shows up in a stack trace, or you want an explanation for one of the more obscure limitations on Java generics (see Section 6.6.6, “Methods May Not Clash after Erasure,” page 224).

Consider this example:

```
public class WordList extends ArrayList<String> {
    public boolean add(String e) {
        return isBadWord(e) ? false : super.add(e);
    }
    ...
}
```

Now consider this code fragment:

```
WordList words = ...;
ArrayList<String> strings = words; // OK—conversion to superclass
strings.add("C++");
```

The last method call invokes the (erased) `add(Object)` method of the `ArrayList` class.

One would reasonably expect dynamic method lookup to work in this case so that the `add` method of `WordList`, not the `add` method of `ArrayList`, is called when `add` is invoked on a `WordList` object.

To make this work, the compiler synthesizes a bridge method in the `WordList` class:

```
public boolean add(Object e) {  
    return add((String) e);  
}
```

In the call `strings.add("C++")`, the `add(Object)` method is called, and it calls the `add(String)` method of the `WordList` class.

Bridge methods can also be called when the return type varies. Consider this method:

```
public class WordList extends ArrayList<String> {  
    public String get(int i) {  
        return super.get(i).toLowerCase();  
    }  
    ...  
}
```

In the `WordList` class, there are two `get` methods:

```
String get(int) // Defined in WordList  
Object get(int) // Overrides the method defined in ArrayList
```

The second method is synthesized by the compiler, and it calls the first. This is again done to make dynamic method lookup work.

These methods have the same parameter types but different return types. In the Java language, you cannot implement such a pair of methods. But in the virtual machine, a method is specified by its name, the parameter types, *and* the return type, which allows the compiler to generate this method pair.



NOTE: Bridge methods are not only used for generic types. They are also used to implement covariant return types. For example, in Chapter 4, you saw how you should declare a `clone` method with the appropriate return type:

```
public class Employee implements Cloneable {  
    public Employee clone() throws CloneNotSupportedException { ... }  
}
```

In this case, the `Employee` class has two `clone` methods:

```
Employee clone() // Defined above  
Object clone() // Synthesized bridge method
```

The bridge method, again generated to make dynamic method lookup work, calls the first method.

6.6 Restrictions on Generics

There are several restrictions when using generic types and methods in Java—some merely surprising and others genuinely inconvenient. Most of them are consequences of type erasure. The following sections show you those that you will most likely encounter in practice.

6.6.1 No Primitive Type Arguments

A type parameter can never be a primitive type. For example, you cannot form an `ArrayList<int>`. As you have seen, in the virtual machine there is only one type, the raw `ArrayList` that stores elements of type `Object`. An `int` is not an object.

When generics were first introduced, this was not considered a big deal. After all, one can form an `ArrayList<Integer>` and rely on autoboxing. Now that generics are more commonly used, however, the pain is increasing. There is a profusion of functional interfaces such as `IntFunction`, `LongFunction`, `DoubleFunction`, `ToIntFunction`, `ToLongFunction`, `ToDoubleFunction`—and that only takes care of unary functions and three of the eight primitive types.

6.6.2 At Runtime, All Types Are Raw

In the virtual machine, there are only raw types. For example, you cannot inquire at runtime whether an `ArrayList` contains `String` objects. A condition such as

```
if (a instanceof ArrayList<String>)
```

is a compile-time error since no such check could ever be executed.

A cast to an instantiation of a generic type is equally ineffective, but it is legal.

```
Object result = ...;
ArrayList<String> list = (ArrayList<String>) result;
// Warning—this only checks whether result is a raw ArrayList
```

Such a cast is allowed because there is sometimes no way to avoid it. If `result` is the outcome of a very general process (such as calling a method through reflection, see Chapter 4) and its exact type is not known to the compiler, the programmer must use a cast. A cast to `ArrayList` or `ArrayList<?>` would not suffice.

To make the warning go away, annotate the variable like this:

```
@SuppressWarnings("unchecked") ArrayList<String> list
= (ArrayList<String>) result;
```



CAUTION: Abusing the `@SuppressWarnings("unchecked")` annotation can lead to *heap pollution*—objects that should belong to a particular generic type instantiation but actually belong to a different one. For example, you can assign an `ArrayList<Employee>` to an `ArrayList<String>` reference. The consequence is a `ClassCastException` when an element of the wrong type is retrieved.



TIP: The trouble with heap pollution is that the reported runtime error is far from the source of the problem—the insertion of a wrong element. If you need to debug such a problem, you can use a “checked view.” Where you constructed, say, an `ArrayList<String>`, instead use

```
List<String> strings  
    = Collections.checkedList(new ArrayList<>(), String.class);
```

The view monitors all insertions into the list and throws an exception when an object of the wrong type is added.

The `getClass` method always returns a raw type. For example, if `list` is an `ArrayList<String>`, then `list.getClass()` returns `ArrayList.class`. In fact, there is no `ArrayList<String>.class`—such a class literal is a syntax error.

Also, you cannot have type variables in class literals. There is no `T.class`, `T[].class`, or `ArrayList<T>.class`.

6.6.3 You Cannot Instantiate Type Variables

You cannot use type variables in expressions such as `new T(...)` or `new T[...]`. These forms are outlawed because they would not do what the programmer intends when `T` is erased.

If you want to create a generic instance or array, you have to work harder. Suppose you want to provide a `repeat` method so that `Arrays.repeat(n, obj)` makes an array containing `n` copies of `obj`. Of course, you’d like the element type of the array to be the same as the type of `obj`. This attempt does not work:

```
public static <T> T[] repeat(int n, T obj) {  
    T[] result = new T[n]; // Error—cannot construct an array new T[...]  
    for (int i = 0; i < n; i++) result[i] = obj;  
    return result;  
}
```

To solve this problem, ask the caller to provide the array constructor as a method reference:

```
String[] greetings = Arrays.repeat(10, "Hi", String[]::new);
```

Here is the implementation of the method:

```
public static <T> T[] repeat(int n, T obj, IntFunction<T[]> constr) {
    T[] result = constr.apply(n);
    for (int i = 0; i < n; i++) result[i] = obj;
    return result;
}
```

Alternatively, you can ask the user to supply a class object, and use reflection.

```
public static <T> T[] repeat(int n, T obj, Class<T> cl) {
    @SuppressWarnings("unchecked") T[] result
        = (T[]) java.lang.reflect.Array.newInstance(cl, n);
    for (int i = 0; i < n; i++) result[i] = obj;
    return result;
}
```

This method is called as follows:

```
String[] greetings = Arrays.repeat(10, "Hi", String.class);
```

Another option is to ask the caller to allocate the array. Usually, the caller is allowed to supply an array of any length, even zero. If the supplied array is too short, the method makes a new one, using reflection.

```
public static <T> T[] repeat(int n, T obj, T[] array) {
    T[] result;
    if (array.length >= n)
        result = array;
    else {
        @SuppressWarnings("unchecked") T[] newArray
            = (T[]) java.lang.reflect.Array.newInstance(
                array.getClass().getComponentType(), n);
        result = newArray;
    }
    for (int i = 0; i < n; i++) result[i] = obj;
    return result;
}
```



TIP: You can instantiate an `ArrayList` with a type variable. For example, the following is entirely legal:

```
public static <T> ArrayList<T> repeat(int n, T obj) {
    ArrayList<T> result = new ArrayList<>(); // OK
    for (int i = 0; i < n; i++) result.add(obj);
    return result;
}
```

This is much simpler than the workarounds you just saw, and I recommend it whenever you don't have a compelling reason for producing an array.



NOTE: If a generic class needs a generic array that is a private part of the implementation, you can get away with just constructing an `Object[]` array. This is what the `ArrayList` class does:

```
public class ArrayList<E> {  
    private Object[] elementData;  
  
    public E get(int index) {  
        return (E) elementData[index];  
    }  
    ...  
}
```

6.6.4 You Cannot Construct Arrays of Parameterized Types

Suppose you want to create an array of `Entry` objects:

```
Entry<String, Integer>[] entries = new Entry<String, Integer>[100];  
// Error—cannot construct an array with generic component type
```

This is a syntax error. The construction is outlawed because, after erasure, the array constructor would create a raw `Entry` array. It would then be possible to add `Entry` objects of any type (such as `Entry<Employee, Manager>`) without an `ArrayStoreException`.

Note that the *type* `Entry<String, Integer>[]` is perfectly legal. You can declare a variable of that type. If you really want to initialize it, you can, like this:

```
@SuppressWarnings("unchecked") Entry<String, Integer>[] entries  
= (Entry<String, Integer>[] ) new Entry<?, ?>[100];
```

But it is simpler to use an array list:

```
ArrayList<Entry<String, Integer>> entries = new ArrayList<>(100);
```

Recall that a varargs parameter is an array in disguise. If such a parameter is generic, you can bypass the restriction against generic array creation. Consider this method:

```
public static <T> ArrayList<T> asList(T... elements) {  
    ArrayList<T> result = new ArrayList<>();  
    for (T e : elements) result.add(e);  
    return result;  
}
```

Now consider this call:

```
Entry<String, Integer> entry1 = ...;  
Entry<String, Integer> entry2 = ...;  
ArrayList<Entry<String, Integer>> entries = Lists.asList(entry1, entry2);
```

The inferred type for `T` is the generic type `Entry<String, Integer>`, and therefore `elements` is an array of type `Entry<String, Integer>`. That is just the kind of array creation that you cannot do yourself!

In this case, the compiler reports a warning, not an error. If your method only reads elements from the parameter array, it should use the `@SafeVarargs` annotation to suppress the warning:

```
@SafeVarargs public static <T> ArrayList<T> asList(T... elements)
```

This annotation can be applied to methods that are static, final, or private, or to constructors. Any other methods might be overridden and are not eligible for the annotation.

6.6.5 Class Type Variables Are Not Valid in Static Contexts

Consider a generic class with type variables, such as `Entry<K, V>`. You cannot use the type variables `K` and `V` with static variables or methods. For example, the following does not work:

```
public class Entry<K, V> {
    private static V defaultValue;
        // Error—V in static context
    public static void setDefault(V value) { defaultValue = value; }
        // Error—V in static context
    ...
}
```

After all, type erasure means there is only one such variable or method in the erased `Entry` class, and not one for each `K` and `V`.

6.6.6 Methods May Not Clash after Erasure

You may not declare methods that would cause clashes after erasure. For example, the following would be an error:

```
public interface Ordered<T> extends Comparable<T> {
    public default boolean equals(T value) {
        // Error—erasure clashes with Object.equals
        return compareTo(value) == 0;
    }
    ...
}
```

The `equals(T value)` method erases to `equals(Object value)`, which clashes with the same method from `Object`.

Sometimes the cause for a clash is more subtle. Here is a nasty situation:

```
public class Employee implements Comparable<Employee> {
    ...
    public int compareTo(Employee other) {
        return name.compareTo(other.name);
    }
}

public class Manager extends Employee implements Comparable<Manager> {
    // Error—cannot have two instantiations of Comparable as supertypes
    ...
    public int compareTo(Manager other) {
        return Double.compare(salary, other.salary);
    }
}
```

The class `Manager` extends `Employee` and therefore picks up the supertype `Comparable<Employee>`. Naturally, managers want to compare each other by salary, not by name. And why not? There is no erasure. Just two methods

```
public int compareTo(Employee other)
public int compareTo(Manager other)
```

The problem is that *the bridge methods clash*. Recall from Section 6.5.3, “Bridge Methods” (page 218) that both of these methods yield a bridge method

```
public int compareTo(Object other)
```

6.6.7 Exceptions and Generics

You cannot throw or catch objects of a generic class. In fact, you cannot even form a generic subclass of `Throwable`:

```
public class Problem<T> extends Exception
    // Error—a generic class can't be a subtype of Throwable
```

You cannot use a type variable in a catch clause:

```
public static <T extends Throwable> void doWork(Runnable r, Class<T> cl) {
    try {
        r.run();
    } catch (T ex) { // Error—can't catch type variable
        Logger.getGlobal().log(..., ..., ex);
    }
}
```

However, you *can* have a type variable in the `throws` declaration:

```
public static <V, T extends Throwable> V doWork(Callable<V> c, T ex) throws T {
    try {
        return c.call();
    } catch (Throwable realEx) {
        ex.initCause(realEx);
        throw ex;
    }
}
```



CAUTION: You can use generics to remove the distinction between checked and unchecked exceptions. The key ingredient is this pair of methods:

```
public class Exceptions {
    @SuppressWarnings("unchecked")
    private static <T extends Throwable>
        void throwAs(Throwable e) throws T {
        throw (T) e; // The cast is erased to (Throwable) e
    }
    public static <V> V doWork(Callable<V> c) {
        try {
            return c.call();
        } catch (Throwable ex) {
            Exceptions.<RuntimeException>throwAs(ex);
            return null;
        }
    }
}
```

Now consider this method:

```
public static String readAll(Path path) {
    return doWork(() -> new String(Files.readAllBytes(path)));
}
```

Even though `Files.readAllBytes` throws a checked exception when the path is not found, that exception is neither declared nor caught in the `readAll` method!

6.7 Reflection and Generics

In the following sections, you will see what you can do with the generic classes in the reflection package and how you can find out the small amount of generic type information in the virtual machine that survives the erasure process.

6.7.1 The Class<T> Class

The `Class` class has a type parameter, namely the class that the `Class` object describes. Huh? Let's do this slowly.

Consider the `String` class. In the virtual machine, there is a `Class` object for this class, which you can obtain as `"Fred".getClass()` or, more directly, as the class literal `String.class`. You can use that object to find out what methods the class has, or to construct an instance.

The type parameter helps write typesafe code. Consider for example the `getConstructor` method of `Class<T>`. It is declared to return a `Constructor<T>`. And the `newInstance` method of `Constructor<T>` is declared to returns an object of type `T`. That's why `String.class` has type `Class<String>`: Its `getConstructor` method yields a `Constructor<String>`, whose `newInstance` method returns a `String`.

That information can save you a cast. Consider this method:

```
public static <T> ArrayList<T> repeat(int n, Class<T> cl)
    throws ReflectiveOperationException {
    ArrayList<T> result = new ArrayList<>();
    for (int i = 0; i < n; i++)
        result.add(cl.getConstructor().newInstance());
    return result;
}
```

The method compiles since `cl.getConstructor().newInstance()` returns a result of type `T`.

Suppose you call this method as `repeat(10, Employee.class)`. Then `T` is inferred to be the type `Employee` since `Employee.class` has type `Class<Employee>`. Therefore, the return type is `ArrayList<Employee>`.

In addition to the `getConstructor` method, there are several other methods of the `Class` class that use the type parameter. They are:

```
Class<? super T> getSuperclass()
<U> Class<? extends U> asSubclass(Class<U> clazz)
T cast(Object obj)
Constructor<T> getDeclaredConstructor(Class<?>... parameterTypes)
T[] getEnumConstants()
```

As you have seen in Chapter 4, there are many situations where you know nothing about the class that a `Class` object describes. Then, you can simply use the wildcard type `Class<?>`.

6.7.2 Generic Type Information in the Virtual Machine

Erasure only affects instantiated type parameters. Complete information about the *declaration* of generic classes and methods is available at runtime.

For example, suppose a call `obj.getClass()` yields `ArrayList.class`. You cannot tell whether `obj` was constructed as an `ArrayList<String>` or `ArrayList<Employee>`. But you can tell that the class `ArrayList` is a generic class with a type parameter `E` that has no bounds.

Similarly, consider the method

```
static <T extends Comparable<? super T>> void sort(List<T> list)
```

of the `Collections` class. As you saw in Chapter 4, you can get the corresponding `Method` object as

```
Method m = Collections.class.getMethod("sort", List.class);
```

From this `Method` object, you can recover the entire method signature.

The interface `Type` in the `java.lang.reflect` package represents generic type declarations. The interface has the following subtypes:

1. The `Class` class, describing concrete types
2. The `TypeVariable` interface, describing type variables (such as `T extends Comparable<? super T>`)
3. The `WildcardType` interface, describing wildcards (such as `? super T`)
4. The `ParameterizedType` interface, describing generic class or interface types (such as `Comparable<? super T>`)
5. The `GenericArrayType` interface, describing generic arrays (such as `T[]`)

Note that the last four subtypes are interfaces—the virtual machine instantiates suitable classes that implement these interfaces.

Both classes and methods can have type variables. Technically speaking, constructors are not methods, and they are represented by a separate class in the reflection library. They too can be generic. To find out whether a `Class`, `Method`, or `Constructor` object comes from a generic declaration, call the `getTypeParameters` method. You get an array of `TypeVariable` instances, one for each type variable in the declaration, or an array of length 0 if the declaration was not generic.

The `TypeVariable<D>` interface is generic. The type parameter is `Class<T>`, `Method`, or `Constructor<T>`, depending on where the type variable was declared. For example, here is how you get the type variable of the `ArrayList` class:

```
TypeVariable<Class<ArrayList>>[] vars = ArrayList.class.getTypeParameters();
String name = vars[0].getName(); // "E"
```

And here is the type variable of the `Collections.sort` method:

```
Method m = Collections.class.getMethod("sort", List.class);
TypeVariable<Method>[] vars = m.getTypeParameters();
String name = vars[0].getName(); // "T"
```

The latter variable has a bound, which you can process like this:

```
Type[] bounds = vars[0].getBounds();
if (bounds[0] instanceof ParameterizedType) { // Comparable<? super T>
    ParameterizedType p = (ParameterizedType) bounds[0];
    Type[] typeArguments = p.getActualTypeArguments();
    if (typeArguments[0] instanceof WildcardType) { // ? super T
        WildcardType t = (WildcardType) typeArguments[0];
        Type[] upper = t.getUpperBounds(); // ? extends ...
        Type[] lower = t.getLowerBounds(); // ? super ...
        if (lower.length > 0) {
            String description = lower[0].getTypeName(); // "T"
            ...
        }
    }
}
```

This gives you a flavor of how you can analyze generic declarations. I won't dwell on the details since this is not something that commonly comes up in practice. The key point is that the declarations of generic classes and methods are not erased and you have access to them through reflection.

Exercises

1. Implement a class `Stack<E>` that manages an array list of elements of type `E`. Provide methods `push`, `pop`, and `isEmpty`.
2. Reimplement the `Stack<E>` class, using an array to hold the elements. If necessary, grow the array in the `push` method. Provide two solutions, one with an `E[]` array and one with an `Object[]` array. Both solutions should compile without warnings. Which do you prefer, and why?
3. Implement a class `Table<K, V>` that manages an array list of `Entry<K, V>` elements. Supply methods to get the value associated with a key, to put a value for a key, and to remove a key.
4. In the previous exercise, make `Entry` into a nested class. Should that class be generic?
5. Consider this variant of the `swap` method where the array can be supplied with varargs:

```
public static <T> T[] swap(int i, int j, T... values) {  
    T temp = values[i];  
    values[i] = values[j];  
    values[j] = temp;  
    return values;  
}
```

Now have a look at the call

```
Double[] result = Arrays.swap(0, 1, 1.5, 2, 3);
```

What error message do you get? Now call

```
Double[] result = Arrays.<Double>swap(0, 1, 1.5, 2, 3);
```

Has the error message improved? What do you do to fix the problem?

6. Implement a generic method that appends all elements from one array list to another. Use a wildcard for one of the type arguments. Provide two equivalent solutions, one with a `? extends E` wildcard and one with `? super E`.
7. Implement a class `Pair<E>` that stores a pair of elements of type `E`. Provide accessors to get the first and second element.
8. Modify the class of the preceding exercise by adding methods `max` and `min`, getting the larger or smaller of the two elements. Supply an appropriate type bound for `E`.
9. In a utility class `Arrays`, supply a method

```
public static <E> Pair<E> firstLast(ArrayList<__> a)
```

that returns a pair consisting of the first and last element of `a`. Supply an appropriate type argument.

10. Provide generic methods `min` and `max` in an `Arrays` utility class that yield the smallest and largest element in an array.
11. Continue the preceding exercise and provide a method `minMax` that yields a `Pair` with the minimum and maximum.
12. Implement the following method that stores the smallest and largest element in `elements` in the `result` list:

```
public static <T> void minmax(List<T> elements,  
    Comparator<? super T> comp, List<? super T> result)
```

Note the wildcard in the last parameter—any supertype of `T` will do to hold the result.

13. Given the method from the preceding exercise, consider this method:

```
public static <T> void maxmin(List<T> elements,
    Comparator<? super T> comp, List<? super T> result) {
    minmax(elements, comp, result);
    Lists.swapHelper(result, 0, 1);
}
```

Why would this method not compile without wildcard capture? Hint: Try to supply an explicit type `Lists.<__>swapHelper(result, 0, 1)`.

14. Implement an improved version of the `closeAll` method in Section 6.3, “Type Bounds” (page 210). Close all elements even if some of them throw an exception. In that case, throw an exception afterwards. If two or more calls throw an exception, chain them together.
15. Implement a method `map` that receives an array list and a `Function<T, R>` object (see Chapter 3), and that returns an array list consisting of the results of applying the function to the given elements.
16. What is the erasure of the following methods in the `Collection` class?

```
public static <T extends Comparable<? super T>>
    void sort(List<T> list)
public static <T extends Object & Comparable<? super T>>
    T max(Collection<? extends T> coll)
```

17. Define a class `Employee` that implements `Comparable<Employee>`. Using the `javap` utility, demonstrate that a bridge method has been synthesized. What does it do?
18. Consider the method

```
public static <T> T[] repeat(int n, T obj, IntFunction<T[]> constr)
```

in Section 6.6.3, “You Cannot Instantiate Type Variables” (page 221). The call `Arrays.repeat(10, 42, int[]::new)` will fail. Why? How can you fix that? What do you need to do for the other primitive types?

19. Consider the method

```
public static <T> ArrayList<T> repeat(int n, T obj)
```

in Section 6.6.3, “You Cannot Instantiate Type Variables” (page 221). This method had no trouble constructing an `ArrayList<T>` which contains an array of `T` values. Can you produce a `T[]` array from that array list without using a class value or a constructor reference? If not, why not?

20. Implement the method

```
@SafeVarargs public static final <T> T[] repeat(int n, T... objs)
```

Return an array with `n` copies of the given objects. Note that no class value or constructor reference is required since you can reflectively increase `objs`.

21. Using the `@SafeVarargs` annotation, write a method that can construct arrays of generic types. For example,

```
List<String>[] result = Arrays.<List<String>>construct(10);  
// Sets result to a List<String>[] of size 10
```

22. Improve the method `public static <V, T extends Throwable> V doWork(Callable<V> c, T ex)` throws `T` of Section 6.6.7, “Exceptions and Generics” (page 225) so that one doesn’t have to pass an exception object, which may never get used. Instead, accept a constructor reference for the exception class.
23. In the cautionary note at the end of Section 6.6.7, “Exceptions and Generics” (page 225), the `throwsAS` helper method is used to “cast” `ex` into a `RuntimeException` and rethrow it. Why can’t you use a regular cast, i.e. `throw (RuntimeException) ex`?
24. Which methods can you call on a variable of type `Class<?>` without using casts?
25. Write a method `public static String genericDeclaration(Method m)` that returns the declaration of the method `m` listing the type parameters with their bounds and the types of the method parameters, including their type arguments if they are generic types.

Collections

Topics in This Chapter

- 7.1 An Overview of the Collections Framework — page 236
- 7.2 Iterators — page 240
- 7.3 Sets — page 242
- 7.4 Maps — page 243
- 7.5 Other Collections — page 247
- 7.6 Views — page 252
- Exercises — page 255

Chapter

7

Many data structures have been developed so programmers can store and retrieve values efficiently. The Java API provides implementations of common data structures and algorithms, as well as a framework to organize them. In this chapter, you will learn how to work with lists, sets, maps, and other collections.

The key points of this chapter are:

1. The `Collection` interface provides common methods for all collections, except for maps which are described by the `Map` interface.
2. A list is a sequential collection in which each element has an integer index.
3. A set is optimized for efficient containment testing. Java provides `HashSet` and `TreeSet` implementations.
4. For maps, you have the choice between `HashMap` and `TreeMap` implementations. A `LinkedHashMap` retains insertion order.
5. The `Collection` interface and `Collections` class provide many useful algorithms: set operations, searching, sorting, shuffling, and more.
6. Views provide access to data stored elsewhere using the standard collection interfaces.

7.1 An Overview of the Collections Framework

The Java collections framework provides implementations of common data structures. To make it easy to write code that is independent of the choice of data structures, the collections framework provides a number of common interfaces, shown in Figure 7-1. The fundamental interface is `Collection` whose methods are shown in Table 7-1.

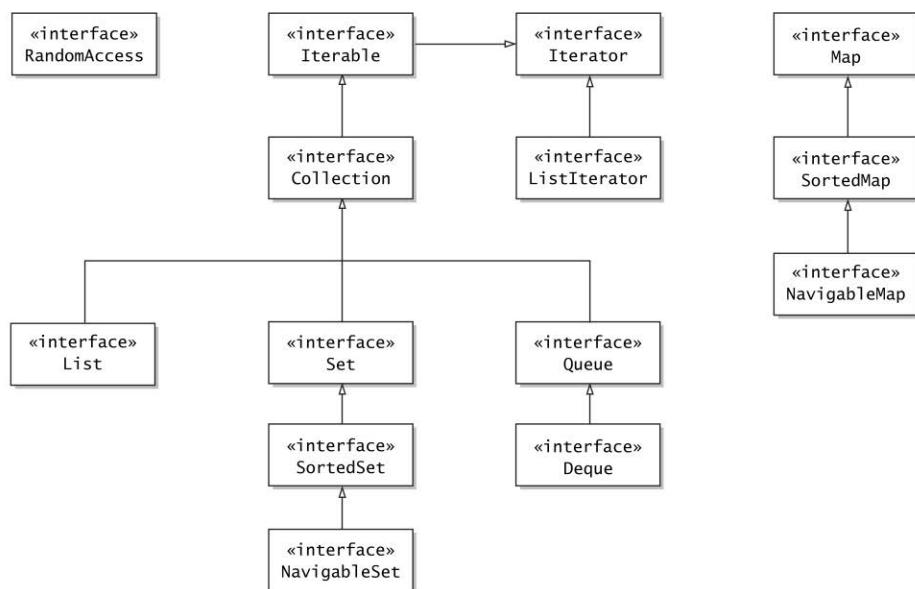


Figure 7-1 Interfaces in the Java collections framework

Table 7-1 The Methods of the `Collection<E>` Interface

Method	Description
<code>boolean add(E e)</code> <code>boolean addAll(Collection<? extends E> c)</code>	Adds e, or the elements in c. Returns true if the collection changed.
<code>boolean remove(Object o)</code> <code>boolean removeAll(Collection<?> c)</code> <code>boolean retainAll(Collection<?> c)</code> <code>boolean removeIf(Predicate<? super E> filter)</code> <code>void clear()</code>	Removes o, or the elements in c, or the elements not in c, or matching elements, or all elements. The first four methods return true if the collection changed.

(Continues)

Table 7-1 The Methods of the Collection<E> Interface (Continued)

Method	Description
int size()	Returns the number of elements in this collection.
boolean isEmpty() boolean contains(Object o) boolean containsAll(Collection<?> c)	Returns true if this collection is empty, or contains o, or contains all elements in c.
Iterator<E> iterator() Stream<E> stream() Stream<E> parallelStream() Spliterator<E> spliterator()	Yields an iterator, or a stream, or a possibly parallel stream, or a spliterator for visiting the elements of this collection. See Section 7.2 for iterators and Chapter 8 for streams. Spliterators are only of interest to implementors of streams.
Object[] toArray() T[] toArray(T[] a)	Returns an array with the elements of this collection. The second method returns a if it has sufficient length.

A List is a sequential collection: Elements have position 0, 1, 2, and so on. Table 7-2 shows the methods of that interface.

The List interface is implemented both by the ArrayList class, which you have seen throughout this book, and the LinkedList class. If you took a course on data structures, you probably remember a linked list—a sequence of linked nodes, each carrying an element. Insertion in the middle of a linked list is speedy—you just splice in a node. But to get to the middle, you have to follow all the links from the beginning, which is slow. There are applications for linked lists, but most application programmers will probably stick with array lists when they need a sequential collection. Still, the List interface is useful. For example, the method Collections.nCopies(n, o) returns a List object with n copies of the object o. That object “cheats” in that it doesn’t actually store n copies but, when you ask about any one of them, returns o.



CAUTION: The List interface provides methods to access the *n*th element of a list, even though such an access may not be efficient. To indicate that it is, a collection class should implement the RandomAccess interface. This is a tagging interface without methods. For example, ArrayList implements List and RandomAccess, but LinkedList implements only the List interface.

Table 7–2 The List Interface

Method	Description
<code>boolean add(int index, E e)</code> <code>boolean addAll(int index, Collection<? extends E> c)</code> <code>boolean add(E e)</code> <code>boolean addAll(Collection<? extends E> c)</code>	Adds <code>e</code> , or the elements in <code>c</code> , before <code>index</code> or to the end. Returns true if the list changed.
<code>E get(int index)</code> <code>E set(int index, E element)</code> <code>E remove(int index)</code>	Gets, sets, or removes the element at the given index. The last two methods return the element at the index before the call.
<code>int indexOf(Object o)</code> <code>int lastIndexOf(Object o)</code>	Returns the index of the first or last element equal to <code>o</code> , or -1 if there is no match.
<code>ListIterator<E> listIterator()</code> <code>ListIterator<E> listIterator(int index)</code>	Yields a list iterator for all elements or the elements starting at <code>index</code> .
<code>void replaceAll(UnaryOperator<E> operator)</code>	Replaces each element with the result of applying the operator to it.
<code>void sort(Comparator<? super E> c)</code>	Sorts this list, using the ordering given by <code>c</code> .
<code>static List<E> of(E... elements)</code>	Yields an unmodifiable list containing the given elements.
<code>List<E> subList(int fromIndex, int toIndex)</code>	Yields a view (Section 7.6) of the sublist starting at <code>fromIndex</code> and ending before <code>toIndex</code> .

In a `Set`, elements are not inserted at a particular position, and duplicate elements are not allowed. A `SortedSet` allows iteration in sort order, and a `NavigableSet` has methods for finding neighbors of elements. You will learn more about sets in Section 7.3, “Sets” (page 242).

A `Queue` retains insertion order, but you can only insert elements at the tail and remove them from the head (just like a queue of people). A `Deque` is a double-ended queue with insertion and removal at both ends.

All collection interfaces are generic, with a type parameter for the element type (`Collection<E>`, `List<E>`, and so on). The `Map<K, V>` interface has a type parameter `K` for the key type and `V` for the value type.

You are encouraged to use the interfaces as much as possible in your code. For example, after constructing an `ArrayList`, store the reference in a variable of type `List`:

```
List<String> words = new ArrayList<>();
```

Whenever you implement a method that processes a collection, use the least restrictive interface as parameter type. Usually, a `Collection`, `List`, or `Map` will suffice.

One advantage of a collections framework is that you don't have to reinvent the wheel when it comes to common algorithms. Some basic algorithms (such as `addAll` and `removeIf`) are methods of the `Collection` interface. The `Collections` utility class contains many additional algorithms that operate on various kinds of collections. You can sort, shuffle, rotate, and reverse lists, find the maximum or minimum, or the position of an arbitrary element in a collection, and generate collections with no elements, one element, or n copies of the same element. Table 7-3 provides a summary.

Table 7-3 Useful Methods of the `Collections` Class

Method (all are static)	Description
<code>boolean disjoint(Collection<?> c1, Collection<?> c2)</code>	Returns true if the collections have no elements in common.
<code>boolean addAll(Collection<? super T> c, T... elements)</code>	Adds all elements to <code>c</code> .
<code>void copy(List<? super T> dest, List<? extends T> src)</code>	Copies all elements from <code>src</code> to the same indexes in <code>dest</code> (which must be at least as long as <code>src</code>).
<code>boolean replaceAll(List<T> list, T oldVal, T newVal)</code>	Replaces all <code>oldVal</code> elements with <code>newVal</code> , either of which may be <code>null</code> . Returns true if at least one match was found.
<code>void fill(List<? super T> list, T obj)</code>	Sets all elements of the list to <code>obj</code> .
<code>List<T> nCopies(int n, T o)</code>	Yields an immutable list with n copies of <code>o</code> .
<code>int frequency(Collection<?> c, Object o)</code>	Returns the number of elements in <code>c</code> equal to <code>o</code> .

(Continues)

Table 7–3 Useful Methods of the Collections Class (*Continued*)

Method (all are static)	Description
<code>int indexOfSubList(List<?> source, List<?> target)</code> <code>int lastIndexOfSubList(List<?> source, List<?> target)</code>	Returns the start of the first or last occurrence of the target list within the source list, or -1 if there is none.
<code>int binarySearch(List<? extends Comparable<? super T>> list, T key)</code> <code>int binarySearch(List<? extends T> list, T key, Comparator<? super T> c)</code>	Returns the position of the key, assuming that the list is sorted by the natural element order or <i>c</i> . If the key is not present, returns <i>i</i> - 1 where <i>i</i> is the location at which the key should be inserted.
<code>sort(List<T> list)</code> <code>sort(List<T> list, Comparator<? super T> c)</code>	Sorts the list, using the natural element order or <i>c</i> .
<code>void swap(List<?> list, int i, int j)</code>	Swaps the elements at the given position.
<code>void rotate(List<?> list, int distance)</code>	Rotates the list, moving the element with index <i>i</i> to $(i + distance) \% list.size()$.
<code>void reverse(List<?> list)</code> <code>void shuffle(List<?> list)</code> <code>void shuffle(List<?> list, Random rnd)</code>	Reverses or randomly shuffles the list.
<code>synchronized(Collection List Set SortedSet NavigableSet Map SortedMap NavigableMap)()</code>	Yields a synchronized view (see Section 7.6).
<code>unmodifiable(Collection List Set SortedSet NavigableSet Map SortedMap NavigableMap)()</code>	Yields an unmodifiable view (see Section 7.6).
<code>checked(Collection List Set SortedSet NavigableSet Map SortedMap NavigableMap Queue)()</code>	Yields a checked view (see Section 7.6).

7.2 Iterators

Each collection provides a way to iterate through its elements in some order. The `Iterable<T>` superinterface of `Collection` defines a method

```
Iterator<T> iterator()
```

It yields an iterator that you can use to visit all elements.

```
Collection<String> coll = ...;
Iterator<String> iter = coll.iterator();
while (iter.hasNext()) {
    String element = iter.next();
    Process element
}
```

In this case, you can simply use the enhanced for loop:

```
for (String element : coll) {
    Process element
}
```



NOTE: For any object *c* of a class that implements the `Iterable<E>` interface, the enhanced for loop is translated to the preceding form.

The `Iterator` interface also has a `remove` method which removes the previously visited element. This loop removes all elements that fulfill a condition:

```
while (iter.hasNext()) {
    String element = iter.next();
    if (element fulfills the condition)
        iter.remove();
}
```

However, it is easier to use the `removeIf` method:

```
coll.removeIf(e -> e fulfills the condition);
```



CAUTION: The `remove` method removes the last element that the iterator has returned, not the element to which the iterator points. You can't call `remove` twice without an intervening call to `next` or `previous`.

The `ListIterator` interface is a subinterface of `Iterator` with methods for adding an element before the iterator, setting the visited element to a different value, and for navigating backwards. It is mainly useful for working with linked lists.

```
List<String> friends = new LinkedList<>();
ListIterator<String> iter = friends.listIterator();
iter.add("Fred"); // Fred |
iter.add("Wilma"); // Fred Wilma |
iter.previous(); // Fred | Wilma
iter.set("Barney"); // Fred | Barney
```



CAUTION: If you have multiple iterators visiting a data structure and one of them mutates it, the other ones can become invalid. An invalid iterator may throw a `ConcurrentModificationException` if you continue using it.

7.3 Sets

A set can efficiently test whether a value is an element, but it gives up something in return: It doesn't remember in which order elements were added. Sets are useful whenever the order doesn't matter. For example, if you want to disallow a set of bad words as usernames, their order doesn't matter. You just want to know whether a proposed username is in the set or not.

The `Set` interface is implemented by the `HashSet` and `TreeSet` classes. Internally, these classes use very different implementations. If you have taken a course in data structures, you may know how to implement hash tables and binary trees—but you can use these classes without knowing their internals.

Generally, hash sets are a bit more efficient, provided you have a good *hash function* for your elements. Library classes such as `String` or `Path` have good hash functions. You learned how to write hash function for your own classes in Chapter 4.

For example, that set of bad words can be implemented simply as

```
Set<String> badWords = new HashSet<>();
badWords.add("sex");
badWords.add("drugs");
badWords.add("c++");
if (badWords.contains(username.toLowerCase()))
    System.out.println("Please choose a different user name");
```

You use a `TreeSet` if you want to traverse the set in sorted order. One reason you might want to do this is to present users a sorted list of choices.

The element type of the set must implement the `Comparable` interface, or you need to supply a `Comparator` in the constructor.

```
TreeSet<String> countries = new TreeSet<>(); // Visits added countries in sorted order
countries = new TreeSet<>((u, v) ->
    u.equals(v) ? 0
    : u.equals("USA") ? -1
    : v.equals("USA") ? 1
    : u.compareTo(v));
// USA always comes first
```

The `TreeSet` class implements the `SortedSet` and `NavigableSet` interfaces, whose methods are shown in Tables 7-4 and 7-5.

Table 7-4 SortedSet<E> Methods

Method	Description
E first() E last()	The first and last element in this set.
SortedSet<E> headSet(E toElement) SortedSet<E> subSet(E fromElement, E toElement) SortedSet<E> tailSet(E fromElement)	Returns a view of the elements starting at fromElement and ending before toElement.

Table 7-5 NavigableSet<E> Methods

Method	Description
E higher(E e) E ceiling(E e) E floor(E e) E lower(E e)	Returns the closest element $> \geq \leq < e$.
E pollFirst() E pollLast()	Removes and returns the first or last element, or returns null if the set is empty.
NavigableSet<E> headSet(E toElement, boolean inclusive) NavigableSet<E> subSet(E fromElement, boolean fromInclusive, E toElement, boolean toExclusive) NavigableSet<E> tailSet(E fromElement, boolean inclusive)	Returns a view of the elements from fromElement to toElement (inclusive or exclusive).

7.4 Maps

Maps store associations between keys and values. Call `put` to add a new association, or change the value of an existing key:

```
Map<String, Integer> counts = new HashMap<>();
counts.put("Alice", 1); // Adds the key/value pair to the map
counts.put("Alice", 2); // Updates the value for the key
```

This example uses a hash map which, as for sets, is usually the better choice if you don't need to visit the keys in sorted order. If you do, use a `TreeMap` instead.

Here is how you can get the value associated with a key:

```
int count = counts.get("Alice");
```

If the key isn't present, the `get` method returns `null`. In this example, that would cause a `NullPointerException` when the value is unboxed. A better alternative is

```
int count = counts.getOrDefault("Alice", 0);
```

Then a count of 0 is returned if the key isn't present.

When you update a counter in a map, you first need to check whether the counter is present, and if so, add 1 to the existing value. The `merge` method simplifies that common operation. The call

```
counts.merge(word, 1, Integer::sum);
```

associates `word` with 1 if the key wasn't previously present, and otherwise combines the previous value and 1, using the `Integer::sum` function.

Table 7-6 summarizes the map operations.

You can get *views* of the keys, values, and entries of a map by calling these methods:

```
Set<K> keySet()
Set<Map.Entry<K, V>> entrySet()
Collection<V> values()
```

The collections that are returned are not copies of the map data, but they are connected to the map. If you remove a key or entry from the view, then the entry is also removed from the underlying map.

To iterate through all keys and values of a map, you can iterate over the set returned by the `entrySet` method:

```
for (Map.Entry<String, Integer> entry : counts.entrySet()) {
    String k = entry.getKey();
    Integer v = entry.getValue();
    Process k, v
}
```

Or simply use the `forEach` method:

```
counts.forEach((k, v) -> {
    Process k, v
});
```



CAUTION: Some map implementations (for example, `ConcurrentHashMap`) disallow `null` for keys or values. And with those that allow it (such as `HashMap`), you need to be very careful if you do use `null` values. A number of map methods interpret a `null` value as an indication that an entry is absent, or should be removed.

Table 7–6 Map<K, V> Methods

Method	Description
V get(Object key) V getOrDefault(Object key, V defaultValue)	If key is associated with a non-null value v, returns v. Otherwise, returns null or defaultValue.
V put(K key, V value)	If key is associated with a non-null value v, associates key with value and returns v. Otherwise, adds entry and returns null.
V putIfAbsent(K key, V value)	If key is associated with a non-null value v, ignores value and returns v. Otherwise, adds entry and returns null.
V merge(K key, V value, BiFunction< ? super V,? super V,? extends V> remappingFunction)	If key is associated with a non-null value v, applies the function to v and value and either associates key with the result or, if the result is null, removes the key. Otherwise, associates key with value. Returns get(key).
V compute(K key, BiFunction< ? super K,? super V,? extends V> remappingFunction)	Applies the function to key and get(key). Either associates key with the result or, if the result is null, removes the key. Returns get(key).
V computeIfPresent(K key, BiFunction< ? super K,? super V,? extends V> remappingFunction)	If key is associated with a non-null value v, applies the function to key and v and either associates key with the result or, if the result is null, removes the key. Returns get(key).
V computeIfAbsent(K key, Function< ? super K,? extends V> mappingFunction)	Applies the function to key unless key is associated with a non-null value. Either associates key with the result or, if the result is null, removes the key. Returns get(key).
void putAll(Map<? extends K, ? extends V> m)	Adds all entries from m.
V remove(Object key) V replace(K key, V newValue)	Removes the key and its associated value, or replaces the old value. Returns the old value, or null if none existed.

(Continues)

Table 7–6 Map<K, V> Methods (*Continued*)

Method	Description
<code>boolean remove(Object key, Object value)</code> <code>boolean replace(K key, V value, V newValue)</code>	Provided that key was associated with value, removes the entry or replaces the old value and returns true. Otherwise, does nothing and returns false. These methods are mainly of interest when the map is accessed concurrently.
<code>int size()</code>	Returns the number of entries.
<code>boolean isEmpty()</code>	Checks if this map is empty.
<code>void clear()</code>	Removes all entries.
<code>void forEach(BiConsumer<? super K, ? super V> action)</code>	Applies the action to all entries.
<code>void replaceAll(BiFunction<? super K, ? super V,> extends V> function)</code>	Calls the function on all entries. Associates keys with non-null results and removes keys with null results.
<code>boolean containsKey(Object key)</code> <code>boolean containsValue(Object value)</code>	Checks whether the map contains the given key or value.
<code>Set<K> keySet()</code> <code>Collection<V> values()</code> <code>Set<Map.Entry<K, V>> entrySet()</code>	Returns views of the keys, values, and entries.
<code>static Map<K, V> of()</code> <code>static Map<K, V> of(K k1, V v1)</code> <code>static Map<K, V> of(K k1, V v1, K k2, V v2)</code> <code>...</code>	Yields an unmodifiable map containing up to ten keys and values.



TIP: Sometimes, you need to present map keys in an order that is different from the sort order. For example, in the JavaServer Faces framework, you specify labels and values of a selection box with a map. Users would be surprised if the choices were sorted alphabetically (Friday, Monday, Saturday, Sunday, Thursday, Tuesday, Wednesday) or in the hash code order. In that case, use a `LinkedHashMap` that remembers the order in which entries were added and iterates through them in that order.

7.5 Other Collections

In the following sections, I briefly discuss some collection classes that you may find useful in practice.

7.5.1 Properties

The `Properties` class implements a map that can be easily saved and loaded using a plain text format. Such maps are commonly used for storing configuration options for programs. For example:

```
Properties settings = new Properties();
settings.put("width", "200");
settings.put("title", "Hello, World!");
try (OutputStream out = Files.newOutputStream(path)) {
    settings.store(out, "Program Properties");
}
```

The result is the following file:

```
#Program Properties
#Mon Nov 03 20:52:33 CET 2014
width=200
title=Hello, World\!
```



NOTE: As of Java 9, property files are encoded in UTF-8. (Previously, they were encoded in ASCII, with characters greater than '\u007e' written as Unicode escapes \unnnn.) Comments start with # or !. A newline in a key or value is written as '\n'. The characters \, #, ! are escaped as \\, \#, \!.

To load properties from a file, call

```
try (InputStream in = Files.newInputStream(path)) {
    settings.load(in);
}
```

Then use the `getProperty` method to get a value for a key. You can specify a default value used when the key isn't present:

```
String title = settings.getProperty("title", "New Document");
```



NOTE: For historical reasons, the `Properties` class implements `Map<Object, Object>` even though the values are always strings. Therefore, don't use the `get` method—it returns the value as an `Object`.

The `System.getProperties` method yields a `Properties` object with system properties. Table 7-7 describes the most useful ones.

Table 7-7 Useful System Properties

Property Key	Description
<code>user.dir</code>	The “current working directory” of this virtual machine
<code>user.home</code>	The user’s home directory
<code>user.name</code>	The user’s account name
<code>java.version</code>	The Java runtime version of this virtual machine
<code>java.home</code>	The home directory of the Java installation
<code>java.class.path</code>	The class path with which this VM was launched
<code>java.io.tmpdir</code>	A directory suitable for temporary files (such as <code>/tmp</code>)
<code>os.name</code>	The name of the operating system (such as <code>Linux</code>)
<code>os.arch</code>	The architecture of the operating system (such as <code>amd64</code>)
<code>os.version</code>	The version of the operating system (such as <code>3.13.0-34-generic</code>)
<code>file.separator</code>	The file separator (<code>/</code> on Unix, <code>\</code> on Windows)
<code>path.separator</code>	The path separator (<code>:</code> on Unix, <code>;</code> on Windows)
<code>line.separator</code>	The newline separator (<code>\n</code> on Unix, <code>\r\n</code> on Windows)

7.5.2 Bit Sets

The `BitSet` class stores a sequence of bits. A bit set packs bits into an array of `long` values, so it is more efficient to use a bit set than an array of `boolean` values. Bit sets are useful for sequences of flag bits or to represent sets of non-negative integers, where the *i*th bit is 1 to indicate that *i* is contained in the set.

The `BitSet` class gives you convenient methods for getting and setting individual bits. This is much simpler than the bit-fiddling necessary to store bits in `int` or `long` variables. There are also methods that operate on all bits together for set operations, such as union and intersection. See Table 7-8 for a complete list. Note that the `BitSet` class is not a collection class—it does not implement `Collection<Integer>`.

Table 7-8 Methods of the BitSet Class

Method	Description
BitSet() BitSet(int nbits)	Constructs a bit set that can initially hold 64, or nbits, bits.
void set(int bitIndex) void set(int fromIndex, int toIndex) void set(int bitIndex, boolean value) void set(int fromIndex, int toIndex, boolean value)	Sets the bit at the given index, or from fromIndex (inclusive) to toIndex (exclusive), to 1 or to the given value.
void clear(int bitIndex) void clear(int fromIndex, int toIndex) void clear()	Sets the bit at the given index, or from fromIndex (inclusive) to toIndex (exclusive), or all bits to 0.
void flip(int bitIndex) void flip(int fromIndex, int toIndex)	Flips the bit at the given index, or from fromIndex (inclusive) to toIndex (exclusive).
boolean get(int bitIndex) BitSet get(int fromIndex, int toIndex)	Gets the bit at the given index, or from fromIndex (inclusive) to toIndex (exclusive).
int nextSetBit(int fromIndex) int previousSetBit(int fromIndex) int nextClearBit(int fromIndex) int previousClearBit(int fromIndex)	Returns the index of the next/previous 1/0 bit, or -1 if none exists.
void and(BitSet set) void andNot(BitSet set) void or(BitSet set) void xor(BitSet set)	Forms the intersection difference union symmetric difference with set.
int cardinality()	Returns the number of 1 bits in this bit set. Caution: The size method returns the current size of the bit vector, not the size of the set.
byte[] toByteArray() long[] toLongArray()	Packs the bits of this bit set into an array.
IntStream stream() String toString()	Returns a stream or string of the integers (that is, indexes of 1 bits) in this bit set.
static BitSet valueOf(byte[] bytes) static BitSet valueOf(long[] longs) static BitSet valueOf(ByteBuffer bb) static BitSet valueOf(LongBuffer lb)	Yields a bit set containing the supplied bits.
boolean isEmpty() boolean intersects(BitSet set)	Checks whether this bit set is empty, or has an element in common with set.

7.5.3 Enumeration Sets and Maps

If you collect sets of enumerated values, use the `EnumSet` class instead of `BitSet`. The `EnumSet` class has no public constructors. Use a static factory method to construct the set:

```
enum Weekday { MONDAY, TUESDAY, WEDNESDAY, THURSDAY, FRIDAY, SATURDAY, SUNDAY };
Set<Weekday> always = EnumSet.allOf(Weekday.class);
Set<Weekday> never = EnumSet.noneOf(Weekday.class);
Set<Weekday> workday = EnumSet.range(Weekday.MONDAY, Weekday.FRIDAY);
Set<Weekday> mwf = EnumSet.of(Weekday.MONDAY, Weekday.WEDNESDAY, Weekday.FRIDAY);
```

You can use the methods of the `Set` interface to work with an `EnumSet`.

An `EnumMap` is a map with keys that belong to an enumerated type. It is implemented as an array of values. You specify the key type in the constructor:

```
EnumMap<Weekday, String> personInCharge = new EnumMap<>(Weekday.class);
personInCharge.put(Weekday.MONDAY, "Fred");
```

7.5.4 Stacks, Queues, and Priority Queues

A stack is a data structure for adding and removing elements at one end (the “top” of the stack). A queue lets you efficiently add elements at one end (the “tail”) and remove them from the other end (the “head”). A double-ended queue, or deque, supports insertion and removal at both ends. With all these data structures, adding elements in the middle is not supported.

The `Queue` and `Deque` interfaces define the methods for these data structures. There is no `Stack` interface in the Java collections framework, just a legacy `Stack` class from the earliest days of Java that you should avoid. If you need a stack, queue, or deque and are not concerned about thread safety, use an `ArrayDeque`.

With a stack, use the `push` and `pop` methods.

```
ArrayDeque<String> stack = new ArrayDeque<>();
stack.push("Peter");
stack.push("Paul");
stack.push("Mary");
while (!stack.isEmpty())
    System.out.println(stack.pop());
```

With a queue, use `add` and `remove`.

```
Queue<String> queue = new ArrayDeque<>();
queue.add("Peter");
queue.add("Paul");
queue.add("Mary");
while (!queue.isEmpty())
    System.out.println(queue.remove());
```

Threadsafe queues are commonly used in concurrent programs. You will find more information about them in Chapter 10.

A *priority queue* retrieves elements in sorted order after they were inserted in arbitrary order. That is, whenever you call the `remove` method, you get the smallest element currently in the priority queue.

A typical use for a priority queue is job scheduling. Each job has a priority. Jobs are added in random order. Whenever a new job can be started, the highest priority job is removed from the queue. (Since it is traditional for priority 1 to be the “highest” priority, the `remove` operation yields the minimum element.)

```
public class Job implements Comparable<Job> { ... }
...
PriorityQueue<Job> jobs = new PriorityQueue<>();
jobs.add(new Job(4, "Collect garbage"));
jobs.add(new Job(9, "Match braces"));
jobs.add(new Job(1, "Fix memory leak"));
...
while (jobs.size() > 0) {
    Job job = jobs.remove(); // The most urgent jobs are removed first
    execute(job);
}
```

Just like a `TreeSet`, a priority queue can hold elements of a class that implements the `Comparable` interface, or you can supply a `Comparator` in the constructor. However, unlike a `TreeSet`, iterating over the elements does not necessarily yield them in sorted order. The priority queue uses algorithms for adding and removing elements that cause the smallest element to gravitate to the root, without wasting time on sorting all elements.

7.5.5 Weak Hash Maps

The `WeakHashMap` class was designed to solve an interesting problem. What happens with a value whose key is no longer used anywhere in your program? If the last reference to a key has gone away, there is no longer any way to refer to the value object so it should be removed by the garbage collector.

It isn’t quite so simple. The garbage collector traces live objects. As long as the map object is live, all entries in it are live and won’t be reclaimed—and neither will be the values that are referenced by the entries.

This is the problem that the `WeakHashMap` class solves. This data structure cooperates with the garbage collector to remove key/value pairs when the only reference to the key is the one from the hash table entry.

Technically, the `WeakHashMap` uses *weak references* to hold keys. A `WeakReference` object holds a reference to another object—in our case, a hash table key. Objects of this type are treated in a special way by the garbage collector. If an object is reachable *only* by a weak reference, the garbage collector reclaims the object and places the weak reference into a queue associated with the `WeakReference` object. Whenever a method is invoked on it, a `WeakHashMap` checks its queue of weak references for new arrivals and removes the associated entries.

7.6 Views

A collection *view* is a lightweight object that implements a collection interface, but doesn't store elements. For example, the `keySet` and `values` methods of a map yield views into the map.

In the following sections, you will see some views that are provided by the Java collections framework.

7.6.1 Small Collections

The `List`, `Set`, and `Map` interfaces provide static methods yielding a set or list with given elements, and a map with given key/value pairs.

For example,

```
List<String> names = List.of("Peter", "Paul", "Mary");
Set<Integer> numbers = Set.of(2, 3, 5);
```

yield a list and a set with three elements. For a map, specify the keys and values like this:

```
Map<String, Integer> scores = Map.of("Peter", 2, "Paul", 3, "Mary", 5);
```

The elements, keys, or values may not be `null`.

The `List` and `Set` interfaces have 11 of methods with zero to ten arguments, and an `of` method with a variable number of arguments. The specializations are provided for efficiency.

For the `Map` interface, it is not possible to provide a version with variable arguments since the argument types alternate between the key and value types. There is a static method `ofEntries` that accepts an arbitrary number of `Map.Entry<K, V>` objects, which you can create with the static `entry` method. For example,

```
import static java.util.Map.*;
...
Map<String, Integer> scores = ofEntries(
    entry("Peter", 2),
    entry("Paul", 3),
    entry("Mary", 5));
```

The `of` and `ofEntries` methods produce objects of classes that have an instance variable for each element, or that are backed by an array.

These collection objects are *unmodifiable*. Any attempt to change their contents results in an `UnsupportedOperationException`.

If you want a mutable collection, you can pass the unmodifiable collection to the constructor:

```
List<String> names = new ArrayList<>(List.of("Peter", "Paul", "Mary"));
```



NOTE: There is also a static `Arrays.asList` method that is similar to `List.of`. It returns a mutable list that is not resizable. That is, you can call `set` but not `add` or `remove` on the list.

7.6.2 Ranges

You can form a sublist view of a list. For example,

```
List<String> sentence = ...;
List<String> nextFive = sentence.subList(5, 10);
```

This view accesses the elements with index 5 through 9. Any mutations of the sublist (such as setting, adding, or removing elements) affect the original.

For sorted sets and maps, you specify a range by the lower and upper bound:

```
TreeSet<String> words = ...;
SortedSet<String> asOnly = words.subSet("a", "b");
```

As with `subList`, the first bound is inclusive, and the second exclusive.

The `headSet` and `tailSet` methods yield a subrange with no lower or upper bound.

```
NavigableSet<String> nAndBeyond = words.tailSet("n");
```

With the `NavigableSet` interface, you can choose for each bound whether it should be inclusive or exclusive—see Table 7-5.

For a sorted map, there are equivalent methods `subMap`, `headMap`, and `tailMap`.

7.6.3 Unmodifiable Views

Sometimes, you want to share the contents of a collection but you don't want it to be modified. Of course, you could copy the values into a new collection, but that is potentially expensive. An unmodifiable view is a better choice. Here is a typical situation. A `Person` object maintains a list of friends. If the `getFriends` gave out a reference to that list, a caller could mutate it. But it is safe to provide an unmodifiable list view:

```
public class Person {  
    private ArrayList<Person> friends;  
  
    public List<Person> getFriends() {  
        return Collections.unmodifiableList(friends);  
    }  
    ...  
}
```

All mutator methods throw an exception when they are invoked on an unmodifiable view.

As you can see from Table 7-3, you can get unmodifiable views as collections, lists, sets, sorted sets, navigable sets, maps, sorted maps, and navigable maps.



NOTE: In Chapter 6, you saw how it is possible to smuggle the wrong kind of elements into a generic collection (a phenomenon called “heap pollution”), and that a runtime error is reported when the inappropriate element is retrieved, not when it is inserted. If you need to debug such a problem, use a *checked view*. Where you constructed, say, an `ArrayList<String>`, instead use

```
List<String> strings  
    = Collections.checkedList(new ArrayList<>(), String.class);
```

The view monitors all insertions into the list and throws an exception when an object of the wrong type is added.



NOTE: The `Collections` class produces *synchronized* views that ensure safe concurrent access to data structures. In practice, these views are not as useful as the data structures in the `java.util.concurrent` package that were explicitly designed for concurrent access. I suggest you use those classes and stay away from synchronized views.

Exercises

1. Implement the “Sieve of Erathostenes” algorithm to determine all prime numbers $\leq n$. Add all numbers from 2 to n to a set. Then repeatedly find the smallest element s in the set, and remove $s^2, s \cdot (s + 1), s \cdot (s + 2)$, and so on. You are done when $s^2 > n$. Do this with both a `HashSet<Integer>` and a `BitSet`.
2. In an array list of strings, make each string uppercase. Do this with (a) an iterator, (b) a loop over the index values, and (c) the `replaceAll` method.
3. How do you compute the union, intersection, and difference of two sets, using just the methods of the `Set` interface and without using loops?
4. Produce a situation that yields a `ConcurrentModificationException`. What can you do to avoid it?
5. Implement a method `public static void swap(List<?> list, int i, int j)` that swaps elements in the usual way when the type of `list` implements the `RandomAccess` interface, and that minimizes the cost of visiting the positions at index `i` and `j` if it is not.
6. I encouraged you to use interfaces instead of concrete data structures—for example, a `Map` instead of a `TreeMap`. Unfortunately, that advice goes only so far. Suppose you have a method parameter of type `Map<String, Set<Integer>>`, and someone calls your method with a `HashMap<String, HashSet<Integer>>`. What happens? What parameter type can you use instead?
7. Write a program that reads all words in a file and prints out how often each word occurred. Use a `TreeMap<String, Integer>`.
8. Write a program that reads all words in a file and prints out on which line(s) each of them occurred. Use a map from strings to sets.
9. You can update the counter in a map of counters as

```
counts.merge(word, 1, Integer::sum);
```

Do the same without the `merge` method, (a) by using `contains`, (b) by using `get` and a `null` check, (c) by using `getOrDefault`, (d) by using `putIfAbsent`.
10. Implement Dijkstra’s algorithm to find the shortest paths in a network of cities, some of which are connected by roads. (For a description, check out your favorite book on algorithms or the Wikipedia article.) Use a helper class `Neighbor` that stores the name of a neighboring city and the distance. Represent the graph as a map from cities to sets of neighbors. Use a `PriorityQueue<Neighbor>` in the algorithm.

11. Write a program that reads a sentence into an array list. Then, using `Collections.shuffle`, shuffle all but the first and last word, without copying the words into another collection.
12. Using `Collections.shuffle`, write a program that reads a sentence, shuffles the words, and prints the result. Fix the capitalization of the initial word and the punctuation of the last word (before and after the shuffle). Hint: Don't shuffle the words.
13. The `LinkedHashMap` calls the method `removeEldestEntry` whenever a new element is inserted. Implement a subclass `Cache` that limits the map to a given size provided in the constructor.
14. Write a method that produces an immutable list view of the numbers from `0` to `n`, without actually storing the numbers.
15. Generalize the preceding exercise to an arbitrary `IntFunction`. Note that the result is an infinite collection, so certain methods (such as `size` and `toArray`) should throw an `UnsupportedOperationException`.
16. Improve the implementation of the preceding exercise by caching the last 100 computed function values.
17. Demonstrate how a checked view can give an accurate error report for a cause of heap pollution.
18. The `Collections` class has static variables `EMPTY_LIST`, `EMPTY_MAP`, and `EMPTY_SET`. Why are they not as useful as the `emptyList`, `emptyMap`, and `emptySet` methods?

Streams

Topics in This Chapter

- 8.1 From Iterating to Stream Operations — page 260
- 8.2 Stream Creation — page 261
- 8.3 The `filter`, `map`, and `flatMap` Methods — page 263
- 8.4 Extracting Substreams and Combining Streams — page 264
- 8.5 Other Stream Transformations — page 265
- 8.6 Simple Reductions — page 266
- 8.7 The Optional Type — page 267
- 8.8 Collecting Results — page 271
- 8.9 Collecting into Maps — page 273
- 8.10 Grouping and Partitioning — page 274
- 8.11 Downstream Collectors — page 275
- 8.12 Reduction Operations — page 277
- 8.13 Primitive Type Streams — page 279
- 8.14 Parallel Streams — page 280
- Exercises — page 283

Chapter



Streams provide a view of data that lets you specify computations at a higher conceptual level than with collections. With a stream, you specify what you want to have done, not how to do it. You leave the scheduling of operations to the implementation. For example, suppose you want to compute the average of a certain property. You specify the source of data and the property, and the stream library can then optimize the computation, for example by using multiple threads for computing sums and counts and combining the results.

The key points of this chapter are:

1. Iterators imply a specific traversal strategy and prohibit efficient concurrent execution.
2. You can create streams from collections, arrays, generators, or iterators.
3. Use `filter` to select elements and `map` to transform elements.
4. Other operations for transforming streams include `limit`, `distinct`, and `sorted`.
5. To obtain a result from a stream, use a reduction operator such as `count`, `max`, `min`, `findFirst`, or `findAny`. Some of these methods return an `Optional` value.
6. The `Optional` type is intended as a safe alternative to working with `null` values. To use it safely, take advantage of the `ifPresent` and `orElse` methods.
7. You can collect stream results in collections, arrays, strings, or maps.

8. The `groupingBy` and `partitioningBy` methods of the `Collectors` class allow you to split the contents of a stream into groups, and to obtain a result for each group.
9. There are specialized streams for the primitive types `int`, `long`, and `double`.
10. Parallel streams automatically parallelize stream operations.

8.1 From Iterating to Stream Operations

When you process a collection, you usually iterate over its elements and do some work with each of them. For example, suppose we want to count all long words in a book. First, let's put them into a list:

```
String contents = new String(Files.readAllBytes(  
    Paths.get("alice.txt")), StandardCharsets.UTF_8); // Read file into string  
List<String> words = List.of(contents.split("\\PL+"));  
// Split into words; nonletters are delimiters
```

Now we are ready to iterate:

```
int count = 0;  
for (String w : words) {  
    if (w.length() > 12) count++;  
}
```

With streams, the same operation looks like this:

```
long count = words.stream()  
.filter(w -> w.length() > 12)  
.count();
```

Now you don't have to scan the loop for evidence of filtering and counting. The method names tell you right away what the code intends to do. Moreover, where the loop prescribes the order of operations in complete detail, a stream is able to schedule the operations any way it wants, as long as the result is correct.

Simply changing `stream` into `parallelStream` allows the stream library to do the filtering and counting in parallel.

```
long count = words.parallelStream()  
.filter(w -> w.length() > 12)  
.count();
```

Streams follow the "what, not how" principle. In our stream example, we describe what needs to be done: get the long words and count them. We don't specify in which order, or in which thread, this should happen. In

contrast, the loop at the beginning of this section specifies exactly how the computation should work, and thereby forgoes any chances of optimization. A stream seems superficially similar to a collection, allowing you to transform and retrieve data. But there are significant differences:

1. A stream does not store its elements. They may be stored in an underlying collection or generated on demand.
2. Stream operations don't mutate their source. For example, the `filter` method does not remove elements from a stream, but it yields a new stream in which they are not present.
3. Stream operations are *lazy* when possible. This means they are not executed until their result is needed. For example, if you only ask for the first five long words instead of all, the `filter` method will stop filtering after the fifth match. As a consequence, you can even have infinite streams!

Let us have another look at the example. The `stream` and `parallelStream` methods yield a *stream* for the `words` list. The `filter` method returns another stream that contains only the words of length greater than twelve. The `count` method reduces that stream to a result.

This workflow is typical when you work with streams. You set up a pipeline of operations in three stages:

1. Create a stream.
2. Specify *intermediate operations* for transforming the initial stream into others, possibly in multiple steps.
3. Apply a *terminal operation* to produce a result. This operation forces the execution of the lazy operations that precede it. Afterwards, the stream can no longer be used.

In our example, the stream was created with the `stream` or `parallelStream` method. The `filter` method transformed it, and `count` was the terminal operation.

In the next section, you will see how to create a stream. The subsequent three sections deal with stream transformations. They are followed by five sections on terminal operations.

8.2 Stream Creation

You have already seen that you can turn any collection into a stream with the `stream` method of the `Collection` interface. If you have an array, use the static `Stream.of` method instead.

```
Stream<String> words = Stream.of(contents.split("\\PL+"));
// split returns a String[] array
```

The `of` method has a varargs parameter, so you can construct a stream from any number of arguments:

```
Stream<String> song = Stream.of("gently", "down", "the", "stream");
```

Use `Arrays.stream(array, from, to)` to make a stream from a part of an array.

To make a stream with no elements, use the static `Stream.empty` method:

```
Stream<String> silence = Stream.empty();
// Generic type <String> is inferred; same as Stream.<String>empty()
```

The `Stream` interface has two static methods for making infinite streams. The `generate` method takes a function with no arguments (or, technically, an object of the `Supplier<T>` interface—see Section 3.6.2, “Choosing a Functional Interface,” page 120). Whenever a stream value is needed, that function is called to produce a value. You can get a stream of constant values as

```
Stream<String> echos = Stream.generate(() -> "Echo");
```

or a stream of random numbers as

```
Stream<Double> randoms = Stream.generate(Math::random);
```

To produce sequences such as 0 1 2 3 ..., use the `iterate` method instead. It takes a “seed” value and a function (technically, a `UnaryOperator<T>`) and repeatedly applies the function to the previous result. For example,

```
Stream<BigInteger> integers
= Stream.iterate(BigInteger.ZERO, n -> n.add(BigInteger.ONE));
```

The first element in the sequence is the seed `BigInteger.ZERO`. The second element is `f(seed)`, or 1 (as a big integer). The next element is `f(f(seed))`, or 2, and so on.

To produce a finite stream instead, add a predicate that specifies when the iteration should finish:

```
BigInteger limit = new BigInteger("10000000");
Stream<BigInteger> integers
= Stream.iterate(BigInteger.ZERO,
n -> n.compareTo(limit) < 0,
n -> n.add(BigInteger.ONE));
```

As soon as the predicate rejects an iteratively generated value, the stream ends.



NOTE: A number of methods in the Java API yield streams. For example, the `Pattern` class has a method `splitAsStream` that splits a `CharSequence` by a regular expression. You can use the following statement to split a string into words:

```
Stream<String> words = Pattern.compile("\\PL+").splitAsStream(contents);
```

The `Scanner.tokens` method yields a stream of tokens of a scanner. Another way to get a stream of words from a string is

```
Stream<String> words = new Scanner(contents).tokens();
```

The static `Files.lines` method returns a `Stream` of all lines in a file:

```
try (Stream<String> lines = Files.lines(path)) {  
    Process lines  
}
```

8.3 The filter, map, and flatMap Methods

A stream transformation produces a stream whose elements are derived from those of another stream. You have already seen the `filter` transformation that yields a new stream with those elements that match a certain condition. Here, we transform a stream of strings into another stream containing only long words:

```
List<String> words = ...;  
Stream<String> longWords = words.stream().filter(w -> w.length() > 12);
```

The argument of `filter` is a `Predicate<T>`—that is, a function from `T` to `boolean`.

Often, you want to transform the values in a stream in some way. Use the `map` method and pass the function that carries out the transformation. For example, you can transform all words to lowercase like this:

```
Stream<String> lowercaseWords = words.stream().map(String::toLowerCase);
```

Here, we used `map` with a method reference. Often, you will use a lambda expression instead:

```
Stream<String> firstLetters = words.stream().map(s -> s.substring(0, 1));
```

The resulting stream contains the first letter of each word.

When you use `map`, a function is applied to each element, and the result is a new stream with the results. Now, suppose you have a function that returns not just one value but a stream of values. Here is an example—a method that turns a string into a stream of strings, namely the individual code points:

```
public static Stream<String> codePoints(String s) {  
    List<String> result = new ArrayList<>();  
    int i = 0;  
    while (i < s.length()) {  
        int j = s.offsetByCodePoints(i, 1);  
        result.add(s.substring(i, j));  
        i = j;  
    }  
    return result.stream();  
}
```

This method correctly handles Unicode characters that require two `char` values because that's the right thing to do. But you don't have to dwell on that.

For example, `codePoints("boat")` is the stream `["b", "o", "a", "t"]`.

Now let's map the `codePoints` method on a stream of strings:

```
Stream<Stream<String>> result = words.stream().map(w -> codePoints(w));
```

You will get a stream of streams, like `[..., ["y", "o", "u", "r"], ["b", "o", "a", "t"], ...]`. To flatten it out to a single stream `[..., "y", "o", "u", "r", "b", "o", "a", "t", ...]`, use the `flatMap` method instead of `map`:

```
Stream<String> flatResult = words.stream().flatMap(w -> codePoints(w))  
    // Calls codePoints on each word and flattens the results
```



NOTE: You will find a `flatMap` method in classes other than streams. It is a general concept in computer science. Suppose you have a generic type `G` (such as `Stream`) and functions `f` from some type `T` to `G<U>` and `g` from `U` to `G<V>`. Then you can compose them—that is, first apply `f` and then `g`, by using `flatMap`. This is a key idea in the theory of *monads*. But don't worry—you can use `flatMap` without knowing anything about monads.

8.4 Extracting Substreams and Combining Streams

The call `stream.limit(n)` returns a new stream that ends after `n` elements (or when the original stream ends if it is shorter). This method is particularly useful for cutting infinite streams down to size. For example,

```
Stream<Double> randoms = Stream.generate(Math::random).limit(100);
```

yields a stream with 100 random numbers.

The call `stream.skip(n)` does the exact opposite. It discards the first `n` elements. This is handy in our book reading example where, due to the way the `split` method works, the first element is an unwanted empty string. We can make it go away by calling `skip`:

```
Stream<String> words = Stream.of(contents.split("\\PL+")).skip(1);
```

The `stream.takeWhile(predicate)` call takes all elements from the stream while the predicate is true, and then stops.

For example, suppose we use the `codePoints` method of the preceding section to split a string into characters, and we want to collect all initial digits. The `takeWhile` method can do this:

```
Stream<String> initialDigits = codePoints(str).takeWhile(  
    s -> "0123456789".contains(s));
```

The `dropWhile` method does the opposite, dropping elements while a condition is true and yielding a stream of all elements starting with the first one for which the condition was false. For example,

```
Stream<String> withoutInitialWhiteSpace = codePoints(str).dropWhile(  
    s -> s.trim().length() == 0);
```

You can concatenate two streams with the static `concat` method of the `Stream` class:

```
Stream<String> combined = Stream.concat(  
    codePoints("Hello"), codePoints("World"));  
// Yields the stream ["H", "e", "l", "l", "o", "W", "o", "r", "l", "d"]
```

Of course, the first stream should not be infinite—otherwise the second wouldn't ever get a chance.

8.5 Other Stream Transformations

The `distinct` method returns a stream that yields elements from the original stream, in the same order, except that duplicates are suppressed. The duplicates need not be adjacent.

```
Stream<String> uniqueWords  
= Stream.of("merrily", "merrily", "merrily", "gently").distinct();  
// Only one "merrily" is retained
```

For sorting a stream, there are several variations of the `sorted` method. One works for streams of `Comparable` elements, and another accepts a `Comparator`. Here, we sort strings so that the longest ones come first:

```
Stream<String> longestFirst  
= words.stream().sorted(Comparator.comparing(String::length).reversed());
```

As with all stream transformations, the `sorted` method yields a new stream whose elements are the elements of the original stream in sorted order.

Of course, you can sort a collection without using streams. The `sorted` method is useful when the sorting process is part of a stream pipeline.

Finally, the `peek` method yields another stream with the same elements as the original, but a function is invoked every time an element is retrieved. That is handy for debugging:

```
Object[] powers = Stream.iterate(1.0, p -> p * 2)
    .peek(e -> System.out.println("Fetching " + e))
    .limit(20).toArray();
```

When an element is actually accessed, a message is printed. This way you can verify that the infinite stream returned by `iterate` is processed lazily.



TIP: When you use a debugger to debug a stream computation, you can set a breakpoint in a method that is called from one of the transformations. With most IDEs, you can also set breakpoints in lambda expressions. If you just want to know what happens at a particular point in the stream pipeline, add

```
.peek(x -> {
    return; })
```

and set a breakpoint on the second line.

8.6 Simple Reductions

Now that you have seen how to create and transform streams, we will finally get to the most important point—getting answers from the stream data. The methods that we cover in this section are called *reductions*. Reductions are *terminal operations*. They reduce the stream to a nonstream value that can be used in your program.

You have already seen a simple reduction: the `count` method that returns the number of elements of a stream.

Other simple reductions are `max` and `min` that return the largest or smallest value. There is a twist—these methods return an `Optional<T>` value that either wraps the answer or indicates that there is none (because the stream happened to be empty). In the olden days, it was common to return `null` in such a situation. But that can lead to null pointer exceptions when it happens in an incompletely tested program. The `Optional` type is a better way of indicating a missing return value. We discuss the `Optional` type in detail in the next section. Here is how you can get the maximum of a stream:

```
Optional<String> largest = words.max(String::compareToIgnoreCase);
System.out.println("largest: " + largest.orElse(""));
```

The `findFirst` returns the first value in a nonempty collection. It is often useful when combined with `filter`. For example, here we find the first word that starts with the letter Q, if it exists:

```
Optional<String> startsWithQ  
    = words.filter(s -> s.startsWith("Q")).findFirst();
```

If you are OK with any match, not just the first one, use the `findAny` method. This is effective when you parallelize the stream, since the stream can report any match that it finds instead of being constrained to the first one.

```
Optional<String> startsWithQ  
    = words.parallel().filter(s -> s.startsWith("Q")).findAny();
```

If you just want to know if there is a match, use `anyMatch`. That method takes a predicate argument, so you won't need to use `filter`.

```
boolean aWordStartsWithQ  
    = words.parallel().anyMatch(s -> s.startsWith("Q"));
```

There are methods `allMatch` and `noneMatch` that return `true` if all or no elements match a predicate. These methods also benefit from being run in parallel.

8.7 The Optional Type

An `Optional<T>` object is a wrapper for either an object of type `T` or no object. In the former case, we say that the value is *present*. The `Optional<T>` type is intended as a safer alternative for a reference of type `T` that either refers to an object or is `null`. But it is only safer if you use it right. The next section shows you how.

8.7.1 How to Work with Optional Values

The key to using `Optional` effectively is to use a method that either *produces an alternative* if the value is not present, or *consumes the value* only if it is present.

Let us look at the first strategy. Often, there is a default that you want to use when there was no match, perhaps the empty string:

```
String result = optionalString.orElse("");  
// The wrapped string, or "" if none
```

You can also invoke code to compute the default:

```
String result = optionalString.orElseGet(() -> System.getProperty("myapp.default"));  
// The function is only called when needed
```

Or you can throw an exception if there is no value:

```
String result = optionalString.orElseThrow(IllegalStateException::new);
// Supply a method that yields an exception object
```

The `orElseGet` method assumes that the alternative computation always succeeds. If that computation can fail, use the `or` method:

```
Optional<String> result = optionalString.or(() ->
    Optional.ofNullable(System.getProperty("myapp.default")));
```

If `optionalString` has a value, then `result` is `optionalString`. If not, and `System.getProperty("myapp.default")` returns a non-null value, then that value, wrapped in an `Optional`, becomes the result. Otherwise, the result is empty.

You have just seen how to produce an alternative if no value is present. The other strategy for working with optional values is to consume the value only if it is present.

The `ifPresent` method accepts a function. If the optional value exists, it is passed to that function. Otherwise, nothing happens.

```
optionalValue.ifPresent(v -> Process v);
```

For example, if you want to add the value to a set if it is present, call

```
optionalValue.ifPresent(v -> results.add(v));
```

or simply

```
optionalValue.ifPresent(results::add);
```

If you want to take one action if the `Optional` has a value and another action if it doesn't, use `ifPresentOrElse`:

```
optionalValue.ifPresentOrElse(
    v -> Process v,
    () -> Do something else);
```

When using `ifPresent` to pass an optional value to a function, the function return value is lost. If you want to process the function result, use `map` instead:

```
Optional<Boolean> added = optionalValue.map(results::add);
```

Now `added` has one of three values: `true` or `false` wrapped into an `Optional`, if `optionalValue` was present, or an empty `Optional` otherwise.



NOTE: This `map` method is the analog of the `map` method of the `Stream` interface that you have seen in Section 8.3, “The `filter`, `map`, and `flatMap` Methods” (page 263). Simply imagine an optional value as a stream of size zero or one. The result again has size zero or one, and in the latter case, the function has been applied.

8.7.2 How Not to Work with Optional Values

If you don't use `Optional` values correctly, you have no benefit over the "something or `null`" approach of the past.

The `get` method gets the wrapped element of an `Optional` value if it exists, or throws a `NoSuchElementException` if it doesn't. Therefore,

```
Optional<T> optionalValue = ...;
optionalValue.get().someMethod()
```

is no safer than

```
T value = ...;
value.someMethod();
```

The `isPresent` method reports whether an `Optional<T>` object has a value. But

```
if (optionalValue.isPresent()) optionalValue.get().someMethod();
```

is no easier than

```
if (value != null) value.someMethod();
```

8.7.3 Creating Optional Values

So far, we have discussed how to consume an `Optional` object someone else created. If you want to write a method that creates an `Optional` object, there are several static methods for that purpose, including `Optional.of(result)` and `Optional.empty()`. For example,

```
public static Optional<Double> inverse(Double x) {
    return x == 0 ? Optional.empty() : Optional.of(1 / x);
}
```

The `ofNullable` method is intended as a bridge from possibly `null` values to optional values. `Optional.ofNullable(obj)` returns `Optional.of(obj)` if `obj` is not `null` and `Optional.empty()` otherwise.

8.7.4 Composing Optional Value Functions with flatMap

Suppose you have a method `f` yielding an `Optional<T>`, and the target type `T` has a method `g` yielding an `Optional<U>`. If they were normal methods, you could compose them by calling `s.f().g()`. But that composition doesn't work since `s.f()` has type `Optional<T>`, not `T`. Instead, call

```
Optional<U> result = s.f().flatMap(T::g);
```

If `s.f()` is present, then `g` is applied to it. Otherwise, an empty `Optional<U>` is returned.

Clearly, you can repeat that process if you have more methods or lambdas that yield `Optional` values. You can then build a pipeline of steps, simply by chaining calls to `flatMap`, that will succeed only when all parts do.

For example, consider the safe `inverse` method of the preceding section. Suppose we also have a safe square root:

```
public static Optional<Double> squareRoot(Double x) {
    return x < 0 ? Optional.empty() : Optional.of(Math.sqrt(x));
}
```

Then you can compute the square root of the inverse as

```
Optional<Double> result = inverse(x).flatMap(MyMath::squareRoot);
```

or, if you prefer,

```
Optional<Double> result
    = Optional.of(-4.0).flatMap(Demo::inverse).flatMap(Demo::squareRoot);
```

If either the `inverse` method or the `squareRoot` returns `Optional.empty()`, the result is empty.



NOTE: You have already seen a `flatMap` method in the `Stream` interface (see Section 8.3, “The `filter`, `map`, and `flatMap` Methods,” page 263). That method was used to compose two methods that yield streams, by flattening out the resulting stream of streams. The `Optional.flatMap` method works in the same way if you interpret an optional value as having zero or one elements.

8.7.5 Turning an `Optional` Into a Stream

The `stream` method turns an `Optional<T>` into a `Stream<T>` with zero or one elements. Sure, why not, but why would you ever want that?

This becomes useful with methods that return an `Optional` result. Suppose you have a stream of user IDs and a method

```
Optional<User> lookup(String id)
```

How do you get a stream of users, skipping those IDs that are invalid?

Of course, you can filter out the invalid IDs and then apply `get` to the remaining ones:

```
Stream<String> ids = ...;
Stream<User> users = ids.map(Users::lookup)
    .filter(Optional::isPresent)
    .map(Optional::get);
```

But that uses the `isPresent` and `get` methods that we warned about. It is more elegant to call

```
Stream<User> users = ids.map(Users::lookup)
    .flatMap(Optional::stream);
```

Each call to `stream` returns a stream with 0 or 1 elements. The `flatMap` method combines them all. That means the nonexistent users are simply dropped.



NOTE: In this section, we consider the happy scenario in which we have a method that returns an `Optional` value. These days, many methods return `null` when there is no valid result. Suppose `Users.classicLookup(id)` returns a `User` object or `null`, not an `Optional<User>`. Then you can of course filter out the `null` values:

```
Stream<User> users = ids.map(Users::classicLookup)
    .filter(Objects::nonNull);
```

But if you prefer the `flatMap` approach, you can use

```
Stream<User> users = ids.flatMap(
    id -> Stream.ofNullable(Users.classicLookup(id)));
```

or

```
Stream<User> users = ids.map(Users::classicLookup)
    .flatMap(Stream::ofNullable);
```

The call `Stream.ofNullable(obj)` yields an empty stream if `obj` is `null` or a stream just containing `obj` otherwise.

8.8 Collecting Results

When you are done with a stream, you will often want to look at the results. You can call the `iterator` method, which yields an old-fashioned iterator that you can use to visit the elements.

Alternatively, you can call the `forEach` method to apply a function to each element:

```
stream.forEach(System.out::println);
```

On a parallel stream, the `forEach` method traverses elements in arbitrary order. If you want to process them in stream order, call `forEachOrdered` instead. Of course, you might then give up some or all of the benefits of parallelism.

But more often than not, you will want to collect the result in a data structure. You can call `toArray` and get an array of the stream elements.

Since it is not possible to create a generic array at runtime, the expression `stream.toArray()` returns an `Object[]` array. If you want an array of the correct type, pass in the array constructor:

```
String[] result = stream.toArray(String[]::new);
// stream.toArray() has type Object[]
```

For collecting stream elements to another target, there is a convenient `collect` method that takes an instance of the `Collector` interface. The `Collectors` class provides a large number of factory methods for common collectors. To collect a stream into a list or set, simply call

```
List<String> result = stream.collect(Collectors.toList());
```

or

```
Set<String> result = stream.collect(Collectors.toSet());
```

If you want to control which kind of set you get, use the following call instead:

```
TreeSet<String> result = stream.collect(Collectors.toCollection(TreeSet::new));
```

Suppose you want to collect all strings in a stream by concatenating them. You can call

```
String result = stream.collect(Collectors.joining());
```

If you want a delimiter between elements, pass it to the `joining` method:

```
String result = stream.collect(Collectors.joining(", "));
```

If your stream contains objects other than strings, you need to first convert them to strings, like this:

```
String result = stream.map(Object::toString).collect(Collectors.joining(", "));
```

If you want to reduce the stream results to a sum, count, average, maximum, or minimum, use one of the `summarizing(Int|Long|Double)` methods. These methods take a function that maps the stream objects to numbers and yield a result of type `(Int|Long|Double)SummaryStatistics`, simultaneously computing the sum, count, average, maximum, and minimum.

```
IntSummaryStatistics summary = stream.collect(
    Collectors.summarizingInt(String::length));
double averageWordLength = summary.getAverage();
double maxWordLength = summary.getMax();
```

8.9 Collecting into Maps

Suppose you have a `Stream<Person>` and want to collect the elements into a map so that later you can look up people by their ID. The `Collectors.toMap` method has two function arguments that produce the map's keys and values. For example,

```
Map<Integer, String> idToName = people.collect(  
    Collectors.toMap(Person::getId, Person::getName));
```

In the common case when the values should be the actual elements, use `Function.identity()` for the second function.

```
Map<Integer, Person> idToPerson = people.collect(  
    Collectors.toMap(Person::getId, Function.identity()));
```

If there is more than one element with the same key, there is a conflict, and the collector will throw an `IllegalStateException`. You can override that behavior by supplying a third function argument that resolves the conflict and determines the value for the key, given the existing and the new value. Your function could return the existing value, the new value, or a combination of them.

Here, we construct a map that contains, for each language in the available locales, as key its name in your default locale (such as "German"), and as value its localized name (such as "Deutsch").

```
Stream<Locale> locales = Stream.of(Locale.getAvailableLocales());  
Map<String, String> languageNames = locales.collect(  
    Collectors.toMap(  
        Locale::getDisplayLanguage,  
        loc -> loc.getDisplayLanguage(loc),  
        (existingValue, newValue) -> newValue));
```

We don't care that the same language might occur twice (for example, German in Germany and in Switzerland), so we just keep the first entry.



NOTE: In this chapter, I use the `Locale` class as a source of an interesting data set. See Chapter 13 for more information about working with locales.

Now suppose we want to know all languages in a given country. Then we need a `Map<String, Set<String>>`. For example, the value for "Switzerland" is the set [French, German, Italian]. At first, we store a singleton set for each language. Whenever a new language is found for a given country, we form the union of the existing and the new set.

```
Map<String, Set<String>> countryLanguageSets = locales.collect(
    Collectors.toMap(
        Locale::getDisplayCountry,
        l -> Collections.singleton(l.getDisplayLanguage()),
        (a, b) -> { // Union of a and b
            Set<String> union = new HashSet<>(a);
            union.addAll(b);
            return union; }));

```

You will see a simpler way of obtaining this map in the next section.

If you want a `TreeMap`, supply the constructor as the fourth argument. You must provide a merge function. Here is one of the examples from the beginning of the section, now yielding a `TreeMap`:

```
Map<Integer, Person> idToPerson = people.collect(
    Collectors.toMap(
        Person::getId,
        Function.identity(),
        (existingValue, newValue) -> { throw new IllegalStateException(); },
        TreeMap::new));

```



NOTE: For each of the `toMap` methods, there is an equivalent `toConcurrentMap` method that yields a concurrent map. A single concurrent map is used in the parallel collection process. When used with a parallel stream, a shared map is more efficient than merging maps. Note that elements are no longer collected in stream order, but that doesn't usually make a difference.

8.10 Grouping and Partitioning

In the preceding section, you saw how to collect all languages in a given country. But the process was a bit tedious. You had to generate a singleton set for each map value and then specify how to merge the existing and new values. Forming groups of values with the same characteristic is very common, and the `groupingBy` method supports it directly.

Let's look at the problem of grouping locales by country. First, form this map:

```
Map<String, List<Locale>> countryToLocales = locales.collect(
    Collectors.groupingBy(Locale::getCountry));

```

The function `Locale::getCountry` is the *classifier function* of the grouping. You can now look up all locales for a given country code, for example

```
List<Locale> swissLocales = countryToLocales.get("CH");
// Yields locales [it_CH, de_CH, fr_CH]
```



NOTE: A quick refresher on locales: Each locale has a language code (such as `en` for English) and a country code (such as `US` for the United States). The locale `en_US` describes English in the United States, and `en_IE` is English in Ireland. Some countries have multiple locales. For example, `ga_IE` is Gaelic in Ireland, and, as the preceding example shows, my JVM knows three locales in Switzerland.

When the classifier function is a predicate function (that is, a function returning a `boolean` value), the stream elements are partitioned into two lists: those where the function returns `true` and the complement. In this case, it is more efficient to use `partitioningBy` instead of `groupingBy`. For example, here we split all locales into those that use English and all others:

```
Map<Boolean, List<Locale>> englishAndOtherLocales = locales.collect(  
    Collectors.partitioningBy(l -> l.getLanguage().equals("en")));  
List<Locale> englishLocales = englishAndOtherLocales.get(true);
```



NOTE: If you call the `groupingByConcurrent` method, you get a concurrent map that, when used with a parallel stream, is concurrently populated. This is entirely analogous to the `toConcurrentMap` method.

8.11 Downstream Collectors

The `groupingBy` method yields a map whose values are lists. If you want to process those lists in some way, supply a *downstream collector*. For example, if you want sets instead of lists, you can use the `Collectors.toSet` collector that you saw in the preceding section:

```
Map<String, Set<Locale>> countryToLocaleSet = locales.collect(  
    groupingBy(Locale::getCountry, toSet()));
```



NOTE: In this example, as well as the remaining examples of this section, I assume a static import of `java.util.stream.Collectors.*` to make the expressions easier to read.

Several collectors are provided for reducing grouped elements to numbers:

- `counting` produces a count of the collected elements. For example,

```
Map<String, Long> countryToLocaleCounts = locales.collect(  
    groupingBy(Locale::getCountry, counting()));
```

counts how many locales there are for each country.

- `summing(Int|Long|Double)` takes a function argument, applies the function to the downstream elements, and produces their sum. For example,

```
Map<String, Integer> stateToCityPopulation = cities.collect(  
    groupingBy(City::getState, summingInt(City::getPopulation)));
```

computes the sum of populations per state in a stream of cities.

- `maxBy` and `minBy` take a comparator and produce maximum and minimum of the downstream elements. For example,

```
Map<String, Optional<City>> stateToLargestCity = cities.collect(  
    groupingBy(City::getState,  
        maxBy(Comparator.comparing(City::getPopulation))));
```

produces the largest city per state.

The `mapping` collector applies a function to downstream results, and it requires yet another collector for processing its results. For example,

```
Map<String, Optional<String>> stateToLongestCityName = cities.collect(  
    groupingBy(City::getState,  
        mapping(City::getName,  
            maxBy(Comparator.comparing(String::length)))));
```

Here, we group cities by state. Within each state, we produce the names of the cities and reduce by maximum length.

The `mapping` method also yields a nicer solution to a problem from the preceding section—gathering a set of all languages in a country.

```
Map<String, Set<String>> countryToLanguages = locales.collect(  
    groupingBy(Locale::getDisplayCountry,  
        mapping(Locale::getDisplayLanguage,  
            toSet())));
```

There is a `flatMapting` method as well, for use with functions that return streams (see Exercise 8).

In the preceding section, I used `toMap` instead of `groupingBy`. In this form, you don't need to worry about combining the individual sets.

If the grouping or mapping function has return type `int`, `long`, or `double`, you can collect elements into a summary statistics object, as discussed in Section 8.8, “Collecting Results” (page 271). For example,

```
Map<String, IntSummaryStatistics> stateToCityPopulationSummary = cities.collect(  
    groupingBy(City::getState,  
        summarizingInt(City::getPopulation)));
```

Then you can get the sum, count, average, minimum, and maximum of the function values from the summary statistics objects of each group.

The filtering collector applies a filter to each group, for example:

```
Map<String, Set<City>> largeCitiesByState
    = cities.collect(
        groupingBy(City::getState,
            filtering(c -> c.getPopulation() > 500000,
            toSet()))); // States without large cities have empty sets
```



NOTE: There are also three versions of a reducing method that apply general reductions, as described in the next section.

Composing collectors is powerful, but it can also lead to very convoluted expressions. The best use is with `groupingBy` or `partitioningBy` to process the “downstream” map values. Otherwise, simply apply methods such as `map`, `reduce`, `count`, `max`, or `min` directly on streams.

8.12 Reduction Operations

The `reduce` method is a general mechanism for computing a value from a stream. The simplest form takes a binary function and keeps applying it, starting with the first two elements. It’s easy to explain this if the function is the sum:

```
List<Integer> values = ...;
Optional<Integer> sum = values.stream().reduce((x, y) -> x + y);
```

In this case, the `reduce` method computes $v_0 + v_1 + v_2 + \dots$, where the v_i are the stream elements. The method returns an `Optional` because there is no valid result if the stream is empty.



NOTE: In this case, you can write `reduce(Integer::sum)` instead of `reduce((x, y) -> x + y)`.

More generally, you can use any operation that combines a partial result x with the next value y to yield a new partial result.

Here is another way of looking at reductions. Given a reduction operation op , the reduction yields $v_0 op v_1 op v_2 op \dots$, where $v_i op v_{i+1}$ denotes the function call $op(v_i, v_{i+1})$. There are many operations that might be useful in

practice, such as sum, product, string concatenation, maximum and minimum, set union and intersection.

If you want to use reduction with parallel streams, the operation must be *associative*: It shouldn't matter in which order you combine the elements. In math notation, $(x \text{ op } y) \text{ op } z$ must be equal to $x \text{ op } (y \text{ op } z)$. An example of an operation that is not associative is subtraction. For example, $(6 - 3) - 2 \neq 6 - (3 - 2)$.

Often, there is an *identity* e such that $e \text{ op } x = x$, and you can use that element as the start of the computation. For example, 0 is the identity for addition. Then call the second form of reduce:

```
List<Integer> values = ...;
Integer sum = values.stream().reduce(0, (x, y) -> x + y)
    // Computes 0 + v0 + v1 + v2 + ...
```

The identity value is returned if the stream is empty, and you no longer need to deal with the `Optional` class.

Now suppose you have a stream of objects and want to form the sum of some property, such as all lengths in a stream of strings. You can't use the simple form of `reduce`. It requires a function $(\tau, \tau) \rightarrow \tau$, with the same types for the arguments and the result. But in this situation, you have two types: The stream elements have type `String`, and the accumulated result is an integer. There is a form of `reduce` that can deal with this situation.

First, you supply an “accumulator” function $(\text{total}, \text{word}) \rightarrow \text{total} + \text{word.length}()$. That function is called repeatedly, forming the cumulative total. But when the computation is parallelized, there will be multiple computations of this kind, and you need to combine their results. You supply a second function for that purpose. The complete call is

```
int result = words.reduce(0,
    (total, word) -> total + word.length(),
    (total1, total2) -> total1 + total2);
```



NOTE: In practice, you probably won't use the `reduce` method a lot. It is usually easier to map to a stream of numbers and use one of its methods to compute sum, max, or min. (We discuss streams of numbers in Section 8.13, “Primitive Type Streams,” page 279.) In this particular example, you could have called `words.mapToInt(String::length).sum()`, which is both simpler and more efficient since it doesn't involve boxing.



NOTE: There are times when `reduce` is not general enough. For example, suppose you want to collect the results in a `BitSet`. If the collection is parallelized, you can't put the elements directly into a single `BitSet` because a `BitSet` object is not threadsafe. For that reason, you can't use `reduce`. Each segment needs to start out with its own empty set, and `reduce` only lets you supply one identity value. Instead, use `collect`. It takes three arguments:

1. A *supplier* to make new instances of the target object, for example a constructor for a hash set
2. An *accumulator* that adds an element to the target, such as an `add` method
3. A *combiner* that merges two objects into one, such as `addAll`

Here is how the `collect` method works for a bit set:

```
BitSet result = stream.collect(BitSet::new, BitSet::set, BitSet::or);
```

8.13 Primitive Type Streams

So far, we have collected integers in a `Stream<Integer>`, even though it is clearly inefficient to wrap each integer into a wrapper object. The same is true for the other primitive types `double`, `float`, `long`, `short`, `char`, `byte`, and `boolean`. The stream library has specialized types `IntStream`, `LongStream`, and `DoubleStream` that store primitive values directly, without using wrappers. If you want to store `short`, `char`, `byte`, and `boolean`, use an `IntStream`, and for `float`, use a `DoubleStream`.

To create an `IntStream`, call the `IntStream.of` and `Arrays.stream` methods:

```
IntStream stream = IntStream.of(1, 1, 2, 3, 5);
stream = Arrays.stream(values, from, to); // values is an int[] array
```

As with object streams, you can also use the static `generate` and `iterate` methods. In addition, `IntStream` and `LongStream` have static methods `range` and `rangeClosed` that generate integer ranges with step size one:

```
IntStream zeroToNinetyNine = IntStream.range(0, 100); // Upper bound is excluded
IntStream zeroToHundred = IntStream.rangeClosed(0, 100); // Upper bound is included
```

The `CharSequence` interface has methods `codePoints` and `chars` that yield an `IntStream` of the Unicode codes of the characters or of the code units in the UTF-16 encoding. (See Chapter 1 for the sordid details.)

```
String sentence = "\uD835\uDD46 is the set of octonions.";
// \uD835\uDD46 is the UTF-16 encoding of the letter ℬ, unicode U+1D546

IntStream codes = sentence.codePoints();
// The stream with hex values 1D546 20 69 73 20 ...
```

When you have a stream of objects, you can transform it to a primitive type stream with the `mapToInt`, `mapToLong`, or `mapToDouble` methods. For example, if you have a stream of strings and want to process their lengths as integers, you might as well do it in an `IntStream`:

```
Stream<String> words = ...;
IntStream lengths = words.mapToInt(String::length);
```

To convert a primitive type stream to an object stream, use the `boxed` method:

```
Stream<Integer> integers = IntStream.range(0, 100).boxed();
```

Generally, the methods on primitive type streams are analogous to those on object streams. Here are the most notable differences:

- The `toArray` methods return primitive type arrays.
- Methods that yield an optional result return an `OptionalInt`, `OptionalLong`, or `OptionalDouble`. These classes are analogous to the `Optional` class, but they have methods `getAsInt`, `getAsLong`, and `getAsDouble` instead of the `get` method.
- There are methods `sum`, `average`, `max`, and `min` that return the sum, average, maximum, and minimum. These methods are not defined for object streams.
- The `summaryStatistics` method yields an object of type `IntSummaryStatistics`, `LongSummaryStatistics`, or `DoubleSummaryStatistics` that can simultaneously report the sum, count, average, maximum, and minimum of the stream.



NOTE: The `Random` class has methods `ints`, `longs`, and `doubles` that return primitive type streams of random numbers.

8.14 Parallel Streams

Streams make it easy to parallelize bulk operations. The process is mostly automatic, but you need to follow a few rules. First of all, you must have a parallel stream. You can get a parallel stream from any collection with the `Collection.parallelStream()` method:

```
Stream<String> parallelWords = words.parallelStream();
```

Moreover, the `parallel` method converts any sequential stream into a parallel one.

```
Stream<String> parallelWords = Stream.of(wordArray).parallel();
```

As long as the stream is in parallel mode when the terminal method executes, all intermediate stream operations will be parallelized.

When stream operations run in parallel, the intent is that the same result is returned as if they had run serially. It is important that the operations are *stateless* and can be executed in an arbitrary order.

Here is an example of something you cannot do. Suppose you want to count all short words in a stream of strings:

```
int[] shortWords = new int[12];
words.parallelStream().forEach(
    s -> { if (s.length() < 12) shortWords[s.length()]++; });
// Error—race condition!
System.out.println(Arrays.toString(shortWords));
```

This is very, very bad code. The function passed to `forEach` runs concurrently in multiple threads, each updating a shared array. As you will see in Chapter 10, that's a classic *race condition*. If you run this program multiple times, you are quite likely to get a different sequence of counts in each run—each of them wrong.

It is your responsibility to ensure that any functions you pass to parallel stream operations are safe to execute in parallel. The best way to do that is to stay away from mutable state. In this example, you can safely parallelize the computation if you group strings by length and count them.

```
Map<Integer, Long> shortWordCounts
    = words.parallelStream()
        .filter(s -> s.length() < 12)
        .collect(groupingBy(
            String::length,
            counting()));
```

By default, streams that arise from ordered collections (arrays and lists), from ranges, generators, and iterators, or from calling `Stream.sorted`, are *ordered*. Results are accumulated in the order of the original elements, and are entirely predictable. If you run the same operations twice, you will get exactly the same results.

Ordering does not preclude efficient parallelization. For example, when computing `stream.map(fun)`, the stream can be partitioned into n segments, each of which is concurrently processed. Then the results are reassembled in order.

Some operations can be more effectively parallelized when the ordering requirement is dropped. By calling the `Stream.unordered` method, you indicate that you are not interested in ordering. One operation that can benefit from this is `Stream.distinct`. On an ordered stream, `distinct` retains the first of all equal elements. That impedes parallelization—the thread processing a segment can't know which elements to discard until the preceding segment has been processed. If it is acceptable to retain *any* of the unique elements, all segments can be processed concurrently (using a shared set to track duplicates).

You can also speed up the `limit` method by dropping ordering. If you just want any n elements from a stream and you don't care which ones you get, call

```
Stream<String> sample = words.parallelStream().unordered().limit(n);
```

As discussed in Section 8.9, “Collecting into Maps” (page 273), merging maps is expensive. For that reason, the `Collectors.groupingByConcurrent` method uses a shared concurrent map. To benefit from parallelism, the order of the map values will not be the same as the stream order.

```
Map<Integer, List<String>> result = words.parallelStream().collect(  
    Collectors.groupingByConcurrent(String::length));  
    // Values aren't collected in stream order
```

Of course, you won't care if you use a downstream collector that is independent of the ordering, such as

```
Map<Integer, Long> wordCounts  
= words.parallelStream()  
.collect(  
    groupingByConcurrent(  
        String::length,  
        counting()));
```



NOTE: Don't turn all your streams into parallel streams with the hope of speeding up their operations. There is a substantial overhead to parallelization that will only pay off for very large data sets. Moreover, the thread pool that is used by parallel streams may perform poorly for blocking operations such as file I/O or network operations. Parallel streams work best with huge in-memory collections of data and computationally intensive processing.



CAUTION: It is very important that you don't modify the collection that is backing a stream while carrying out a stream operation (even if the modification is threadsafe). Remember that streams don't collect their data—that data is always in a separate collection. If you were to modify that collection, the outcome of the stream operations would be undefined. The JDK documentation refers to this requirement as *noninterference*. It applies both to sequential and parallel streams.

To be exact, since intermediate stream operations are lazy, it is possible to mutate the collection up to the point when the terminal operation executes. For example, the following, while certainly not recommended, will work:

```
List<String> wordList = ...;
Stream<String> words = wordList.stream();
wordList.add("END");
long n = words.distinct().count();
```

But this code is wrong:

```
Stream<String> words = wordList.stream();
words.forEach(s -> if (s.length() < 12) wordList.remove(s));
// Error—interference
```

Exercises

1. Verify that asking for the first five long words does not call the filter method once the fifth long word has been found. Simply log each method call.
2. Measure the difference when counting long words with a `parallelStream` instead of a `stream`. Call `System.currentTimeMillis` before and after the call and print the difference. Switch to a larger document (such as *War and Peace*) if you have a fast computer.
3. Suppose you have an array `int[] values = { 1, 4, 9, 16 }`. What is `Stream.of(values)`? How do you get a stream of `int` instead?
4. Using `Stream.iterate`, make an infinite stream of random numbers—not by calling `Math.random` but by directly implementing a *linear congruential generator*. In such a generator, you start with $x_0 = \text{seed}$ and then produce $x_{n+1} = (a x_n + c) \% m$, for appropriate values of a , c , and m . You should implement a method with parameters a , c , m , and seed that yields a `Stream<Long>`. Try out $a = 25214903917$, $c = 11$, and $m = 2^{48}$.
5. The `codePoints` method in Section 8.3, “The `filter`, `map`, and `flatMap` Methods” (page 263) was a bit clumsy, first filling an array list and then turning

it into a stream. Write a stream-based version instead, using the `IntStream.iterate` method to construct a finite stream of offsets, then extract the substrings.

6. Use the `String.codePoints` method to implement a method that tests whether a string is a word, consisting only of letters. (Hint: `Character.isAlphabetic`.) Using the same approach, implement a method that tests whether a string is a valid Java identifier.
7. Turning a file into a stream of tokens, list the first 100 tokens that are words in the sense of the preceding exercise. Read the file again and list the 10 most frequent words, ignoring letter case.
8. Find a realistic use for the `Collectors.flatMapting` method. Consider some class with a method yielding an `Optional`. Then group by some characteristic and, for each group, collect the nonempty optional values by using `flatMapting` and `Optional.stream`.
9. Read the words from `/usr/share/dict/words` (or a similar word list) into a stream and produce an array of all words containing five distinct vowels.
10. Given a finite stream of strings, find the average string length.
11. Given a finite stream of strings, find all strings of maximum length.
12. Your manager asks you to write a method `public static <T> boolean isFinite(Stream<T> stream)`. Why isn't that such a good idea? Go ahead and write it anyway.
13. Write a method `public static <T> Stream<T> zip(Stream<T> first, Stream<T> second)` that alternates elements from the streams `first` and `second` (or `null` if the stream whose turn it is runs out of elements).
14. Join all elements in a `Stream<ArrayList<T>>` to one `ArrayList<T>`. Show how to do this with each of the three forms of `reduce`.
15. Write a call to `reduce` that can be used to compute the average of a `Stream<Double>`. Why can't you simply compute the sum and divide by `count()`?
16. Find 500 prime numbers with 50 decimal digits, using a parallel stream of `BigInteger` and the `BigInter.isProbablePrime` method. Is it any faster than using a serial stream?
17. Find the 500 longest strings in *War and Peace* with a parallel stream. Is it any faster than using a serial stream?
18. How can you eliminate adjacent duplicates from a stream? Would your method work if the stream was parallel?

Processing Input and Output

Topics in This Chapter

- 9.1 Input/Output Streams, Readers, and Writers — page 288
- 9.2 Paths, Files, and Directories — page 298
- 9.3 HTTP Connections — page 306
- 9.4 Regular Expressions — page 310
- 9.5 Serialization — page 319
- Exercises — page 325

Chapter

9

In this chapter, you will learn how to work with files, directories, and web pages, and how to read and write data in binary and text format. You will also find a discussion of regular expressions, which can be useful for processing input. (I couldn't think of a better place to handle that topic, and apparently neither could the Java developers—when the regular expression API specification was proposed, it was attached to the specification request for “new I/O” features.) Finally, this chapter shows you the object serialization mechanism that lets you store objects as easily as you can store text or numeric data.

The key points of this chapter are:

1. An `InputStream` is a source of bytes, and an `OutputStream` is a destination for bytes.
2. A `Reader` reads characters, and a `Writer` writes them. Be sure to specify a character encoding.
3. The `Files` class has convenience methods for reading all bytes or lines of a file.
4. The `DataInput` and `DataOutput` interfaces have methods for writing numbers in binary format.
5. Use a `RandomAccessFile` or a memory-mapped file for random access.

6. A `Path` is an absolute or relative sequence of path components in a file system. Paths can be combined (or “resolved”).
7. Use the methods of the `Files` class to copy, move, or delete files and to recursively walk through a directory tree.
8. To read or update a ZIP file, use a ZIP file system.
9. You can read the contents of a web page with the `URL` class. To read metadata or write data, use the `URLConnection` class.
10. With the `Pattern` and `Matcher` classes, you can find all matches of a regular expression in a string, as well as the captured groups for each match.
11. The serialization mechanism can save and restore any object implementing the `Serializable` interface, provided its instance variables are also serializable.

9.1 Input/Output Streams, Readers, and Writers

In the Java API, a source from which one can read bytes is called an *input stream*. The bytes can come from a file, a network connection, or an array in memory. (These streams are unrelated to the streams of Chapter 8.) Similarly, a destination for bytes is an *output stream*. In contrast, *readers* and *writers* consume and produce sequences of *characters*. In the following sections, you will learn how to read and write bytes and characters.

9.1.1 Obtaining Streams

The easiest way to obtain a stream from a file is with the static methods

```
InputStream in = Files.newInputStream(path);
OutputStream out = Files.newOutputStream(path);
```

Here, `path` is an instance of the `Path` class that is covered in Section 9.2.1, “Paths” (page 298). It describes a path in a file system.

If you have a URL, you can read its contents from the input stream returned by the `openStream` method of the `URL` class:

```
URL url = new URL("http://horstmann.com/index.html");
InputStream in = url.openStream();
```

Section 9.3, “HTTP Connections” (page 306) shows how to send data to a web server.

The `ByteArrayInputStream` class lets you read from an array of bytes.

```
byte[] bytes = ....;
InputStream in = new ByteArrayInputStream(bytes);
```

Conversely, to send output to a byte array, use a `ByteArrayOutputStream`:

```
ByteArrayOutputStream out = new ByteArrayOutputStream();
Write to out
byte[] bytes = out.toByteArray();
```

9.1.2 Reading Bytes

The `InputStream` class has a method to read a single byte:

```
InputStream in = ....;
int b = in.read();
```

This method either returns the byte as an integer between 0 and 255, or returns -1 if the end of input has been reached.



CAUTION: The Java `byte` type has values between -128 and 127. You can cast the returned value into a `byte` *after* you have checked that it is not -1.

More commonly, you will want to read the bytes in bulk. The most convenient method is the `readAllBytes` method that simply reads all bytes from the stream into a byte array:

```
byte[] bytes = in.readAllBytes();
```



TIP: If you want to read all bytes from a file, call the convenience method

```
byte[] bytes = Files.readAllBytes(path);
```

If you want to read some, but not all bytes, provide a byte array and call the `readNBytes` method:

```
byte[] bytes = new byte[len];
int bytesRead = in.readNBytes(bytes, offset, n);
```

The method reads until either `n` bytes are read or no further input is available, and returns the actual number of bytes read. If no input was available at all, the methods return -1.



NOTE: There is also a `read(byte[], int, int)` method whose description seems exactly like `readNBytes`. The difference is that the `read` method only attempts to read the bytes and returns immediately with a lower count if it fails. The `readNBytes` method keeps calling `read` until all requested bytes have been obtained or `read` returns -1.

9.1.3 Writing Bytes

The `write` methods of an `OutputStream` can write individual bytes and byte arrays.

```
OutputStream out = ...;
int b = ...;
out.write(b);
byte[] bytes = ...;
out.write(bytes);
out.write(bytes, start, length);
```

When you are done writing a stream, you must *close* it in order to commit any buffered output. This is best done with a try-with-resources statement:

```
try (OutputStream out = ...) {
    out.write(bytes);
}
```

If you need to copy an input stream to an output stream, use the `InputStream.transferTo` method:

```
try (InputStream in = ...; OutputStream out = ...) {
    in.transferTo(out);
}
```

Both streams need to be closed after the call to `transferTo`. It is best to use a try-with-resources statement, as in the code example.

To write a file to an `OutputStream`, call

```
Files.copy(path, out);
```

Conversely, to save an `InputStream` to a file, call

```
Files.copy(in, path, StandardCopyOption.REPLACE_EXISTING);
```

9.1.4 Character Encodings

Input and output streams are for sequences of bytes, but in many cases you will work with text—that is, sequences of characters. It then matters how characters are encoded into bytes.

Java uses the Unicode standard for characters. Each character or “code point” has a 21-bit integer number. There are different *character encodings*—methods for packaging those 21-bit numbers into bytes.

The most common encoding is UTF-8, which encodes each Unicode code point into a sequence of one to four bytes (see Table 9-1). UTF-8 has the advantage that the characters of the traditional ASCII character set, which contains all characters used in English, only take up one byte each.

Table 9-1 UTF-8 Encoding

Character Range	Encoding
0...7F	0a ₆ a ₅ a ₄ a ₃ a ₂ a ₁ a ₀
80...FF	110a ₁₀ a ₉ a ₈ a ₇ a ₆ 10a ₅ a ₄ a ₃ a ₂ a ₁ a ₀
800...FFFF	1110a ₁₅ a ₁₄ a ₁₃ a ₁₂ 10a ₁₁ a ₁₀ a ₉ a ₈ a ₇ a ₆ 10a ₅ a ₄ a ₃ a ₂ a ₁ a ₀
10000...10FFFF	11110a ₂₀ a ₁₉ a ₁₈ 10a ₁₇ a ₁₆ a ₁₅ a ₁₄ a ₁₃ a ₁₂ 10a ₁₁ a ₁₀ a ₉ a ₈ a ₇ a ₆ 10a ₅ a ₄ a ₃ a ₂ a ₁ a ₀

Another common encoding is UTF-16, which encodes each Unicode code point into one or two 16-bit values (see Table 9-2). This is the encoding used in Java strings. Actually, there are two forms of UTF-16, called “big-endian” and “little-endian.” Consider the 16-bit value `0x2122`. In big-endian format, the more significant byte comes first: `0x21` followed by `0x22`. In little-endian format, it is the other way around: `0x22` `0x21`. To indicate which of the two is used, a file can start with the “byte order mark,” the 16-bit quantity `0xFEFF`. A reader can use this value to determine the byte order and discard it.

Table 9-2 UTF-16 Encoding

Character Range	Encoding
0...FFFF	a ₁₅ a ₁₄ a ₁₃ a ₁₂ a ₁₁ a ₁₀ a ₉ a ₈ a ₇ a ₆ a ₅ a ₄ a ₃ a ₂ a ₁ a ₀
10000...10FFFF	110110b ₁₉ b ₁₈ b ₁₇ b ₁₆ a ₁₅ a ₁₄ a ₁₃ a ₁₂ a ₁₁ a ₁₀ 110111a ₉ a ₈ a ₇ a ₆ a ₅ a ₄ a ₃ a ₂ a ₁ a ₀ where b ₁₉ b ₁₈ b ₁₇ b ₁₆ = a ₂₀ a ₁₉ a ₁₈ a ₁₇ a ₁₆ - 1



CAUTION: Some programs, including Microsoft Notepad, add a byte order mark at the beginning of UTF-8 encoded files. Clearly, this is unnecessary since there are no byte ordering issues in UTF-8. But the Unicode standard allows it, and even suggests that it's a pretty good idea since it leaves little doubt about the encoding. It is supposed to be removed when reading a UTF-8 encoded file. Sadly, Java does not do that, and bug reports against this issue are closed as “will not fix.” Your best bet is to strip out any leading `\uFEFF` that you find in your input.

In addition to the UTF encodings, there are partial encodings that cover a character range suitable for a given user population. For example, ISO 8859-1 is a one-byte code that includes accented characters used in Western European

languages. Shift_JIS is a variable-length code for Japanese characters. A large number of these encodings are still in widespread use.

There is no reliable way to automatically detect the character encoding from a stream of bytes. Some API methods let you use the “default charset”—the character encoding that is preferred by the operating system of the computer. Is that the same encoding that is used by your source of bytes? These bytes may well originate from a different part of the world. Therefore, you should always explicitly specify the encoding. For example, when reading a web page, check the Content-Type header.



NOTE: The platform encoding is returned by the static method `Charset.defaultCharset`. The static method `Charset.availableCharsets` returns all available `Charset` instances, as a map from canonical names to `Charset` objects.



CAUTION: The Oracle implementation has a system property `file.encoding` for overriding the platform default. This is not an officially supported property, and it is not consistently followed by all parts of Oracle’s implementation of the Java library. You should not set it.

The `StandardCharsets` class has static variables of type `Charset` for the character encodings that every Java virtual machine must support:

```
StandardCharsets.UTF_8  
StandardCharsets.UTF_16  
StandardCharsets.UTF_16BE  
StandardCharsets.UTF_16LE  
StandardCharsets.ISO_8859_1  
StandardCharsets.US_ASCII
```

To obtain the `Charset` for another encoding, use the static `forName` method:

```
Charset shiftJIS = Charset.forName("Shift_JIS");
```

Use the `Charset` object when reading or writing text. For example, you can turn an array of bytes into a string as

```
String str = new String(bytes, StandardCharsets.UTF_8);
```



TIP: Some methods allow you to specify a character encoding with a `Charset` object or a string. Choose the `StandardCharsets` constants, so you don’t have to worry about the correct spelling. For example, `new String(bytes, "UTF 8")` is not acceptable and will cause a runtime error.



CAUTION: Some methods (such as the `String(byte[])` constructor) use the default platform encoding if you don't specify any; others (such as `Files.readAllLines()`) use UTF-8.

9.1.5 Text Input

To read text input, use a Reader. You can obtain a Reader from any input stream with the `InputStreamReader` adapter:

```
InputStream inStream = ...;
Reader in = new InputStreamReader(inStream, charset);
```

If you want to process the input one UTF-16 code unit at a time, you can call the `read` method:

```
int ch = in.read();
```

The method returns a code unit between 0 and 65536, or -1 at the end of input.

That is not very convenient. Here are several alternatives.

With a short text file, you can read it into a string like this:

```
String content = new String(Files.readAllBytes(path), charset);
```

But if you want the file as a sequence of lines, call

```
List<String> lines = Files.readAllLines(path, charset);
```

Or better, process them lazily as a Stream:

```
try (Stream<String> lines = Files.lines(path, charset)) {
    ...
}
```



NOTE: If an `IOException` occurs as the stream fetches the lines, that exception is wrapped into an `UncheckedIOException` which is thrown out of the stream operation. (This subterfuge is necessary because stream operations are not declared to throw any checked exceptions.)

To read numbers or words from a file, use a Scanner, as you have seen in Chapter 1. For example,

```
Scanner in = new Scanner(path, "UTF-8");
while (in.hasNextDouble()) {
    double value = in.nextDouble();
    ...
}
```



TIP: To read alphabetic words, set the scanner's delimiter to a regular expression that is the complement of what you want to accept as a token. For example, after calling

```
in.useDelimiter("\\PL+");
```

the scanner reads in letters since any sequence of nonletters is a delimiter. See Section 9.4.1, “The Regular Expression Syntax” (page 310) for the regular expression syntax.

You can then obtain a stream of all words as

```
Stream<String> words = in.tokens();
```

If your input does not come from a file, wrap the `InputStream` into a `BufferedReader`:

```
try (BufferedReader reader
      = new BufferedReader(new InputStreamReader(url.openStream())))
{
    Stream<String> lines = reader.lines();
    ...
}
```

A `BufferedReader` reads input in chunks for efficiency. (Oddly, this is not an option for basic readers.) It has methods `readLine` to read a single line and `lines` to yield a stream of lines.

If a method asks for a `Reader` and you want it to read from a file, call `Files.newBufferedReader(path, charset)`.

9.1.6 Text Output

To write text, use a `Writer`. With the `write` method, you can write strings. You can turn any output stream into a `Writer`:

```
OutputStream outStream = ...;
Writer out = new OutputStreamWriter(outStream, charset);
out.write(str);
```

To get a writer for a file, use

```
Writer out = Files.newBufferedWriter(path, charset);
```

It is more convenient to use a `PrintWriter`, which has the `print`, `println`, and `printf` that you have always used with `System.out`. Using those methods, you can print numbers and use formatted output.

If you write to a file, construct a `PrintWriter` like this:

```
PrintWriter out = new PrintWriter(Files.newBufferedWriter(path, charset));
```

If you write to another stream, use

```
PrintWriter out = new PrintWriter(  
    new OutputStreamWriter(outStream, charset));
```



NOTE: `System.out` is an instance of `PrintStream`, not `PrintWriter`. This is a relic from the earliest days of Java. However, the `print`, `println`, and `printf` methods work the same way for the `PrintStream` and `PrintWriter` classes, using a character encoding for turning characters into bytes.

If you already have the text to write in a string, call

```
String content = ...;  
Files.write(path, content.getBytes(charset));
```

or

```
Files.write(path, lines, charset);
```

Here, `lines` can be a `Collection<String>`, or even more generally, an `Iterable<? extends CharSequence>`.

To append to a file, use

```
Files.write(path, content.getBytes(charset), StandardOpenOption.APPEND);  
Files.write(path, lines, charset, StandardOpenOption.APPEND);
```



CAUTION: When writing text with a partial character set such as ISO 8859-1, any unmappable characters are silently changed to a “replacement”—in most cases, either the ? character or the Unicode replacement character U+FFFD.

Sometimes, a library method wants a `Writer` to write output. If you want to capture that output in a string, hand it a `StringWriter`. Or, if it wants a `PrintWriter`, wrap the `StringWriter` like this:

```
StringWriter writer = new StringWriter();  
throwable.printStackTrace(new PrintWriter(writer));  
String stackTrace = writer.toString();
```

9.1.7 Reading and Writing Binary Data

The `DataInput` interface declares the following methods for reading a number, a character, a boolean value, or a string in binary format:

```
byte readByte()
int readUnsignedByte()
char readChar()
short readShort()
int readUnsignedShort()
int readInt()
long readLong()
float readFloat()
double readDouble()
void readFully(byte[] b)
```

The `DataOutput` interface declares corresponding `write` methods.



NOTE: These methods read and write numbers in big-endian format.



CAUTION: There are also `readUTF/writeUTF` methods that use a “modified UTF-8” format. These methods are *not* compatible with regular UTF-8, and are only useful for JVM internals.

The advantage of binary I/O is that it is fixed width and efficient. For example, `.writeInt` always writes an integer as a big-endian 4-byte binary quantity regardless of the number of digits. The space needed is the same for each value of a given type, which speeds up random access. Also, reading binary data is faster than parsing text. The main drawback is that the resulting files cannot be easily inspected in a text editor.

You can use the `DataInputStream` and `DataOutputStream` adapters with any stream. For example,

```
DataInput in = new DataInputStream(Files.newInputStream(path));
DataOutput out = new DataOutputStream(Files.newOutputStream(path));
```

9.1.8 Random-Access Files

The `RandomAccessFile` class lets you read or write data anywhere in a file. You can open a random-access file either for reading only or for both reading and writing; specify the option by using the string “`r`” (for read access) or “`rw`” (for read/write access) as the second argument in the constructor. For example,

```
RandomAccessFile file = new RandomAccessFile(path.toString(), "rw");
```

A random-access file has a *file pointer* that indicates the position of the next byte to be read or written. The `seek` method sets the file pointer to an arbitrary byte position within the file. The argument to `seek` is a long integer between

zero and the length of the file (which you can obtain with the `length` method). The `getFilePointer` method returns the current position of the file pointer.

The `RandomAccessFile` class implements both the `DataInput` and `DataOutput` interfaces. To read and write numbers from a random-access file, use methods such as `readInt/writeInt` that you saw in the preceding section. For example,

```
int value = file.readInt();
file.seek(file.getFilePointer() - 4);
file.writeInt(value + 1);
```

9.1.9 Memory-Mapped Files

Memory-mapped files provide another, very efficient approach for random access that works well for very large files. However, the API for data access is completely different from that of input/output streams. First, get a *channel* to the file:

```
FileChannel channel = FileChannel.open(path,
    StandardOpenOption.READ, StandardOpenOption.WRITE)
```

Then, map an area of the file (or, if it is not too large, the entire file) into memory:

```
ByteBuffer buffer = channel.map(FileChannel.MapMode.READ_WRITE,
    0, channel.size());
```

Use methods `get`, `getInt`, `getDouble`, and so on to read values, and the equivalent `put` methods to write values.

```
int offset = ...;
int value = buffer.getInt(offset);
buffer.put(offset, value + 1);
```

At some point, and certainly when the channel is closed, these changes are written back to the file.



NOTE: By default, the methods for reading and writing numbers use big-endian byte order. You can change the byte order with the command

```
buffer.order(ByteOrder.LITTLE_ENDIAN);
```

9.1.10 File Locking

When multiple simultaneously executing programs modify the same file, they need to communicate in some way, or the file can easily become damaged. File locks can solve this problem.

Suppose your application saves a configuration file with user preferences. If a user invokes two instances of the application, it could happen that both of them want to write the configuration file at the same time. In that situation, the first instance should lock the file. When the second instance finds the file locked, it can decide to wait until the file is unlocked or simply skip the writing process. To lock a file, call either the `lock` or `tryLock` methods of the `FileChannel` class.

```
FileChannel channel = FileChannel.open(path);
FileLock lock = channel.lock();
```

or

```
FileLock lock = channel.tryLock();
```

The first call blocks until the lock becomes available. The second call returns immediately, either with the lock or with `null` if the lock is not available. The file remains locked until the lock or the channel is closed. It is best to use a `try-with-resources` statement:

```
try (FileLock lock = channel.lock()) {
    ...
}
```

9.2 Paths, Files, and Directories

You have already seen `Path` objects for specifying file paths. In the following sections, you will see how to manipulate these objects and how to work with files and directories.

9.2.1 Paths

A `Path` is a sequence of directory names, optionally followed by a file name. The first component of a path may be a root component, such as `/` or `C:\`. The permissible root components depend on the file system. A path that starts with a root component is *absolute*. Otherwise, it is *relative*. For example, here we construct an absolute and a relative path. For the absolute path, we assume we are running on a Unix-like file system.

```
Path absolute = Paths.get("/", "home", "cay");
Path relative = Paths.get("myapp", "conf", "user.properties");
```

The static `Paths.get` method receives one or more strings, which it joins with the path separator of the default file system (`/` for a Unix-like file system, `\` for Windows). It then parses the result, throwing an `InvalidPathException` if the result is not a valid path in the given file system. The result is a `Path` object.

You can also provide a string with separators to the `Paths.get` method:

```
Path homeDirectory = Paths.get("/home/cay");
```



NOTE: A `Path` object does not have to correspond to a file that actually exists. It is merely an abstract sequence of names. To create a file, first make a path, then call a method to create the corresponding file—see Section 9.2.2, “Creating Files and Directories” (page 300).

It is very common to combine or “resolve” paths. The call `p.resolve(q)` returns a path according to these rules:

- If `q` is absolute, then the result is `q`.
- Otherwise, the result is “`p` then `q`,” according to the rules of the file system.

For example, suppose your application needs to find its configuration file relative to the home directory. Here is how you can combine the paths:

```
Path workPath = homeDirectory.resolve("myapp/work");
// Same as homeDirectory.resolve(Paths.get("myapp/work"));
```

There is a convenience method `resolveSibling` that resolves against a path’s parent, yielding a sibling path. For example, if `workPath` is `/home/cay/myapp/work`, the call

```
Path tempPath = workPath.resolveSibling("temp");
```

yields `/home/cay/myapp/temp`.

The opposite of `resolve` is `relativize`. The call `p.relativize(r)` yields the path `q` which, when resolved with `p`, yields `r`. For example,

```
Paths.get("/home/cay").relativize(Paths.get("/home/fred/myapp"))
```

yields `../fred/myapp`, assuming we have a file system that uses `..` to denote the parent directory.

The `normalize` method removes any redundant `.` and `..` components (or whatever the file system may deem redundant). For example, normalizing the path `/home/cay/.../fred/./myapp` yields `/home/fred/myapp`.

The `toAbsolutePath` method yields the absolute path of a given path. If the path is not already absolute, it is resolved against the “user directory”—that is, the directory from which the JVM was invoked. For example, if you launched a program from `/home/cay/myapp`, then `Paths.get("config").toAbsolutePath()` returns `/home/cay/myapp/config`.

The `Path` interface has methods for taking paths apart and combining them with other paths. This code sample shows some of the most useful ones:

```
Path p = Paths.get("/home", "cay", "myapp.properties");
Path parent = p.getParent(); // The path /home/cay
Path file = p.getFileName(); // The last element, myapp.properties
Path root = p.getRoot(); // The initial segment / (null for a relative path)
Path first = p.getName(0); // The first element
Path dir = p.subpath(1, p.getNameCount());
    // All but the first element, cay/myapp.properties
```

The `Path` interface extends the `Iterable<Path>` element, so you can iterate over the name components of a `Path` with an enhanced `for` loop:

```
for (Path component : path) {
    ...
}
```



NOTE: Occasionally, you may need to interoperate with legacy APIs that use the `File` class instead of the `Path` interface. The `Path` interface has a `toFile` method, and the `File` class has a `toPath` method.

9.2.2 Creating Files and Directories

To create a new directory, call

```
Files.createDirectory(path);
```

All but the last component in the path must already exist. To create intermediate directories as well, use

```
Files.createDirectories(path);
```

You can create an empty file with

```
Files.createFile(path);
```

The call throws an exception if the file already exists. The checks for existence and the creation are atomic. If the file doesn't exist, it is created before anyone else has a chance to do the same.

The call `Files.exists(path)` checks whether the given file or directory exists. To test whether it is a directory or a “regular” file (that is, with data in it, not something like a directory or symbolic link), call the static methods `isDirectory` and `isRegularFile` of the `Files` class.

There are convenience methods for creating a temporary file or directory in a given or system-specific location.

```
Path tempFile = Files.createTempFile(dir, prefix, suffix);
Path tempFile = Files.createTempFile(prefix, suffix);
Path tempDir = Files.createTempDirectory(dir, prefix);
Path tempDir = Files.createTempDirectory(prefix);
```

Here, `dir` is a `Path`, and `prefix/suffix` are strings which may be null. For example, the call `Files.createTempFile(null, ".txt")` might return a path such as `/tmp/1234405522364837194.txt`.

9.2.3 Copying, Moving, and Deleting Files

To copy a file from one location to another, simply call

```
Files.copy(fromPath, toPath);
```

To move a file (that is, copy and delete the original), call

```
Files.move(fromPath, toPath);
```

You can also use this command to move an empty directory.

The copy or move will fail if the target exists. If you want to overwrite an existing target, use the `REPLACE_EXISTING` option. If you want to copy all file attributes, use the `COPY_ATTRIBUTES` option. You can supply both like this:

```
Files.copy(fromPath, toPath, StandardCopyOption.REPLACE_EXISTING,
           StandardCopyOption.COPY_ATTRIBUTES);
```

You can specify that a move should be atomic. Then you are assured that either the move completed successfully, or the source continues to be present. Use the `ATOMIC_MOVE` option:

```
Files.move(fromPath, toPath, StandardCopyOption.ATOMIC_MOVE);
```

See Table 9-3 for a summary of the options that are available for file operations.

Finally, to delete a file, simply call

```
Files.delete(path);
```

This method throws an exception if the file doesn't exist, so instead you may want to use

```
boolean deleted = Files.deleteIfExists(path);
```

The deletion methods can also be used to remove an empty directory.

Table 9–3 Standard Options for File Operations

Option	Description
StandardOpenOption; use with newBufferedWriter, newInputStream, newOutputStream, write	
READ	Open for reading
WRITE	Open for writing
APPEND	If opened for writing, append to the end of the file
TRUNCATE_EXISTING	If opened for writing, remove existing contents
CREATE_NEW	Create a new file and fail if it exists
CREATE	Atomically create a new file if it doesn't exist
DELETE_ON_CLOSE	Make a "best effort" to delete the file when it is closed
SPARSE	A hint to the file system that this file will be sparse
DSYNC SYNC	Requires that each update to the file data data and metadata be written synchronously to the storage device
StandardCopyOption; use with copy, move	
ATOMIC_MOVE	Move the file atomically
COPY_ATTRIBUTES	Copy the file attributes
REPLACE_EXISTING	Replace the target if it exists
LinkOption; use with all of the above methods and exists, isDirectory, isRegularFile	
NOFOLLOW_LINKS	Do not follow symbolic links
FileVisitOption; use with find, walk, walkFileTree	
FOLLOW_LINKS	Follow symbolic links

9.2.4 Visiting Directory Entries

The static `Files.list` method returns a `Stream<Path>` that reads the entries of a directory. The directory is read lazily, making it possible to efficiently process directories with huge numbers of entries.

Since reading a directory involves a system resource that needs to be closed, you should use a try-with-resources block:

```
try (Stream<Path> entries = Files.list(pathToDirectory)) {
    ...
}
```

The `list` method does not enter subdirectories. To process all descendants of a directory, use the `Files.walk` method instead.

```
try (Stream<Path> entries = Files.walk(pathToRoot)) {  
    // Contains all descendants, visited in depth-first order  
}
```

Here is a sample traversal of the unzipped `src.zip` tree:

```
java  
java/nio  
java/nio/DirectCharBufferU.java  
java/nio/ByteBufferAsShortBufferRL.java  
java/nio/MappedByteBuffer.java  
...  
java/nio/ByteBufferAsDoubleBufferB.java  
java/nio/charset  
java/nio/charset/CoderMalfunctionError.java  
java/nio/charset/CharsetDecoder.java  
java/nio/charset/UnsupportedCharsetException.java  
java/nio/charset/spi  
java/nio/charset/spi/CharsetProvider.java  
java/nio/charset/StandardCharsets.java  
java/nio/charset/Charset.java  
...  
java/nio/charset/CoderResult.java  
java/nio/HeapFloatBufferR.java  
...
```

As you can see, whenever the traversal yields a directory, it is entered before continuing with its siblings.

You can limit the depth of the tree that you want to visit by calling `Files.walk(pathToRoot, depth)`. Both `walk` methods have a varargs parameter of type `FileVisitOption...`, but there is only one option you can supply: `FOLLOW_LINKS` to follow symbolic links.



NOTE: If you filter the paths returned by `walk` and your filter criterion involves the file attributes stored with a directory, such as size, creation time, or type (file, directory, symbolic link), then use the `find` method instead of `walk`. Call that method with a predicate function that accepts a path and a `BasicFileAttributes` object. The only advantage is efficiency. Since the directory is being read anyway, the attributes are readily available.

This code fragment uses the `Files.walk` method to copy one directory to another:

```
Files.walk(source).forEach(p -> {
    try {
        Path q = target.resolve(source.relativize(p));
        if (Files.isDirectory(p))
            Files.createDirectory(q);
        else
            Files.copy(p, q);
    } catch (IOException ex) {
        throw new UncheckedIOException(ex);
    }
});
```

Unfortunately, you cannot easily use the `Files.walk` method to delete a tree of directories since you need to first visit the children before deleting the parent. In that case, use the `walkFileTree` method. It requires an instance of the `FileVisitor` interface. Here is when the file visitor gets notified:

1. Before a directory is processed:

```
FileVisitResult preVisitDirectory(T dir, IOException ex)
```

2. When a file is encountered:

```
FileVisitResult visitFile(T path, BasicFileAttributes attrs)
```

3. When an exception occurs in the `visitFile` method:

```
FileVisitResult visitFailed(T path, IOException ex)
```

4. After a directory is processed:

```
FileVisitResult postVisitDirectory(T dir, IOException ex)
```

In each case, the notification method returns one of the following results:

- Continue visiting the next file: `FileVisitResult.CONTINUE`
- Continue the walk, but without visiting the entries in this directory: `FileVisitResult.SKIP_SUBTREE`
- Continue the walk, but without visiting the siblings of this file: `FileVisitResult.SKIP_SIBLINGS`
- Terminate the walk: `FileVisitResult.TERMINATE`

If any of the methods throws an exception, the walk is also terminated, and that exception is thrown from the `walkFileTree` method.

The `SimpleFileVisitor` class implements this interface, continuing the iteration at each point and rethrowing any exceptions.

Here is how you can delete a directory tree:

```
Files.walkFileTree(root, new SimpleFileVisitor<Path>() {
    public FileVisitResult visitFile(Path file,
        BasicFileAttributes attrs) throws IOException {
        Files.delete(file);
        return FileVisitResult.CONTINUE;
    }
    public FileVisitResult postVisitDirectory(Path dir,
        IOException ex) throws IOException {
        if (ex != null) throw ex;
        Files.delete(dir);
        return FileVisitResult.CONTINUE;
    }
});
```

9.2.5 ZIP File Systems

The `Paths` class looks up paths in the default file system—the files on the user's local disk. You can have other file systems. One of the more useful ones is a ZIP file system. If `zipname` is the name of a ZIP file, then the call

```
FileSystem zipfs = FileSystems.newFileSystem(Paths.get(zipname), null);
```

establishes a file system that contains all files in the ZIP archive. It's an easy matter to copy a file out of that archive if you know its name:

```
Files.copy(zipfs.getPath(sourceName), targetPath);
```

Here, `zipfs.getPath` is the analog of `Paths.get` for an arbitrary file system.

To list all files in a ZIP archive, walk the file tree:

```
Files.walk(zipfs.getPath("/")).forEach(p -> {
    Process p
});
```

You have to work a bit harder to create a new ZIP file. Here is the magic incantation:

```
Path zipPath = Paths.get("myfile.zip");
URI uri = new URI("jar", zipPath.toUri().toString(), null);
// Constructs the URI jar:file://myfile.zip
try (FileSystem zipfs = FileSystems.newFileSystem(uri,
    Collections.singletonMap("create", "true"))) {
    // To add files, copy them into the ZIP file system
    Files.copy(sourcePath, zipfs.getPath("/").resolve(targetPath));
}
```



NOTE: There is an older API for working with ZIP archives, with classes `ZipInputStream` and `ZipOutputStream`, but it's not as easy to use as the one described in this section.

9.3 HTTP Connections

You can read from a URL by using the input stream returned from `URL.getInputStream` method. However, if you want additional information about a web resource, or if you want to write data, you need more control over the process than the `URL` class provides. The `URLConnection` class was designed before HTTP was the universal protocol of the Web. It provides support for a number of protocols, but its HTTP support is somewhat cumbersome. When the decision was made to support HTTP/2, it became clear that it would be best to provide a modern client interface instead of reworking the existing API. In Java 9, the `HttpClient` provides a more convenient API and HTTP/2 support. The API classes are located in the `jdk.incubator.http` package, to indicate that its API is likely to evolve as a result of user feedback before it is finalized in Java 10.

In the following sections, I provide a cookbook for using the `HttpURLConnection` class, and then give an overview of the API in the incubator.

9.3.1 The `URLConnection` and `HttpURLConnection` Classes

To use the `URLConnection` class, follow these steps:

1. Get an `URLConnection` object:

```
URLConnection connection = url.openConnection();
```

For an HTTP URL, the returned object is actually an instance of `HttpURLConnection`.

2. If desired, set request properties:

```
connection.setRequestProperty("Accept-Charset", "UTF-8, ISO-8859-1");
```

If a key has multiple values, separate them by commas.

3. To send data to the server, call

```
connection.setDoOutput(true);
try (OutputStream out = connection.getOutputStream()) {
    // Write to out
}
```

4. If you want to read the response headers and you haven't called `getOutputStream`, call

```
connection.connect();
```

Then query the header information:

```
Map<String, List<String>> headers = connection.getHeaderFields();
```

For each key, you get a list of values since there may be multiple header fields with the same key.

5. Read the response:

```
try (InputStream in = connection.getInputStream()) {  
    // Read from in  
}
```

A common use case is to post form data. The `URLConnection` class automatically sets the content type to `application/x-www-form-urlencoded` when writing data to a HTTP URL, but you need to encode the name/value pairs:

```
URL url = ...;  
URLConnection connection = url.openConnection();  
connection.setDoOutput(true);  
try (Writer out = new OutputStreamWriter(  
        connection.getOutputStream(), StandardCharsets.UTF_8)) {  
    Map<String, String> postData = ...;  
    boolean first = true;  
    for (Map.Entry<String, String> entry : postData.entrySet()) {  
        if (first) first = false;  
        else out.write("&");  
        out.write(URLEncoder.encode(entry.getKey(), "UTF-8"));  
        out.write("=");  
        out.write(URLEncoder.encode(entry.getValue(), "UTF-8"));  
    }  
}  
try (InputStream in = connection.getInputStream()) {  
    ...  
}
```

9.3.2 The HTTP Client API

The HTTP client API whose incubator version is included in Java 9 provides another mechanism for connecting to a web server which is simpler than the `URLConnection` class with its rather fussy set of stages.



NOTE: To use this feature, you need to run your program with the command-line option

```
--add-modules jdk.incubator.httpclient
```

An `HttpClient` can issue requests and receive responses. You get a client by calling

```
HttpClient client = HttpClient.newHttpClient();
```

Alternatively, if you need to configure the client, use a builder API like this:

```
HttpClient client = HttpClient.newBuilder()
    .followRedirects(HttpClient.Redirect.ALWAYS)
    .build();
```

That is, you get a builder, call methods to customize the item that is going to be built, and then call the `build` method to finalize the building process. This is a common pattern for constructing immutable objects.

Follow the same pattern for formulating requests. Here is a `GET` request:

```
HttpRequest request = HttpRequest.newBuilder()
    .uri(new URI("http://horstmann.com"))
    .GET()
    .build();
```

The `URI` is the “uniform resource identifier” which is, when using HTTP, the same as a URL. However, in Java, the `URL` class has methods for actually opening a connection to a URL, whereas the `URI` class is only concerned with the syntax (scheme, host, port, path, query, fragment, and so on).

When sending the request, you have to tell the client how to handle the response. If you just want the body as a string, send the request with a `HttpResponse.BodyHandler.asString()`, like this:

```
HttpResponse<String> response
    = client.send(request, HttpResponse.BodyHandler.asString());
```

The `HttpResponse` class is a template whose type denotes the type of the body. You get the response body string simply as

```
String bodyString = response.body();
```

There are other response body handlers that get the response as a byte array or a file. One can hope that eventually the JDK will support JSON and provide a JSON handler.

With a `POST` request, you similarly need a “body processor” that turns the request data into the data that is being posted. There are body processors for strings, byte arrays, and files. Again, one can hope that the library designers will wake up to the reality that most `POST` requests involve form data or JSON objects, and provide appropriate processors.

In the meantime, to send a form post, you need to URL-encode the request data, just like in the preceding section.

```
Map<String, String> postData = ...;
boolean first = true;
StringBuilder body = new StringBuilder();
for (Map.Entry<String, String> entry : postData.entrySet()) {
    if (first) first = false;
    else body.append("&");
    body.append(URLEncoder.encode(entry.getKey(), "UTF-8"));
    body.append("=");
    body.append(URLEncoder.encode(entry.getValue(), "UTF-8"));
}
HttpRequest request = HttpRequest.newBuilder()
    .uri(httpUrlString)
    .header("Content-Type", "application/x-www-form-urlencoded")
    .POST(HttpRequest.BodyProcessor.fromString(body.toString()))
    .build();
```

Note that, unlike with the `URLConnection` class, you need to specify the content type for forms.

Similarly, for posting JSON data, you specify the content type and provide a JSON string.

The `HttpResponse` object also yields the status code and the response headers.

```
int status = response.statusCode();
HttpHeaders responseHeaders = response.headers();
```

You can turn the `HttpHeaders` object into a map:

```
Map<String, List<String>> headerMap = responseHeaders.map();
```

The map values are lists since in HTTP, each key can have multiple values.

If you just want the value of a particular key, and you know that there won't be multiple values, call the `firstValue` method:

```
Optional<String> lastModified = headerMap.firstValue("Last-Modified");
```

You get the response value or an empty optional if none was supplied.



TIP: To enable logging for the `HttpClient`, add this line to `net.properties` in your JDK:

```
jdk.httpclient.HttpClient.log=all
```

Instead of `all`, you can specify a comma-separated list of headers, requests, content, errors, ssl, trace, and frames, optionally followed by `:control`, `:data`, `:window`, or `:all`. Don't use any spaces.

Then set the logging level for the logger named `jdk.httpclient.HttpClient` to `INFO`, for example by adding this line to the `logging.properties` file in your JDK:

```
jdk.httpclient.HttpClient.level=INFO
```

9.4 Regular Expressions

Regular expressions specify string patterns. Use them whenever you need to locate strings that match a particular pattern. For example, suppose you want to find hyperlinks in an HTML file. You need to look for strings of the pattern ``. But wait—there may be extra spaces, or the URL may be enclosed in single quotes. Regular expressions give you a precise syntax for specifying what sequences of characters are legal matches.

In the following sections, you will see the regular expression syntax used by the Java API, and how to put regular expressions to work.

9.4.1 The Regular Expression Syntax

In a regular expression, a character denotes itself unless it is one of the reserved characters

`. * + ? { | () [\ ^ $`

For example, the regular expression `Java` only matches the string `Java`.

The symbol `.` matches any single character. For example, `.a.a` matches `Java` and `data`.

The `*` symbol indicates that the preceding constructs may be repeated 0 or more times; for a `+`, it is 1 or more times. A suffix of `?` indicates that a construct is optional (0 or 1 times). For example, `be+s?` matches `be`, `bee`, and `bees`. You can specify other multiplicities with `{ }` (see Table 9-4).

A `|` denotes an alternative: `.(oo|ee)f` matches `beef` or `woof`. Note the parentheses—without them, `.oo|eef` would be the alternative between `.oo` and `eef`. Parentheses are also used for grouping—see Section 9.4.4, “Groups” (page 316).

A *character class* is a set of character alternatives enclosed in brackets, such as `[jj]`, `[0-9]`, `[A-Za-z]`, or `[^0-9]`. Inside a character class, the `-` denotes a range (all characters whose Unicode values fall between the two bounds). However, a `-` that is the first or last character in a character class denotes itself. A `^` as the first character in a character class denotes the complement (all characters except those specified).

There are many *predefined character classes* such as `\d` (digits) or `\p{Sc}` (Unicode currency symbols). See Tables 9-4 and 9-5.

The characters `^` and `$` match the beginning and end of input.

If you need to have a literal `. * + ? { | () [\ ^ $`, precede it by a backslash. Inside a character class, you only need to escape `[` and `\`, provided you are

careful about the positions of] - ^. For example, []^] is a class containing all three of them.

Alternatively, surround a string with \Q and \E. For example, \(\$0\.99\) and \Q(\$0.99)\E both match the string (\$0.99).



TIP: If you have a string that may contain some of the many special characters in the regular expression syntax, you can escape them all by calling Parse.quote(str). This simply surrounds the string with \Q and \E, but it takes care of the special case where str may contain \E.

Table 9-4 Regular Expression Syntax

Expression	Description	Example
Characters		
<i>c</i> , not one of . * + ? { () [\ ^ \$	The character <i>c</i>	J
.	Any character except line terminators, or any character if the DOTALL flag is set	
\x{ <i>p</i> }	The Unicode code point with hex code <i>p</i>	\x{1D546}
\uhhhh, \xhh, \o0, \oo0, \ooo0	The UTF-16 code unit with the given hex or octal value	\uFEFF
\a, \e, \f, \n, \r, \t	Alert (\x{7}), escape (\x{1B}), form feed (\x{B}), newline (\x{A}), carriage return (\x{D}), tab (\x{9})	\n
\cc, where <i>c</i> is in [A-Z] or one of @ [\] ^ _ ?	The control character corresponding to the character <i>c</i>	\cH is a backspace (\x{8})
\c, where <i>c</i> is not in [A-Za-zA-Z0-9]	The character <i>c</i>	\`
\Q ... \E	Everything between the start and the end of the quotation	\Q(...)\\E matches the string (...)

(Continues)

Table 9–4 Regular Expression Syntax (*Continued*)

Expression	Description	Example
Character Classes		
[C ₁ C ₂ ...], where C _i are characters, ranges c-d, or character classes	Any of the characters represented by C ₁ , C ₂ , . . .	[0-9+-]
[^...]	Complement of a character class	[^\d\s]
[...&...]	Intersection of character classes	[p{L}&[^A-Za-z]]
\p{...}, \P{...}	A predefined character class (see Table 9-5); its complement	\p{L} matches a Unicode letter, and so does \p{L—you can omit braces around a single letter}
\d, \D	Digits ([0-9], or \p{Digit} when the UNICODE_CHARACTER_CLASS flag is set); the complement	\d+ is a sequence of digits
\w, \W	Word characters ([a-zA-Z0-9_], or Unicode word characters when the UNICODE_CHARACTER_CLASS flag is set); the complement	
\s, \S	Spaces ([\n\r\t\f\x{B}], or \p{IsWhite_Space} when the UNICODE_CHARACTER_CLASS flag is set); the complement	\s*, \s* is a comma surrounded by optional white space
\h, \v, \H, \V	Horizontal whitespace, vertical whitespace, their complements	
Sequences and Alternatives		
XY	Any string from X, followed by any string from Y	[1-9][0-9]* is a positive number without leading zero
X Y	Any string from X or Y	http ftp

(Continues)

Table 9-4 Regular Expression Syntax (*Continued*)

Expression	Description	Example
Grouping		
(X)	Captures the match of X	'([^\"]*)' captures the quoted text
\n	The <i>n</i> th group	(["\"]).*\1 matches 'Fred' or "Fred" but not "Fred"
(?<name>X)	Captures the match of X with the given name	'(?<id>[A-Za-z0-9]+)' captures the match with name id
\k<name>	The group with the given name	\k<id> matches the group with name id
(?:X)	Use parentheses without capturing X	In (?:http ftp)://(.*) <i>,</i> the match after :// is \1
(?f ₁ f ₂ ...:X), (?f ₁ ...f _k ...:X), with f _i in [dimsuUx]	Matches, but does not capture, X with the given flags on or off (after -)	(?i:jpe?g) is a case-insensitive match
Other (?...)	See the Pattern API documentation	
Quantifiers		
X?	Optional X	\+? is an optional + sign
X*, X ₊	0 or more X, 1 or more X	[1-9][0-9] [*] is an integer ≥ 10
X{ <i>n</i> }, X{ <i>n</i> ,}, X{ <i>m,n</i> }	<i>n</i> times X, at least <i>n</i> times X, between <i>m</i> and <i>n</i> times X	[0-7]{1,3} are one to three octal digits
Q?, where Q is a quantified expression	Reluctant quantifier, attempting the shortest match before trying longer matches	.*(?<.+?>).* captures the shortest sequence enclosed in angle brackets
Q+, where Q is a quantified expression	Possessive quantifier, taking the longest match without backtracking	'[^']*+' matches strings enclosed in single quotes and fails quickly on strings without a closing quote
Boundary Matches		
^ \$	Beginning, end of input (or beginning, end of line in multiline mode)	^Java\$ matches the input or line Java

(Continues)

Table 9–4 Regular Expression Syntax (*Continued*)

Expression	Description	Example
\A \Z \z	Beginning of input, end of input, absolute end of input (unchanged in multiline mode)	
\b \B	Word boundary, nonword boundary	\bJava\b matches the word Java
\R	A Unicode line break	
\G	The end of the previous match	

Table 9–5 Predefined Character Classes \p{...}

Name	Description
<i>posixClass</i>	<i>posixClass</i> is one of Lower, Upper, Alpha, Digit, Alnum, Punct, Graph, Print, Cntrl, XDigit, Space, Blank, ASCII, interpreted as POSIX or Unicode class, depending on the UNICODE_CHARACTER_CLASS flag
IsScript, sc=Script, script=Script	A script accepted by Character.UnicodeScript.forName
InBlock, blk=Block, block=Block	A block accepted by Character.UnicodeBlock.forName
Category, InCategory, gc=Category, general_category=Category	A one- or two-letter name for a Unicode general category
IsProperty	<i>Property</i> is one of Alphabetic, Ideographic, Letter, Lowercase, Uppercase, Titlecase, Punctuation, Control, White_Space, Digit, Hex_Digit, Join_Control, Noncharacter_Code_Point, Assigned
javaMethod	Invokes the method Character.isMethod (must not be deprecated)

9.4.2 Finding One Match

Generally, there are two ways to use a regular expression: Either you want to find out whether a string conforms to the expression, or you want to find all matches of a regular expressions in a string.

In the first case, simply use the static `matches` method:

```
String regex = "[+-]?\d+";
CharSequence input = ...;
if (Pattern.matches(regex, input)) {
    ...
}
```

If you need to use the same regular expression many times, it is more efficient to compile it. Then, create a `Matcher` for each input:

```
Pattern pattern = Pattern.compile(regex);
Matcher matcher = pattern.matcher(input);
if (matcher.matches()) ...
```

If the match succeeds, you can retrieve the location of matched groups—see the following section.

If you want to match elements in a collection or stream, turn the pattern into a predicate:

```
Stream<String> strings = ....
Stream<String> result = strings.filter(pattern.asPredicate());
```

The result contains all strings that match the regular expression.

9.4.3 Finding All Matches

In this section, we consider the other common use case for regular expressions—finding all matches in an input. Use this loop:

```
String input = ...;
Matcher matcher = pattern.matcher(input);
while (matcher.find()) {
    String match = matcher.group();
    int matchStart = matcher.start();
    int matchEnd = matcher.end();
    ...
}
```

In this way, you can process each match in turn. As shown in the code fragment, you can get the matched string as well as its position in the input string.

More elegantly, you can call the `results` method to get a `Stream<MatchResult>`. The `MatchResult` interface has methods `group`, `start`, and `end`, just like `Matcher`. (In fact, the `Matcher` class implements this interface.) Here is how you get a list of all matches:

```
List<String> matches = pattern.matcher(input)
    .results()
    .map(Matcher::group)
    .collect(Collectors.toList());
```

If you have the data in a file, then you can use the `Scanner.findAll` method to get a `Stream<MatchResult>`, without first having to read the contents into a string. You can pass a `Pattern` or a pattern string:

```
Scanner in = new Scanner(path, "UTF-8");
Stream<String> words = in.findAll("\pL+")
    .map(MatchResult::group);
```

9.4.4 Groups

It is common to use groups for extracting components of a match. For example, suppose you have a line item in the invoice with item name, quantity, and unit price such as

```
Blackwell Toaster USD29.95
```

Here is a regular expression with groups for each component:

```
(\p{Alnum}+(\s+\p{Alnum}+*))\s+([A-Z]{3})([0-9.]*)
```

After matching, you can extract the `n`th group from the matcher as

```
String contents = matcher.group(n);
```

Groups are ordered by their opening parenthesis, starting at 1. (Group 0 is the entire input.) In this example, here is how to take the input apart:

```
Matcher matcher = pattern.matcher(input);
if (matcher.matches()) {
    item = matcher.group(1);
    currency = matcher.group(3);
    price = matcher.group(4);
}
```

We aren't interested in group 2; it only arose from the parentheses that were required for the repetition. For greater clarity, you can use a noncapturing group:

```
(\p{Alnum}+(?:\s+\p{Alnum}+*))\s+([A-Z]{3})([0-9.]*)
```

Or, even better, capture by name:

```
(?<item>\p{Alnum}+(\s+\p{Alnum}+*))\s+(<currency>[A-Z]{3})(?<price>[0-9.]*)
```

Then, you can retrieve the items by name:

```
item = matcher.group("item");
```

With the `start` and `end` methods, you can get the group positions in the input:

```
int itemStart = matcher.start("item");
int itemEnd = matcher.end("item");
```



NOTE: Retrieving groups by name only works with a `Matcher`, not with a `MatchResult`.



NOTE: When you have a group inside a repetition, such as `(\s+\p{Alnum}+)*` in the example above, it is not possible to get all of its matches. The `group` method only yields the last match, which is rarely useful. You need to capture the entire expression with another group.

9.4.5 Splitting along Delimiters

Sometimes, you want to break an input along matched delimiters and keep everything else. The `Pattern.split` method automates this task. You obtain an array of strings, with the delimiters removed:

```
String input = ...;
Pattern commas = Pattern.compile("\s*,\s*");
String[] tokens = commas.split(input);
// "1, 2, 3" turns into ["1", "2", "3"]
```

If there are many tokens, you can fetch them lazily:

```
Stream<String> tokens = commas.splitAsStream(input);
```

If you don't care about precompiling the pattern or lazy fetching, you can just use the `String.split` method:

```
String[] tokens = input.split("\s*,\s*");
```

If the input is in a file, use a scanner:

```
Scanner in = new Scanner(path, "UTF-8");
in.useDelimiter("\s*,\s*");
Stream<String> tokens = in.tokens();
```

9.4.6 Replacing Matches

If you want to replace all matches of a regular expression with a string, call `replaceAll` on the matcher:

```
Matcher matcher = commas.matcher(input);
String result = matcher.replaceAll(",");
// Normalizes the commas
```

Or, if you don't care about precompiling, use the `replaceAll` method of the `String` class:

```
String result = input.replaceAll("\s*,\s*", ",");
```

The replacement string can contain group numbers `$n` or names `${name}`. They are replaced with the contents of the corresponding captured group.

```
String result = "3:45".replaceAll(  
    "(\\d{1,2})(?:\\d{2})",  
    "$1 hours and ${minutes} minutes");  
// Sets result to "3 hours and 45 minutes"
```

You can use `\` to escape `$` and `\` in the replacement string, or you can call the `Matcher.quoteReplacement` convenience method:

```
matcher.replaceAll(Matcher.quoteReplacement(str))
```

If you want to carry out a more complex operation than splicing in group matches, then you can provide a replacement function instead of a replacement string. The function accepts a `MatchResult` and yields a string. For example, here we replace all words with at least four letters with their uppercase version:

```
String result = Pattern.compile("\\pL{4,}")  
.matcher("Mary had a little lamb")  
.replaceAll(m -> m.group().toUpperCase());  
// Yields "MARY had a LITTLE LAMB"
```

The `replaceFirst` method replaces only the first occurrence of the pattern.

9.4.7 Flags

Several *flags* change the behavior of regular expressions. You can specify them when you compile the pattern:

```
Pattern pattern = Pattern.compile(regex,  
    Pattern.CASE_INSENSITIVE | Pattern.UNICODE_CHARACTER_CLASS);
```

Or you can specify them inside the pattern:

```
String regex = "(?iU:expression)";
```

Here are the flags:

- `Pattern.CASE_INSENSITIVE` or `i`: Match characters independently of the letter case. By default, this flag takes only US ASCII characters into account.
- `Pattern.UNICODE_CASE` or `u`: When used in combination with `CASE_INSENSITIVE`, use Unicode letter case for matching.
- `Pattern.UNICODE_CHARACTER_CLASS` or `u`: Select Unicode character classes instead of POSIX. Implies `UNICODE_CASE`.
- `Pattern.MULTILINE` or `m`: Make `^` and `$` match the beginning and end of a line, not the entire input.
- `Pattern.UNIX_LINES` or `d`: Only `'\n'` is a line terminator when matching `^` and `$` in multiline mode.

- Pattern.DOTALL or s: Make the . symbol match all characters, including line terminators.
- Pattern.COMMENTS or x: Whitespace and comments (from # to the end of a line) are ignored.
- Pattern.LITERAL: The pattern is taking literally and must be matched exactly, except possibly for letter case.
- Pattern.CANON_EQ: Take canonical equivalence of Unicode characters into account. For example, u followed by “ (diaeresis) matches ü.

The last two flags cannot be specified inside a regular expression.

9.5 Serialization

In the following sections, you will learn about object serialization—a mechanism for turning an object into a bunch of bytes that can be shipped somewhere else or stored on disk, and for reconstituting the object from those bytes.

Serialization is an essential tool for distributed processing, where objects are shipped from one virtual machine to another. It is also used for fail-over and load balancing, when serialized objects can be moved to another server. If you work with server-side software, you will often need to enable serialization for classes. The following sections tell you how to do that.

9.5.1 The Serializable Interface

In order for an object to be serialized—that is, turned into a bunch of bytes—it must be an instance of a class that implements the `Serializable` interface. This is a marker interface with no methods, similar to the `Cloneable` interface that you saw in Chapter 4.

For example, to make `Employee` objects serializable, the class needs to be declared as

```
public class Employee implements Serializable {  
    private String name;  
    private double salary;  
    ...  
}
```

It is safe and appropriate to implement the `Serializable` interface if all instance variables have primitive or `enum` type, or refer to serializable objects. Many classes in the standard library are serializable. Arrays and the collection classes that you saw in Chapter 7 are serializable provided their elements

are. More generally, all objects that you can reach from a serializable object need to be serializable.

In the case of the `Employee` class, and indeed with most classes, there is no problem. In the following sections, you will see what to do when a little extra help is needed.

To serialize objects, you need an `ObjectOutputStream`, which is constructed with another `OutputStream` that receives the actual bytes.

```
ObjectOutputStream out = new ObjectOutputStream(  
    Files.newOutputStream(path));
```

Now call the `writeObject` method:

```
Employee peter = new Employee("Peter", 90000);  
Employee paul = new Manager("Paul", 180000);  
out.writeObject(peter);  
out.writeObject(paul);
```

To read the objects back in, construct an `ObjectInputStream`:

```
ObjectInputStream in = new ObjectInputStream(  
    Files.newInputStream(path));
```

Retrieve the objects in the same order in which they were written, using the `readObject` method.

```
Employee e1 = (Employee) in.readObject();  
Employee e2 = (Employee) in.readObject();
```

When an object is written, the name of the class and the names and values of all instance variables are saved. If the value of an instance variable belongs to a primitive type, it is saved as binary data. If it is an object, it is again written with the `writeObject` method.

When an object is read in, the process is reversed. The class name and the names and values of the instance variables are read, and the object is reconstituted.

There is just one catch. Suppose there were two references to the same object. Let's say each employee has a reference to their boss:

```
Employee peter = new Employee("Peter", 90000);  
Employee paul = new Manager("Barney", 105000);  
Manager mary = new Manager("Mary", 180000);  
peter.setBoss(mary);  
paul.setBoss(mary);  
out.writeObject(peter);  
out.writeObject(paul);
```

When reading these two objects back in, both of them need to have the *same* boss, not two references to identical but distinct objects.

In order to achieve this, each object gets a *serial number* when it is saved. When you pass an object reference to `writeObject`, the `ObjectOutputStream` checks if the object reference was previously written. In that case, it just writes out the serial number and does not duplicate the contents of the object.

In the same way, an `ObjectInputStream` remembers all objects it has encountered. When reading in a reference to a repeated object, it simply yields a reference to the previously read object.

9.5.2 Transient Instance Variables

Certain instance variables should not be serialized—for example, database connections that are meaningless when an object is reconstituted. Also, when an object keeps a cache of values, it might be better to drop the cache and recompute it instead of storing it.

To prevent an instance variable from being serialized, simply tag it with the `transient` modifier. Also, mark instance variables as transient if they belong to nonserializable classes. Transient fields are always skipped when objects are serialized.

9.5.3 The `readObject` and `writeObject` Methods

In rare cases, you need to tweak the serialization mechanism. A serializable class can add any desired action to the default read and write behavior, by defining methods with the signature

```
private void readObject(ObjectInputStream in)
    throws IOException, ClassNotFoundException
private void writeObject(ObjectOutputStream out)
    throws IOException
```

Then, the object headers continue to be written as usual, but the instance variables fields are no longer automatically serialized. Instead, these methods are called.

Here is a typical example. The `Point2D` class in the JavaFX library is not serializable. Now, suppose you want to serialize a class `LabeledPoint` that stores a `String` and a `Point2D`. First, you need to mark the `Point2D` field as transient to avoid a `NotSerializableException`.

```
public class LabeledPoint implements Serializable {
    private String label;
    private transient Point2D point;
    ...
}
```

In the `writeObject` method, first write the nontransient `label` variable by calling the `defaultWriteObject` method. This is a special method of the `ObjectOutputStream` class that should only be called from within a `writeObject` method of a serializable class. Then, write the point coordinates using the `writeDouble` method from the `DataOutput` interface.

```
private void writeObject(ObjectOutputStream out)
    throws IOException {
    out.defaultWriteObject();
    out.writeDouble(point.getX());
    out.writeDouble(point.getY());
}
```

In the `readObject` method, reverse the process:

```
private void readObject(ObjectInputStream in)
    throws IOException, ClassNotFoundException {
    in.defaultReadObject();
    double x = in.readDouble();
    double y = in.readDouble();
    point = new Point2D(x, y);
}
```

The `readObject` and `writeObject` methods only need to read and write their own instance variables. They should not concern themselves with superclass data.



NOTE: A class can define its own serialization format by implementing the `Externalizable` interface and providing methods

```
public void readExternal(ObjectInput in)
public void writeExternal(ObjectOutput out)
```

When reading an externalizable object, the object stream creates an object with the no-argument constructor and then calls the `readExternal` method. This can give better performance, but it is very rarely used.

9.5.4 The `readResolve` and `writeReplace` Methods

We take it for granted that objects can only be constructed with the constructor. However, a deserialized object is *not constructed*. Its instance variables are simply restored from an object stream.

This is a problem if the constructor enforces some condition. For example, a singleton object may be implemented so that the constructor can only be called once. Before Java had the `enum` construct, enumerated types were simulated by classes with a private constructor that was called once for each instance. As another example, database entities could be constructed so that they always come from a pool of managed instances.

These situations are exceedingly rare. Nowadays, the serialization of enum types is automatic. And you shouldn't implement your own mechanism for singletons. If you need a singleton, make an enumerated type with one instance that is, by convention, called INSTANCE.

```
public enum PersonDatabase {  
    INSTANCE;  
  
    public Person findById(int id) { ... }  
    ...  
}
```

Now let's suppose that you are in the rare situation where you want to control the identity of each deserialized instance. As an example, suppose a Person class wants to restore its instances from a database when deserializing. Then don't serialize the object itself but some proxy that can locate or construct the object. Provide a writeReplace method that returns the proxy object:

```
public class Person implements Serializable {  
    private int id;  
    // Other instance variables  
    ...  
    private Object writeReplace() {  
        return new PersonProxy(id);  
    }  
}
```

When a Person object is serialized, none of its instance variables are saved. Instead, the writeReplace method is called and its *return value* is serialized and written to the stream.

The proxy class needs to implement a readResolve method that yields a Person:

```
public class PersonProxy implements Serializable {  
    private int id;  
  
    public PersonProxy(int id) {  
        this.id = id;  
    }  
  
    public Object readResolve() {  
        return PersonDatabase.INSTANCE.findById(id);  
    }  
}
```

When the readObject method finds a PersonProxy in an ObjectInputStream, it deserializes the proxy, calls its readResolve method, and returns the result.

9.5.5 Versioning

Serialization was intended for sending objects from one virtual machine to another, or for short-term persistence of state. If you use serialization for long-term persistence, or in any situation where classes can change between serialization and deserialization, you will need to consider what happens when your classes evolve. Can version 2 read the old data? Can the users who still use version 1 read the files produced by the new version?

The serialization mechanism supports a simple versioning scheme. When an object is serialized, both the name of the class and its `serialVersionUID` are written to the object stream. That unique identifier is assigned by the implementor, by defining an instance variable

```
private static final long serialVersionUID = 1L; // Version 1
```

When the class evolves in an incompatible way, the implementor should change the UID. Whenever a deserialized object has a nonmatching UID, the `readObject` method throws an `InvalidClassException`.

If the `serialVersionUID` matches, deserialization proceeds even if the implementation has changed. Each nontransient instance variable of the object to be read is set to the value in the serialized state, provided that the name and type match. All other instance variables are set to the default: `null` for object references, zero for numbers, and `false` for `boolean` values. Anything in the serialized state that doesn't exist in the object to be read is ignored.

Is that process safe? Only the implementor of the class can tell. If it is, then the implementor should give the new version of the class the same `serialVersionUID` as the old version.

If you don't assign a `serialVersionUID`, one is automatically generated by hashing a canonical description of the instance variables, methods, and supertypes. You can see the hash code with the `serialver` utility. The command

```
serialver ch09.sec05.Employee
```

displays

```
private static final long serialVersionUID = -4932578720821218323L;
```

When the class implementation changes, there is a very high probability that the hash code changes as well.

If you need to be able to read old version instances, and you are certain that is safe to do so, run `serialver` on the old version of your class and add the result to the new version.



NOTE: If you want to implement a more sophisticated versioning scheme, override the `readObject` method and call the `readFields` method instead of the `defaultReadObject` method. You get a description of all fields found in the stream, and you can do with them what you want.

Exercises

1. Write a utility method for copying all of an `InputStream` to an `OutputStream`, without using any temporary files. Provide another solution, without a loop, using operations from the `Files` class, using a temporary file.
2. Write a program that reads a text file and produces a file with the same name but extension `.toc`, containing an alphabetized list of all words in the input file together with a list of line numbers in which each word occurs. Assume that the file's encoding is UTF-8.
3. Write a program that reads a file containing text and, assuming that most words are English, guesses whether the encoding is ASCII, ISO 8859-1, UTF-8, or UTF-16, and if the latter, which byte ordering is used.
4. Using a `Scanner` is convenient, but it is a bit slower than using a `BufferedReader`. Read in a long file a line at a time, counting the number of input lines, with (a) a `Scanner` and `hasNextLine/nextLine`, (b) a `BufferedReader` and `readLine`, (c) a `BufferedReader` and `lines`. Which is the fastest? The most convenient?
5. When an encoder of a `Charset` with partial Unicode coverage can't encode a character, it replaces it with a default—usually, but not always, the encoding of "?". Find all replacements of all available character sets that support encoding. Use the `newEncoder` method to get an encoder, and call its `replacement` method to get the replacement. For each unique result, report the canonical names of the `Charsets` that use it.
6. The BMP file format for uncompressed image files is well documented and simple. Using random access, write a program that reflects each row of pixels in place, without writing a new file.
7. Look up the API documentation for the `MessageDigest` class and write a program that computes the SHA-512 digest of a file. Feed blocks of bytes to the `MessageDigest` object with the `update` method, then display the result of calling `digest`. Verify that your program produces the same result as the `sha512sum` utility.

8. Write a utility method for producing a ZIP file containing all files from a directory and its descendants.
9. Using the `URLConnection` class, read data from a password-protected web page with “basic” authentication. Concatenate the user name, a colon, and the password, and compute the Base64 encoding:

```
String input = username + ":" + password;
String encoding = Base64.getEncoder().encodeToString(
    input.getBytes(StandardCharsets.UTF_8));
```

Set the HTTP header `Authorization` to the value `"Basic " + encoding`. Then read and print the page contents.

10. Using a regular expression, extract all decimal integers (including negative ones) from a string into an `ArrayList<Integer>` (a) using `find`, and (b) using `split`. Note that a `+` or `-` that is not followed by a digit is a delimiter.
11. Using regular expressions, extract the directory path names (as an array of strings), the file name, and the file extension from an absolute or relative path such as `/home/cay/myfile.txt`.
12. Come up with a realistic use case for using group references in `Matcher.replaceAll` and implement it.
13. Implement a method that can produce a clone of any serializable object by serializing it into a byte array and deserializing it.
14. Implement a serializable class `Point` with instance variables for `x` and `y`. Write a program that serializes an array of `Point` objects to a file, and another that reads the file.
15. Continue the preceding exercise, but change the data representation of `Point` so that it stores the coordinates in an array. What happens when the new version tries to read a file generated by the old version? What happens when you fix up the `serialVersionUID`? Suppose your life depended upon making the new version compatible with the old. What could you do?
16. Which classes in the standard Java library implement `Externalizable`? Which of them use `writeReplace/readResolve`?

Concurrent Programming

Topics in This Chapter

- 10.1 Concurrent Tasks — page 330
- 10.2 Asynchronous Computations — page 335
- 10.3 Thread Safety — page 341
- 10.4 Parallel Algorithms — page 348
- 10.5 Threadsafe Data Structures — page 350
- 10.6 Atomic Counters and Accumulators — page 354
- 10.7 Locks and Conditions — page 357
- 10.8 Threads — page 362
- 10.9 Processes — page 366
- Exercises — page 371

Chapter

IO

Java was one of the first mainstream programming languages with built-in support for concurrent programming. Early Java programmers were enthusiastic about how easy it was to load images in background threads or implement a web server that serves multiple requests concurrently. At the time, the focus was on keeping a processor busy while some tasks spend their time waiting for the network. Nowadays, most computers have multiple processors or cores, and programmers worry about keeping them all busy.

In this chapter, you will learn how to divide computations into concurrent tasks and how to execute them safely. My focus is on the needs of application programmers, not system programmers who write web servers or middleware.

For that reason, I arranged the information in this chapter so that I can, as much as possible, first show you the tools that you should be using in your work. I cover the low-level constructs later in the chapter. It is useful to know about these low-level details so that you get a feel for the costs of certain operations. But it is best to leave low-level thread programming to the experts. If you want to become one of them, I highly recommend the excellent book *Java Concurrency in Practice* by Brian Goetz et al. [Addison-Wesley, 2006].

The key points of this chapter are:

1. A `Runnable` describes a task that can be executed asynchronously but does not return a result.
2. An `ExecutorService` schedules tasks instances for execution.

3. A `Callable` describes a task that can be executed asynchronously and yields a result.
4. You can submit one or more `Callable` instances to an `ExecutorService` and combine the results when they are available.
5. When multiple threads operate on shared data without synchronization, the result is unpredictable.
6. Prefer using parallel algorithms and threadsafe data structures over programming with locks.
7. Parallel streams and array operations automatically and safely parallelize computations.
8. A `ConcurrentHashMap` is a threadsafe hash table that allows atomic update of entries.
9. You can use `AtomicLong` for a lock-free shared counter, or use `LongAdder` if contention is high.
10. A lock ensures that only one thread at a time executes a critical section.
11. An interruptible task should terminate when the interrupted flag is set or an `InterruptedException` occurs.
12. A long-running task should not block the user-interface thread of a program, but progress and final updates need to occur in the user-interface thread.
13. The `Process` class lets you execute a command in a separate process and interact with the input, output, and error streams.

10.1 Concurrent Tasks

When you design a concurrent program, you need to think about the tasks that can be run together. In the following sections, you will see how to execute tasks concurrently.

10.1.1 Running Tasks

In Java, the `Runnable` interface describes a task you want to run, perhaps concurrently with others.

```
public interface Runnable {  
    void run();  
}
```

Like all methods, the `run` method is executed in a *thread*. A thread is a mechanism for executing a sequence of instructions, usually provided by the operating system. Multiple threads run concurrently, by using separate processors or different time slices on the same processor.

If you want to execute a `Runnable` in a separate thread, you could spawn a thread just for this `Runnable`, and you will see how to do that in Section 10.8.1, “Starting a Thread” (page 363). But in practice, it doesn’t usually make sense to have a one-to-one relationship between tasks and threads. When tasks are short-lived, you want to run many of them on the same thread, so you don’t waste the time it takes to start a thread. When your tasks are computationally intensive, you just want one thread per processor instead of one thread per task, to avoid the overhead of switching among threads. You do not want to think of these issues when you design tasks, and therefore, it is best to separate tasks and task scheduling.

In the Java concurrency library, an *executor service* schedules and executes tasks, choosing the threads on which to run them.

```
Runnable task = () -> { ... };
ExecutorService executor = ...;
executor.execute(task);
```

The `Executors` class has factory methods for executor services with different scheduling policies. The call

```
exec = Executors.newCachedThreadPool();
```

yields an executor service optimized for programs with many tasks that are short lived or spend most of their time waiting. Each task is executed on an idle thread if possible, but a new thread is allocated if all threads are busy. There is no bound on the number of concurrent threads. Threads that are idle for an extended time are terminated.

The call

```
exec = Executors.newFixedThreadPool(nthreads);
```

yield a pool with a fixed number of threads. When you submit a task, it is queued up until a thread becomes available. This is a good choice to use for computationally intensive tasks, or to limit the resource consumption of a service. You can derive the number of threads from the number of available processors, which you obtain as

```
int processors = Runtime.getRuntime().availableProcessors();
```

Now go ahead and run the concurrency demo program in the book’s companion code. It runs two tasks concurrently.

```
public static void main(String[] args) {
    Runnable hellos = () -> {
        for (int i = 1; i <= 1000; i++)
            System.out.println("Hello " + i);
    };
    Runnable goodbyes = () -> {
        for (int i = 1; i <= 1000; i++)
            System.out.println("Goodbye " + i);
    };

    ExecutorService executor = Executors.newCachedThreadPool();
    executor.execute(hellos);
    executor.execute(goodbyes);
}
```

Run the program a few times to see how the outputs are interleaved.

```
Goodbye 1
...
Goodbye 871
Goodbye 872
Hello 806
Goodbye 873
Goodbye 874
Goodbye 875
Goodbye 876
Goodbye 877
Goodbye 878
Goodbye 879
Goodbye 880
Goodbye 881
Hello 807
Goodbye 882
...
Hello 1000
```



NOTE: You may note that the program waits a bit after the last printout. It terminates when the pooled threads have been idle for a while and the executor service terminates them.



CAUTION: If concurrent tasks try to read or update a shared value, the result may be unpredictable. We will discuss this issue in detail in Section 10.3, “Thread Safety” (page 341). For now, we will assume that tasks do not share mutable data.

10.1.2 Futures

A `Runnable` carries out a task, but it doesn't yield a value. If you have a task that computes a result, use the `Callable<V>` interface instead. Its `call` method, unlike the `run` method of the `Runnable` interface, returns a value of type `V`:

```
public interface Callable<V> {  
    V call() throws Exception;  
}
```

As a bonus, the `call` method can throw arbitrary exceptions which can be relayed to the code that obtains the result.

To execute a `Callable`, submit it to an executor service:

```
ExecutorService executor = Executors.newFixedThreadPool();  
Callable<V> task = ...;  
Future<V> result = executor.submit(task);
```

When you submit the task, you get a *future*—an object that represents a computation whose result will be available at some future time. The `Future` interface has the following methods:

```
V get() throws InterruptedException, ExecutionException  
V get(long timeout, TimeUnit unit)  
    throws InterruptedException, ExecutionException, TimeoutException;  
boolean cancel(boolean mayInterruptIfRunning)  
boolean isCancelled()  
boolean isDone()
```

The `get` method *blocks* until the result is available or until the timeout has been reached. That is, the thread containing the call does not progress until the method returns normally or throws an exception. If the `call` method yields a value, the `get` method returns that value. If the `call` method throws an exception, the `get` method throws an `ExecutionException` wrapping the thrown exception. If the timeout has been reached, the `get` method throws a `TimeoutException`.

The `cancel` method attempts to cancel the task. If the task isn't already running, it won't be scheduled. Otherwise, if `mayInterruptIfRunning` is `true`, the thread running the task is interrupted.



NOTE: A task that wants to be interruptible must periodically check for interruption requests. This is required for any tasks that you'd like to cancel when some other subtask has succeeded. See Section 10.8.2, “Thread Interruption” (page 364) for more details on interruption.

A task may need to wait for the result of multiple subtasks. Instead of submitting each subtask separately, you can use the `invokeAll` method, passing a Collection of `Callable` instances.

For example, suppose you want to count how often a word occurs in a set of files. For each file, make a `Callable<Integer>` that returns the count for that file. Then submit them all to the executor. When all tasks have completed, you get a list of the futures (all of which are done), and you can total up the answers.

```
String word = ...;
Set<Path> paths = ...;
List<Callable<Long>> tasks = new ArrayList<>();
for (Path p : paths) tasks.add(
    () -> { return number of occurrences of word in p });
List<Future<Long>> results = executor.invokeAll(tasks);
// This call blocks until all tasks have completed
long total = 0;
for (Future<Long> result : results) total += result.get();
```

There is also a variant of `invokeAll` with a timeout, which cancels all tasks that have not completed when the timeout is reached.



NOTE: If it bothers you that the calling task blocks until all subtasks are done, you can use an `ExecutorCompletionService`. It returns the futures in the order of completion.

```
ExecutorCompletionService service
    = new ExecutorCompletionService(executor);
for (Callable<T> task : tasks) service.submit(task);
for (int i = 0; i < tasks.size(); i++) {
    Process service.take().get()
    Do something else
}
```

The `invokeAny` method is like `invokeAll`, but it returns as soon as any one of the submitted tasks has completed normally, without throwing an exception. It then returns the value of its `Future`. The other tasks are cancelled. This is useful for a search that can conclude as soon as a match has been found. This code snippet locates a file containing a given word:

```
String word = ...;
Set<Path> files = ...;
List<Callable<Path>> tasks = new ArrayList<>();
for (Path p : files) tasks.add(
    () -> { if (word occurs in p) return p; else throw ... });
Path found = executor.invokeAny(tasks);
```

As you can see, the `ExecutorService` does a lot of work for you. Not only does it map tasks to threads, but it also deals with task results, exceptions, and cancellation.



NOTE: Java EE provides a `ManagedExecutorService` subclass that is suitable for concurrent tasks in a Java EE environment.

10.2 Asynchronous Computations

In the preceding section, our approach to concurrent computation was to break up a task and then wait until all pieces have completed. But waiting is not always a good idea. In the following sections, you will see how to implement wait-free or *asynchronous* computations.

10.2.1 Completable Futures

When you have a `Future` object, you need to call `get` to obtain the value, blocking until the value is available. The `CompletableFuture` class implements the `Future` interface, and it provides a second mechanism for obtaining the result. You register a *callback* that will be invoked (in some thread) with the result once it is available.

```
CompletableFuture<String> f = ...;
f.thenAccept((String s) -> Process the result s);
```

In this way, you can process the result, without blocking, as soon as it is available.

There are a few API methods that return `CompletableFuture` objects. For example, the `HttpClient` class can fetch a web page asynchronously:

```
HttpClient client = HttpClient.newHttpClient();
HttpRequest request = HttpRequest.newBuilder(new URI(urlString)).GET().build();
CompletableFuture<HttpResponse<String>> f = client.sendAsync(
    request, BodyHandler.asString());
```

To run a task asynchronously and obtain a `CompletableFuture`, you don't submit it directly to an executor service. Instead, you call the static method `CompletableFuture.supplyAsync`:

```
CompletableFuture<String> f = CompletableFuture.supplyAsync(
    () -> { String result; Compute the result; return result; },
    executor);
```

If you omit the executor, the task is run on a default executor (namely the executor returned by `ForkJoinPool.commonPool()`).

Note that the first argument of this method is a `Supplier<T>`, not a `Callable<T>`. Both interfaces describe functions with no arguments and a return value of type `T`, but a `Supplier` function cannot throw a checked exception.

A `CompletableFuture` can complete in two ways: either with a result, or with an uncaught exception. In order to handle both cases, use the `whenComplete` method. The supplied function is called with the result (or `null` if none) and the exception (or `null` if none).

```
f.whenComplete((s, t) -> {
    if (t == null) { Process the result s; }
    else { Process the Throwable t; }
});
```

The `CompletableFuture` is called completable because you can manually set a completion value. (In other concurrency libraries, such an object is called a *promise*). Of course, when you create a `CompletableFuture` with `supplyAsync`, the completion value is implicitly set when the task has finished. But setting the result explicitly gives you additional flexibility. For example, two tasks can work simultaneously on computing an answer:

```
CompletableFuture<Integer> f = new CompletableFuture<>();
executor.execute(() -> {
    int n = workHard(arg);
    f.complete(n);
});
executor.execute(() -> {
    int n = workSmart(arg);
    f.complete(n);
});
```

To instead complete a future with an exception, call

```
Throwable t = ...;
f.completeExceptionally(t);
```



NOTE: It is safe to call `complete` or `completeExceptionally` on the same future in multiple threads. If the future is already completed, these calls have no effect.

The `isDone` method tells you whether a `Future` object has been completed (normally or with an exception). In the preceding example, the `workHard` and `workSmart` methods can use that information to stop working when the result has been determined by the other method.



CAUTION: Unlike a plain Future, the computation of a CompletableFuture is not interrupted when you invoke its cancel method. Canceling simply sets the Future object to be completed exceptionally, with a CancellationException. In general, this makes sense since a CompletableFuture may not have a single thread that is responsible for its completion. However, this restriction also applies to CompletableFuture instances returned by methods such as supplyAsync, which could in principle be interrupted. See Exercise 27 for a workaround.

10.2.2 Composing Completable Futures

Nonblocking calls are implemented through callbacks. The programmer registers a callback for the action that should occur after a task completes. Of course, if the next action is also asynchronous, the next action after that is in a different callback. Even though the programmer thinks in terms of “first do step 1, then step 2, then step 3,” the program logic can become dispersed in “callback hell.” It gets even worse when you have to add error handling. Suppose step 2 is “the user logs in.” You may need to repeat that step since the user can mistype the credentials. Trying to implement such a control flow in a set of callbacks—or to understand it once it has been implemented—can be quite challenging.

The CompletableFuture class solves this problem by providing a mechanism for *composing* asynchronous tasks into a processing pipeline.

For example, suppose we want to extract all links from a web page in order to build a web crawler. Let’s say we have a method

```
public void CompletableFuture<String> readPage(URI url)
```

that yields the text of a web page when it becomes available. If the method

```
public static List<URI> getLinks(String page)
```

yields the URIs in an HTML page, you can schedule it to be called when the page is available:

```
CompletableFuture<String> contents = readPage(url);
CompletableFuture<List<URI>> links = contents.thenApply(Parser::getLinks);
```

The thenApply method doesn’t block either. It returns another future. When the first future has completed, its result is fed to the getLinks method, and the return value of that method becomes the final result.

With completable futures, you just specify what you want to have done and in which order. It won’t all happen right away, of course, but what is important is that all the code is in one place.

Conceptually, `CompletableFuture` is a simple API, but there are many variants of methods for composing completable futures. Let us first look at those that deal with a single future (see Table 10-1). (For each method shown, there are also two `Async` variants that I don't show. One of them uses a shared `ForkJoinPool`, and the other has an `Executor` parameter.) In the table, I use a shorthand notation for the ponderous functional interfaces, writing $T \rightarrow U$ instead of `Function<?, super T, U>`. These aren't actual Java types, of course.

You have already seen the `thenApply` method. Suppose `f` is a function that receives values of type `T` and returns values of type `U`. The calls

```
CompletableFuture<U> future.thenApply(f);
CompletableFuture<U> future.thenApplyAsync(f);
```

return a future that applies the function `f` to the result of `future` when it is available. The second call runs `f` in yet another thread.

The `thenCompose` method, instead of taking a function mapping the type `T` to the type `U`, receives a function mapping `T` to `CompletableFuture<U>`. That sounds rather abstract, but it can be quite natural. Consider the action of reading a web page from a given URL. Instead of supplying a method

```
public String blockingReadPage(URI url)
```

it is more elegant to have that method return a future:

```
public CompletableFuture<String> readPage(URI url)
```

Now, suppose we have another method that gets the URL from user input, perhaps from a dialog that won't reveal the answer until the user has clicked the OK button. That, too, is an event in the future:

```
public CompletableFuture<URI> getURLInput(String prompt)
```

Here we have two functions $T \rightarrow \text{CompletableFuture } U$ and $U \rightarrow \text{CompletableFuture } V$. Clearly, they compose to a function $T \rightarrow \text{CompletableFuture } V$ if the second function is called when the first one has completed. That is exactly what `thenCompose` does.

In the preceding section, you saw the `whenComplete` method for handling exceptions. There is also a `handle` method that requires a function processing the result or exception and computing a new result. In many cases, it is simpler to call the `exceptionally` method instead:

```
CompletableFuture<String> contents = readPage(url)
    .exceptionally(t -> { Log t; return emptyPage; });
```

The supplied handler is only called if an exception occurred, and it produces a result to be used in the processing pipeline. If no exception occurred, the original result is used.

The methods in Table 10-1 with `void` result are normally used at the end of a processing pipeline.

Table 10-1 Adding an Action to a `CompletableFuture<T>` Object

Method	Parameter	Description
<code>thenApply</code>	<code>T -> U</code>	Apply a function to the result.
<code>thenAccept</code>	<code>T -> void</code>	Like <code>thenApply</code> , but with <code>void</code> result.
<code>thenCompose</code>	<code>T -> CompletableFuture<U></code>	Invoke the function on the result and execute the returned future.
<code>handle</code>	<code>(T, Throwable) -> U</code>	Process the result or error and yield a new result.
<code>whenComplete</code>	<code>(T, Throwable) -> void</code>	Like <code>handle</code> , but with <code>void</code> result.
<code>exceptionally</code>	<code>Throwable -> T</code>	Turn the error into a default result.
<code>thenRun</code>	<code>Runnable</code>	Execute the <code>Runnable</code> with <code>void</code> result.

Now let us turn to methods that combine multiple futures (see Table 10-2).

The first three methods run a `CompletableFuture<T>` and a `CompletableFuture<U>` action concurrently and combine the results.

The next three methods run two `CompletableFuture<T>` actions concurrently. As soon as one of them finishes, its result is passed on, and the other result is ignored.

Finally, the static `allOf` and `anyOf` methods take a variable number of completable futures and yield a `CompletableFuture<Void>` that completes when all of them, or any one of them, completes. The `allOf` method does not yield a result. The `anyOf` method does *not* terminate the remaining tasks. Exercises 28 and 29 show useful improvements of these two methods.



NOTE: Technically speaking, the methods in this section accept parameters of type `CompletionStage`, not `CompletableFuture`. The `CompletionStage` interface describes how to compose asynchronous computations, whereas the `Future` interface focuses on the result of a computation. A `CompletableFuture` is both a `CompletionStage` and a `Future`.

Table 10-2 Combining Multiple Composition Objects

Method	Parameters	Description
thenCombine	CompletableFuture<U>, (T, U) -> V	Execute both and combine the results with the given function.
thenAcceptBoth	CompletableFuture<U>, (T, U) -> void	Like thenCombine, but with void result.
runAfterBoth	CompletableFuture<?>, Runnable	Execute the runnable after both complete.
applyToEither	CompletableFuture<T>, T -> V	When a result is available from one or the other, pass it to the given function.
acceptEither	CompletableFuture<T>, T -> void	Like applyToEither, but with void result.
runAfterEither	CompletableFuture<?>, Runnable	Execute the runnable after one or the other completes.
static allOf	CompletableFuture<?>...	Complete with void result after all given futures complete.
static anyOf	CompletableFuture<?>...	Complete after any of the given futures completes and yield its result.

10.2.3 Long-Running Tasks in User-Interface Callbacks

One of the reasons to use threads is to make your programs more responsive. This is particularly important in an application with a user interface. When your program needs to do something time-consuming, you cannot do the work in the user-interface thread, or the user interface will freeze. Instead, fire up another worker thread.

For example, if you want to read a web page when the user clicks a button, don't do this:

```
Button read = new Button("Read");
read.setOnAction(event -> { // Bad—long-running action is executed on UI thread
    Scanner in = new Scanner(url.openStream());
    while (in.hasNextLine()) {
        String line = in.nextLine();
        ...
    });
}
```

Instead, do the work in a separate thread.

```
read.setOnAction(event -> { // Good—long-running action in separate thread
    Runnable task = () -> {
        Scanner in = new Scanner(url.openStream());
        while (in.hasNextLine()) {
            String line = in.nextLine();
            ...
        }
    }
    executor.execute(task);
});
```

However, you cannot directly update the user interface from the thread that executes the long-running task. User interfaces such as JavaFX, Swing, or Android are not threadsafe. You cannot manipulate user-interface elements from multiple threads, or they risk becoming corrupted. In fact, JavaFX and Android check for this, and throw an exception if you try to access the user interface from a thread other than the UI thread.

Therefore, you need to schedule any UI updates to happen on the UI thread. Each user-interface library provides some mechanism to schedule a `Runnable` for execution on the UI thread. For example, in JavaFX, you can use

```
Platform.runLater(() ->
    message.appendText(line + "\n"));
```



NOTE: It is tedious to implement lengthy operations while giving users feedback on the progress, so user-interface libraries usually provide some kind of helper class for managing the details, such as `SwingWorker` in Swing and `AsyncTask` in Android. You specify actions for the long-running task (which is run on a separate thread), as well as progress updates and the final disposition (which are run on the UI thread).

The `Task` class in JavaFX takes a slightly different approach to progress updates. The class provides methods to update task properties (a message, completion percentage, and result value) in the long-running thread. You bind the properties to user-interface elements, which are then updated in the UI thread.

10.3 Thread Safety

Many programmers initially think that concurrent programming is pretty easy. You just divide your work into tasks, and that's it. What could possibly go wrong?

In the following sections, I show you what can go wrong, and give a high-level overview of what you can do about it.

10.3.1 Visibility

Even operations as simple as writing and reading a variable can be incredibly complicated with modern processors. Consider this example:

```
private static boolean done = false;

public static void main(String[] args) {
    Runnable hellos = () -> {
        for (int i = 1; i <= 1000; i++)
            System.out.println("Hello " + i);
        done = true;
    };
    Runnable goodbye = () -> {
        int i = 1;
        while (!done) i++;
        System.out.println("Goodbye " + i);
    };
    Executor executor = Executors.newCachedThreadPool();
    executor.execute(hellos);
    executor.execute(goodbye);
}
```

The first task prints “Hello” a thousand times, and then sets `done` to `true`. The second task waits for `done` to become `true`, and then prints “Goodbye” once, incrementing a counter while it is waiting for that happy moment.

You’d expect the output to be something like

```
Hello 1
...
Hello 1000
Goodbye 501249
```

When I run this program on my laptop, the program prints up to “Hello 1000” and never terminates. The effect of

```
done = true;
```

may not be *visible* to the thread running the second task.

Why wouldn’t it be visible? Modern compilers, virtual machines, and processors perform many optimizations. These optimizations assume that the code is sequential unless explicitly told otherwise.

One optimization is caching of memory locations. We think of a memory location such as `done` as bits somewhere in the transistors of a RAM chip. But RAM chips are slow—many times slower than modern processors. Therefore, a processor tries to hold the data that it needs in registers or an onboard memory cache, and eventually writes changes back to memory. This caching is simply indispensable for processor performance. There are operations for

synchronizing cached copies, but they have a significant performance cost and are only issued when requested.

Another optimization is instruction reordering. The compiler, the virtual machine, and the processor are allowed to change the order of instructions to speed up operations, provided it does not change the sequential semantics of the program.

For example, consider a computation

```
x = Something not involving y;  
y = Something not involving x;  
z = x + y;
```

The first two steps must occur before the third, but they can occur in either order. A processor can (and often will) run the first two steps concurrently, or swap the order if the inputs to the second step are more quickly available.

In our case, the loop

```
while (!done) i++;
```

can be reordered as

```
if (!done) while (true) i++;
```

since the loop body does not change the value of `done`.

By default, optimizations assume that there are no concurrent memory accesses. If there are, the virtual machine needs to know, so that it can then emit processor instructions that inhibit improper reorderings.

There are several ways of ensuring that an update to a variable is visible. Here is a summary:

1. The value of a `final` variable is visible after initialization.
2. The initial value of a `static` variable is visible after static initialization.
3. Changes to a `volatile` variable are visible.
4. Changes that happen before releasing a lock are visible to anyone acquiring the same lock (see Section 10.7.1, “Locks,” page 357).

In our case, the problem goes away if you declare the shared variable `done` with the `volatile` modifier:

```
private static volatile boolean done;
```

Then the compiler generates instructions that cause the virtual machine to issue processor commands for cache synchronization. As a result, any change to `done` in one task becomes visible to the other tasks.

The `volatile` modifier happens to suffice to solve this particular problem. But as you will see in the next section, declaring shared variables as `volatile` is not a general solution.



TIP: It is an excellent idea to declare any field that does not change after initialization as `final`. Then you never have to worry about its visibility.

10.3.2 Race Conditions

Suppose multiple concurrent tasks update a shared integer counter.

```
private static volatile int count = 0;  
...  
count++; // Task 1  
...  
count++; // Task 2  
...
```

The variable has been declared as `volatile`, so the updates are visible. But that is not enough.

The update `count++` actually means

```
register = count + 1;  
count = register;
```

When these computations are interleaved, the wrong value can be stored back into the `count` variable. In the parlance of concurrency, we say that the increment operation is not *atomic*. Consider this scenario:

```
int count = 0; // Initial value  
register1 = count + 1; // Thread 1 computes count + 1  
... // Thread 1 is preempted  
register2 = count + 1; // Thread 2 computes count + 1  
count = register2; // Thread 2 stores 1 in count  
... // Thread 1 is running again  
count = register1; // Thread 1 stores 1 in count
```

Now `count` is 1, not 2. This kind of error is called a *race condition* because it depends on which thread wins the “race” for updating the shared variable.

Does this problem really happen? It certainly does. Run the demo program of the companion code. It has 100 threads, each incrementing the counter 1,000 times and printing the result.

```
for (int i = 1; i <= 100; i++) {  
    int taskId = i;  
    Runnable task = () -> {  
        for (int k = 1; k <= 1000; k++)  
            count++;  
        System.out.println(taskId + ": " + count);  
    };  
    executor.execute(task);  
}
```

The output usually starts harmlessly enough as something like

```
1: 1000  
3: 2000  
2: 3000  
6: 4000
```

After a while, it looks a bit scary:

```
72: 58196  
68: 59196  
73: 61196  
71: 60196  
69: 62196
```

But that might just be because some threads were paused at inopportune moments. What matters is what happens with the task that finished last. Did it bring up the counter to 100,000?

I ran the program dozens of times on my multi-core laptop, and it fails every time. Years ago, when personal computers had a single CPU, race conditions were more difficult to observe, and programmers did not notice such dramatic failures often. But it doesn't matter whether a wrong value is computed within seconds or hours.

This example looks at the simple case of a shared counter in a toy program. Exercise 17 shows the same problem in a realistic example. But it's not just counters. Race conditions are a problem whenever shared variables are mutated. For example, when adding a value to the head of a queue, the insertion code might look like this:

```
Node n = new Node();  
if (head == null) head = n;  
else tail.next = n;  
tail = n;  
tail.value = newValue;
```

Lots of things can go wrong if this sequence of instructions is paused at an unfortunate time and another task gets control, accessing the queue while it is in an inconsistent state.

Work through Exercise 21 to get a feel for how a data structure can get corrupted by concurrent mutation.

We need to ensure that the entire sequence of operation is carried out together. Such an instruction sequence is called a *critical section*. You can use a *lock* to protect critical sections and make critical sequences of operation atomic. You will learn how to program with locks in Section 10.7.1, “Locks” (page 357).

While it is straightforward to use locks for protecting critical sections, locks are not a general solution for solving all concurrency problems. They are difficult to use properly, and it is easy to make mistakes that severely degrade performance or even cause “deadlock.”

10.3.3 Strategies for Safe Concurrency

In languages such as C and C++, programmers need to manually allocate and deallocate memory. That sounds dangerous—and it is. Many programmers have spent countless miserable hours chasing memory allocation bugs. In Java, there is a garbage collector, and few Java programmers need to worry about memory management.

Unfortunately, there is no equivalent mechanism for shared data access in a concurrent program. The best you can do is to follow a set of guidelines to manage the inherent dangers.

A highly effective strategy is *refinement*. Just say no when it comes to sharing data among tasks. For example, when your tasks need to count something, give each of them a private counter instead of updating a shared counter. When the tasks are done, they can hand off their results to another task that combines them.

Another good strategy is *immutability*. It is safe to share immutable objects. For example, instead of adding results to a shared collection, a task can generate an immutable collection of results. Another task combines the results into another immutable data structure. The idea is simple, but there are a few things to watch out for—see Section 10.3.4, “Immutable Classes” (page 347).

The third strategy is *locking*. By granting only one task at a time access to a data structure, one can keep it from being damaged. In Section 10.5, “Threadsafte Data Structures” (page 350), you will see data structures provided by the Java concurrency library that are safe to use concurrently. Section 10.7.1, “Locks” (page 357) shows you how locking works, and how experts build these data structures.

Locking is error-prone, and it can be expensive since it reduces opportunities for concurrent execution. For example, if you have lots of tasks contributing results to a shared hash table, and the table is locked for each update, then that is a real bottleneck. If most tasks have to wait their turn, they aren't doing useful work. Sometimes it is possible to *partition* data so that different pieces can be accessed concurrently. Several data structures in the Java concurrency library use partitioning, as do the parallel algorithms in the streams library. Don't try this at home! It is really hard to get it right. Instead, use the data structures and algorithms from the Java library.

10.3.4 Immutable Classes

A class is immutable when its instances, once constructed, cannot change. It sounds at first as if you can't do much with them, but that isn't true. The ubiquitous `String` class is immutable, as are the classes in the date and time library (see Chapter 12). Each date instance is immutable, but you can obtain new dates, such as the one that comes a day after a given one.

Or consider a set for collecting results. You could use a mutable `HashSet` and update it like this:

```
results.addAll(newResults);
```

But that is clearly dangerous.

An immutable set always creates new sets. You would update the results somewhat like this:

```
results = results.union(newResults);
```

There is still mutation, but it is much easier to control what happens to one variable than to a hash set with many methods.

It is not difficult to implement immutable classes, but you should pay attention to these issues:

1. Don't change the object state after construction. Be sure to declare instance variables `final`. There is no reason not to, and you gain an important advantage: the virtual machine ensures that a `final` instance variable is visible after construction (Section 10.3.1, "Visibility," page 342).
2. Of course, none of the methods can be mutators. You should make them `final`, or better, declare the class `final`, so that mutators cannot be added in subclasses.
3. Don't leak state that can be mutated externally. None of your (non-private) methods can return a reference to any innards that could be used for mutation, such as an internal array or collection. When one of your

methods calls a method of another class, it must not pass any such references either, since the called method might otherwise use them for mutation. Instead, pass a copy.

4. Conversely, don't store any reference to a mutable object that the constructor receives. Instead, make a copy.
5. Don't let the `this` reference escape in a constructor. When you call another method, you know not to pass any internal references, but what about `this`? That's perfectly safe after construction, but if you reveal `this` in the constructor, someone could observe the object in an incomplete state. Also beware of constructors giving out inner class references that contain a hidden `this` reference. Naturally, these situations are quite rare.

10.4 Parallel Algorithms

Before starting to parallelize your computations, you should check if the Java library has done this for you. The stream library or the `Arrays` class may already do what you need.

10.4.1 Parallel Streams

The stream library can automatically parallelize operations on large data sets. For example, if `coll` is a large collection of strings, and you want to find how many of them start with the letter A, call

```
long result = coll.parallelStream().filter(s -> s.startsWith("A")).count();
```

The `parallelStream` method yields a parallel stream. The stream is broken up into segments. The filtering and counting is done on each segment, and the results are combined. You don't need to worry about the details.



CAUTION: When you use parallel streams with lambdas (for example, as the argument to `filter` and `map` in the preceding examples), be sure to stay away from unsafe mutation of shared objects.

For parallel streams to work well, a number of conditions need to be fulfilled:

- There needs to be enough data. There is a substantial overhead for parallel streams that is only repaid for large data sets.
- The data should be in memory. It would be inefficient to have to wait for the data to arrive.

- The stream should be efficiently splittable into subregions. A stream backed by an array or a balanced binary tree works well, but a linked list or the result of Stream.iterate does not.
- The stream operations should do a substantial amount of work. If the total work load is not large, it does not make sense to pay for the cost of setting up the concurrent computation.
- The stream operations should not block.

In other words, don't turn all your streams into parallel streams. Use parallel streams only when you do a substantial amount of sustained computational work on data that is already in memory.

10.4.2 Parallel Array Operations

The `Arrays` class has a number of parallelized operations. Just as with the parallel stream operations of the preceding sections, the operations break the array into sections, work on them concurrently, and combine the results.

The static `Arrays.parallelSetAll` method fills an array with values computed by a function. The function receives the element index and computes the value at that location.

```
Arrays.parallelSetAll(values, i -> i % 10);
    // Fills values with 0 1 2 3 4 5 6 7 8 9 0 1 2 ...
```

Clearly, this operation benefits from being parallelized. There are versions for all primitive type arrays and for object arrays.

The `parallelSort` method can sort an array of primitive values or objects. For example,

```
Arrays.parallelSort(words, Comparator.comparing(String::length));
```

With all methods, you can supply the bounds of a range, such as

```
Arrays.parallelSort(values, values.length / 2, values.length); // Sort the upper half
```



NOTE: At first glance, it seems a bit odd that these methods have `parallel` in their names—the user shouldn't care how the setting or sorting happens. However, the API designers wanted to make it clear that the operations are parallelized. That way, users are on notice to avoid generator or comparison functions with side effects.

Finally, there is a `parallelPrefix` that is rather specialized—Exercise 4 gives a simple example.

For other parallel operations on arrays, turn the arrays into parallel streams. For example, to compute the sum of a long array of integers, call

```
long sum = IntStream.of(values).parallel().sum();
```

10.5 Threadsafe Data Structures

If multiple threads concurrently modify a data structure, such as a queue or hash table, it is easy to damage the internals of the data structure. For example, one thread may begin to insert a new element. Suppose it is preempted in the middle of rerouting links, and another thread starts traversing the same location. The second thread may follow invalid links and create havoc, perhaps throwing exceptions or even getting trapped in an infinite loop.

As you will see in Section 10.7.1, “Locks” (page 357), you can use locks to ensure that only one thread can access the data structure at a given point in time, blocking any others. But you can do better than that. The collections in the `java.util.concurrent` package have been cleverly implemented so that multiple threads can access them without blocking each other, provided they access different parts.



NOTE: These collections yield *weakly consistent* iterators. That means that the iterators present elements appearing at onset of iteration, but may or may not reflect some or all of the modifications that were made after they were constructed. However, such an iterator will not throw a `ConcurrentModificationException`.

In contrast, an iterator of a collection in the `java.util` package throws a `ConcurrentModificationException` when the collection has been modified after construction of the iterator.

10.5.1 Concurrent Hash Maps

A `ConcurrentHashMap` is, first of all, a hash map whose operations are threadsafe. No matter how many threads operate on the map at the same time, the internals are not corrupted. Of course, some threads may be temporarily blocked, but the map can efficiently support a large number of concurrent readers and a certain number of concurrent writers.

But that is not enough. Suppose we want to use a map to count how often certain features are observed. As an example, suppose multiple threads encounter words, and we want to count their frequencies. Obviously, the following code for updating a count is not threadsafe:

```
ConcurrentHashMap<String, Long> map = new ConcurrentHashMap<>();  
...  
Long oldValue = map.get(word);  
Long newValue = oldValue == null ? 1 : oldValue + 1;  
map.put(word, newValue); // Error—might not replace oldValue
```

Another thread might be updating the exact same count at the same time.

To update a value safely, use the `compute` method. It is called with a key and a function to compute the new value. That function receives the key and the associated value, or `null` if there is none, and computes the new value. For example, here is how we can update a count:

```
map.compute(word, (k, v) -> v == null ? 1 : v + 1);
```

The `compute` method is *atomic*—no other thread can mutate the map entry while the computation is in progress.

There are also variants `computeIfPresent` and `computeIfAbsent` that only compute a new value when there is already an old one, or when there isn't yet one.

Another atomic operation is `putIfAbsent`. A counter might be initialized as

```
map.putIfAbsent(word, 0L);
```

You often need to do something special when a key is added for the first time. The `merge` method makes this particularly convenient. It has a parameter for the initial value that is used when the key is not yet present. Otherwise, the function that you supplied is called, combining the existing value and the initial value. (Unlike `compute`, the function does not process the key.)

```
map.merge(word, 1L, (existingValue, newValue) -> existingValue + newValue);
```

or simply,

```
map.merge(word, 1L, Long::sum);
```

Of course, the functions passed to `compute` and `merge` should complete quickly, and they should not attempt to mutate the map.



NOTE: There are methods that atomically remove or replace an entry if it is currently equal to an existing one. Before the `compute` method was available, people would write code like this for incrementing a count:

```
do {  
    oldValue = map.get(word);  
    newValue = oldValue + 1;  
} while (!map.replace(word, oldValue, newValue));
```



NOTE: There are several *bulk operations* for searching, transforming, or visiting a `ConcurrentHashMap`. They operate on a snapshot of the data and can safely execute even while other threads operate on the map. In the API documentation, look for the operations whose names start with `search`, `reduce`, and `forEach`. There are variants that operate on the keys, values, and entries. The `reduce` methods have specializations for `int`-, `long`-, and `double`-valued reduction functions.

10.5.2 Blocking Queues

One commonly used tool for coordinating work between tasks is a *blocking queue*. Producer tasks insert items into the queue, and consumer tasks retrieve them. The queue lets you safely hand over data from one task to another.

When you try to add an element and the queue is currently full, or you try to remove an element when the queue is empty, the operation blocks. In this way, the queue balances the workload. If the producer tasks run slower than the consumer tasks, the consumers block while waiting for the results. If the producers run faster, the queue fills up until the consumers catch up.

Table 10-3 shows the methods for blocking queues. The blocking queue methods fall into three categories that differ by the action they perform when the queue is full or empty. In addition to the blocking methods, there are methods that throw an exception when they don't succeed, and methods that return with a failure indicator instead of throwing an exception if they cannot carry out their tasks.



NOTE: The `poll` and `peek` methods return `null` to indicate failure. Therefore, it is illegal to insert `null` values into these queues.

There are also variants of the `offer` and `poll` methods with a timeout. For example, the call

```
boolean success = q.offer(x, 100, TimeUnit.MILLISECONDS);
```

tries for 100 milliseconds to insert an element to the tail of the queue. If it succeeds, it returns `true`; otherwise, it returns `false` when it times out. Similarly, the call

```
Object head = q.poll(100, TimeUnit.MILLISECONDS)
```

Table 10-3 Blocking Queue Operations

Method	Normal Action	Error Action
put	Adds an element to the tail	Blocks if the queue is full
take	Removes and returns the head element	Blocks if the queue is empty
add	Adds an element to the tail	Throws an <code>IllegalStateException</code> if the queue is full
remove	Removes and returns the head element	Throws a <code>NoSuchElementException</code> if the queue is empty
element	Returns the head element	Throws a <code>NoSuchElementException</code> if the queue is empty
offer	Adds an element and returns true	Returns false if the queue is full
poll	Removes and returns the head element	Returns <code>null</code> if the queue is empty
peek	Returns the head element	Returns <code>null</code> if the queue is empty

tries for 100 milliseconds to remove the head of the queue. If it succeeds, it returns the head; otherwise, it returns `null` when it times out.

The `java.util.concurrent` package supplies several variations of blocking queues. A `LinkedBlockingQueue` is based on a linked list, and an `ArrayBlockingQueue` uses a circular array.

Exercise 11 shows how to use blocking queues for analyzing files in a directory. One thread walks the file tree and inserts files into a queue. Several threads remove the files and search them. In this application, it is likely that the producer quickly fills up the queue with files and blocks until the consumers can catch up.

A common challenge with such a design is stopping the consumers. A consumer cannot simply quit when the queue is empty. After all, the producer might not yet have started, or it may have fallen behind. If there is a single producer, it can add a “last item” indicator to the queue, similar to a dummy suitcase with a label “last bag” in a baggage claim belt.

10.5.3 Other Threadsafe Data Structures

Just like you can choose between hash maps and tree maps in the `java.util` package, there is a concurrent map that is based on comparing keys, called `ConcurrentSkipListMap`. Use it if you need to traverse the keys in sorted order, or if you need one of the added methods in the `NavigableMap` interface (see Chapter 7). Similarly, there is a `ConcurrentSkipListSet`.

The `CopyOnWriteArrayList` and `CopyOnWriteArraySet` are threadsafe collections in which all mutators make a copy of the underlying array. This arrangement is useful if the threads that iterate over the collection greatly outnumber the threads that mutate it. When you construct an iterator, it contains a reference to the current array. If the array is later mutated, the iterator still has the old array, but the collection's array is replaced. As a consequence, the older iterator has a consistent (but potentially outdated) view that it can access without any synchronization expense.

Suppose you want a large, threadsafe set instead of a map. There is no `ConcurrentHashSet` class, and you know better than trying to create your own. Of course, you can use a `ConcurrentHashMap` with bogus values, but that gives you a map, not a set, and you can't apply operations of the `Set` interface.

The static `newKeySet` method yields a `Set<K>` that is actually a wrapper around a `ConcurrentHashMap<K, Boolean>`. (All map values are `Boolean.TRUE`, but you don't actually care since you just use it as a set.)

```
Set<String> words = ConcurrentHashMap.newKeySet();
```

If you have an existing map, the `keySet` method yields the set of keys. That set is mutable. If you remove the set's elements, the keys (and their values) are removed from the map. But it doesn't make sense to add elements to the key set, because there would be no corresponding values to add. You can use a second `keySet` method, with a default value used when adding elements to the set:

```
Set<String> words = map.keySet(1L);
words.add("Java");
```

If "Java" wasn't already present in `words`, it now has a value of one.

10.6 Atomic Counters and Accumulators

If multiple threads update a shared counter, you need to make sure that this is done in a threadsafe way. There are a number of classes in the `java.util.concurrent.atomic` package that use safe and efficient machine-level

instructions to guarantee atomicity of operations on integers, long and boolean values, object references, and arrays thereof. Using these classes correctly requires considerable expertise. However, atomic counters and accumulators are convenient for application-level programming.

For example, you can safely generate a sequence of numbers like this:

```
public static AtomicLong nextNumber = new AtomicLong();
// In some thread ...
long id = nextNumber.incrementAndGet();
```

The `incrementAndGet` method atomically increments the `AtomicLong` and returns the post-increment value. That is, the operations of getting the value, adding 1, setting it, and producing the new value cannot be interrupted. It is guaranteed that the correct value is computed and returned, even if multiple threads access the same instance concurrently.

There are methods for atomically setting, adding, and subtracting values, but suppose you want to make a more complex update. One way is to use the `updateAndGet` method. For example, suppose you want to keep track of the largest value that is observed by different threads. The following won't work:

```
public static AtomicLong largest = new AtomicLong();
// In some thread ...
largest.set(Math.max(largest.get(), observed)); // Error—race condition!
```

This update is not atomic. Instead, call `updateAndGet` with a lambda expression for updating the variable. In our example, we can call

```
largest.updateAndGet(x -> Math.max(x, observed));
```

or

```
largest.accumulateAndGet(observed, Math::max);
```

The `accumulateAndGet` method takes a binary operator that is used to combine the atomic value and the supplied argument.

There are also methods `getAndUpdate` and `getAndAccumulate` that return the old value.



NOTE: These methods are also provided for the classes:

AtomicInteger	AtomicLongFieldUpdater
AtomicIntegerArray	AtomicReference
AtomicIntegerFieldUpdater	AtomicReferenceArray
AtomicLongArray	AtomicReferenceFieldUpdater

When you have a very large number of threads accessing the same atomic values, performance suffers because updates are carried out *optimistically*. That is, the operation computes a new value from a given old value, then does

the replacement provided the old value is still the current one, or retries if it is not. Under heavy contention, updates require too many retries.

The classes `LongAdder` and `LongAccumulator` solve this problem for certain common updates. A `LongAdder` is composed of multiple variables whose collective sum is the current value. Multiple threads can update different summands, and new summands are automatically provided when the number of threads increases. This is efficient in the common situation where the value of the sum is not needed until after all work has been done. The performance improvement can be substantial—see Exercise 9.

If you anticipate high contention, you should simply use a `LongAdder` instead of an `AtomicLong`. The method names are slightly different. Call `increment` to increment a counter or `add` to add a quantity, and `sum` to retrieve the total.

```
final LongAdder count = new LongAdder();
for (...) {
    executor.execute(() -> {
        while (...) {
            ...
            if (...) count.increment();
        }
    });
...
long total = count.sum();
```



NOTE: Of course, the `increment` method does *not* return the old value. Doing that would undo the efficiency gain of splitting the sum into multiple summands.

The `LongAccumulator` generalizes this idea to an arbitrary accumulation operation. In the constructor, you provide the operation as well as its neutral element. To incorporate new values, call `accumulate`. Call `get` to obtain the current value.

```
LongAccumulator accumulator = new LongAccumulator(Long::sum, 0);
// In some tasks ...
accumulator.accumulate(value);
// When all work is done
long sum = accumulator.get();
```

Internally, the accumulator has variables a_1, a_2, \dots, a_n . Each variable is initialized with the neutral element (0 in our example).

When `accumulate` is called with value v , then one of them is atomically updated as $a_i = a_i \text{ op } v$, where op is the accumulation operation written in infix form. In our example, a call to `accumulate` computes $a_i = a_i + v$ for some i .

The result of get is $a_1 \text{ op } a_2 \text{ op } \dots \text{ op } a_n$. In our example, that is the sum of the accumulators, $a_1 + a_2 + \dots + a_n$.

If you choose a different operation, you can compute maximum or minimum (see Exercise 10). In general, the operation must be associative and commutative. That means that the final result must be independent of the order in which the intermediate values were combined.

There are also `DoubleAdder` and `DoubleAccumulator` that work in the same way, except with double values.



TIP: If you use a hash map of `LongAdder`, you can use the following idiom to increment the adder for a key:

```
ConcurrentHashMap<String, LongAdder> counts = ...;
counts.computeIfAbsent(key, k -> new LongAdder()).increment();
```

When the count for key is incremented the first time, a new adder is set.

10.7 Locks and Conditions

Now you have seen several tools that application programmers can safely use for structuring concurrent applications. You may be curious how one would build a threadsafe counter or blocking queue. The following sections show you how it is done, so that you gain some understanding of the costs and complexities.

10.7.1 Locks

To avoid the corruption of shared variables, one needs to ensure that only one thread at a time can compute and set the new values. Code that must be executed in its entirety, without interruption, is called a *critical section*. One can use a *lock* to implement a critical section:

```
Lock countLock = new ReentrantLock(); // Shared among multiple threads
int count; // Shared among multiple threads
...
countLock.lock();
try {
    count++; // Critical section
} finally {
    countLock.unlock(); // Make sure the lock is unlocked
}
```



NOTE: In this section, I use the `ReentrantLock` class to explain how locking works. As you will see in the next section, there is no requirement to use explicit locks since there are “*implicit*” locks that are used by the `synchronized` keyword. But it is easier to understand what goes on under the hood by looking at explicit locks.

The first thread to execute the `lock` method locks the `countLock` object and then proceeds into the critical section. If another thread tries to call `lock` on the same object, it is blocked until the first thread executes the call to `unlock`. In this way, it is guaranteed that only one thread at a time can execute the critical section.

Note that, by placing the `unlock` method into a `finally` clause, the lock is released if any exception happens in the critical section. Otherwise, the lock would be permanently locked, and no other thread would be able to proceed past it. This would clearly be very bad. Of course, in this case, the critical section can’t throw an exception since it only executes an integer increment. But it is a common idiom to use the `try/finally` statement anyway, in case more code gets added later.

At first glance, it seems simple enough to use locks for protecting critical sections. However, the devil is in the details. Experience has shown that many programmers have difficulty writing correct code with locks. They might use the wrong locks, or create situations that *deadlock* when no thread can make progress because all of them wait for a lock.

For that reason, application programmers should use locks as a matter of last resort. First try to avoid sharing, by using immutable data or handing off mutable data from one thread to another. If you must share, use prebuilt threadsafe structures such as a `ConcurrentHashMap` or a `LongAdder`. Still, it is useful to know about locks so you can understand how such data structures can be implemented.

10.7.2 The `synchronized` Keyword

In the preceding section, I showed you how to use a `ReentrantLock` to implement a critical section. You don’t have to use an explicit lock because in Java, *every object* has an *intrinsic lock*. To understand intrinsic locks, however, it helps to have seen explicit locks first.

The `synchronized` keyword is used to lock the intrinsic lock. It can occur in two forms. You can lock a block:

```
synchronized (obj) {  
    Critical section  
}
```

This essentially means

```
obj.intrinsicLock.lock();  
try {  
    Critical section  
} finally {  
    obj.intrinsicLock.unlock();  
}
```

An object does not actually have a field that is an intrinsic lock. The code is just meant to illustrate what goes on when you use the `synchronized` keyword.

You can also declare a method as `synchronized`. Then its body is locked on the receiver parameter `this`. That is,

```
public synchronized void method() {  
    Body  
}
```

is the equivalent of

```
public void method() {  
    this.intrinsicLock.lock();  
    try {  
        Body  
    } finally {  
        this.intrinsicLock.unlock();  
    }  
}
```

For example, a counter can simply be declared as

```
public class Counter {  
    private int value;  
    public synchronized int increment() {  
        value++;  
        return value;  
    }  
}
```

By using the intrinsic lock of the `Counter` instance, there is no need to come up with an explicit lock.

As you can see, using the `synchronized` keyword yields code that is quite concise. Of course, to understand this code, you have to know that each object has an intrinsic lock.



NOTE: There is more to locks than atomicity. Locks also guarantee visibility. For example, consider the `done` variable that gave us so much grief in Section 10.3.1, “Visibility” (page 342). If you use a lock for both writing and reading the variable, then you are assured that the caller of `get` sees any update to the variable through a call by `set`.

```
public class Flag {  
    private boolean done;  
    public synchronized void set() { done = true; }  
    public synchronized boolean get() { return done; }  
}
```

Synchronized methods were inspired by the *monitor* concept that was pioneered by Per Brinch Hansen and Tony Hoare in the 1970s. A monitor is essentially a class in which all instance variables are private and all methods are protected by a private lock.

In Java, it is possible to have public instance variables and to mix synchronized and unsynchronized methods. More problematically, the intrinsic lock is publicly accessible.

Many programmers find this confusing. For example, Java 1.0 has a `Hashtable` class with synchronized methods for mutating the table. To safely iterate over such a table, you can acquire the lock like this:

```
synchronized (table) {  
    for (K key : table.keySet()) ...  
}
```

Here, `table` denotes both the hash table and the lock that its methods use. This is a common source of misunderstandings—see Exercise 22.

10.7.3 Waiting on Conditions

Consider a simple `Queue` class with methods for adding and removing objects. Synchronizing the methods ensures that these operations are atomic.

```
public class Queue {  
    class Node { Object value; Node next; };  
    private Node head;  
    private Node tail;  
  
    public synchronized void add(Object newValue) {  
        Node n = new Node();  
        if (head == null) head = n;  
        else tail.next = n;  
        tail = n;  
    }
```

```
    tail.value = newValue;
}

public synchronized Object remove() {
    if (head == null) return null;
    Node n = head;
    head = n.next;
    return n.value;
}
}
```

Now suppose we want to turn the `remove` method into a method `take` that blocks if the queue is empty.

The check for emptiness must come inside the synchronized method because otherwise the inquiry would be meaningless—another thread might have emptied the queue in the meantime.

```
public synchronized Object take() {
    if (head == null) ... // Now what?
    Node n = head;
    head = n.next;
    return n.value;
}
```

But what should happen if the queue is empty? No other thread can add elements while the current thread holds the lock. This is where the `wait` method comes in.

If the `take` method finds that it cannot proceed, it calls the `wait` method:

```
public synchronized Object take() throws InterruptedException {
    while (head == null) wait();
    ...
}
```

The current thread is now deactivated and gives up the lock. This lets in another thread that can, we hope, add elements to the queue. This is called *waiting on a condition*.

Note that the `wait` method is a method of the `Object` class. It relates to the lock that is associated with the object.

There is an essential difference between a thread that is blocking to acquire a lock and a thread that has called `wait`. Once a thread calls the `wait` method, it enters a *wait set* for the object. The thread is not made runnable when the lock is available. Instead, it stays deactivated until another thread has called the `notifyAll` method on the same object.

When another thread has added an element, it should call that method:

```
public synchronized void add(Object newValue) {  
    ...  
    notifyAll();  
}
```

The call to `notifyAll` reactivates all threads in the wait set. When the threads are removed from the wait set, they are again runnable and the scheduler will eventually activate them again. At that time, they will attempt to reacquire the lock. As one of them succeeds, it continues where it left off, returning from the call to `wait`.

At this time, the thread should test the condition again. There is no guarantee that the condition is now fulfilled—the `notifyAll` method merely signals to the waiting threads that it *may be* fulfilled at this time and that it is worth checking for the condition again. For that reason, the test is in a loop

```
while (head == null) wait();
```

A thread can only call `wait`, `notifyAll`, or `notify` on an object if it holds the lock on that object.



CAUTION: Another method, `notify`, unblocks only a single thread from the wait set. That is more efficient than unblocking all threads, but there is a danger. If the chosen thread finds that it still cannot proceed, it becomes blocked again. If no other thread calls `notify` again, the program deadlocks.



NOTE: When implementing data structures with blocking methods, the `wait`, `notify`, and `notifyAll` methods are appropriate. But they are not easy to use properly. Application programmers should never have a need to use these methods. Instead, use prebuilt data structures such as `LinkedBlockingQueue` or `ConcurrentHashMap`.

10.8 Threads

As we are nearing the end of this chapter, the time has finally come to talk about threads, the primitives that actually execute tasks. Normally, you are better off using executors that manage threads for you, but the following sections give you some background information about working directly with threads.

10.8.1 Starting a Thread

Here is how to run a thread in Java:

```
Runnable task = () -> { ... };
Thread thread = new Thread(task);
thread.start();
```

The static `sleep` method makes the current thread sleep for a given period, so that some other threads have a chance to do work.

```
Runnable task = () -> {
    ...
    Thread.sleep(millis);
    ...
}
```

If you want to wait for a thread to finish, call the `join` method:

```
thread.join();
```

These two methods throw the checked `InterruptedException` that is discussed in the next section.

A thread ends when its `run` method returns, either normally or because an exception was thrown. In the latter case, the *uncaught exception handler* of the thread is invoked. When the thread is created, that handler is set to the uncaught exception handler of the thread group, which is ultimately the global handler (see Chapter 5). You can change the handler of a thread by calling the `setUncaughtExceptionHandler` method.



NOTE: The initial release of Java defined a `stop` method that immediately terminates a thread, and a `suspend` method that blocks a thread until another thread calls `resume`. Both methods have since been deprecated.

The `stop` method is inherently unsafe. Suppose a thread is stopped in the middle of a critical section—for example, inserting an element into a queue. Then the queue is left in a partially updated state. However, the lock protecting the critical section is unlocked, and other threads can use the corrupted data structure. You should interrupt a thread when you want it to stop. The interrupted thread can then stop when it is safe to do so.

The `suspend` method is not as risky but still problematic. If a thread is suspended while it holds a lock, any other thread trying to acquire that lock blocks. If the resuming thread is among them, the program deadlocks.

10.8.2 Thread Interruption

Suppose that, for a given query, you are always satisfied with the first result. When the search for an answer is distributed over multiple tasks, you want to cancel all others as soon as the answer is obtained. In Java, task cancellation is *cooperative*.

Each thread has an *interrupted status* that indicates that someone would like to “interrupt” the thread. There is no precise definition of what interruption means, but most programmers use it to indicate a cancellation request.

A `Runnable` can check for this status, which is typically done in a loop:

```
Runnable task = () -> {
    while (more work to do) {
        if (Thread.currentThread().isInterrupted()) return;
        Do more work
    }
};
```

When the thread is interrupted, the `run` method simply ends.



NOTE: There is also a static `Thread.interrupted` method which gets the interrupted status of the current thread, then clears it, and returns the old status.

Sometimes, a thread becomes temporarily inactive. That can happen if a thread waits for a value to be computed by another thread or for input/output, or if it goes to sleep to give other threads a chance.

If the thread is interrupted while it waits or sleeps, it is immediately reactivated—but in this case, the interrupted status is not set. Instead, an `InterruptedException` is thrown. This is a checked exception, and you must catch it inside the `run` method of a `Runnable`. The usual reaction to the exception is to end the `run` method:

```
Runnable task = () -> {
    try {
        while (more work to do) {
            Do more work
            Thread.sleep(millis);
        }
    }
    catch (InterruptedException ex) {
        // Do nothing
    }
};
```

When you catch the `InterruptedException` in this way, there is no need to check for the interrupted status. If the thread was interrupted outside the call to `Thread.sleep`, the status is set and the `Thread.sleep` method throws an `InterruptedException` as soon as it is called.



TIP: The `InterruptedException` may seem pesky, but you should not just catch and hide it when you call a method such as `sleep`. If you can't do anything else, at least set the interrupted status:

```
try {
    Thread.sleep(millis);
} catch (InterruptedException ex) {
    Thread.currentThread().interrupt();
}
```

Or better, simply propagate the exception to a competent handler:

```
public void mySubTask() throws InterruptedException {
    ...
    Thread.sleep(millis);
    ...
}
```

10.8.3 Thread-Local Variables

Sometimes, you can avoid sharing by giving each thread its own instance, using the `ThreadLocal` helper class. For example, the `NumberFormat` class is not threadsafe. Suppose we have a static variable

```
public static final NumberFormat currencyFormat = NumberFormat.getCurrencyInstance();
```

If two threads execute an operation such as

```
String amountDue = currencyFormat.format(total);
```

then the result can be garbage since the internal data structures used by the `NumberFormat` instance can be corrupted by concurrent access. You could use a lock or provide a synchronized method to ensure atomic access to the shared `NumberFormat` variable. Alternatively, you could construct a local `NumberFormat` object whenever you need it, but that is also wasteful.

To construct one instance per thread, use the following code:

```
public static final ThreadLocal<NumberFormat> currencyFormat
    = ThreadLocal.withInitial(() -> NumberFormat.getCurrencyInstance());
```

To access the actual formatter, call

```
String amountDue = currencyFormat.get().format(total);
```

The first time you call `get` in a given thread, the lambda expression in the constructor is called to create the instance for the thread. From then on, the `get` method returns the instance belonging to the current thread.

10.8.4 Miscellaneous Thread Properties

The `Thread` class exposes a number of properties for threads, but most of them are more useful for students of certification exams than application programmers. This section briefly reviews them.

Threads can be collected in groups, and there are API methods to manage thread groups, such as interrupting all threads in a group. Nowadays, executors are the preferred mechanism for managing groups of tasks.

You can set *priorities* for threads, where high-priority threads are scheduled to run before lower-priority ones. Hopefully, priorities are honored by the virtual machine and the host platform, but the details are highly platform-dependent. Therefore, using priorities is fragile and not generally recommended.

Threads have *states*, and you can tell whether a thread is new, running, blocked on input/output, waiting, or terminated. When you use threads as an application programmer, you rarely have a reason to inquire about their states.

Threads have names, and you can change the name for debugging purposes. For example:

```
Thread.currentThread().setName("Bitcoin-miner-1");
```

When a thread terminates due to an uncaught exception, the exception is passed to the thread's *uncaught exception handler*. By default, its stack trace is dumped to `System.err`, but you can install your own handler (see Chapter 5).

A *daemon* is a thread that has no other role in life than to serve others. This is useful for threads that send timer ticks or clean up stale cache entries. When only daemon threads remain, the virtual machine exits.

To make a daemon thread, call `thread.setDaemon(true)` before starting the thread.

10.9 Processes

Up to now, you have seen how to execute Java code in separate threads within the same program. Sometimes, you need to execute another program. For this, use the `ProcessBuilder` and `Process` classes. The `Process` class executes a command in a separate operating system process and lets you interact with

its standard input, output, and error streams. The `ProcessBuilder` class lets you configure a `Process` object.



NOTE: The `ProcessBuilder` class is a more flexible replacement for the `Runtime.exec` calls.

10.9.1 Building a Process

Start the building process by specifying the command that you want to execute. You can supply a `List<String>` or simply the strings that make up the command.

```
ProcessBuilder builder = new ProcessBuilder("gcc", "myapp.c");
```



CAUTION: The first string must be an executable command, not a shell builtin. For example, to run the `dir` command in Windows, you need to build a process with strings `"cmd.exe"`, `"/C"`, and `"dir"`.

Each process has a *working directory*, which is used to resolve relative directory names. By default, a process has the same working directory as the virtual machine, which is typically the directory from which you launched the `java` program. You can change it with the `directory` method:

```
builder = builder.directory(path.toFile());
```



NOTE: Each of the methods for configuring a `ProcessBuilder` returns itself, so that you can chain commands. Ultimately, you will call

```
Process p = new ProcessBuilder(command).directory(file).start();
```

Next, you will want to specify what should happen to the standard input, output, and error streams of the process. By default, each of them is a pipe that you can access with

```
OutputStream processIn = p.getOutputStream();
InputStream processOut = p.getInputStream();
InputStream processErr = p.getErrorStream();
```

Note that the input stream of the process is an output stream in the JVM! You write to that stream, and whatever you write becomes the input of the process. Conversely, you read what the process writes to the output and error streams. For you, they are input streams.

You can specify that the input, output, and error streams of the new process should be the same as the JVM. If the user runs the JVM in a console, any user input is forwarded to the process, and the process output shows up in the console. Call

```
builder.inheritIO()
```

to make this setting for all three streams. If you only want to inherit some of the streams, pass the value

```
ProcessBuilder.Redirect.INHERIT
```

to the `redirectInput`, `redirectOutput`, or `redirectError` methods. For example,

```
builder.redirectOutput(ProcessBuilder.Redirect.INHERIT);
```

You can redirect the process streams to files by supplying `File` objects:

```
builder.redirectInput(inputFile)
    .redirectOutput(outputFile)
    .redirectError(errorFile)
```

The files for output and error are created or truncated when the process starts. To append to existing files, use

```
builder.redirectOutput(ProcessBuilder.Redirect.appendTo(outputFile));
```

It is often useful to merge the output and error streams, so you see the outputs and error messages in the sequence in which the process generates them. Call

```
builder.redirectErrorStream(true)
```

to activate the merging. If you do that, you can no longer call `redirectError` on the `ProcessBuilder` or `getErrorStream` on the `Process`.

Finally, you may want to modify the environment variables of the process. Here, the builder chain syntax breaks down. You need to get the builder's environment (which is initialized by the environment variables of the process running the JVM), then put or remove entries.

```
Map<String, String> env = builder.environment();
env.put("LANG", "fr_FR");
env.remove("JAVA_HOME");
Process p = builder.start();
```

10.9.2 Running a Process

After you have configured the builder, invoke its `start` method to start the process. If you configured the input, output, and error streams as pipes, you can now write to the input stream and read the output and error streams. For example,

```
Process process = new ProcessBuilder("/bin/ls", "-l")
    .directory(Paths.get("/tmp").toFile())
    .start();
try (Scanner in = new Scanner(process.getInputStream())) {
    while (in.hasNextLine())
        System.out.println(in.nextLine());
}
```



CAUTION: There is limited buffer space for the process streams. You should not flood the input, and you should read the output promptly. If there is a lot of input and output, you may need to produce and consume it in separate threads.

To wait for the process to finish, call

```
int result = process.waitFor();
```

or, if you don't want to wait indefinitely,

```
long delay = ...;
if (process.waitFor(delay, TimeUnit.SECONDS)) {
    int result = process.exitValue();
    ...
} else {
    process.destroyForcibly();
}
```

The first call to `waitFor` returns the exit value of the process (by convention, 0 for success or a nonzero error code). The second call returns true if the process didn't time out. Then you need to retrieve the exit value by calling the `exitValue` method.

Instead of waiting for the process to finish, you can just leave it running and occasionally call `isAlive` to see whether it is still alive. To kill the process, call `destroy` or `destroyForcibly`. The difference between these calls is platform-dependent. On Unix, the former terminates the process with `SIGTERM`, the latter with `SIGKILL`. (The `supportsNormalTermination` method returns true if the `destroy` method can terminate the process normally.)

Finally, you can receive an asynchronous notification when the process has completed. The call `process.onExit()` yields a `CompletableFuture<Process>` that you can use to schedule any action.

```
process.onExit().thenAccept(
    p -> System.out.println("Exit value: " + p.exitValue()));
```

10.9.3 Process Handles

To get more information about a process that your program started, or any other process that is currently running on your machine, use the `ProcessHandle` interface. You can obtain a `ProcessHandle` in four ways:

1. Given a `Process` object `p`, `p.toHandle()` yields its `ProcessHandle`.
2. Given a long operating system process ID, `ProcessHandle.of(id)` yields the handle of that process.
3. `ProcessHandle.current()` is the handle of the process that runs this Java virtual machine.
4. `ProcessHandle.allProcesses()` yields a `Stream<ProcessHandle>` of all operating system processes that are visible to the current process.

Given a process handle, you can get its process ID, its parent process, its children, and its descendants:

```
long pid = handle.pid();
Optional<ProcessHandle> parent = handle.parent();
Stream<ProcessHandle> children = handle.children();
Stream<ProcessHandle> descendants = handle.descendants();
```



NOTE: The `Stream<ProcessHandle>` instances that are returned by the `allProcesses`, `children`, and `descendants` methods are just snapshots in time. Any of the processes in the stream may be terminated by the time you get around to seeing them, and other processes may have started that are not in the stream.

The `info` method yields a `ProcessHandle.Info` object with methods for obtaining information about the process.

```
Optional<String[]> arguments()
Optional<String> command()
Optional<String> commandLine()
Optional<String> startInstant()
Optional<String> totalCpuDuration()
Optional<String> user()
```

All of these methods return `Optional` values since it is possible that a particular operating system may not be able to report the information.

For monitoring or forcing process termination, the `ProcessHandle` interface has the same `isAlive`, `supportsNormalTermination`, `destroy`, `destroyForcibly`, and `onExit` methods as the `Process` class. However, there is no equivalent to the `waitFor` method.

Exercises

1. Using parallel streams, find all files in a directory that contain a given word. How do you find just the first one? Are the files actually searched concurrently?
2. How large does an array have to be for `Arrays.parallelSort` to be faster than `Arrays.sort` on your computer?
3. Implement a method yielding a task that reads through all words in a file, trying to find a given word. The task should finish immediately (with a debug message) when it is interrupted. For all files in a directory, schedule one task for each file. Interrupt all others when one of them has succeeded.
4. One parallel operation not discussed in Section 10.4.2, “Parallel Array Operations” (page 349) is the `parallelPrefix` method that replaces each array element with the accumulation of the prefix for a given associative operation. Huh? Here is an example. Consider the array `[1, 2, 3, 4, ...]` and the `*x` operation. After executing `Arrays.parallelPrefix(values, (x, y) -> x * y)`, the array contains

`[1, 1 * 2, 1 * 2 * 3, 1 * 2 * 3 * 4, ...]`

Perhaps surprisingly, this computation can be parallelized. First, join neighboring elements, as indicated here:

`[1, 1 * 2, 3, 3 * 4, 5, 5 * 6, 7, 7 * 8]`

The gray values are left alone. Clearly, one can make this computation concurrently in separate regions of the array. In the next step, update the indicated elements by multiplying them with elements that are one or two positions below:

`[1, 1 * 2, 1 * 2 * 3, 1 * 2 * 3 * 4, 5, 5 * 6, 5 * 6 * 7, 5 * 6 * 7 * 8]`

This can again be done concurrently. After $\log(n)$ steps, the process is complete. This is a win over the straightforward linear computation if sufficient processors are available.

In this exercise, you will use the `parallelPrefix` method to parallelize the computation of Fibonacci numbers. We use the fact that the n th Fibonacci number is the top left coefficient of F^n , where $F = \begin{pmatrix} 1 & 1 \\ 1 & 0 \end{pmatrix}$. Make an array filled with 2×2 matrices. Define a `Matrix` class with a multiplication method, use `parallelSetAll` to make an array of matrices, and use `parallelPrefix` to multiply them.

5. Produce an example that demonstrates escaping of `this` in a constructor of an immutable class (see Section 10.3.3, “Strategies for Safe Concurrency,” page 346). Try to come up with something convincing and scary. If you use an event listener (as many examples on the Web do), it should listen for something interesting, which isn’t easy for an immutable class.
6. Write an application in which multiple threads read all words from a collection of files. Use a `ConcurrentHashMap<String, Set<File>>` to track in which files each word occurs. Use the `merge` method to update the map.
7. Repeat the preceding exercise, but use `computeIfAbsent` instead. What is the advantage of this approach?
8. In a `ConcurrentHashMap<String, Long>`, find the key with maximum value (breaking ties arbitrarily). Hint: `reduceEntries`.
9. Generate 1,000 threads, each of which increments a counter 100,000 times. Compare the performance of using `AtomicLong` versus `LongAdder`.
10. Use a `LongAccumulator` to compute the maximum or minimum of the accumulated elements.
11. Use a blocking queue for processing files in a directory. One thread walks the file tree and inserts files into a queue. Several threads remove the files and search each one for a given keyword, printing out any matches. When the producer is done, it should put a dummy file into the queue.
12. Repeat the preceding exercise, but instead have each consumer compile a map of words and their frequencies that are inserted into a second queue. A final thread merges the dictionaries and prints the ten most common words. Why don’t you need to use a `ConcurrentHashMap`?
13. Repeat the preceding exercise, making a `Callable<Map<String, Integer>>` for each file and using an appropriate executor service. Merge the results when all are available. Why don’t you need to use a `ConcurrentHashMap`?
14. Use an `ExecutorCompletionService` instead and merge the results as soon as they become available.
15. Repeat the preceding exercise, using a global `ConcurrentHashMap` for collecting the word frequencies.
16. Repeat the preceding exercise, using parallel streams. None of the stream operations should have any side effects.
17. Write a program that walks a directory tree and generates a thread for each file. In the threads, count the number of words in the files and, without using locks, update a shared counter that is declared as

```
public static long count = 0;
```

Run the program multiple times. What happens? Why?

18. Fix the program of the preceding exercise with using a lock.
19. Fix the program of the preceding exercise with using a LongAdder.
20. Consider this stack implementation:

```
public class Stack {  
    class Node { Object value; Node next; };  
    private Node top;  
  
    public void push(Object newValue) {  
        Node n = new Node();  
        n.value = newValue;  
        n.next = top;  
        top = n;  
    }  
  
    public Object pop() {  
        if (top == null) return null;  
        Node n = top;  
        top = n.next;  
        return n.value;  
    }  
}
```

Describe two different ways in which the data structure can fail to contain the correct elements.

21. Consider this queue implementation:

```
public class Queue {  
    class Node { Object value; Node next; };  
    private Node head;  
    private Node tail;  
  
    public void add(Object newValue) {  
        Node n = new Node();  
        if (head == null) head = n;  
        else tail.next = n;  
        tail = n;  
        tail.value = newValue;  
    }  
  
    public Object remove() {  
        if (head == null) return null;  
        Node n = head;  
        head = n.next;  
        return n.value;  
    }  
}
```

Describe two different ways in which the data structure can fail to contain the correct elements.

22. What is wrong with this code snippet?

```
public class Stack {  
    private Object myLock = "LOCK";  
  
    public void push(Object newValue) {  
        synchronized (myLock) {  
            ...  
        }  
    }  
    ...  
}
```

23. What is wrong with this code snippet?

```
public class Stack {  
    public void push(Object newValue) {  
        synchronized (new ReentrantLock()) {  
            ...  
        }  
    }  
    ...  
}
```

24. What is wrong with this code snippet?

```
public class Stack {  
    private Object[] values = new Object[10];  
    private int size;  
  
    public void push(Object newValue) {  
        synchronized (values) {  
            if (size == values.length)  
                values = Arrays.copyOf(values, 2 * size);  
            values[size] = newValue;  
            size++;  
        }  
    }  
    ...  
}
```

25. Write a program that asks the user for a URL, reads the web page at that URL, and displays all the links. Use a `CompletableFuture` for each step. Don't call `get`.

26. Write a method

```
public static <T> CompletableFuture<T> repeat(  
    Supplier<T> action, Predicate<T> until)
```

that asynchronously repeats the action until it produces a value that is accepted by the `until` function, which should also run asynchronously. Test with a function that reads a `java.net.PasswordAuthentication` from the console, and a function that simulates a validity check by sleeping for a second and then checking that the password is "secret". Hint: Use recursion.

27. Implement a static method `CompletableFuture<T> <T> supplyAsync(Supplier<T> action, Executor exec)` that returns an instance of a subclass of `CompletableFuture<T>` whose `cancel` method can interrupt the thread that executes the action method, provided the task is running. In a `Runnable`, capture the current thread, then call `action.get()`, and complete the `CompletableFuture` with the result or exception.

28. The method

```
static CompletableFuture<Void> CompletableFuture.allOf(CompletableFuture<?>... cfs)
```

does not yield the results of the arguments, which makes it a bit cumbersome to use. Implement a method that combines completable futures of the same type:

```
static <T> CompletableFuture<List<T>> allOf(List<CompletableFuture<T>> cfs)
```

Note that this method has a `List` parameter since you cannot have variable arguments of a generic type.

29. The method

```
static CompletableFuture<Object>
    CompletableFuture.anyOf(CompletableFuture<?>... cfs)
```

returns as soon as any of the arguments completes, normally or *exceptionally*. This is markedly different from `ExecutorService.invokeAny` which keeps going until one of the tasks completes successfully and prevents the method from being used for a concurrent search. Implement a method

```
static CompletableFuture<T> anyOf(List<Supplier<T>> actions, Executor exec)
```

that yields the first actual result, or a `NoSuchElementException` if all actions completed with exceptions.

Annotations

Topics in This Chapter

- 11.1 Using Annotations — page 378
- 11.2 Defining Annotations — page 383
- 11.3 Standard Annotations — page 386
- 11.4 Processing Annotations at Runtime — page 391
- 11.5 Source-Level Annotation Processing — page 394
- Exercises — page 398

Chapter

I I

Annotations are tags that you insert into your source code so that some tool can process them. The tools can operate on the source level, or they can process class files into which the compiler has placed annotations.

Annotations do not change the way your programs are compiled. The Java compiler generates the same virtual machine instructions with or without the annotations.

To benefit from annotations, you need to select a processing tool and use annotations that your processing tool understands, before you can apply that tool to your code.

There is a wide range of uses for annotations. For example, JUnit uses annotations to mark methods that execute tests and to specify how the tests should be run. The Java Persistence Architecture uses annotations to define mappings between classes and database tables, so that objects can be persisted automatically without the developer having to write SQL queries.

In this chapter, you will learn the details of the annotation syntax, how to define your own annotations, and how to write annotation processors that work at the source level or at runtime.

The key points of this chapter are:

1. You can annotate declarations just as you use modifiers such as `public` or `static`.

2. You can also annotate types that appear in declarations, casts, instanceof checks, or method references.
3. An annotation starts with a @ symbol and may contain key/value pairs called elements.
4. Annotation values must be compile-time constants: primitive types, enum constants, class literals, other annotations, or arrays thereof.
5. An item can have repeating annotations or annotations of different types.
6. To define an annotation, specify an annotation interface whose methods correspond to the annotation elements.
7. The Java library defines over a dozen annotations, and annotations are extensively used in the Java Enterprise Edition.
8. To process annotations in a running Java program, you can use reflection and query the reflected items for annotations.
9. Annotation processors process source files during compilation, using the Java language model API to locate annotated items.

11.1 Using Annotations

Here is an example of a simple annotation:

```
public class CacheTest {  
    ...  
    @Test public void checkRandomInsertions()  
}
```

The annotation @Test annotates the checkRandomInsertions method. In Java, an annotation is used like a modifier (such as public or static). The name of each annotation is preceded by an @ symbol.

By itself, the @Test annotation does not do anything. It needs a tool to be useful. For example, the JUnit 4 testing tool (available at <http://junit.org>) calls all methods that are labeled @Test when testing a class. Another tool might remove all test methods from a class file so they are not shipped with the program after it has been tested.

11.1.1 Annotation Elements

Annotations can have key/value pairs called *elements*, such as

```
@Test(timeout=10000)
```

The names and types of the permissible elements are defined by each annotation (see Section 11.2, “Defining Annotations,” page 383). The elements can be processed by the tools that read the annotations.

An annotation element is one of the following:

- A primitive type value
- A String
- A class object
- An instance of an `enum`
- An annotation
- An array of the preceding (but not an array of arrays)

For example,

```
@BugReport(showStopper=true,  
           assignedTo="Harry",  
           testCase=CacheTest.class,  
           status=BugReport.Status.CONFIRMED)
```



CAUTION: An annotation element can never have the value `null`.

Elements can have default values. For example, the `timeout` element of the JUnit `@Test` annotation has default `0L`. Therefore, the annotation `@Test` is equivalent to `@Test(timeout=0L)`.

If the element name is `value`, and that is the only element you specify, you can omit `value=`. For example, `@SuppressWarnings("unchecked")` is the same as `@SuppressWarnings(value="unchecked")`.

If an element value is an array, enclose its components in braces:

```
@BugReport(reportedBy={"Harry", "Fred"})
```

You can omit the braces if the array has a single component:

```
@BugReport(reportedBy="Harry") // Same as {"Harry"}
```

An annotation element can be another annotation:

```
@BugReport(ref=@Reference(id=11235811), ...)
```



NOTE: Since annotations are processed by the compiler, all element values must be compile-time constants.

11.1.2 Multiple and Repeated Annotations

An item can have multiple annotations:

```
@Test  
@BugReport(showStopper=true, reportedBy="Joe")  
public void checkRandomInsertions()
```

If the author of an annotation declared it to be repeatable, you can repeat the same annotation multiple times:

```
@BugReport(showStopper=true, reportedBy="Joe")  
@BugReport(reportedBy={"Harry", "Carl"})  
public void checkRandomInsertions()
```

11.1.3 Annotating Declarations

So far, you have seen annotations applied to method declarations. There are many other places where annotations can occur. They fall into two categories: *declarations* and *type uses*. Declaration annotations can appear at the declarations of

- Classes (including `enum`) and interfaces (including annotation interfaces)
- Methods
- Constructors
- Instance variables (including `enum` constants)
- Local variables (including those declared in `for` and `try-with-resources` statements)
- Parameter variables and `catch` clause parameters
- Type parameters
- Packages

For classes and interfaces, put the annotations before the `class` or `interface` keyword:

```
@Entity public class User { ... }
```

For variables, put them before the type:

```
@SuppressWarnings("unchecked") List<User> users = ...;  
public User getUser(@Param("id") String userId)
```

A type parameter in a generic class or method can be annotated like this:

```
public class Cache<@Immutable V> { ... }
```

A package is annotated in a file `package-info.java` that contains only the `package` statement preceded by annotations.

```
/**  
 * Package-level Javadoc  
 */  
@GPL(version="3")  
package com.horstmann.corejava;  
import org.gnu.GPL;
```

Note that the `import` statement for the annotation comes *after* the package declaration.



NOTE: Annotations for local variables and packages are discarded when a class is compiled. Therefore, they can only be processed at the source level.

11.1.4 Annotating Type Uses

A declaration annotation provides some information about the item being declared. For example, in the declaration

```
public User getUser(@NotNull String userId)
```

it is asserted that the `userId` parameter is not null.



NOTE: The `@NotNull` annotation is a part of the Checker Framework (<http://types.cs.washington.edu/checker-framework>). With that framework, you can include assertions in your program, such that a parameter is non-null or that a `String` contains a regular expression. A static analysis tool then checks whether the assertions are valid in a given body of source code.

Now suppose we have a parameter of type `List<String>`, and we want to express that all of the strings are non-null. That is where type use annotations come in. Place the annotation before the type argument: `List<@NotNull String>`

Type use annotations can appear in the following places:

- With generic type arguments: `List<@NotNull String>`, `Comparator.<@NotNull String> reverseOrder()`.
- In any position of an array: `@NotNull String[][] words` (`words[i][j]` is not null), `String @NotNull [][] words` (`words` is not null), `String[] @NotNull [] words` (`words[i]` is not null).
- With superclasses and implemented interfaces: `class Warning extends @Localized Message`.
- With constructor invocations: `new @Localized String(...)`.

- With nested types: `Map.<@Localized Entry>`.
- With casts and `instanceof` checks: `(@Localized String) text, if (text instanceof @Localized String)`. (The annotations are only for use by external tools. They have no effect on the behavior of a cast or an `instanceof` check.)
- With exception specifications: `public String read() throws @Localized IOException`.
- With wildcards and type bounds: `List<@Localized ? extends Message>, List<? extends @Localized Message>`.
- With method and constructor references: `@Localized Message::getText`.

There are a few type positions that cannot be annotated:

```
@NonNull String.class // Error—cannot annotate class literal  
import java.lang.@NonNull String; // Error—cannot annotate import
```

You can place annotations before or after other modifiers such as `private` and `static`. It is customary (but not required) to put type use annotations after other modifiers, and declaration annotations before other modifiers. For example,

```
private @NonNull String text; // Annotates the type use  
@Id private String userId; // Annotates the variable
```



NOTE: As you will see in Section 11.2, “Defining Annotations” (page 383), an annotation author needs to specify where a particular annotation can appear. If an annotation is permissible both for a variable and a type use, and it is used in a variable declaration, then both the variable and the type use are annotated. For example, consider

```
public User getUser(@NonNull String userId)  
if @NonNull can apply both to parameters and to type uses, the userId  
parameter is annotated, and the parameter type is @NonNull String.
```

11.1.5 Making Receivers Explicit

Suppose you want to annotate parameters that are not being mutated by a method.

```
public class Point {  
    public boolean equals(@ReadOnly Object other) { ... }  
}
```

Then a tool that processes this annotation would, upon seeing a call

```
p.equals(q)
```

reason that `q` has not been changed.

But what about `p`?

When the method is called, the receiver variable `this` is bound to `p`, but this is never declared, so you cannot annotate it.

Actually, you can declare it, with a rarely used syntax variant, just so that you can add an annotation:

```
public class Point {  
    public boolean equals(@ReadOnly Point this, @ReadOnly Object other) { ... }  
}
```

The first parameter is called the *receiver parameter*. It must be named `this`. Its type is the class that is being constructed.



NOTE: You can provide a receiver parameter only for methods, not for constructors. Conceptually, the `this` reference in a constructor is not an object of the given type until the constructor has completed. Instead, an annotation placed on the constructor describes a property of the constructed object.

A different hidden parameter is passed to the constructor of an inner class, namely the reference to the enclosing class object. You can make this parameter explicit as well:

```
static class Sequence {  
    private int from;  
    private int to;  
  
    class Iterator implements java.util.Iterator<Integer> {  
        private int current;  
  
        public Iterator(@ReadOnly Sequence Sequence.this) {  
            this.current = Sequence.this.from;  
        }  
        ...  
    }  
    ...  
}
```

The parameter must be named just like when you refer to it, `EnclosingClass.this`, and its type is the enclosing class.

11.2 Defining Annotations

Each annotation must be declared by an *annotation interface*, with the `@interface` syntax. The methods of the interface correspond to the elements of the

annotation. For example, the JUnit Test annotation is defined by the following interface:

```
@Target(ElementType.METHOD)
@Retention(RetentionPolicy.RUNTIME)
public @interface Test {
    long timeout();
    ...
}
```

The `@interface` declaration creates an actual Java interface. Tools that process annotations receive objects that implement the annotation interface. When the JUnit test runner tool gets an object that implements `Test`, it simply invokes the `timeout` method to retrieve the `timeout` element of a particular `Test` annotation.

The element declarations in the annotation interface are actually method declarations. The methods of an annotation interface can have no parameters and no `throws` clauses, and they cannot be generic.

The `@Target` and `@Retention` annotations are *meta-annotations*. They annotate the `Test` annotation, indicating the places where the annotation can occur and where it can be accessed.

The value of the `@Target` meta-annotation is an array of `ElementType` objects, specifying the items to which the annotation can apply. You can specify any number of element types, enclosed in braces. For example,

```
@Target({ElementType.TYPE, ElementType.METHOD})
public @interface BugReport
```

Table 11-1 shows all possible targets. The compiler checks that you use an annotation only where permitted. For example, if you apply `@BugReport` to a variable, a compile-time error results.



NOTE: An annotation without an `@Target` restriction can be used with any declarations but not with type parameters and type uses. (These were the only possible targets in the first Java release that supported annotations.)

The `@Retention` meta-annotation specifies where the annotation can be accessed. There are three choices.

1. `RetentionPolicy.SOURCE`: The annotation is available to source processors, but it is not included in class files.
2. `RetentionPolicy.CLASS`: The annotation is included in class files, but the virtual machine does not load them. This is the default.

Table 11-1 Element Types for the @Target Annotation

Element Type	Annotation Applies To
ANNOTATION_TYPE	Annotation type declarations
PACKAGE	Packages
TYPE	Classes (including enum) and interfaces (including annotation types)
METHOD	Methods
CONSTRUCTOR	Constructors
FIELD	Instance variables (including enum constants)
PARAMETER	Method or constructor parameters
LOCAL_VARIABLE	Local variables
TYPE_PARAMETER	Type parameters
TYPE_USE	Uses of a type

3. `RetentionPolicy.RUNTIME`: The annotation is available at runtime and can be accessed through the reflection API.

You will see examples of all three scenarios later in this chapter.

There are several other meta-annotations—see Section 11.3, “Standard Annotations” (page 386) for a complete list.

To specify a default value for an element, add a `default` clause after the method defining the element. For example,

```
public @interface Test {
    long timeout() default 0L;
    ...
}
```

This example shows how to denote a default of an empty array and a default for an annotation:

```
public @interface BugReport {
    String[] reportedBy() default {};
        // Defaults to empty array
    Reference ref() default @Reference(id=0);
        // Default for an annotation
    ...
}
```



CAUTION: Defaults are not stored with the annotation; instead, they are dynamically computed. If you change a default and recompile the annotation class, all annotated elements will use the new default, even in class files that have been compiled before the default changed.

You cannot extend annotation interfaces, and you never supply classes that implement annotation interfaces. Instead, source processing tools and the virtual machine generate proxy classes and objects when needed.

11.3 Standard Annotations

The Java API defines a number of annotation interfaces in the `java.lang`, `java.lang.annotation`, and `javax.annotation` packages. Four of them are meta-annotations that describe the behavior of annotation interfaces. The others are regular annotations that you use to annotate items in your source code. Table 11-2 shows these annotations. I will discuss them in detail in the following two sections.

Table 11-2 The Standard Annotations

Annotation Interface	Applicable To	Purpose
Override	Methods	Checks that this method overrides a superclass method.
Deprecated	All declarations	Marks item as deprecated.
SuppressWarnings	All declarations except packages	Suppresses warnings of a given type.
SafeVarargs	Methods and constructors	Asserts that the varargs parameter is safe to use.
FunctionalInterface	Interfaces	Marks an interface as functional (with a single abstract method).
PostConstruct PreDestroy	Methods	The method should be invoked immediately after construction or before removal of an injected object.
Resource	Classes and interfaces, methods, fields	On a class or interface, marks it as a resource to be used elsewhere. On a method or field, marks it for dependency injection.

(Continues)

Table 11-2 The Standard Annotations (*Continued*)

Annotation Interface	Applicable To	Purpose
Resources	Classes and interfaces	Specifies an array of resources.
Generated	All declarations	Marks an item as source code that has been generated by a tool.
Target	Annotations	Specifies the locations to which this annotation can be applied.
Retention	Annotations	Specifies where this annotation can be used.
Documented	Annotations	Specifies that this annotation should be included in the documentation of annotated items.
Inherited	Annotations	Specifies that this annotation is inherited by subclasses.
Repeatable	Annotations	Specifies that this annotation can be applied multiple times to the same item.

11.3.1 Annotations for Compilation

The `@Deprecated` annotation can be attached to any items whose use is no longer encouraged. The compiler will warn when you use a deprecated item. This annotation has the same role as the `@deprecated` Javadoc tag. However, the annotation persists until runtime.



NOTE: The `jdeprscan` utility which is part of the JDK can scan a set of JAR files for deprecated elements.

The `@Override` makes the compiler check that the annotated method really overrides a method from the superclass. For example, if you declare

```
public class Point {
    @Override public boolean equals(Point other) { ... }
    ...
}
```

then the compiler will report an error—this `equals` method does not override the `equals` method of the `Object` class because that method has a parameter of type `Object`, not `Point`.

The `@SuppressWarnings` annotation tells the compiler to suppress warnings of a particular type, for example,

```
@SuppressWarnings("unchecked") T[] result  
= (T[]) Array.newInstance(cl, n);
```

The `@SafeVarargs` annotation asserts that a method does not corrupt its varargs parameter (see Chapter 6).

The `@Generated` annotation is intended for use by code generator tools. Any generated source code can be annotated to differentiate it from programmer-provided code. For example, a code editor can hide the generated code, or a code generator can remove older versions of generated code. Each annotation must contain a unique identifier for the code generator. A date string (in ISO 8601 format) and a comment string are optional. For example,

```
@Generated(value="com.horstmann.generator",  
date="2015-01-04T12:08:56.235-0700");
```

You have seen the `FunctionalInterface` annotation in Chapter 3. It is used to annotate conversion targets for lambda expressions, such as

```
@FunctionalInterface  
public interface IntFunction<R> {  
    R apply(int value);  
}
```

If you later add another abstract method, the compiler will generate an error. Of course, you should only add this annotation to interfaces that describe functions. There are other interfaces with a single abstract method (such as `AutoCloseable`) that are not conceptually functions.

11.3.2 Annotations for Managing Resources

The `@PostConstruct` and `@PreDestroy` annotations are used in environments that control the lifecycle of objects, such as web containers and application servers. Methods tagged with these annotations should be invoked immediately after an object has been constructed or immediately before it is being removed.

The `@Resource` annotation is intended for resource injection. For example, consider a web application that accesses a database. Of course, the database access information should not be hardwired into the web application. Instead, the web container has some user interface for setting connection parameters and a JNDI name for a data source. In the web application, you can reference the data source like this:

```
@Resource(name="jdbc/employeedb")  
private DataSource source;
```

When an object containing this instance variable is constructed, the container “injects” a reference to the data source—that is, sets the instance variable to a `DataSource` object that is configured with the name “`jdbc/employeedb`”.

11.3.3 Meta-Annotations

You have already seen the `@Target` and `@Retention` meta-annotations in Section 11.2, “Defining Annotations” (page 383).

The `@Documented` meta-annotation gives a hint to documentation tools such as Javadoc. Documented annotations should be treated just like other modifiers (such as `private` or `static`) for documentation purposes. In contrast, other annotations should not be included in the documentation.

For example, the `@SuppressWarnings` annotation is not documented. If a method or field has that annotation, it is an implementation detail that is of no interest to the Javadoc reader. On the other hand, the `@FunctionalInterface` annotation is documented since it is useful for the programmer to know that the interface is intended to describe a function. Figure 11-1 shows the documentation.

The `@Inherited` meta-annotation applies only to annotations for classes. When a class has an inherited annotation, then all of its subclasses automatically have the same annotation. This makes it easy to create annotations that work similar to marker interfaces (such as the `Serializable` interface).

Suppose you define an inherited annotation `@Persistent` to indicate that objects of a class can be saved in a database. Then the subclasses of persistent classes are automatically annotated as persistent.

```
@Inherited @interface Persistent { }

@Persistent class Employee { ... }
class Manager extends Employee { ... } // Also @Persistent
```

The `@Repeatable` meta-annotation makes it possible to apply the same annotation multiple times. For example, suppose the `@TestCase` annotation is repeatable. Then it can be used like this:

```
@TestCase(params="4", expected="24")
@TestCase(params="0", expected="1")
public static long factorial(int n) { ... }
```

For historical reasons, the implementor of a repeatable annotation needs to provide a *container annotation* that holds the repeated annotations in an array.

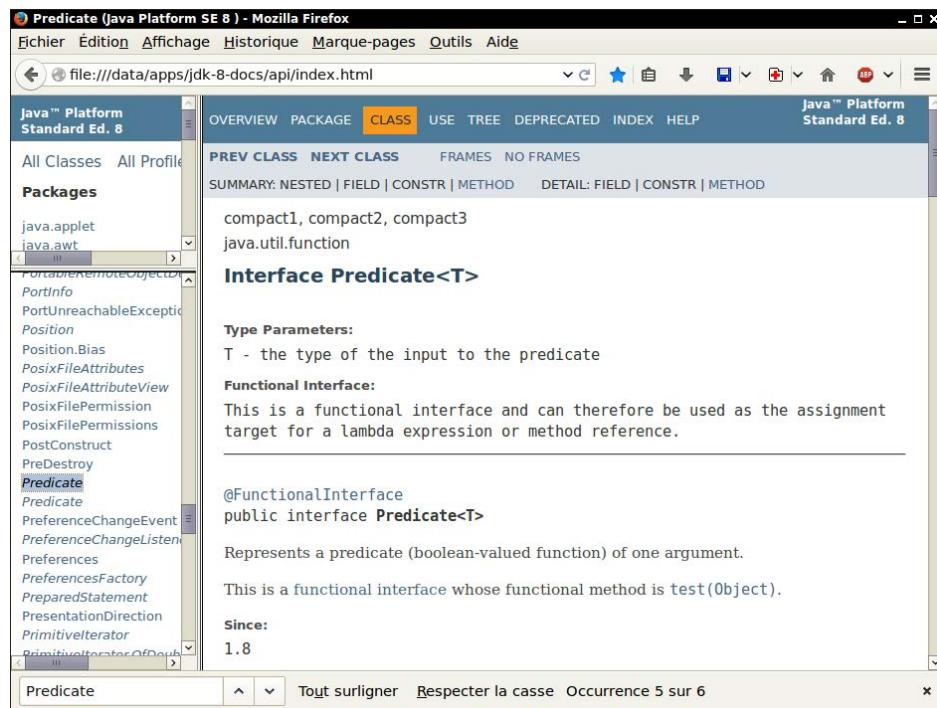


Figure 11-1 A documented annotation

Here is how to define the `@TestCase` annotation and its container:

```
@Repeatable(TestCases.class)
@interface TestCase {
    String params();
    String expected();
}

@interface TestCases {
    TestCase[] value();
}
```

Whenever the user supplies two or more `@TestCase` annotations, they are automatically wrapped into a `@TestCases` annotation. This complicates processing of the annotation, as you will see in the next section.

11.4 Processing Annotations at Runtime

So far, you have seen how to add annotations to source files and how to define annotation types. Now the time has come to see what good can come out of that.

In this section, I show you a simple example of processing an annotation at runtime using the reflection API that you have already seen in Chapter 4. Suppose we want to reduce the tedium of implementing `toString` methods. Of course, one can write a generic `toString` method using reflection that simply includes all instance variable names and values. But suppose we want to customize that process. We may not want to include all instance variables, or we may want to skip class and variable names. For example, for the `Point` class we may prefer `[5,10]` instead of `Point[x=5,y=10]`. Of course, any number of other enhancements would be plausible, but let's keep it simple. The point is to demonstrate what an annotation processor can do.

Annotate all classes that you want to benefit from this service with the `@ToString` annotation. In addition, all instance variables that should be included need to be annotated as well. The annotation is defined like this:

```
@Target({ElementType.FIELD, ElementType.TYPE})
@Retention(RetentionPolicy.RUNTIME)
public @interface ToString {
    boolean includeName() default true;
}
```

Here are annotated `Point` and `Rectangle` classes:

```
@ToString(includeName=false)
public class Point {
    @ToString(includeName=false) private int x;
    @ToString(includeName=false) private int y;
    ...
}

@ToString
public class Rectangle {
    @ToString(includeName=false) private Point topLeft;
    @ToString private int width;
    @ToString private int height;
    ...
}
```

The intent is for a rectangle to be represented as string as `Rectangle[[5, 10], width=20,height=30]`.

At runtime, we cannot modify the implementation of the `toString` method for a given class. Instead, let us provide a method that can format any object, discovering and using the `Tostring` annotations if they are present.

The key are the methods

```
T getAnnotation(Class<T>)
T getDeclaredAnnotation(Class<T>)
T[] getAnnotationsByType(Class<T>)
T[] getDeclaredAnnotationsByType(Class<T>)
Annotation[] getAnnotations()
Annotation[] getDeclaredAnnotations()
```

of the `AnnotatedElement` interface. The reflection classes `Class`, `Field`, `Parameter`, `Method`, `Constructor`, and `Package` implement that interface.

As with other reflection methods, the methods with `Declared` in their name yield annotations in the class itself, whereas the others include inherited ones. In the context of annotations, this means that the annotation is `@Inherited` and applied to a superclass.

If an annotation is not repeatable, call `getAnnotation` to locate it. For example:

```
Class cl = obj.getClass();
ToString ts = cl.getAnnotation(ToString.class);
if (ts != null && ts.includeName()) ...
```

Note that you pass the class object for the annotation (here, `ToString.class`) and you get back an object of some proxy class that implements the `ToString` interface. You can then invoke the interface methods to get the values of the annotation elements. If the annotation is not present, the `getAnnotation` method returns `null`.

It gets a bit messy if an annotation is repeatable. If you call `getAnnotation` to look up a repeatable annotation, and the annotation was actually repeated, then you also get `null`. That is because the repeated annotations were wrapped inside the container annotation.

In this case, you should call `getAnnotationsByType`. That call “looks through” the container and gives you an array of the repeated annotations. If there was just one annotation, you get it in an array of length 1. With this method, you don’t have to worry about the container annotation.

The `getAnnotations` method gets all annotations (of any type) with which an item is annotated, with repeated annotations wrapped into containers.

Here is the implementation of the annotation-aware `toString` method:

```
public class ToStrings {
    public static String toString(Object obj) {
        if (obj == null) return "null";
        Class<?> cl = obj.getClass();
        ToString ts = cl.getAnnotation(ToString.class);
        if (ts == null) return obj.toString();
        StringBuilder result = new StringBuilder();
        if (ts.includeName()) result.append(cl.getName());
        result.append("[");
        boolean first = true;
        for (Field f : cl.getDeclaredFields()) {
            ts = f.getAnnotation(ToString.class);
            if (ts != null) {
                if (first) first = false; else result.append(",");
                f.setAccessible(true);

                if (ts.includeName()) {
                    result.append(f.getName());
                    result.append("=");
                }
                try {
                    result.append(ToStrings.toString(f.get(obj)));
                } catch (ReflectiveOperationException ex) {
                    ex.printStackTrace();
                }
            }
        }
        result.append("]");
        return result.toString();
    }
}
```

When a class is annotated with `ToString`, the method iterates over its fields and prints the ones that are also annotated. If the `includeName` element is `true`, then the class or field name is included in the string.

Note that the method calls itself recursively. Whenever an object belongs to a class that isn't annotated, its regular `toString` method is used and the recursion stops.

This is a simple but typical use of the runtime annotation API. Look up classes, fields, and so on, using reflection; call `getAnnotation` or `getAnnotationsByType` on the potentially annotated elements to retrieve the annotations; then, invoke the methods of the annotation interfaces to obtain the element values.

11.5 Source-Level Annotation Processing

In the preceding section, you saw how to analyze annotations in a running program. Another use for annotation is the automatic processing of source files to produce more source code, configuration files, scripts, or whatever else one might want to generate.

To show you the mechanics, I will repeat the example of generating `toString` methods. However, this time, let's generate them in Java source. Then the methods will get compiled with the rest of the program, and they will run at full speed instead of using reflection.

11.5.1 Annotation Processors

Annotation processing is integrated into the Java compiler. During compilation, you can *invoke annotation processors* by running

```
javac -processor ProcessorClassName1,ProcessorClassName2,... sourceFiles
```

The compiler locates the annotations of the source files. Each annotation processor is executed in turn and given the annotations in which it expressed an interest. If an annotation processor creates a new source file, the process is repeated. Once a processing round yields no further source files, all source files are compiled.



NOTE: An annotation processor can only generate new source files. It cannot modify an existing source file.

An annotation processor implements the `Processor` interface, generally by extending the `AbstractProcessor` class. You need to specify which annotations your processor supports. In our case:

```
@SupportedAnnotationTypes("com.horstmann.annotations.ToString")
@SupportedSourceVersion(SourceVersion.RELEASE_8)
public class ToStringAnnotationProcessor extends AbstractProcessor {
    @Override
    public boolean process(Set<? extends TypeElement> annotations,
                          RoundEnvironment currentRound) {
        ...
    }
}
```

A processor can claim specific annotation types, wildcards such as `"com.horstmann.*"` (all annotations in the `com.horstmann` package or any subpackage), or even `"*"` (all annotations).

The `process` method is called once for each round, with the set of all annotations that were found in any files during this round, and a `RoundEnvironment` reference that contains information about the current processing round.

11.5.2 The Language Model API

You use the *language model* API for analyzing source-level annotations. Unlike the reflection API, which presents the virtual machine representation of classes and methods, the language model API lets you analyze a Java program according to the rules of the Java language.

The compiler produces a tree whose nodes are instances of classes that implement the `javax.lang.model.element.Element` interface and its subinterfaces, `TypeElement`, `VariableElement`, `ExecutableElement`, and so on. These are the compile-time analogs to the `Class`, `Field/Parameter`, `Method/Constructor` reflection classes.

I do not want to cover the API in detail, but here are the highlights that you need to know for processing annotations.

- The `RoundEnvironment` gives you a set of all elements annotated with a particular annotation, by calling the method

```
Set<? extends Element> getElementsAnnotatedWith(Class<? extends Annotation> a)
Set<? extends Element> getElementsAnnotatedWithAny(
    Set<Class<? extends Annotation>> annotations)
    // Useful for repeated annotations
```

- The source-level equivalent of the `AnnotateElement` interface is `AnnotatedConstruct`. You use the methods

```
A getAnnotation(Class<A> annotationType)
A[] getAnnotationsByType(Class<A> annotationType)
```

to get the annotation or repeated annotations for a given annotation class.

- A `TypeElement` represents a class or interface. The `getEnclosedElements` method yields a list of its fields and methods.
- Calling `getSimpleName` on an `Element` or `getQualifiedName` on a `TypeElement` yields a `Name` object that can be converted to a string with `toString`.

11.5.3 Using Annotations to Generate Source Code

Let us return to our task of automatically generating `toString` methods. We can't put these methods into the original classes—annotation processors can only produce new classes, not modify existing ones.

Therefore, we'll add all methods into a utility class `ToStrings`:

```
public class ToStrings {  
    public static String toString(Point obj) {  
        Generated code  
    }  
    public static String toString(Rectangle obj) {  
        Generated code  
    }  
    ...  
    public static String toString(Object obj) {  
        return Objects.toString(obj);  
    }  
}
```

Since we don't want to use reflection, we annotate accessor methods, not fields:

```
@ToString  
public class Rectangle {  
    ...  
    @ToString(includeName=false) public Point getTopLeft() { return topLeft; }  
    @ToString public int getWidth() { return width; }  
    @ToString public int getHeight() { return height; }  
}
```

The annotation processor should then generate the following source code:

```
public static String toString(Rectangle obj) {  
    StringBuilder result = new StringBuilder();  
    result.append("Rectangle");  
    result.append("[");  
    result.append(toString(obj.getTopLeft()));  
    result.append(",");  
    result.append("width=");  
    result.append(toString(obj.getWidth()));  
    result.append(",");  
    result.append("height=");  
    result.append(toString(obj.getHeight()));  
    result.append("]");  
    return result.toString();  
}
```

The "boilerplate" code is in gray. Here is an outline of the method that produces the `toString` method for a class with given `TypeElement`:

```
private void writeToStringMethod(PrintWriter out, TypeElement te) {
    String className = te.getQualifiedName().toString();
    Print method header and declaration of string builder
    ToString ann = te.getAnnotation(ToString.class);
    if (ann.includeName()) Print code to add class name
    for (Element c : te.getEnclosedElements()) {
        ann = c.getAnnotation(ToString.class);
        if (ann != null) {
            if (ann.includeName()) Print code to add field name
            Print code to append toString(obj.methodName())
        }
    }
    Print code to return string
}
```

And here is an outline of the process method of the annotation processor. It creates a source file for the helper class and writes the class header and one method for each annotated class.

```
public boolean process(Set<? extends TypeElement> annotations,
    RoundEnvironment currentRound) {
    if (annotations.size() == 0) return true;
    try {
        JavaFileObject sourceFile = processingEnv.getFiler().createSourceFile(
            "com.horstmann.annotations.ToStrings");
        try (PrintWriter out = new PrintWriter(sourceFile.openWriter())) {
            Print code for package and class
            for (Element e : currentRound.getElementsAnnotatedWith(ToString.class)) {
                if (e instanceof TypeElement) {
                    TypeElement te = (TypeElement) e;
                    writeToStringMethod(out, te);
                }
            }
            Print code for toString(Object)
        } catch (IOException ex) {
            processingEnv.getMessager().printMessage(
                Kind.ERROR, ex.getMessage());
        }
    }
    return true;
}
```

For the tedious details, check the book's companion code.

Note that the process method is called in subsequent rounds with an empty list of annotations. It then returns immediately so it doesn't create the source file twice.



TIP: To see the rounds, run the `javac` command with the `-XprintRounds` flag:

```
Round 1:  
  input files: {ch11.sec05.Point, ch11.sec05.Rectangle,  
               ch11.sec05.SourceLevelAnnotationDemo}  
  annotations: [com.horstmann.annotations.ToString]  
  last round: false  
Round 2:  
  input files: {com.horstmann.annotations.ToStrings}  
  annotations: []  
  last round: false  
Round 3:  
  input files: {}  
  annotations: []  
  last round: true
```

This example demonstrates how tools can harvest source file annotations to produce other files. The generated files don't have to be source files. Annotation processors may choose to generate XML descriptors, property files, shell scripts, HTML documentation, and so on.



NOTE: You have now seen how to process annotations in source files and in a running program. A third possibility is to process annotations in class files, usually on the fly when loading them into the virtual machine. You need a tool such as ASM (<http://asm.ow2.org>) to locate and evaluate the annotations, and rewrite the byte codes.

Exercises

1. Describe how `Object.clone` could be modified to use a `@Cloneable` annotation instead of the `Cloneable` marker interface.
2. If annotations had existed in early versions of Java, then the `Serializable` interface would surely have been an annotation. Implement a `@Serializable` annotation. Choose a text or binary format for persistence. Provide classes for streams or readers/writers that persist the state of objects by saving and restoring all fields that are primitive values or themselves serializable. Don't worry about cyclic references for now.
3. Repeat the preceding assignment, but do worry about cyclic references.
4. Add a `@Transient` annotation to your serialization mechanism that acts like the `transient` modifier.

5. Define an annotation `@Todo` that contains a message describing whatever it is that needs to be done. Define an annotation processor that produces a reminder list from a source file. Include a description of the annotated item and the todo message.
6. Turn the annotation of the preceding exercise into a repeating annotation.
7. If annotations had existed in early versions of Java, they might have taken the role of Javadoc. Define annotations `@Param`, `@Return`, and so on, and produce a basic HTML document from them with an annotation processor.
8. Implement the `@TestCase` annotation, generating a source file whose name is the name of the class in which the annotation occurs, followed by `Test`. For example, if `MyMath.java` contains

```
@TestCase(params="4", expected="24")
@TestCase(params="0", expected="1")
public static long factorial(int n) { ... }
```

then generate a file `MyMathTest.java` with statements

```
assert(MyMath.factorial(4) == 24);
assert(MyMath.factorial(0) == 1);
```

You may assume that the test methods are static, and that `params` contains a comma-separated list of parameters of the correct type.

9. Implement the `@TestCase` annotation as a runtime annotation and provide a tool that checks it. Again, assume that the test methods are static and restrict yourself to a reasonable set of parameter and return types that can be described by strings in the annotation elements.
10. Implement a processor for the `@Resource` annotation that accepts an object of some class and looks for fields of type `String` annotated with `@Resource(name="URL")`. Then load the URL and “inject” the string variable with that content, using reflection.

The Date and Time API

Topics in This Chapter

- 12.1 The Time Line — page 402
- 12.2 Local Dates — page 404
- 12.3 Date Adjusters — page 407
- 12.4 Local Time — page 409
- 12.5 Zoned Time — page 410
- 12.6 Formatting and Parsing — page 413
- 12.7 Interoperating with Legacy Code — page 416
- Exercises — page 417

Chapter

12

Time flies like an arrow, and we can easily set a starting point and count forwards and backwards in seconds. So why is it so hard to deal with time? The problem is humans. All would be easy if we could just tell each other: “Meet me at 1371409200, and don’t be late!” But we want time to relate to daylight and the seasons. That’s where things get complicated. Java 1.0 had a `Date` class that was, in hindsight, naïve, and had most of its methods deprecated in Java 1.1 when a `Calendar` class was introduced. Its API wasn’t stellar, its instances were mutable, and it didn’t deal with issues such as leap seconds. The third time is a charm, and the `java.time` API introduced in Java 8 has remedied the flaws of the past and should serve us for quite some time. In this chapter, you will learn what makes time computations so vexing, and how the `Date` and `Time` API solves these issues.

The key points of this chapter are:

1. All `java.time` objects are immutable.
2. An `Instant` is a point on the time line (similar to a `Date`).
3. In Java time, each day has exactly 86,400 seconds (that is, no leap seconds).
4. A `Duration` is the difference between two instants.
5. `LocalDateTime` has no time zone information.

6. TemporalAdjuster methods handle common calendar computations, such as finding the first Tuesday of a month.
7. ZonedDateTime is a point in time in a given time zone (similar to GregorianCalendar).
8. Use a Period, not a Duration, when advancing zoned time, in order to account for daylight savings time changes.
9. Use DateTimeFormatter to format and parse dates and times.

12.1 The Time Line

Historically, the fundamental time unit—the second—was derived from Earth’s rotation around its axis. There are 24 hours or $24 \times 60 \times 60 = 86400$ seconds in a full revolution, so it seems just a question of astronomical measurements to precisely define a second. Unfortunately, Earth wobbles slightly, and a more precise definition was needed. In 1967, a new precise definition of a second, matching the historical definition, was derived from an intrinsic property of atoms of caesium-133. Since then, a network of atomic clocks keeps the official time.

Ever so often, the official time keepers synchronize the absolute time with the rotation of Earth. At first, the official seconds were slightly adjusted, but starting in 1972, “leap seconds” were occasionally inserted. (In theory, a second might need to be removed once in a while, but that has not yet happened.) There is talk of changing the system again. Clearly, leap seconds are a pain, and many computer systems instead use “smoothing” where time is artificially slowed down or sped up just before the leap second, keeping 86,400 seconds per day. This works because the local time on a computer isn’t all that precise, and computers are used to synchronizing themselves with an external time service.

The Java Date and Time API specification requires that Java uses a time scale that:

- Has 86,400 seconds per day
- Exactly matches the official time at noon each day
- Closely matches it elsewhere, in a precisely defined way

That gives Java the flexibility to adjust to future changes in the official time.

In Java, an Instant represents a point on the time line. An origin, called the *epoch*, is arbitrarily set at midnight of January 1, 1970 at the prime meridian that passes through the Greenwich Royal Observatory in London. This is the

same convention used in the Unix/POSIX time. Starting from that origin, time is measured in 86,400 seconds per day, forwards and backwards, to nanosecond precision. The `Instant` values go back as far as a billion years (`Instant.MIN`). That's not quite enough to express the age of the Universe (around 13.5 billion years), but it should be enough for all practical purposes. After all, a billion years ago, the Earth was covered in ice and populated by microscopic ancestors of today's plants and animals. The largest value, `Instant.MAX`, is December 31 of the year 1,000,000,000.

The static method call `Instant.now()` gives the current instant. You can compare two instants with the `equals` and `compareTo` methods in the usual way, so you can use instants as timestamps.

To find out the difference between two instants, use the static method `Duration.between`. For example, here is how you can measure the running time of an algorithm:

```
Instant start = Instant.now();
runAlgorithm();
Instant end = Instant.now();
Duration timeElapsed = Duration.between(start, end);
long millis = timeElapsed.toMillis();
```

A `Duration` is the amount of time between two instants. You can get the length of a `Duration` in conventional units by calling `toNanos`, `toMillis`, `toSeconds`, `toMinutes`, `toHours`, or `toDays`.

Conversely, you can obtain a duration with one of the static methods `ofNanos`, `ofMillis`, `ofSeconds`, `ofMinutes`, `ofHours`, `ofDays`:

```
Duration oneWeek = Duration.ofDays(7);
long secondsPerWeek = oneWeek.toSeconds();
```

Durations require more than a `long` value for their internal storage. The number of seconds is stored in a `long`, and the number of nanoseconds in an additional `int`. If you want to make computations to nanosecond accuracy, and you actually need the entire range of a `Duration`, you can use one of the methods in Table 12-1. Otherwise, you can just call `toNanos` and do your calculations with `long` values.



NOTE: It takes almost 300 years of nanoseconds to overflow a `long`.

For example, if you want to check whether an algorithm is at least ten times faster than another, you can compute

```
Duration timeElapsed2 = Duration.between(start2, end2);
boolean overTenTimesFaster
    = timeElapsed.multipliedBy(10).minus(timeElapsed2).isNegative();
// Or timeElapsed.toNanos() * 10 < timeElapsed2.toNanos()
```



NOTE: The Instant and Duration classes are immutable, and all methods, such as multipliedBy or minus, return a new instance.

Table 12-1 Arithmetic Operations for Time Instants and Durations

Method	Description
plus, minus	Adds a duration to, or subtracts a duration from, this Instant or Duration.
plusNanos, plusMillis, plusSeconds, plusMinutes, plusHours, plusDays	Adds a number of the given time units to this Instant or Duration.
minusNanos, minusMillis, minusSeconds, minusMinutes, minusHours, minusDays	Subtracts a number of the given time units from this Instant or Duration.
multipliedBy, dividedBy, negated	Returns a duration obtained by multiplying or dividing this Duration by a given long, or by -1, or a long obtained by dividing two durations. Note that you can scale only durations, not instants.
isZero, isNegative	Checks whether this Duration is zero or negative.

12.2 Local Dates

Now let us turn from absolute time to human time. There are two kinds of human time in the Java API, *local date/time* and *zoned time*. Local date/time has a date and/or time of day, but no associated time zone information. An example of a local date is June 14, 1903 (the day on which Alonzo Church, inventor of the lambda calculus, was born). Since that date has neither a time of day nor time zone information, it does not correspond to a precise instant of time. In contrast, July 16, 1969, 09:32:00 EDT (the launch of Apollo 11) is a zoned date/time, representing a precise instant on the time line.

There are many calculations where time zones are not required, and in some cases they can even be a hindrance. Suppose you schedule a meeting every week at 10:00. If you add 7 days (that is, $7 \times 24 \times 60 \times 60$ seconds) to the last zoned time, and you happen to cross the daylight savings time boundary, the meeting will be an hour too early or too late!

For that reason, the API designers recommend that you do not use zoned time unless you really want to represent absolute time instances. Birthdays, holidays, schedule times, and so on are usually best represented as local dates or times.

A `LocalDate` is a date with a year, month, and day of the month. To construct one, you can use the `now` or `of` static methods:

```
LocalDate today = LocalDate.now(); // Today's date
LocalDate alonzosBirthday = LocalDate.of(1903, 6, 14);
alonzoxBirthday = LocalDate.of(1903, Month.JUNE, 14);
// Uses the Month enumeration
```

Unlike the irregular conventions in Unix and `java.util.Date`, where months are zero-based and years are counted from 1900, you supply the usual numbers for the month of year. Alternatively, you can use the `Month` enumeration.

Table 12-2 shows the most useful methods for working with `LocalDate` objects. For example, *Programmer's Day* is the 256th day of the year. Here is how you can easily compute it:

```
LocalDate programmersDay = LocalDate.of(2014, 1, 1).plusDays(255);
// September 13, but in a leap year it would be September 12
```

Recall that the difference between two time instants is a `Duration`. The equivalent for local dates is a `Period`, which expresses a number of elapsed years, months, or days. You can call `birthday.plus(Period.ofYears(1))` to get the birthday next year. Of course, you can also just call `birthday.plusYears(1)`. But `birthday.plus(Duration.ofDays(365))` won't produce the correct result in a leap year.

The `until` method yields the difference between two local dates. For example,

```
independenceDay.until(christmas)
```

yields a period of 5 months and 21 days. That is actually not terribly useful because the number of days per month varies. To find the number of days, use

```
independenceDay.until(christmas, ChronoUnit.DAYS) // 174 days
```

Table 12–2 LocalDate Methods

Method	Description
<code>now, of, ofInstant</code>	These static methods construct a LocalDate from the current time, from the given year, month, and day, or from an Instant and ZoneId.
<code>plusDays, plusWeeks, plusMonths, plusYears</code>	Adds a number of days, weeks, months, or years to this LocalDate.
<code>minusDays, minusWeeks, minusMonths, minusYears</code>	Subtracts a number of days, weeks, months, or years from this LocalDate.
<code>datesUntil</code>	Yields a Stream<LocalDate> of all dates between this one and the given date.
<code>plus, minus</code>	Adds or subtracts a Duration or Period.
<code>withDayOfMonth, withDayOfYear, withMonth, withYear</code>	Returns a new LocalDate with the day of month, day of year, month, or year changed to the given value.
<code>getDayOfMonth</code>	Gets the day of the month (between 1 and 31).
<code>getDayOfYear</code>	Gets the day of the year (between 1 and 366).
<code>getDayOfWeek</code>	Gets the day of the week, returning a value of the DayOfWeek enumeration.
<code>getMonth, getMonthValue</code>	Gets the month as a value of the Month enumeration, or as a number between 1 and 12.
<code>getYear</code>	Gets the year, between -999,999,999 and 999,999,999.
<code>until</code>	Gets the Period, or the number of the given ChronoUnits, between two dates.
<code>toEpochSecond</code>	Given a LocalTime and ZoneOffset, yields the number of seconds from the epoch to the specified point in time.
<code>isBefore, isAfter</code>	Compares this LocalDate with another.
<code>isLeapYear</code>	Returns true if the year is a leap year—that is, if it is divisible by 4 but not by 100, or divisible by 400. The algorithm is applied for all past years, even though that is historically inaccurate. (Leap years were invented in the year -46, and the rules involving divisibility by 100 and 400 were introduced in the Gregorian calendar reform of 1582. The reform took over 300 years to become universal.)



CAUTION: Some methods in Table 12-2 could potentially create nonexistent dates. For example, adding one month to January 31 should not yield February 31. Instead of throwing an exception, these methods return the last valid day of the month. For example,

```
LocalDate.of(2016, 1, 31).plusMonths(1)
```

and

```
LocalDate.of(2016, 3, 31).minusMonths(1)
```

```
yield February 29, 2016.
```

The `datesUntil` method yields a stream of `LocalDate` objects between a start and an end date:

```
Stream<LocalDate> allDaysInMay2018
    = LocalDate.of(2018,5,1).datesUntil(LocalDate.of(2018,6,1));
Stream<LocalDate> allMondaysIn2018
    = LocalDate.of(2018,1,1).datesUntil(LocalDate.of(2019,1,1), Period.ofDays(7));
```

The `getDayOfWeek` yields the weekday, as a value of the `DayOfWeek` enumeration. `DayOfWeek.MONDAY` has the numerical value 1, and `DayOfWeek.SUNDAY` has the value 7. For example,

```
LocalDate.of(1900, 1, 1).getDayOfWeek().getValue()
```

yields 1. The `DayOfWeek` enumeration has convenience methods `plus` and `minus` to compute weekdays modulo 7. For example, `DayOfWeek.SATURDAY.plus(3)` yields `DayOfWeek.TUESDAY`.



NOTE: The weekend days actually come at the end of the week. This is different from `java.util.Calendar` where Sunday has value 1 and Saturday value 7.

In addition to `LocalDate`, there are also classes `MonthDay`, `YearMonth`, and `Year` to describe partial dates. For example, December 25 (with the year unspecified) can be represented as a `MonthDay`.

12.3 Date Adjusters

For scheduling applications, you often need to compute dates such as “the first Tuesday of every month.” The `TemporalAdjusters` class provides a number of static methods for common adjustments. You pass the result of an adjustment method to the `with` method. For example, the first Tuesday of a month can be computed like this:

```
LocalDate firstTuesday = LocalDate.of(year, month, 1).with(
    TemporalAdjusters.nextOrSame(DayOfWeek.TUESDAY));
```

As always, the `with` method returns a new `LocalDate` object without modifying the original. Table 12-3 shows the available adjusters.

Table 12-3 Date Adjusters in the `TemporalAdjusters` Class

Method	Description
<code>next(weekday)</code> , <code>previous(weekday)</code>	Next or previous date that falls on the given weekday
<code>nextOrSame(weekday)</code> , <code>previousOrSame(weekday)</code>	Next or previous date that falls on the given weekday, starting from the given date
<code>dayOfWeekInMonth(n, weekday)</code>	The nth weekday in the month
<code>lastInMonth(weekday)</code>	The last weekday in the month
<code>firstDayOfMonth()</code> , <code>firstDayOfNextMonth()</code> , <code>firstDayOfNextYear()</code> , <code>lastDayOfMonth()</code> , <code>lastDayOfPreviousMonth()</code> , <code>lastDayOfYear()</code>	The date described in the method name

You can also make your own adjuster by implementing the `TemporalAdjuster` interface. Here is an adjuster for computing the next weekday:

```
TemporalAdjuster NEXT_WORKDAY = w -> {
    LocalDate result = (LocalDate) w;
    do {
        result = result.plusDays(1);
    } while (result.getDayOfWeek().getValue() >= 6);
    return result;
};

LocalDate backToWork = today.with(NEXT_WORKDAY);
```

Note that the parameter of the lambda expression has type `Temporal`, and it must be cast to `LocalDate`. You can avoid this cast with the `ofDateAdjuster` method that expects a `UnaryOperator<LocalDate>`. Here we specify the adjuster as a lambda expression.

```
TemporalAdjuster NEXT_WORKDAY = TemporalAdjusters.ofDateAdjuster(w -> {
    LocalDate result = w; // No cast
    do {
        result = result.plusDays(1);
    } while (result.getDayOfWeek().getValue() >= 6);
    return result;
});
```

12.4 Local Time

A `LocalTime` represents a time of day, such as 15:30:00. You can create an instance with the `now` or `of` methods:

```
LocalTime rightNow = LocalTime.now();
LocalTime bedtime = LocalTime.of(22, 30); // or LocalTime.of(22, 30, 0)
```

Table 12-4 shows common operations with local times. The `plus` and `minus` operations wrap around a 24-hour day. For example,

```
LocalTime wakeup = bedtime.plusHours(8); // wakeup is 6:30:00
```



NOTE: `LocalTime` doesn't concern itself with AM/PM. That silliness is left to a formatter—see Section 12.6, “Formatting and Parsing” (page 413).

Table 12-4 `LocalTime` Methods

Method	Description
<code>now, of, ofInstant</code>	These static methods construct a <code>LocalTime</code> from the current time, from the given hours, minutes, and, optionally, seconds and nanoseconds, or from an <code>Instant</code> and <code>ZoneId</code> .
<code>plusHours, plusMinutes, plusSeconds, plusNanos</code>	Adds a number of hours, minutes, seconds, or nanoseconds to this <code>LocalTime</code> .
<code>minusHours, minusMinutes, minusSeconds, minusNanos</code>	Subtracts a number of hours, minutes, seconds, or nanoseconds from this <code>LocalTime</code> .
<code>plus, minus</code>	Adds or subtracts a <code>Duration</code> .
<code>withHour, withMinute, withSecond, withNano</code>	Returns a new <code>LocalTime</code> with the hour, minute, second, or nanosecond changed to the given value.
<code>getHour, getMinute, getSecond, getNano</code>	Gets the hour, minute, second, or nanosecond of this <code>LocalTime</code> .
<code>toSecondOfDay, toNanoOfDay</code>	Returns the number of seconds or nanoseconds between midnight and this <code>LocalTime</code> .
<code>toEpochSecond</code>	Given a <code>LocalDate</code> and <code>ZoneOffset</code> , yields the number of seconds from the epoch to the specified point in time.
<code>isBefore, isAfter</code>	Compares this <code>LocalTime</code> with another.

There is a `LocalDateTime` class representing a date and time. That class is suitable for storing points in time in a fixed time zone—for example, for a schedule of classes or events. However, if you need to make calculations that span the daylight savings time, or if you need to deal with users in different time zones, you should use the `ZonedDateTime` class that we discuss next.

12.5 Zoned Time

Time zones, perhaps because they are an entirely human creation, are even messier than the complications caused by the Earth's irregular rotation. In a rational world, we'd all follow the clock in Greenwich, and some of us would eat our lunch at 02:00, others at 22:00. Our stomachs would figure it out. This is actually done in China, which spans four conventional time zones. Elsewhere, we have time zones with irregular and shifting boundaries and, to make matters worse, the daylight savings time.

As capricious as the time zones may appear to the enlightened, they are a fact of life. When you implement a calendar application, it needs to work for people who fly from one country to another. When you have a conference call at 10:00 in New York, but happen to be in Berlin, you expect to be alerted at the correct local time.

The Internet Assigned Numbers Authority (IANA) keeps a database of all known time zones around the world (<https://www.iana.org/time-zones>), which is updated several times per year. The bulk of the updates deals with the changing rules for daylight savings time. Java uses the IANA database.

Each time zone has an ID, such as `America/New_York` or `Europe/Berlin`. To find out all available time zones, call `ZoneId.getAvailableIds`. At the time of this writing, there were almost 600 IDs.

Given a time zone ID, the static method `ZoneId.of(id)` yields a `ZoneId` object. You can use that object to turn a `LocalDateTime` object into a `ZonedDateTime` object by calling `local.atZone(zoneId)`, or you can construct a `ZonedDateTime` by calling the static method `ZonedDateTime.of(year, month, day, hour, minute, second, nano, zoneId)`. For example,

```
ZonedDateTime apollo11launch = ZonedDateTime.of(1969, 7, 16, 9, 32, 0, 0,  
        ZoneId.of("America/New_York"));  
        // 1969-07-16T09:32-04:00[America/New_York]
```

This is a specific instant in time. Call `apollo11launch.toInstant` to get the `Instant`. Conversely, if you have an instant in time, call `instant.atZone(ZoneId.of("UTC"))` to get the `ZonedDateTime` at the Greenwich Royal Observatory, or use another `ZoneId` to get it elsewhere on the planet.



NOTE: UTC stands for “Coordinated Universal Time,” and the acronym is a compromise between the aforementioned English and the French “Temps Universel Coordiné,” having the distinction of being incorrect in either language. UTC is the time at the Greenwich Royal Observatory, without daylight savings time.

Many of the methods of `ZonedDateTime` are the same as those of `LocalDateTime` (see Table 12-5). Most are straightforward, but daylight savings time introduces some complications.

Table 12-5 `ZonedDateTime` Methods

Method	Description
<code>now, of, ofInstant</code>	These static methods construct a <code>ZonedDateTime</code> from the current time, or from a year, month, day, hour, minute, second, nanosecond (or a <code>LocalDate</code> and <code>LocalTime</code>), and <code>ZoneId</code> , or from an <code>Instant</code> and <code>ZoneId</code> .
<code>plusDays, plusWeeks, plusMonths, plusYears, plusHours, plusMinutes, plusSeconds, plusNanos</code>	Adds a number of temporal units to this <code>ZonedDateTime</code> .
<code>minusDays, minusWeeks, minusMonths, minusYears, minusHours, minusMinutes, minusSeconds, minusNanos</code>	Subtracts a number of temporal units from this <code>LocalDate</code> .
<code>plus, minus</code>	Adds or subtracts a <code>Duration</code> or <code>Period</code> .
<code>withDayOfMonth, withDayOfYear, withMonth, withYear, withHour, withMinute, withSecond, withNano</code>	Returns a new <code>ZonedDateTime</code> , with one temporal unit changed to the given value.
<code>withZoneSameInstant, withZoneSameLocal</code>	Returns a new <code>ZonedDateTime</code> in the given time zone, either representing the same instant or the same local time.
<code>getDayOfMonth</code>	Gets the day of the month (between 1 and 31).
<code>getDayOfYear</code>	Gets the day of the year (between 1 and 366).
<code>getDayOfWeek</code>	Gets the day of the week, returning a value of the <code>DayOfWeek</code> enumeration.

(Continues)

Table 12-5 ZonedDateTime Methods (*Continued*)

Method	Description
getMonth, getMonthValue	Gets the month as a value of the Month enumeration, or as a number between 1 and 12.
getYear	Gets the year, between -999,999,999 and 999,999,999.
getHour, getMinute, getSecond, getNano	Gets the hour, minute, second, or nanosecond of this ZonedDateTime.
getOffset	Gets the offset from UTC, as a ZoneOffset instance. Offsets can vary from -12:00 to +14:00. Some time zones have fractional offsets. Offsets change with daylight savings time.
toLocalDate, toLocalTime, toInstant	Yields the local date or local time, or the corresponding instant.
isBefore, isAfter	Compares this ZonedDateTime with another.

When daylight savings time starts, clocks advance by an hour. What happens when you construct a time that falls into the skipped hour? For example, in 2013, Central Europe switched to daylight savings time on March 31 at 2:00. If you try to construct nonexistent time March 31 2:30, you actually get 3:30.

```
ZonedDateTime skipped = ZonedDateTime.of(
    LocalDate.of(2013, 3, 31),
    LocalTime.of(2, 30),
    ZoneId.of("Europe/Berlin"));
// Constructs March 31 3:30
```

Conversely, when daylight time ends, clocks are set back by an hour, and there are two instants with the same local time! When you construct a time within that span, you get the earlier of the two.

```
ZonedDateTime ambiguous = ZonedDateTime.of(
    LocalDate.of(2013, 10, 27), // End of daylight savings time
    LocalTime.of(2, 30),
    ZoneId.of("Europe/Berlin"));
// 2013-10-27T02:30+02:00[Europe/Berlin]
ZonedDateTime anHourLater = ambiguous.plusHours(1);
// 2013-10-27T02:30+01:00[Europe/Berlin]
```

An hour later, the time has the same hours and minutes, but the zone offset has changed.

You also need to pay attention when adjusting a date across daylight savings time boundaries. For example, if you set a meeting for next week, don't add a duration of seven days:

```
ZonedDateTime nextMeeting = meeting.plus(Duration.ofDays(7));  
// Caution! Won't work with daylight savings time
```

Instead, use the `Period` class.

```
ZonedDateTime nextMeeting = meeting.plus(Period.ofDays(7)); // OK
```



CAUTION: There is also an `OffsetDateTime` class that represents times with an offset from UTC, but without time zone rules. That class is intended for specialized applications that specifically require the absence of those rules, such as certain network protocols. For human time, use `ZonedDateTime`.

12.6 Formatting and Parsing

The `DateTimeFormatter` class provides three kinds of formatters to print a date/time value:

- Predefined standard formatters (see Table 12-6)
- Locale-specific formatters
- Formatters with custom patterns

To use one of the standard formatters, simply call its `format` method:

```
String formatted = DateTimeFormatter.ISO_DATE_TIME.format(apollo11launch);  
// 1969-07-16T09:32:00-05:00[America/New_York]
```

The standard formatters are mostly intended for machine-readable timestamps. To present dates and times to human readers, use a locale-specific formatter. There are four styles, `SHORT`, `MEDIUM`, `LONG`, and `FULL`, for both date and time—see Table 12-7.

The static methods `ofLocalizedDate`, `ofLocalizedTime`, and `ofLocalDateTime` create such a formatter. For example:

```
DateTimeFormatter formatter = DateTimeFormatter.ofLocalDateTime(FormatStyle.LONG);  
String formatted = formatter.format(apollo11launch);  
// July 16, 1969 9:32:00 AM EDT
```

These methods use the default locale. To change to a different locale, simply use the `withLocale` method.

```
formatted = formatter.withLocale(Locale.FRENCH).format(apollo11launch);  
// 16 juillet 1969 09:32:00 EDT
```

Table 12–6 Predefined Formatters

Formatter	Description	Example
BASIC_ISO_DATE	Year, month, day, zone offset without separators	19690716-0500
ISO_LOCAL_DATE, ISO_LOCAL_TIME, ISO_LOCAL_DATE_TIME	Separators -, :, T	1969-07-16, 09:32:00, 1969-07-16T09:32:00
ISO_OFFSET_DATE, ISO_OFFSET_TIME, ISO_OFFSET_DATE_TIME	Like ISO_LOCAL_XXX, but with zone offset	1969-07-16-05:00, 09:32:00-05:00 1969-07-16T09:32:00-05:00
ISO_ZONED_DATE_TIME	With zone offset and zone ID	1969-07-16T09:32:00-05:00[America/New_York]
ISO_INSTANT	In UTC, denoted by the Z zone ID	1969-07-16T14:32:00Z
ISO_DATE, ISO_TIME, ISO_DATE_TIME	Like ISO_OFFSET_DATE, ISO_OFFSET_TIME, and ISO_ZONED_DATE_TIME, but the zone information is optional	1969-07-16-05:00, 09:32:00-05:00, 1969-07-16T09:32:00-05:00[America/New_York]
ISO_ORDINAL_DATE	The year and day of year, for LocalDate	1969-197
ISO_WEEK_DATE	The year, week, and day of week, for LocalDate	1969-W29-3
RFC_1123_DATE_TIME	The standard for email timestamps, codified in RFC 822 and updated to four digits for the year in RFC 1123	Wed, 16 Jul 1969 09:32:00 -0500

Table 12-7 Date and Time Formatting Styles

Style	Date	Time
SHORT	7/16/69	9:32 AM
MEDIUM	Jul 16, 1969	9:32:00 AM
LONG	July 16, 1969	9:32:00 AM EDT
FULL	Wednesday, July 16, 1969	9:32:00 AM EDT

The `DayOfWeek` and `Month` enumerations have methods `getDisplayName` for giving the names of weekdays and months in different locales and formats.

```
for (DayOfWeek w : DayOfWeek.values())
    System.out.print(w.getDisplayName(TextStyle.SHORT, Locale.ENGLISH) + " ");
// Prints Mon Tue Wed Thu Fri Sat Sun
```

See Chapter 13 for more information about locales.



NOTE: The `java.time.format.DateTimeFormatter` class is intended as a replacement for `java.util.DateFormat`. If you need an instance of the latter for backwards compatibility, call `formatter.toFormat()`.

Finally, you can roll your own date format by specifying a pattern. For example,

```
formatter = DateTimeFormatter.ofPattern("E yyyy-MM-dd HH:mm");
```

formats a date in the form `Wed 1969-07-16 09:32`. Each letter denotes a different time field, and the number of times the letter is repeated selects a particular format, according to rules that are arcane and seem to have organically grown over time. Table 12-8 shows the most useful pattern elements.

To parse a date/time value from a string, use one of the static `parse` methods. For example,

```
LocalDate churchsBirthday = LocalDate.parse("1903-06-14");
ZonedDateTime apollo11Launch
    = ZonedDateTime.parse("1969-07-16 03:32:00-0400",
        DateTimeFormatter.ofPattern("yyyy-MM-dd HH:mm:ssxx"));
```

The first call uses the standard `ISO_LOCAL_DATE` formatter, the second one a custom formatter.

Table 12–8 Commonly Used Formatting Symbols for Date/Time Formats

ChronoField or Purpose	Examples
ERA	G: AD, GGGG: Anno Domini, GGGGG: A
YEAR_OF_ERA	yy: 69, yyyy: 1969
MONTH_OF_YEAR	M: 7, MM: 07, MMM: Jul, MMMM: July, MMMMM: J
DAY_OF_MONTH	d: 6, dd: 06
DAY_OF_WEEK	e: 3, E: Wed, EEEE: Wednesday, EEEEE: W
HOUR_OF_DAY	H: 9, HH: 09
CLOCK_HOUR_OF_AM_PM	K: 9, KK: 09
AMPM_OF_DAY	a: AM
MINUTE_OF_HOUR	mm: 02
SECOND_OF_MINUTE	ss: 00
NANO_OF_SECOND	nnnnnn: 000000
Time zone ID	VV: America/New_York
Time zone name	z: EDT, zzzz: Eastern Daylight Time
Zone offset	x: -04, xx: -0400, xxx: -04:00, XXX: same, but use Z for zero
Localized zone offset	O: GMT-4, OOOO: GMT-04:00

12.7 Interoperating with Legacy Code

The Java Date and Time API must interoperate with existing classes, in particular, the ubiquitous `java.util.Date`, `java.util.GregorianCalendar`, and `java.sql.Date/Time/Timestamp`.

The `Instant` class is a close analog to `java.util.Date`. In Java 8, that class has two added methods: the `toInstant` method that converts a `Date` to an `Instant`, and the static `from` method that converts in the other direction.

Similarly, `ZonedDateTime` is a close analog to `java.util.GregorianCalendar`, and that class has gained conversion methods in Java 8. The `toZonedDateTime` method converts a `GregorianCalendar` to a `ZonedDateTime`, and the static `from` method does the opposite conversion.

Another set of conversions is available for the date and time classes in the `java.sql` package. You can also pass a `DateTimeFormatter` to legacy code that uses `java.text.Format`. Table 12-9 summarizes these conversions.

Table 12-9 Conversions between `java.time` Classes and Legacy Classes

Classes	To Legacy Class	From Legacy Class
Instant ↔ <code>java.util.Date</code>	<code>Date.from(instant)</code>	<code>date.toInstant()</code>
ZonedDateTime ↔ <code>java.util.GregorianCalendar</code>	<code>GregorianCalendar. from(zonedDateTime)</code>	<code>cal.toZonedDateTime()</code>
Instant ↔ <code>java.sql.Timestamp</code>	<code>TimeStamp.from(instant)</code>	<code>timestamp.toInstant()</code>
LocalDateTime ↔ <code>java.sql.Timestamp</code>	<code>Timestamp. valueOf(localDateTime)</code>	<code>timeStamp.toLocalDateTime()</code>
LocalDate ↔ <code>java.sql.Date</code>	<code>Date.valueOf(localDate)</code>	<code>date.toLocalDate()</code>
LocalTime ↔ <code>java.sql.Time</code>	<code>Time.valueOf(localTime)</code>	<code>time.toLocalTime()</code>
DateTimeFormatter → <code>java.text.DateFormat</code>	<code>formatter.toFormat()</code>	None
<code>java.util.TimeZone</code> → <code>ZoneId</code>	<code>Timezone.getTimeZone(id)</code>	<code>timeZone.toZoneId()</code>
<code>java.nio.file.attribute.FileTime</code> → <code>Instant</code>	<code>FileTime.from(instant)</code>	<code>fileTime.toInstant()</code>

Exercises

1. Compute Programmer’s Day without using `plusDays`.
2. What happens when you add one year to `LocalDate.of(2000, 2, 29)`? Four years? Four times one year?
3. Implement a method `next` that takes a `Predicate<LocalDate>` and returns an adjuster yielding the next date fulfilling the predicate. For example,
`today.with(next(w -> getDayOfWeek().getValue() < 6))`
computes the next workday.

4. Write an equivalent of the Unix `cal` program that displays a calendar for a month. For example, `java Cal 3 2013` should display

1	2	3				
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31

indicating that March 1 is a Friday. (Show the weekend at the end of the week.)

5. Write a program that prints how many days you have been alive.
6. List all Friday the 13th in the twentieth century.
7. Implement a `TimeInterval` class that represents an interval of time, suitable for calendar events (such as a meeting on a given date from 10:00 to 11:00). Provide a method to check whether two intervals overlap.
8. Obtain the offsets of today's date in all supported time zones for the current time instant, turning `ZoneId.getAvailableZoneIds` into a stream and using stream operations.
9. Again using stream operations, find all time zones whose offsets aren't full hours.
10. Your flight from Los Angeles to Frankfurt leaves at 3:05 pm local time and takes 10 hours and 50 minutes. When does it arrive? Write a program that can handle calculations like this.
11. Your return flight leaves Frankfurt at 14:05 and arrives in Los Angeles at 16:40. How long is the flight? Write a program that can handle calculations like this.
12. Write a program that solves the problem described at the beginning of Section 12.5, "Zoned Time" (page 410). Read a set of appointments in different time zones and alert the user which ones are due within the next hour in local time.

Internationalization

Topics in This Chapter

- 13.1 Locales — page 422
- 13.2 Number Formats — page 427
- 13.3 Currencies — page 428
- 13.4 Date and Time Formatting — page 429
- 13.5 Collation and Normalization — page 431
- 13.6 Message Formatting — page 433
- 13.7 Resource Bundles — page 435
- 13.8 Character Encodings — page 438
- 13.9 Preferences — page 439
- Exercises — page 441

Chapter

I3

There's a big world out there, and hopefully many of its inhabitants will be interested in your software. Some programmers believe that all they need to do to internationalize their application is to support Unicode and translate the messages in the user interface. However, as you will see, there is a lot more to internationalizing programs. Dates, times, currencies, even numbers are formatted differently in different parts of the world. In this chapter, you will learn how to use the internationalization features of Java so that your programs present and accept information in a way that makes sense to your users, wherever they may be.

At the end of this chapter, you will find a brief overview of the Java Preferences API for storing user preferences.

The key points of this chapter are:

1. Translating an application for international users requires more than translating messages. In particular, formatting for numbers and dates varies widely across the world.
2. A locale describes language and formatting preferences for a population of users.
3. The `NumberFormat` and `DateTimeFormat` classes handle locale-aware formatting of numbers, currencies, dates, and times.

4. The `MessageFormat` class can format message strings with placeholders, each of which can have its own format.
5. Use the `Collator` class for locale-dependent sorting of strings.
6. The `ResourceBundle` class manages localized strings and objects for multiple locales.
7. The `Preferences` class can be used for storing user preferences in a platform-independent way.

13.1 Locales

When you look at an application that is adapted to an international market, the most obvious difference is the language. But there are many more subtle differences; for example, numbers are formatted quite differently in English and in German. The number

123,456.78

should be displayed as

123.456,78

for a German user—that is, the roles of the decimal point and the decimal comma separator are reversed. There are similar variations in the display of dates. In the United States, dates are displayed as month/day/year; Germany uses the more sensible order of day/month/year, whereas in China, the usage is year/month/day. Thus, the American date

3/22/61

should be presented as

22.03.1961

to a German user. If the month names are written out explicitly, then the difference in languages becomes even more apparent. The English

March 22, 1961

should be presented as

22. März 1961

in German, or

1961年3月22日

in Chinese.

A *locale* specifies the language and location of a user, which allows formatters to take user preferences into account. The following sections show you how to specify a locale and how to control the locale settings of a Java program.

13.1.1 Specifying a Locale

A locale consists of up to five components:

1. A language, specified by two or three lowercase letters, such as `en` (English), `de` (German), or `zh` (Chinese). Table 13-1 shows common codes.
2. Optionally, a script, specified by four letters with an initial uppercase, such as `Latn` (Latin), `Cyril` (Cyrillic), or `Hant` (traditional Chinese characters). This can be useful because some languages, such as Serbian, are written in Latin or Cyrillic, and some Chinese readers prefer the traditional over the simplified characters.
3. Optionally, a country or region, specified by two uppercase letters or three digits, such as `US` (United States) or `CH` (Switzerland). Table 13-2 shows common codes.
4. Optionally, a *variant*.
5. Optionally, an extension. Extensions describe local preferences for calendars (such as the Japanese calendar), numbers (Thai instead of Western digits), and so on. The Unicode standard specifies some of these extensions. Extensions start with `u-` and a two-letter code specifying whether the extension deals with the calendar (`ca`), numbers (`nu`), and so on. For example, the extension `u-nu-thai` denotes the use of Thai numerals. Other extensions are entirely arbitrary and start with `x-`, such as `x-java`.



NOTE: Variants are rarely used nowadays. There used to be a “Nynorsk” variant of Norwegian, but it is now expressed with a different language code, `nn`. What used to be variants for the Japanese imperial calendar and Thai numerals are now expressed as extensions.

Rules for locales are formulated in the “Best Current Practices” memo BCP 47 of the Internet Engineering Task Force (<http://tools.ietf.org/html/bcp47>). You can find a more accessible summary at www.w3.org/International/articles/language-tags.

Table 13-1 Common Language Codes

Language	Code	Language	Code
Chinese	zh	Japanese	ja
Danish	da	Korean	ko
Dutch	du	Norwegian	no
English	en	Portuguese	pt
French	fr	Spanish	es
Finnish	fi	Swedish	sv
Italian	it	Turkish	tr

Table 13-2 Common Country Codes

Country	Code	Country	Code
Austria	AT	Japan	JP
Belgium	BE	Korea	KR
Canada	CA	The Netherlands	NL
China	CN	Norway	NO
Denmark	DK	Portugal	PT
Finland	FI	Spain	ES
Germany	DE	Sweden	SE
Great Britain	GB	Switzerland	CH
Greece	GR	Taiwan	TW
Ireland	IE	Turkey	TR
Italy	IT	United States	US



NOTE: The codes for languages and countries seem a bit random because some of them are derived from local languages. German in German is Deutsch, Chinese in Chinese is zhongwen; hence de and zh. And Switzerland is CH, deriving from the latin term *Confoederatio Helvetica* for the Swiss confederation.

Locales are described by tags—hyphenated strings of locale elements such as en-US.

In Germany, you would use a locale de-DE. Switzerland has four official languages (German, French, Italian, and Rhaeto-Romance). A German speaker in Switzerland would want to use a locale de-CH. This locale uses the rules for the German language, but currency values are expressed in Swiss francs, not euros.

If you only specify the language, say, de, then the locale cannot be used for country-specific issues such as currencies.

You can construct a Locale object from a tag string like this:

```
Locale usEnglish = Locale.forLanguageTag("en-US");
```

The toLanguageTag method yields the language tag for a given locale. For example, Locale.US.toLanguageTag() is the string "en-US".

For your convenience, there are predefined locale objects for various countries:

```
Locale.CANADA
Locale.CANADA_FRENCH
Locale.CHINA
Locale.FRANCE
Locale.GERMANY
Locale.ITALY
Locale.JAPAN
Locale.KOREA
Locale.PRC
Locale.TAIWAN
Locale.UK
Locale.US
```

A number of predefined locales specify just a language without a location:

```
Locale.CHINESE
Locale.ENGLISH
Locale.FRENCH
Locale.GERMAN
Locale.ITALIAN
Locale.JAPANESE
Locale.KOREAN
Locale.SIMPLIFIED_CHINESE
Locale.TRADITIONAL_CHINESE
```

Finally, the static getAvailableLocales method returns an array of all locales known to the virtual machine.



NOTE: You can get all language codes as Locale.getISOLanguages() and all country codes as Locale.getISOCountries().

13.1.2 The Default Locale

The static `getDefault` method of the `Locale` class initially gets the default locale as stored by the local operating system.

Some operating systems allow the user to specify different locales for displayed messages and for formatting. For example, a French speaker living in the United States can have French menus but currency values in dollar.

To obtain these preferences, call

```
Locale displayLocale = Locale.getDefault(Locale.Category.DISPLAY);
Locale formatLocale = Locale.getDefault(Locale.Category.FORMAT);
```



NOTE: In Unix, you can specify separate locales for numbers, currencies, and dates, by setting the `LC_NUMERIC`, `LC_MONETARY`, and `LC_TIME` environment variables. Java does not pay attention to these settings.



TIP: For testing, you might want to switch the default locale of your program. Supply the language and region properties when you launch your program. For example, here we set the default locale to German (Switzerland):

```
java -Duser.language=de -Duser.country=CH MainClass
```

You can also change the script and variant, and you can have separate settings for the display and format locales, for example, `-Duser.script.display=Hant`.

You can change the default locale of the virtual machine by calling one of

```
Locale.setDefault(newLocale);
Locale.setDefault(category, newLocale);
```

The first call changes the locales returned by `Locale.getDefault()` and `Locale.getDisplayDefault(category)` for all categories.

13.1.3 Display Names

Suppose you want to allow a user to choose among a set of locales. You don't want to display cryptic tag strings; the `getDisplayName` method returns a string describing the locale in a form that can be presented to a user, such as
German (Switzerland)

Actually, there is a problem here. The display name is issued in the default locale. That might not be appropriate. If your user already selected German

as the preferred language, you probably want to present the string in German. You can do just that by giving the German locale as a parameter. The code

```
Locale loc = Locale.forLanguageTag("de-CH");
System.out.println(loc.getDisplayName(Locale.GERMAN));
```

prints

Deutsch (Schweiz)

This example shows why you need `Locale` objects. You feed them to locale-aware methods that produce text to be presented to users in different locations. You will see many examples in the following sections.



CAUTION: Even such mundane operations as turning a string into lowercase or uppercase can be locale-specific. For example, in the Turkish locale, the lowercase of the letter I is a dotless i. Programs that tried to normalize strings by storing them in lowercase have mysteriously failed for Turkish customers. It is a good idea to always use the variants of `toUpperCase` and `toLowerCase` that take a `Locale` argument. For example, try out:

```
String cmd = "QUIT".toLowerCase(Locale.forLanguageTag("tr"));
// "quit" with a dotless i
```

Of course, in Turkey, where `Locale.getDefault()` yields just that locale, `"QUIT".toLowerCase()` is not the same as `"quit"`.

If you want to normalize English language strings to lowercase, you should pass an English locale to the `toLowerCase` method.



NOTE: You can explicitly set the locale for input and output operations.

- When reading numbers from a `Scanner`, you can set its locale with the `useLocale` method.
- The `String.format` and `PrintWriter.printf` methods optionally take a `Locale` argument.

13.2 Number Formats

The `NumberFormat` class in the `java.text` package provides three factory methods for formatters that can format and parse numbers: `getNumberInstance`, `getCurrencyInstance`, and `getPercentInstance`. For example, here is how you can format a currency value in German:

```
Locale loc = Locale.GERMANY;
NumberFormat formatter = NumberFormat.getCurrencyInstance(loc);
double amt = 123456.78;
String result = formatter.format(amt);
```

The result is

123.456,78€

Note that the currency symbol is € and that it is placed at the end of the string. Also, note the reversal of decimal points and decimal commas.

Conversely, to read in a number that was entered or stored with the conventions of a certain locale, use the `parse` method:

```
String input = ...;
NumberFormat formatter = NumberFormat.getNumberInstance();
// Get the number formatter for default format locale
Number parsed = formatter.parse(input);
double x = parsed.doubleValue();
```

The return type of `parse` is the abstract type `Number`. The returned object is either a `Double` or a `Long` wrapper object, depending on whether the parsed number was a floating-point number. If you don't care about the distinction, you can simply use the `doubleValue` method of the `Number` class to retrieve the wrapped number.

If the text for the number is not in the correct form, the method throws a `ParseException`. For example, leading whitespace in the string is not allowed. (Call `trim` to remove it.) However, any characters that follow the number in the string are simply ignored, and no exception is thrown.

13.3 Currencies

To format a currency value, you can use the `NumberFormat.getCurrencyInstance` method. However, that method is not very flexible—it returns a formatter for a single currency. Suppose you prepare an invoice for an American customer in which some amounts are in dollars and others are in euros. You can't just use two formatters

```
NumberFormat dollarFormatter = NumberFormat.getCurrencyInstance(Locale.US);
NumberFormat euroFormatter = NumberFormat.getCurrencyInstance(Locale.GERMANY);
```

Your invoice would look very strange, with some values formatted like \$100,000 and others like 100.000€. (Note that the euro value uses a decimal point, not a comma.)

Instead, use the `Currency` class to control the currency used by the formatters. You can get a `Currency` object by passing a currency identifier to the static

`Currency.getInstance` method. Table 13-3 lists common identifiers. The static method `Currency.getAvailableCurrencies` yields a `Set<Currency>` with the currencies known to the virtual machine.

Once you have a `Currency` object, call the `setCurrency` method for the formatter. Here is how to format euro amounts for your American customer:

```
NumberFormat formatter = NumberFormat.getCurrencyInstance(Locale.US);
formatter.setCurrency(Currency.getInstance("EUR"));
System.out.println(formatter.format(euros));
```

If you need to display localized names or symbols of currencies, call

```
getDisplayName()
getSymbol()
```

These methods return strings in the default display locale. You can also provide an explicit locale parameter.

Table 13-3 Common Currency Identifiers

Currency	Identifier	Currency	Identifier
U. S. Dollar	USD	Chinese Renminbi (Yuan)	CNY
Euro	EUR	Indian Rupee	INR
British Pound	GBP	Russian Ruble	RUB
Japanese Yen	JPY	Swiss Francs	CHF

13.4 Date and Time Formatting

When formatting date and time, there are four locale-dependent issues:

1. The names of months and weekdays should be presented in the local language.
2. There will be local preferences for the order of year, month, and day.
3. The Gregorian calendar might not be the local preference for expressing dates.
4. The time zone of the location must be taken into account.

Use the `DateTimeFormatter` from the `java.time.format` package, and not the legacy `java.util.DateFormat`. Decide whether you need the date, time, or both. Pick one of four formats—see Table 13-4. If you format date and time, you can pick them separately.

Table 13-4 Locale-Specific Formatting Styles

Style	Date	Time
SHORT	7/16/69	9:32 AM
MEDIUM	Jul 16, 1969	9:32:00 AM
LONG	July 16, 1969	9:32:00 AM EDT
FULL	Wednesday, July 16, 1969	9:32:00 AM EDT

Then get a formatter:

```
FormatStyle style = ...; // One of FormatStyle.SHORT, FormatStyle.MEDIUM, ...
DateTimeFormatter dateFormatter = DateTimeFormatter.ofLocalizedDate(style);
DateTimeFormatter timeFormatter = DateTimeFormatter.ofLocalizedTime(style);
DateTimeFormatter dateTimeFormatter = DateTimeFormatter.ofLocalDateTime(style);
// or DateTimeFormatter.ofLocalDateTime(style1, style2)
```

These formatters use the current format locale. To use a different locale, use the `withLocale` method:

```
DateTimeFormatter dateFormatter
= DateTimeFormatter.ofLocalizedDate(style).withLocale(locale);
```

Now you can format a `LocalDate`, `LocalDateTime`, `LocalTime`, or `ZonedDateTime`:

```
ZonedDateTime appointment = ...
String formatted = formatter.format(appointment);
```

To parse a string, use one of the static `parse` methods of `LocalDate`, `LocalDateTime`, `LocalTime`, or `ZonedDateTime`.

```
LocalTime time = LocalTime.parse("9:32 AM", formatter);
```

If the string cannot be successfully parsed, a `DateTimeParseException` is thrown.



CAUTION: These methods are not suitable for parsing human input, at least not without preprocessing. For example, the short time formatter for the United States will parse "9:32 AM" but not "9:32AM" or "9:32 am".



CAUTION: Date formatters parse nonexistent dates, such as November 31, and adjust them to the last date in the given month.

Sometimes, you need to display just the names of weekdays and months, for example, in a calendar application. Call the `getDisplayName` method of the `DayOfWeek` and `Month` enumerations.

```
for (Month m : Month.values())
    System.out.println(m.getDisplayName(textStyle, locale) + " ");
```

Table 13-5 shows the text styles. The STANDALONE versions are for display outside a formatted date. For example, in Finnish, January is “tammikuuta” inside a date, but “tammikuu” standalone.



NOTE: The first day of the week can be Saturday, Sunday, or Monday, depending on the locale. You can obtain it like this:

```
DayOfWeek first = WeekFields.of(locale).getFirstDayOfWeek();
```

Table 13-5 Values of the `java.time.format.TextStyle` Enumeration

Style	Example
FULL / FULL_STANDALONE	January
SHORT / SHORT_STANDALONE	Jan
NARROW / NARROW_STANDALONE	J

13.5 Collation and Normalization

Most programmers know how to compare strings with the `compareTo` method of the `String` class. Unfortunately, when interacting with human users, this method is not very useful. The `compareTo` method uses the values of the UTF-16 encoding of the string, which leads to absurd results, even in English. For example, the following five strings are ordered according to the `compareTo` method:

```
Athens
Zulu
able
zebra
Ångström
```

For dictionary ordering, you would want to consider upper case and lower case equivalent, and accents should not be significant. To an English speaker, the sample list of words should be ordered as

```
able
Ångström
Athens
zebra
Zulu
```

However, that order would not be acceptable to a Swedish user. In Swedish, the letter Å is different from the letter A, and it is collated *after* the letter Z! That is, a Swedish user would want the words to be sorted as

```
able
Athens
zebra
Zulu
Ångström
```

To obtain a locale-sensitive comparator, call the static `Collator.getInstance` method:

```
Collator coll = Collator.getInstance(locale);
words.sort(coll);
// Collator implements Comparator<Object>
```

There are a couple of advanced settings for collators. You can set a collator's *strength* to adjust how selective it should be. Character differences are classified as primary, secondary, or tertiary. For example, in English, the difference between e and f is considered primary, the difference between e and é is secondary, and between e and E is tertiary.

For example, when processing city names, you may not care about the differences between

```
San José
San Jose
SAN JOSE
```

In that case, configure the collator by calling

```
coll.setStrength(Collator.PRIMARY);
```

A more technical setting is the *decomposition mode* which deals with the fact that a character or sequence of characters can sometimes be described in more than one way in Unicode. For example, an é (U+00E9) can also be expressed as a plain e (U+0065) followed by a ' (combining acute accent U+0301). You probably don't care about that difference, and by default, it is not significant. If you do care, you need to configure the collator as follows:

```
coll.setStrength(Collator.IDENTICAL);
coll.setDecomposition(Collator.NO_DECOMPOSITION);
```

Conversely, if you want to be very lenient and consider the trademark symbol ™ (U+2122) the same as the character combination TM, then set the decomposition mode to `Collator.FULL_DECOMPOSITION`.

You might want to convert strings into normalized forms even when you don't do collation—for example, for persistent storage or communication with another program. The Unicode standard defines four normalization forms (C,

D, KC, and KD)—see www.unicode.org/unicode/reports/tr15/tr15-23.html. In the normalization form C, accented characters are always composed. For example, a sequence of e and a combining acute accent ' is combined into a single character é. In form D, accented characters are always decomposed into their base letters and combining accents: é is turned into e followed by '. Forms KC and KD also decompose characters such as the trademark symbol ™. The W3C recommends that you use normalization form C for transferring data over the Internet.

The static `normalize` method of the `java.text.Normalizer` class carries out the normalization process. For example,

```
String city = "San Jose\u0301";
String normalized = Normalizer.normalize(city, Normalizer.Form.NFC);
```

13.6 Message Formatting

When you internationalize a program, you often have messages with variable parts. The static `format` method of the `MessageFormat` class takes a template string with placeholders, followed by the placeholder values, like this:

```
String template = "{0} has {1} messages";
String message = MessageFormat.format(template, "Pierre", 42);
```

Of course, instead of hardcoding the template, you should look up a locale-specific one, such as "Il y a {1} messages pour {0}" in French. You will see how to do that in Section 13.7, "Resource Bundles" (page 435).

Note that the ordering of the placeholders may differ among languages. In English, the message is "Pierre has 42 messages", but in French, it is "Il y a 42 messages pour Pierre". The placeholder `{0}` is the first argument after the template in the call to `format`, `{1}` is the next argument, and so on.

You can format numbers as currency amounts by adding a suffix `number,currency` to the placeholder, like this:

```
template="Your current total is {0,number,currency}."
```

In the United States, a value of 1023.95 is be formatted as \$1,023.95. The same value is displayed as 1.023,95€ in Germany, using the local currency symbol and decimal separator convention.

The `number` indicator can be followed by `currency`, `integer`, `percent`, or a number format pattern of the `DecimalFormat` class, such as `$,##0`.

You can format values of the legacy `java.util.Date` class with an indicator `date` or `time`, followed by the format `short`, `medium`, `long`, or `full`, or a format pattern of the `SimpleDateFormat` such as `yyyy-MM-dd`.

Note that you need to convert `java.time` values; for example,

```
String message = MessageFormat("It is now {0,time,short}.", Date.from(Instant.now()));
```

Finally, a choice formatter lets you generate messages such as

```
No files copied  
1 file copied  
42 files copied
```

depending on the placeholder value.

A choice format is a sequence of pairs, each containing a lower limit and a format string. The limit and format string are separated by a # character, and the pairs are separated by | characters.

```
String template = "{0,choice,0#No files|1#1 file|2#{0} files} copied";
```

Note that {0} occurs twice in the template. When the message format applies the choice format to the {0} placeholder and the value is 42, the choice format returns "{0} files". That string is then formatted again, and the result is spliced into the message.



NOTE: The design of the choice format is a bit muddleheaded. If you have three format strings, you need two limits to separate them. (In general, you need one fewer limit than you have format strings.) The `MessageFormat` class actually ignores the first limit!

Use the < symbol instead of # to denote that a choice should be selected if the lower bound is strictly less than the value. You can also use the ≤ symbol (U+2264) as a synonym for #, and specify a lower bound of -∞ (a minus sign followed by U+221E) for the first value. This makes the format string easier to read:

```
-∞<No files|0<1 file|2≤{0} files
```



CAUTION: Any text in single quotes ' . . .' is included literally. For example, '{0}' is not a placeholder but the literal string {0}. If the template has single quotes, you must *double them*.

```
String template = "<a href=''{0}''>{1}</a>";
```

The static `MessageFormat.format` method uses the current format locale to format the values. To format with an arbitrary locale, you have to work a bit harder because there is no “varargs” method that you can use. You need to place the values to be formatted into an `Object[]` array, like this:

```
MessageFormat mf = new MessageFormat(template, locale);
String message = mf.format(new Object[] { arg1, arg2, ... });
```

13.7 Resource Bundles

When localizing an application, it is best to separate the program from the message strings, button labels, and other texts that need to be translated. In Java, you can place them into *resource bundles*. Then, you can give these bundles to a translator who can edit them without having to touch the source code of the program.



NOTE: Chapter 4 describes a concept of JAR file resources, whereby data files, sounds, and images can be placed in a JAR file. The `getResource` method of the class `Class` finds the file, opens it, and returns a URL to the resource. That is a useful mechanism for bundling files with a program, but it has no locale support.

13.7.1 Organizing Resource Bundles

When localizing an application, you produce a set of resource bundles. Each bundle is either a property file or a special class, with entries for a particular locale or set of matching locales.

In this section, I only discuss property files since they are much more common than resource classes. A property file is a text file with extension `.properties` that contains key/value pairs. For example, a file `messages_de_DE.properties` might contain

```
computeButton=Rechnen
cancelButton=Abbrechen
defaultPaperSize=A4
```

You need to use a specific naming convention for the files that make up these bundles. For example, resources specific to Germany go into a file `bundleName_de_DE`, whereas those shared by all German-speaking countries go into `bundleName_de`. For a given combination of language, script, and country, the following *candidates* are considered:

```
bundleName_language_script_country
bundleName_language_script
bundleName_language_country
bundleName_language
```

If `bundleName` contains periods, then the file must be placed in a matching subdirectory. For example, files for the bundle `com.mycompany.messages` are `com/mycompany/messages_de_DE.properties`, and so on.

To load a bundle, call

```
ResourceBundle res = ResourceBundle.getBundle(bundleName);
```

for the default locale, or

```
ResourceBundle bundle = ResourceBundle.getBundle(bundleName, locale);
```

for the given locale.



CAUTION: The first `getBundle` method does *not* use the default display locale, but the overall default locale. If you look up a resource for the user interface, be sure to pass `Locale.getDefault(Locale.Category.DISPLAY)` as the locale.

To look up a string, call the `getString` method with the key.

```
String computeButtonLabel = bundle.getString("computeButton");
```

The rules for loading bundle files are a bit complex and involve two phases. In the first phase, a matching bundle is located. This involves up to three steps.

1. First, all candidate combinations of bundle name, language, script, country, and variant are attempted, in the order given above, until a match is found. For example, if the target locale is `de-DE` and there is no `messages_de_DE.properties` but there is `messages_de.properties`, that becomes the matching bundle.
2. If there is no match, the process is repeated with the default locale. For example, if a German bundle is requested but there is none, and the default locale is `en-US`, then `messages_en_US.properties` is accepted as a match.
3. If there is no match with the default locale either, then the bundle with no suffixes (for example, `messages.properties`) is a match. If that is not present either, the search fails.



NOTE: There are special rules for variants, Chinese simplified and traditional scripts, and Norwegian languages. See the Javadoc for `ResourceBundle.Control` for details.

In the second phase, the *parents* of the matching bundle are located. The parents are those in the candidate list below the matching bundle, and

the bundle without suffixes. For example, the parents of `messages_de_DE.properties` are `messages_de.properties` and `messages.properties`.

The `getString` method looks for keys in the matching bundle and its parents.



NOTE: If the matching bundle was found in the first phase, then its parents are never taken from the default locale.



NOTE: In the past, property files were limited to using the ASCII character set. All non-ASCII characters had to be encoded using the `\uxxxx` encoding, like this:

```
prefs=Pr\u00e9f\u00e8res
```

Nowadays, property files are assumed to be in UTF-8, and you can simply write the localized string in the file:

```
prefs=Préférences
```

13.7.2 Bundle Classes

To provide resources that are not strings, define classes that extend the `ResourceBundle` class. Use a naming convention similar to that of property resources, for example

```
com.mycompany.MyAppResources_en_US  
com.mycompany.MyAppResources_de  
com.mycompany.MyAppResources
```

To implement a resource bundle class, you can extend the `ListResourceBundle` class. Place all your resources into an array of key/value pairs and return it in the `getContents` method. For example,

```
package com.mycompany;  
public class MyAppResources_de extends ListResourceBundle {  
    public Object[][][] getContents() {  
        public Object[][][] {  
            return new Object[][][] {  
                { "backgroundColor", Color.BLACK },  
                { "defaultPageSize", new double[] { 210, 297 } }  
            };  
        }  
    }  
}
```

To get objects out of such a resource bundle, call the `getObject` method:

```
ResourceBundle bundle  
= ResourceBundle.getBundle("com.mycompany.MyAppResources", locale);  
Color backgroundColor = (Color) bundle.getObject("backgroundColor");  
double[] paperSize = (double[]) bundle.getObject("defaultPageSize");
```



CAUTION: The `ResourceBundle.getBundle` method gives preference to classes over property files when it finds both a class and a property file with the same bundle name.

13.8 Character Encodings

The fact that Java uses Unicode doesn't mean that all your problems with character encodings have gone away. Fortunately, you don't have to worry about the encoding of `String` objects. Any string you receive, be it a command-line argument, console input, or input from a GUI text field, will be a UTF-16 encoded string that contains the text provided by the user.

When you display a string, the virtual machine encodes it for the local platform. There are two potential problems. It could happen that a display font does not have a glyph for a particular Unicode character. In a Java GUI, such characters are displayed as hollow boxes. For console output, if the console uses a character encoding that cannot represent all output characters, missing characters are displayed as ?. Users can correct these issues by installing appropriate fonts or by switching the console to UTF-8.

The situation gets more complex when your program reads plain text files produced by users. Simple-minded text editors often produce files in the local platform encoding. You can obtain that encoding by calling

```
Charset platformEncoding = Charset.defaultCharset();
```

This is a reasonable guess for the user's preferred character encoding, but you should allow your users to override it.

If you want to offer a choice of character encodings, you can obtain localized names as

```
String displayName = encoding.displayName(locale);
// Yields names such as UTF-8, ISO-8859-6, or GB18030
```

Unfortunately, these names aren't really suitable for end users who would want to have choices between Unicode, Arabic, Chinese Simplified, and so on.



TIP: Java source files are also text files. Assuming you are not the only programmer on a project, don't store source files in the platform encoding. You could represent any non-ASCII characters in code or comments with \uxxxx escapes, but that is tedious. Instead, set your text editor to use UTF-8. Either set your console preference to UTF-8, or compile with

```
javac -encoding UTF-8 *.java
```

13.9 Preferences

I close this chapter with an API that is tangentially related to internationalization—the storage of user preferences (which might include the preferred locale).

Of course, you can store preferences in a property file that you load on program startup. However, there is no standard convention for naming and placing configuration files, which increases the likelihood of conflicts as users install multiple Java applications.

Some operating systems have a central repository for configuration information. The best-known example is the registry in Microsoft Windows. The `Preferences` class, which is the standard mechanism in Java for storing user preferences, uses the registry on Windows. On Linux, the information is stored in the local file system instead. The specific repository implementation is transparent to the programmer using the `Preferences` class.

The `Preferences` repository holds a tree of nodes. Each node in the repository has a table of key/value pairs. Values can be numbers, boolean values, strings, or byte arrays.



NOTE: No provision is made for storing arbitrary objects. You are, of course, free to store a serialized object as a byte array if you aren't worried about using serialization for long-term storage.

Paths to nodes look like `/com/mycompany/myapp`. As with package names, you can avoid name clashes by starting the paths with reversed domain names.

There are two parallel trees. Each program user has one tree. An additional tree, called the system tree, is available for settings that are common to all users. The `Preferences` class uses the operating system notion of the “current user” for accessing the appropriate user tree. To access a node in the tree, start with the user or system root:

```
Preferences root = Preferences.userRoot();
```

or

```
Preferences root = Preferences.systemRoot();
```

Then access nodes through their path names:

```
Preferences node = root.node("/com/mycompany/myapp");
```

Alternatively, provide a `Class` object to the static `userNodeForPackage` or `systemNodeForPackage` method, and the node path is derived from the package name of the class.

```
Preferences node = Preferences.userNodeForPackage(obj.getClass());
```

Once you have a node, you can access the key/value table. Retrieve a string with

```
String preferredLocale = node.get("locale", "");
```

For other types, use one of these methods:

```
String get(String key, String defval)
int getInt(String key, int defval)
long getLong(String key, long defval)
float getFloat(String key, float defval)
double getDouble(String key, double defval)
boolean getBoolean(String key, boolean defval)
byte[] getByteArray(String key, byte[] defval)
```

You must specify a default value when reading the information, in case the repository data is not available.

Conversely, you can write data to the repository with `put` methods such as

```
void put(String key, String value)
void.putInt(String key, int value)
```

and so on.

To remove an entry from a node, call

```
void remove(String key)
```

Call `node.removeNode()` to remove the entire node and its children.

You can enumerate all keys stored in a node, and all child paths of a node, with the methods

```
String[] keys()
String[] childrenNames()
```



NOTE: There is no way to find out the type of the value of a particular key.

You can export the preferences of a subtree by calling the method

```
void exportSubtree(OutputStream out)
```

on the root node of the subtree.

The data is saved in XML format. You can import it into another repository by calling

```
InputStream in = Files.newInputStream(path);
Preferences.importPreferences(in);
```

Exercises

1. Write a program that demonstrates the date and time formatting styles in France, China, and Thailand (with Thai digits).
2. Which of the locales in your JVM don't use Western digits for formatting numbers?
3. Which of the locales in your JVM use the same date convention (month/day/year) as the United States?
4. Write a program that prints the names of all languages of locales in your JVM in all available languages. Collate them and suppress duplicates.
5. Repeat the preceding exercise for currency names.
6. Write a program that lists all currencies that have different symbols in at least two locales.
7. Write a program that lists the display and standalone month names in all locales in which they differ, excepting those where the standalone names consist of digits.
8. Write a program that lists all Unicode characters that are expanded to two or more ASCII characters in normalization form KC or KD.
9. Take one of your programs and internationalize all messages, using resource bundles in at least two languages.
10. Provide a mechanism for showing available character encodings with a human-readable description, like in your web browser. The language names should be localized. (Use the translations for locale languages.)
11. Provide a class for locale-dependent display of paper sizes, using the preferred dimensional unit and default paper size in the given locale. (Everyone on the planet, with the exception of the United States and Canada, uses ISO 216 paper sizes. Only three countries in the world have not yet officially adopted the metric system: Liberia, Myanmar (Burma), and the United States.)

Compiling and Scripting

Topics in This Chapter

- 14.1 The Compiler API — page 444
- 14.2 The Scripting API — page 448
- 14.3 The Nashorn Scripting Engine — page 452
- 14.4 Shell Scripting with Nashorn — page 461
- Exercises — page 464

Chapter

I4

In this chapter, you will learn how to use the compiler API to compile Java code from inside of your application. You will also see how to run programs written in other languages from your Java programs, using the scripting API. This is particularly useful if you want to give your users the ability to enhance your program with scripts.

The key points of this chapter are:

1. With the compiler API, you can generate Java code on the fly and compile it.
2. The scripting API lets Java program interoperate with a number of scripting languages.
3. The JDK includes Nashorn, a JavaScript interpreter with good performance and fidelity to the JavaScript standard.
4. Nashorn offers a convenient syntax for working with Java lists and maps, as well as JavaBeans properties.
5. Nashorn supports lambda expressions and a limited mechanism for extending Java classes and implementing Java interfaces.
6. Nashorn has support for writing shell scripts in JavaScript.

14.1 The Compiler API

There are quite a few tools that need to compile Java code. Obviously, development environments and programs that teach Java programming are among them, as well as testing and build automation tools. Another example is the processing of JavaServer Pages—web pages with embedded Java statements.

14.1.1 Invoking the Compiler

It is very easy to invoke the compiler. Here is a sample call:

```
JavaCompiler compiler = ToolProvider.getSystemJavaCompiler();
OutputStream outStream = ...;
OutputStream errStream = ...;
int result = compiler.run(null, outStream, errStream,
    "-sourcepath", "src", "Test.java");
```

A result value of 0 indicates successful compilation.

The compiler sends output and error messages to the provided streams. You can set these parameters to `null`, in which case `System.out` and `System.err` are used. The first parameter of the `run` method is an input stream. As the compiler takes no console input, you can always leave it as `null`. (The `run` method is inherited from a generic `Tool` interface, which allows for tools that read input.)

The remaining parameters of the `run` method are the arguments that you would pass to `javac` if you invoked it on the command line. These can be options or file names.

14.1.2 Launching a Compilation Task

You can have more control over the compilation process with a `CompilationTask` object. This can be useful if you want to supply source from string, capture class files in memory, or process the error and warning messages.

To obtain a `CompilationTask`, start with a `compiler` object as in the preceding section. Then call

```
JavaCompiler.CompilationTask task = compiler.getTask(
    errorWriter, // Uses System.err if null
    fileManager, // Uses the standard file manager if null
    diagnostics, // Uses System.err if null
    options, // null if no options
    classes, // For annotation processing; null if none
    sources);
```

The last three arguments are `Iterable` instances. For example, a sequence of options might be specified as

```
Iterable<String> options = List.of("-d", "bin");
```

The `sources` parameter is an `Iterable` of `JavaFileObject` instances. If you want to compile disk files, get a `StandardJavaFileManager` and call its `getJavaFileObjects` method:

```
StandardJavaFileManager fileManager
    = compiler.getStandardFileManager(null, null, null);
Iterable<JavaFileObject> sources
    = fileManager.getJavaFileObjectsFromFiles("File1.java", "File2.java");
JavaCompiler.CompilationTask task
    = compiler.getTask(null, null, null, options, null, sources);
```



NOTE: The `classes` parameter is only used for annotation processing. In that case, you also need to call `task.processors(annotationProcessors)` with a list of `Processor` objects. See Chapter 11 for an example of annotation processing.

The `getTask` method returns the task object but does not yet start the compilation process. The `CompilationTask` class extends `Callable<Boolean>`. You can pass it to an `ExecutorService` for concurrent execution, or you can just make a synchronous call:

```
Boolean success = task.call();
```

14.1.3 Reading Source Files from Memory

If you generate source code on the fly, you can have it compiled from memory, without having to save files to disk. Use this class to hold the code:

```
public class StringSource extends SimpleJavaFileObject {
    private String code;

    StringSource(String name, String code) {
        super(URI.create("string:/// " + name.replace('.', '/') + ".java"), Kind.SOURCE);
        this.code = code;
    }

    public CharSequence getCharContent(boolean ignoreEncodingErrors) {
        return code;
    }
}
```

Then generate the code for your classes and give the compiler a list of `StringSource` objects.

```
String pointCode = ...;
String rectangleCode = ...;
List<StringSource> sources = List.of(
    new StringSource("Point", pointCode),
    new StringSource("Rectangle", rectangleCode));
task = compiler.getTask(null, null, null, null, null, sources);
```

14.1.4 Writing Byte Codes to Memory

If you compile classes on the fly, there is no need to save the class files to disk. You can save them to memory and load them right away.

First, here is a class for holding the bytes:

```
public class ByteArrayClass extends SimpleJavaFileObject {
    private ByteArrayOutputStream out;

    ByteArrayClass(String name) {
        super(URI.create("bytes:/// " + name.replace('.', '/') + ".class"), Kind.CLASS);
    }

    public byte[] getCode() {
        return out.toByteArray();
    }

    public OutputStream openOutputStream() throws IOException {
        out = new ByteArrayOutputStream();
        return out;
    }
}
```

Next, you need to configure the file manager to use these classes for output:

```
List<ByteArrayClass> classes = new ArrayList<>();
StandardJavaFileManager stdFileManager
    = compiler.getStandardFileManager(null, null, null);
JavaFileManager fileManager
    = new ForwardingJavaFileManager<JavaFileManager>(stdFileManager) {
        public JavaFileObject getJavaFileForOutput(Location location,
            String className, Kind kind, FileObject sibling)
            throws IOException {
            if (kind == Kind.CLASS) {
                ByteArrayClass outfile = new ByteArrayClass(className);
                classes.add(outfile);
                return outfile;
            } else
                return super.getJavaFileForOutput(
                    location, className, kind, sibling);
        }
    };
};
```

To load the classes, you need a class loader (see Chapter 4):

```
public class ByteArrayClassLoader extends ClassLoader {  
    private Iterable<ByteArrayClass> classes;  
  
    public ByteArrayClassLoader(Iterable<ByteArrayClass> classes) {  
        this.classes = classes;  
    }  
  
    @Override public Class<?> findClass(String name) throws ClassNotFoundException {  
        for (ByteArrayClass cl : classes) {  
            if (cl.getName().equals("/") + name.replace('.', '/') + ".class")) {  
                byte[] bytes = cl.getCode();  
                return defineClass(name, bytes, 0, bytes.length);  
            }  
        }  
        throw new ClassNotFoundException(name);  
    }  
}
```

After compilation has finished, call the `Class.forName` method with that class loader:

```
ByteArrayClassLoader loader = new ByteArrayClassLoader(classes);  
Class<?> cl = Class.forName("Rectangle", true, loader);
```

14.1.5 Capturing Diagnostics

To listen to error messages, install a `DiagnosticListener`. The listener receives a `Diagnostic` object whenever the compiler reports a warning or error message. The `DiagnosticCollector` class implements this interface. It simply collects all diagnostics so that you can iterate through them after the compilation is complete.

```
DiagnosticCollector<JavaFileObject> collector = new DiagnosticCollector<>();  
compiler.getTask(null, fileManager, collector, null, null, sources).call();  
for (Diagnostic<? extends JavaFileObject> d : collector.getDiagnostics()) {  
    System.out.println(d);  
}
```

A `Diagnostic` object contains information about the problem location (including file name, line number, and column number) as well as a human-readable description.

You can also install a `DiagnosticListener` to the standard file manager, in case you want to trap messages about missing files:

```
StandardJavaFileManager fileManager  
= compiler.getStandardFileManager(diagnostics, null, null);
```

14.2 The Scripting API

A scripting language is a language that avoids the usual edit/compile/link/run cycle by interpreting the program text at runtime. This encourages experimentation. Also, scripting languages tend to be less complex, which makes them suitable as extension languages for expert users of your programs.

The scripting API lets you combine the advantages of scripting and traditional languages. It enables you to invoke scripts written in JavaScript, Groovy, Ruby, and even exotic languages such as Scheme and Haskell, from a Java program. In the following sections, you will see how to select an engine for a particular language, how to execute scripts, and how to take advantage of advanced features that some scripting engines offer.

14.2.1 Getting a Scripting Engine

A scripting engine is a library that can execute scripts in a particular language. When the virtual machine starts, it discovers the available scripting engines. To enumerate them, construct a `ScriptEngineManager` and invoke the `getEngineFactories` method.

Usually, you know which engine you need, and you can simply request it by name. For example:

```
ScriptEngineManager manager = new ScriptEngineManager();
ScriptEngine engine = manager.getEngineByName("nashorn");
```

The Java Development Kit contains a JavaScript engine called “Nashorn” described in Section 14.3, “The Nashorn Scripting Engine” (page 452). You can add more languages by providing the necessary JAR files on the class path. There is no longer an official list of languages with Java scripting integration. Just use your favorite search engine to find “JSR 223 support” for your favorite language.

Once you have an engine, you can call a script simply by invoking

```
Object result = engine.eval(scriptString);
```

You can also read a script from a Reader:

```
Object result = engine.eval(Files.newBufferedReader(path, charset));
```

You can invoke multiple scripts on the same engine. If one script defines variables, functions, or classes, most scripting engines retain the definitions for later use. For example,

```
engine.eval("n = 1728");
Object result = engine.eval("n + 1");
```

will return 1729.



NOTE: To find out whether it is safe to concurrently execute scripts in multiple threads, call `engine.getFactory().getParameter("THREADING")`. The returned value is one of the following:

- `null`: Concurrent execution is not safe.
- `"MULTITHREADED"`: Concurrent execution is safe. Effects from one thread might be visible from another thread.
- `"THREAD-ISOLATED"`: In addition, different variable bindings are maintained for each thread.
- `"STATELESS"`: In addition, scripts do not alter variable bindings.

14.2.2 Bindings

A *binding* consists of a name and an associated Java object. For example, consider these statements:

```
engine.put("k", 1728);
Object result = engine.eval("k + 1");
```

Conversely, you can retrieve variables that were bound by scripting statements:

```
engine.eval("n = 1728");
Object result = engine.get("n");
```

These bindings live in the *engine scope*. In addition, there is a global scope. Any bindings that you add to the `ScriptEngineManager` are visible to all engines.

Instead of adding bindings to the engine or global scope, you can collect them in an object of type `Bindings` and pass it to the `eval` method:

```
Bindings scope = engine.createBindings();
scope.put("k", 1728);
Object result = engine.eval("k + 1", scope);
```

This is useful if a set of bindings should not persist for future calls to the `eval` method.

14.2.3 Redirecting Input and Output

You can redirect the standard input and output of a script by calling the `setReader` and `setWriter` methods of the script context. For example,

```
StringWriter writer = new StringWriter();
engine.getContext().setWriter(writer);
engine.eval("print('Hello')");
String result = writer.toString();
```

Any output written with the JavaScript `print` function is sent to `writer`.

The `setReader` and `setWriter` methods only affect the scripting engine's standard input and output sources. For example, if you execute the JavaScript code

```
print('Hello');
java.lang.System.out.println('World');
```

only the first output is redirected.



NOTE: The Nashorn engine does not have the notion of a standard input source. Calling `setReader` has no effect.



NOTE: In JavaScript, semicolons at the end of a line are optional. Many JavaScript programmers put them in anyway, but in this chapter, I omit them so you can more easily distinguish between Java and JavaScript code snippets.

For the same reason, I use '`...`', not "`...`", for JavaScript strings whenever possible.

14.2.4 Calling Scripting Functions and Methods

With some scripting engines, you can invoke a function in the scripting language without evaluating the code for the invocation as a script. This is useful if you allow users to implement a service in a scripting language of their choice, so that you can call it from Java.

The scripting engines that offer this functionality (among them Nashorn) implement the `Invocable` interface. To call a function, call the `invokeFunction` method with the function name, followed by the arguments:

```
// Define greet function in JavaScript
engine.eval("function greet(how, whom) { return how + ', ' + whom + '!' }");

// Call the function with arguments "Hello", "World"
result = ((Invocable) engine).invokeFunction(
    "greet", "Hello", "World");
```

If the scripting language is object-oriented, call `invokeMethod`:

```
// Define Greeter class in JavaScript
engine.eval("function Greeter(how) { this.how = how }");
engine.eval("Greeter.prototype.welcome =
    + " function(whom) { return this.how + ', ' + whom + '!' }");
// Construct an instance
Object yo = engine.eval("new Greeter('Yo')");

// Call the welcome method on the instance
result = ((Invocable) engine).invokeMethod(yo, "welcome", "World");
```



NOTE: For more information on how to define classes in JavaScript, see *JavaScript—The Good Parts* by Douglas Crockford (O'Reilly, 2008).



NOTE: If the script engine does not implement the `Invocable` interface, you might still be able to call a method in a language-independent way. The `getMethodCallSyntax` method of the `ScriptEngineFactory` class produces a string that you can pass to the `eval` method.

You can go a step further and ask the scripting engine to implement a Java interface. Then you can call scripting functions and methods with the Java method call syntax.

The details depend on the scripting engine, but typically you need to supply a function for each method of the interface. For example, consider a Java interface

```
public interface Greeter {
    String welcome(String whom);
}
```

If you define a global function with the same name in Nashorn, you can call it through this interface.

```
// Define welcome function in JavaScript
engine.eval("function welcome(whom) { return 'Hello, ' + whom + '!' }");
// Get a Java object and call a Java method
Greeter g = ((Invocable) engine).getInterface(Greeter.class);
result = g.welcome("World");
```

In an object-oriented scripting language, you can access a script class through a matching Java interface. For example, here is how to call an object of the JavaScript `Greeter` class with Java syntax:

```
Greeter g = ((Invocable) engine).getInterface(yo, Greeter.class);
result = g.welcome("World");
```

See Exercise 2 for a more useful example.

14.2.5 Compiling a Script

Some scripting engines can compile scripting code into an intermediate form for efficient execution. Those engines implement the `Compilable` interface. The following example shows how to compile and evaluate code contained in a script file:

```
if (engine implements Compilable) {  
    Reader reader = Files.newBufferedReader(path, charset);  
    CompiledScript script = ((Compilable) engine).compile(reader);  
    script.eval();  
}
```

Of course, it only makes sense to compile a script if it does a lot of work or if you need to execute it frequently.

14.3 The Nashorn Scripting Engine

The Java Development Kit ships with a JavaScript engine called Nashorn, which is very fast and highly compliant with version 5.1 of the ECMAScript standard for JavaScript. (An ECMAScript 6.0 implementation is in progress.) You can use Nashorn like any other script engine, but it also has special features for interoperating with Java.



NOTE: Nashorn is the German word for rhinoceros—literally, nose-horn, an allusion to a well-regarded JavaScript book that has a rhino on the cover. (You get extra karma for pronouncing it nas-horn, not na-shorn.)

14.3.1 Running Nashorn from the Command Line

The Java Development Kit ships with a command-line tool called `jjs` that is similar to the `jshell` tool, except that it is a shell for JavaScript. Simply launch it and issue JavaScript commands.

```
$ jjs  
jjs> 'Hello, World'  
Hello, World
```

The JavaScript shell provides a “read-eval-print” loop, or REPL. Whenever you enter an expression, its value is printed.

```
jjs> 'Hello, World!'.length  
13
```

You can define functions and call them:

```
jjs> function factorial(n) { return n <= 1 ? 1 : n * factorial(n - 1) }
function factorial(n) { return n <= 1 ? 1 : n * factorial(n - 1) }
jjs> factorial(10)
3628800
```



TIP: When writing more complex functions, it is a good idea to put the JavaScript code into a file and load it into jjs with the `load` command:

```
load('functions.js')
```

You can call Java methods:

```
var url = new java.net.URL('http://horstmann.com')
var input = new java.util.Scanner(url.openStream())
input.useDelimiter('$')
var contents = input.next()
```

Now, when you type `contents`, you see the contents of the web page.

Look how refreshing this is. You didn't have to worry about exceptions. You can make experiments dynamically. I wasn't quite sure whether I could read the entire contents by setting the delimiter to \$, but I tried it out and it worked. And I didn't have to write `public static void main`. I didn't have to compile a thing. I didn't have to make a project in my IDE. The REPL is an easy way to explore an API. It is a bit odd that one drives Java from JavaScript, but it is also convenient. Note how I didn't have to define the types for the `input` and `contents` variables.



TIP: The JavaScript REPL would be even more refreshing if it supported command-line editing. On Linux/Unix/Mac OS, you can install `rlwrap` and run `rlwrap jjs`. Then you can press the ↑ key to get the previous commands, and you can edit them. Alternatively, you can run `jjs` inside Emacs. Don't worry—this won't hurt a bit. Start Emacs and hit M-x (that is, Alt+x or Esc x) shell Enter, then type `jjs`. Type expressions as usual. Use M-p and M-n to recall the previous or next line, and the left and right arrow keys to move within a line. Edit a command, then press Enter to see it executed.

14.3.2 Invoking Getters, Setters, and Overloaded Methods

When you have Java objects in a Nashorn program, you can invoke methods on them. For example, suppose you get an instance of the Java class `NumberFormat`:

```
var fmt = java.text.NumberFormat.getInstance()
```

Of course, you can call a method on it:

```
fmt.setMinimumFractionDigits(2)
```

But in the case of a property getter or setter, you can do better than that, using the property access syntax:

```
fmt.minimumFractionDigits = 2
```

If the expression `fmt.minimumFractionDigits` occurs to the left of the `=` operator, it is translated to an invocation of the `setMinimumFractionDigits` method. Otherwise it turns into a call `fmt.getMinimumFractionDigits()`.

You can even use the JavaScript bracket notation to access properties:

```
fmt['minimumFractionDigits'] = 2
```

Note that the argument of the `[]` operator is a string. In this context, it's not useful, but you can call `fmt[str]` with a string variable and thereby access arbitrary properties.

JavaScript has no concept of method overloading. There can be only one method with a given name, and it can have any number of parameters of any type. Nashorn attempts to pick the correct Java method by looking at the number and types of the parameters.

In almost all cases, there is only one Java method that matches the supplied parameters. If there is not, you can manually pick the correct method with the following rather strange syntax:

```
list['remove(Object)'](1)
```

Here, we specify the `remove(Object)` method that removes the `Integer` object 1 from the list. (There is also a `remove(int)` method that removes the object at position 1.)

14.3.3 Constructing Java Objects

When you want to construct objects in JavaScript (as opposed to having them handed to you from the scripting engine), you need to know how to access Java packages. There are two mechanisms.

There are global objects `java`, `javax`, `javafx`, `com`, `org`, and `edu` that yield package and class objects via the dot notation. For example,

```
var javaNetPackage = java.net // A JavaPackage object  
var URL = java.net.URL // A JavaClass object
```

If you need to access a package that does not start with one of the above identifiers, you can find it in the `Package` object, such as `Package.ch.cern`.

Alternatively, call the `Java.type` function:

```
var URL = Java.type('java.net.URL')
```

This is a bit faster than `java.net.URL`, and you get better error checking. (If you make a spelling error such as `java.net.Url`, Nashorn will think it is a package.) But if you want speed and good error handling, you probably shouldn't be using a scripting language in the first place, so I will stick with the shorter form.



NOTE: The Nashorn documentation suggests that class objects should be defined at the top of a script file, just like you place imports at the top of a Java file:

```
var URL = Java.type('java.net.URL')
var JMath = Java.type('java.lang.Math')
// Avoids conflict with JavaScript Math object
```

Once you have a class object, you can call static methods:

```
JMath.floorMod(-3, 10)
```

To construct an object, pass the class object to the JavaScript `new` operator. Pass any constructor parameters in the usual way:

```
var URL = java.net.URL
var url = new URL('http://horstmann.com')
```

If you aren't concerned about efficiency, you can also call

```
var url = new java.net.URL('http://horstmann.com')
```



CAUTION: If you use `Java.type` with `new`, you need an extra set of parentheses:

```
var url = new (Java.type('java.net.URL'))('http://horstmann.com')
```

If you need to specify an inner class, you can do so with the dot notation:

```
var entry = new java.util.AbstractMap.SimpleEntry('hello', 42)
```

Alternatively, if you use `Java.type`, add a `$` like the JVM does:

```
var Entry = Java.type('java.util.AbstractMap$SimpleEntry')
```

14.3.4 Strings in JavaScript and Java

Strings in Nashorn are, of course, JavaScript objects. For example, consider the call

```
'Hello'.slice(-2) // Yields 'lo'
```

Here, we call the JavaScript method `slice`. There is no such method in Java. But the call

```
'Hello'.compareTo('World')
```

also works, even though in JavaScript there is no `compareTo` method. (You just use the `<` operator.)

In this case, the JavaScript string is converted to a Java string. In general, a JavaScript string is converted to a Java string whenever it is passed to a Java method.

Also note that *any* JavaScript object is converted to a string when it is passed to a Java method with a `String` parameter. Consider

```
var path = java.nio.file.Paths.get(/home/)  
// A JavaScript RegExp is converted to a Java String!
```

Here, `/home/` is a regular expression. The `Paths.get` method wants a `String`, and it gets one, even though it makes no sense in this situation. One shouldn't blame Nashorn for this. It follows the general JavaScript behavior to turn anything into a string when a string is expected. The same conversion happens for numbers and Boolean values. For example, `'Hello'.slice('-2')` is perfectly valid. The string `'-2'` is silently converted to the number `-2`. It is features like this one that make programming in a dynamically typed language such an exciting adventure.

14.3.5 Numbers

JavaScript has no explicit support for integers. Its `Number` type is the same as the Java `double` type. When a number is passed to Java code that expects an `int` or `long`, any fractional part is silently removed. For example, `'Hello'.slice(-2.99)` is the same as `'Hello'.slice(-2)`.

For efficiency, Nashorn keeps computations as integers when possible, but that difference is generally transparent. Here is one situation when it is not:

```
var price = 10  
java.lang.String.format('Price: %.2f', price)  
// Error: f format not valid for java.lang.Integer
```

The value of `price` happens to be an integer, and it is assigned to an `Object` since the `format` method has an `Object...` varargs parameter. Therefore, Nashorn produces a `java.lang.Integer`. That causes the `format` method to fail because the `f` format is intended for floating-point numbers. In this case, you can force conversion to `java.lang.Double` by calling the `Number` function:

```
java.lang.String.format('Unit price: %.2f', Number(price))
```

14.3.6 Working with Arrays

To construct a Java array, first make a class object:

```
var intArray = Java.type('int[]')
var StringArray = Java.type('java.lang.String[]')
```

Then call the `new` operator and supply the length of the array:

```
var numbers = new intArray(10) // A primitive int[] array
var names = new StringArray(10) // An array of String references
```

Then use the bracket notation in the usual way:

```
numbers[0] = 42
print(numbers[0])
```

You get the length of the array as `numbers.length`. To iterate through all values of the `names` array, use

```
for each (var elem in names)
    Do something with elem
```

This is the equivalent of the enhanced `for` loop in Java. If you need the index values, use the following loop instead:

```
for (var i in names)
    Do something with i and names[i]
```



CAUTION: Even though this loop looks just like the enhanced `for` loop in Java, it visits the index values. JavaScript arrays can be sparse.

Suppose you initialize a JavaScript array as

```
var names = []
names[0] = 'Fred'
names[2] = 'Barney'
```

Then the loop `for (var i in names) print(i)` prints 0 and 2.

Java and JavaScript arrays are quite different. When you supply a JavaScript array where a Java array is expected, Nashorn will carry out the conversion. But sometimes, you need to help it along. Given a JavaScript array, use the `Java.to` method to obtain the equivalent Java array:

```
var javaNames = Java.to(names, StringArray) // An array of type String[]
```

Conversely, use `Java.from` to turn a Java array into a JavaScript array:

```
var jsNumbers = Java.from(numbers)
jsNumbers[-1] = 42
```

You need to use `Java.to` to resolve overload ambiguities. For example,

```
java.util.Arrays.toString([1, 2, 3])
```

is ambiguous since Nashorn can't decide whether to convert to an `int[]` or `Object[]` array. In that situation, call

```
java.util.Arrays.toString(Java.to([1, 2, 3], Java.type('int[]')))
```

or simply

```
java.util.Arrays.toString(Java.to([1, 2, 3], 'int[]'))
```

14.3.7 Lists and Maps

Nashorn provides "syntactic sugar" for Java lists and maps. You can use the bracket operator with any Java `List` to invoke the `get` and `set` methods:

```
var names = java.util.List.of('Fred', 'Wilma', 'Barney')
var first = names[0]
names[0] = 'Duke'
```

The bracket operator also works for Java maps:

```
var scores = new java.util.HashMap
scores['Fred'] = 10 // Calls scores.put('Fred', 10)
```

To visit all elements in the map, you can use the JavaScript `for` each loop:

```
for (var key in scores) ...
for each (var value in scores) ...
```

If you want to process keys and values together, simply iterate over the entry set:

```
for each (var e in scores.entrySet())
Process e.key and e.value
```



NOTE: The `for` each loop works for any Java class that implements the `Iterable` interface.

14.3.8 Lambdas

JavaScript has anonymous functions, such as

```
var square = function(x) { return x * x }
// The right-hand side is an anonymous function
var result = square(2)
// The () operator invokes the function
```

Syntactically, such an anonymous function is very similar to a Java lambda expression. Instead of an arrow after the parameter list, you have the keyword `function`.

You can use an anonymous function as a functional interface argument of a Java method, just like you could use a lambda expression in Java. For example,

```
java.util.Arrays.sort(words,
    function(s, t) { return s.length - t.length })
// Sorts the array by increasing length
```

If you turn on ECMAScript 6 syntax by starting jjs with the `--language=es6` option, you can use the “arrow function” syntax:

```
java.util.Arrays.sort(words, (s, t) => s.length - t.length);
```

This looks just like a Java lambda expression, except that JavaScript uses a “fat arrow” `=>` where Java uses the `->` symbol.

14.3.9 Extending Java Classes and Implementing Java Interfaces

To extend a Java class, or to implement a Java interface, use the `Java.extend` function. Supply the class object of the superclass or interface and a JavaScript object with the methods that you want to override or implement.

For example, here is an iterator that produces an infinite sequence of random numbers. We override two methods, `next` and `hasNext`. For each method, we provide an implementation as an anonymous JavaScript function:

```
var RandomIterator = Java.extend(java.util.Iterator, {
    next: function() Math.random(),
    hasNext: function() true
}) // RandomIterator is a class object
var iter = new RandomIterator() // Use it to construct an instance
```



NOTE: When calling `Java.extend`, you can specify any number of superinterfaces as well as a superclass. Place all class objects before the object with the implemented methods.

Another Nashorn syntax extension lets you define anonymous subclasses of interfaces or abstract classes. When `new JavaClassObject` is followed by a JavaScript object, an object of the extended class is returned. For example,

```
var iter = new java.util.Iterator {
    next: function() Math.random(),
    hasNext: function() true
}
```

If the supertype is abstract and has only one abstract method, you don’t even have to name the method. Instead, pass the function as if it were a constructor parameter:

```
var task = new java.lang.Runnable(function() { print('Hello') })
// task is an object of an anonymous class implementing Runnable
```



CAUTION: When extending a *concrete* class, you cannot use this constructor syntax. For example,

```
new java.lang.Thread(function() { print('Hello') })
```

calls a Thread constructor, in this case the constructor Thread(Runnable). The call to new returns an object of class Thread, not of a subclass of Thread.

If you want instance variables in your subclass, add them to the JavaScript object. For example, here is an iterator that produces ten random numbers:

```
var iter = new java.util.Iterator {
    count: 10,
    next: function() { this.count--; return Math.random() },
    hasNext: function() this.count > 0
}
```

Note that the JavaScript methods `next` and `hasNext` refer to the instance variable as `this.count`.

It is possible to invoke a superclass method when overriding a method, but it is quite finicky. The call `Java.super(obj)` yields an object on which you can invoke the superclass method of the class to which `obj` belongs, but you must have that object available. Here is a way to achieve that:

```
var arr = new (Java.extend(java.util.ArrayList)) {
    add: function(x) {
        print('Adding ' + x);
        return Java.super(arr).add(x)
    }
}
```

When you call `arr.add('Fred')`, a message is printed before the value is added to the array list. Note that the call `Java.super(arr)` requires the `arr` variable, which is being set to the value returned by `new`. Calling `Java.super(this)` does not work—that only gets the JavaScript object that defines the method, not the Java proxy. The `Java.super` mechanism is only useful for defining individual objects, not subclasses.



NOTE: Instead of calling `Java.super(arr).add(x)`, you can also use the syntax `arr.super$add(x)`.

14.3.10 Exceptions

When a Java method throws an exception, you can catch it in JavaScript in the usual way:

```
try {
    var first = list.get(0)
    ...
} catch (e) {
    if (e instanceof java.lang.IndexOutOfBoundsException)
        print('list is empty')
}
```

Note that there is only one `catch` clause, unlike in Java where you can catch expressions by type. That, too, is in the spirit of dynamic languages where all type inquiry happens at runtime.

14.4 Shell Scripting with Nashorn

If you need to automate a repetitive task on your computer, chances are that you have put the commands in a *shell script*—a script that replays a set of OS-level commands. I have a directory `~/bin` filled with dozens of shell scripts: to upload files to my website, my blog, my photo storage, and to my publisher’s FTP site; to convert images to blog size; to bulk-email my students; to back up my computer at two o’clock in the morning.

For me, these are bash scripts, but in the olden days when I used Windows they were batch files. So what is wrong with that? The problem comes once you have a need for branches and loops. For some reason, most implementors of command shells are terrible at programming language design. The way variables, branches, loops, and functions are implemented in bash is simply awful, and the batch language in Windows is even worse. I have a few bash scripts that started out modest but have over time accreted so much cruft that they are unmanageable. This is a common problem.

Why not just write these scripts in Java? Java is quite verbose. If you call external commands via `Runtime.exec`, you need to manage standard input/output/error streams. The Nashorn designers want you to consider JavaScript as an alternative. The syntax is comparatively lightweight, and Nashorn offers some conveniences that are specifically geared towards shell programmers.

14.4.1 Executing Shell Commands

To use the scripting extensions in Nashorn, run

```
jjs -scripting
```

Now you can execute shell commands by including them in backquotes, for example

```
`ls -al`
```

The standard output and standard error streams of the last command are captured in \$OUT and \$ERR. The exit code of the command is in \$EXIT. (By convention, an exit code of zero means success, and nonzero codes describe error conditions.)

You can also capture the standard output by assigning the result of the backquoted command to a variable:

```
var output = `ls -al`
```

You can use the familiar < and > operators to redirect standard input and output:

```
`sort < /etc/group`  
`ls -al > /tmp/dir.txt`
```

Use the | operator to pipe the output of one command into the input of another:

```
`ls -al | sort`
```

Use semicolons to separate commands:

```
`cd /usr/bin ; ls -al`
```

14.4.2 String Interpolation

In shell scripts, expressions inside \${...} are evaluated within doubly quoted and backquoted strings. This is called “string interpolation.” For example,

```
var cmd = "javac -classpath ${classpath} ${mainclass}.java"  
$EXEC(cmd)
```

or simply

```
`javac -classpath ${classpath} ${mainclass}.java`
```

injects the contents of the variables `classpath` and `mainclass` into the command.

You can use arbitrary expressions inside the \${...}:

```
var message = "The current time is ${java.time.Instant.now()}"  
// Sets message to a string such as The current time is 2013-10-12T21:48:58.545Z
```

As with the bash shell, string interpolation does not work inside singly quoted strings.

```
var message = 'The current time is ${java.time.Instant.now()}'  
// Sets message to The current time is ${java.time.Instant.now()}
```

Strings are also interpolated in “here documents”—inline documents in a script. These inline documents are useful when a command reads multiple lines from standard input and the script author doesn’t want to put the input in a separate file. As an example, here is how you can feed commands to the GlassFish administration tool:

```
name='myapp'  
dir='/opt/apps/myapp'  
$EXEC("asadmin", <<END  
start-domain  
start-database  
deploy ${name} ${dir}  
exit  
END
```

The `<<END` construct means: “Insert the string that starts on the next line and is terminated by the line `END`.” (Instead of `END`, you can use any identifier that doesn’t appear inside the string.)

Note that the name and location of the application are interpolated.

String interpolation and here documents are only available in scripting mode.

14.4.3 Script Inputs

You can supply command-line arguments to a script. Since it is possible to include multiple script files on the `jjs` command line, you need to separate the script files and arguments with a `--`:

```
jjs script1.js script2.js -- arg1 arg2 arg3
```

In the script file, you receive the command-line arguments in the `arguments` array:

```
var deployCommand = "deploy ${arguments[0]} ${arguments[1]}"
```

You can use `$ARG` instead of `arguments`. If you use that variable with string interpolation, you need two dollar signs:

```
var deployCommand = "deploy ${$ARG[0]} ${$ARG[1]}"
```

In your script, you can obtain the shell’s environment variables through the `$ENV` object:

```
var javaHome = $ENV.JAVA_HOME
```

In scripting mode, you can prompt the user for input with the `readLine` function:

```
var username = readLine('Username: ')
```

Finally, to exit a script, use the `exit` function. You can supply an optional exit code.

```
if (username.length == 0) exit(1)
```

The first line of a script can be a “shebang,” the symbols `#!` followed by the location of the script interpreter. For example,

```
#!/opt/java/bin/jjs
```

On Linux/Unix/Mac OS X, you can make the script file executable, add the script directory to the `PATH`, and then simply run it as `script.js`.

When a script starts with a shebang, scripting mode is automatically activated.



CAUTION: When you use a shebang in a script with command-line arguments, script users need to supply dashes before the arguments:

```
script.js -- arg1 arg2 arg3
```

Exercises

1. In the JavaServer Pages technology, a web page is a mixture of HTML and Java, for example:

```
<ul>
<% for (int i = 10; i >= 0; i--) { %>
    <li><%= i %></li>
<% } %>
<p>Liftoff!</p>
```

Everything outside `<%...%>` and `<%=...%>` is printed as is. Code inside is evaluated. If the starting delimiter is `<%=`, the result is added to the printout.

Implement a program that reads such a page, turns it into a Java method, executes it, and yields the resulting page.

2. From a Java program, call the JavaScript `JSON.parse` method to turn a JSON-formatted string into a JavaScript object, then turn it back into a string. Do this (a) with `eval`, (b) with `invokeMethod`, (c) by a Java method call through the interface

```
public interface JSON {
    Object parse(String str);
    String stringify(Object obj);
}
```

3. Is compiling worthwhile with Nashorn? Write a JavaScript program that sorts an array the dumb way, trying all permutations until it is sorted. Compare the running time of the compiled and interpreted version. Here is a JavaScript function for computing the next permutation:

```
function nextPermutation(a) {
    // Find the largest nonincreasing suffix starting at a[i]
    var i = a.length - 1
    while (i > 0 && a[i - 1] >= a[i]) i--
    if (i > 0) {
        // Swap a[i - 1] with the rightmost a[k] > a[i - 1]
        // Note that a[i] > a[i - 1]
        var k = a.length - 1
        while (a[k] <= a[i - 1]) k--
        swap(a, i - 1, k)
    } // Otherwise, the suffix is the entire array

    // Reverse the suffix
    var j = a.length - 1
    while (i < j) { swap(a, i, j); i++; j-- }
}
```

4. Find a Scheme implementation that is compatible with the Java Scripting API. Write a factorial function in Scheme and call it from Java.
5. Pick some part of the Java API that you want to explore—for example, the `ZonedDateTime` class. Run some experiments in `jjs`: construct objects, call methods, and observe the returned values. Did you find it easier than writing test programs in Java?
6. Run `jjs` and, using the stream library, interactively work out a solution for the following problem: Print all unique long words (> 12 characters) from a file in sorted order. First read the words, then filter the long words, and so on. How does this interactive approach compare to your usual workflow?
7. Run `jjs`. Call
- ```
var b = new java.math.BigInteger('1234567890987654321')
```
- Then display `b` (simply by typing `b` and Enter). What do you get? What is the value of `b.mod(java.math.BigInteger.TEN)`? Why is `b` displayed so strangely? How can you display the actual value of `b`?
8. At the end of Section 14.3.9, “Extending Java Classes and Implementing Java Interfaces” (page 459), you saw how to extend `ArrayList` so that every call to `add` is logged. But that only worked for a single object. Write a JavaScript function that is a factory for such objects, so that you can generate any number of logging array lists.

9. Write a script that makes a JAR file containing all class files in the sub-directories of a given directory. Derive the JAR file name from the last component of the directory name. Use the `JAVA_HOME` environment variable to locate the `jar` executable.
10. Write a script that prints the values of all environment variables.
11. Write a script `nextYear.js` that obtains the age of the user and then prints `Next year, you will be ..., adding 1 to the input.` The age can be specified on the command line or in the `AGE` environment variable. If neither are present, prompt the user.

# The Java Platform Module System

## Topics in This Chapter

- 15.1 The Module Concept — page 470
- 15.2 Naming Modules — page 472
- 15.3 The Modular “Hello, World!” Program — page 472
- 15.4 Requiring Modules — page 474
- 15.5 Exporting Packages — page 476
- 15.6 Modules and Reflective Access — page 479
- 15.7 Modular JARs — page 482
- 15.8 Automatic Modules and the Unnamed Module — page 484
- 15.9 Command-Line Flags for Migration — page 485
- 15.10 Transitive and Static Requirements — page 487
- 15.11 Qualified Exporting and Opening — page 489
- 15.12 Service Loading — page 490
- 15.13 Tools for Working with Modules — page 491
- Exercises — page 494

# Chapter

# I5

An important characteristic of object-oriented programming is encapsulation. A class declaration consists of a public interface and a private implementation. A class can evolve by changing the implementation without affecting its users. A module system provides the same benefits for programming in the large. A module can make classes and packages selectively available so that its evolution can be controlled.

Several existing Java module systems rely on class loaders to isolate classes. However, Java 9 introduces a new system, called the Java Platform Module System, that is supported by the Java compiler and virtual machine. It was designed to modularize the large code base of the Java platform. You can, if you choose, use this system to modularize your own applications.

Whether or not you use Java platform modules in your own applications, you may be impacted by the modularized Java platform. This chapter shows you how to declare and use Java platform modules. You will also learn how to migrate your applications to work with the modularized Java platform and third-party modules.

The key points of this chapter are:

1. The Java Platform Module System was designed to modularize the Java platform.
2. You can use the Java Platform Module System to modularize applications and libraries.

3. A module is a collection of packages.
4. The properties of a module are defined in `module-info.java`.
5. A module declares on which other modules it depends.
6. A module provides encapsulation. Accessible packages must be explicitly exported.
7. A module may allow reflective access to private features by opening a package or the entire module.
8. The module system provides support for the `ServiceLoader` facility.
9. A modular JAR is a JAR with a `module-info.class` file that is placed on the module path.
10. By placing a regular JAR on the module path, it becomes an automatic module that exports and opens all of its packages.
11. All packages on the class path form the unnamed module.
12. To migrate existing applications, you may need to override access restrictions with command-line options.
13. The `jdeps` tool analyzes the dependencies of a given set of JAR files. The `jlink` tool produces an application with minimal dependencies.

## 15.1 The Module Concept

In object-oriented programming, the fundamental building block is the class. Classes provide encapsulation. Private features can only be accessed by code that has explicit permission, namely the methods of the class. This makes it possible to reason about access. If a private variable has changed, you can produce a set of all possible culprits. If you need to modify the private representation, you know which methods are affected.

In Java, packages provide the next larger organizational grouping. A package is a collection of classes. Packages also provide a level of encapsulation. Any feature with package access (neither public nor private) is accessible only from methods in the same package.

However, in large systems, this level of access control is not enough. Any public feature (that is, a feature that is accessible outside a package) is accessible everywhere. Suppose you want to modify or drop a rarely used feature. Once it is public, there is no way to reason about the impact of that change.

This is the situation that the Java platform designers faced. Over twenty years, the JDK grows by leaps and bounds, but clearly some features are essentially

obsolete. Everyone's favorite example is CORBA. When is the last time you used it? Yet, the `org.omg.corba` package is shipped with every JDK. As it happens, it would not be too difficult to put all of CORBA into a JAR file so that it can be used by those few who still need it.

What about `java.awt`? It shouldn't be required in a server-side application, right? Except that the class `java.awt.DataFlavor` is used in the implementation of SOAP, an XML-based web services protocol.

The Java platform designers, faced with a giant hairball of code, decided that they needed a structuring mechanism that provides more control. They looked at existing module systems (such as OSGi) and found them unsuitable for their problem. Instead, they designed a new system, called the *Java Platform Module System*, that is now a part of the Java language and virtual machine. That system has been used successfully to modularize the Java API, and you can, if you so choose, use it with your own applications.

A Java platform module consists of:

- A collection of packages
- Optionally, resource files and other files such as native libraries
- A list of the accessible packages in the module
- A list of all modules on which this module depends

The Java platform enforces encapsulation and dependencies, both at compile time and in the virtual machine.

Why should you consider using the Java Platform Module System for your own programs instead of following the traditional approach of using JAR files on the class path? There are two advantages.

1. Strong encapsulation: You can control which of your packages are accessible, and you don't have to worry about maintaining code that you didn't intend for public consumption.
2. Reliable configuration: You avoid common class path problems such as duplicate or missing classes.

There are some issues that the Java Platform Module System does not address, such as versioning of modules. There is no support for specifying which version of a module is required, or for using multiple versions of a module in the same program. These can be desirable features, but you must use mechanisms other than the Java Platform Module System if you need them.

## 15.2 Naming Modules

A module is a collection of packages. The package names in the module need not be related. For example, the module `java.sql` contains packages `java.sql`, `javax.sql`, and `javax.transaction.xa`. Also, as you can see from this example, it is perfectly acceptable for the module name to be the same as a package name.

Just like a package name, a module name is made up of letters, digits, underscores, and periods. Also, just as with package names, there is no hierarchical relationship between modules. If you had a module `com.horstmann` and another module `com.horstmann.corejava`, they would be unrelated, as far as the module system is concerned.

When creating a module for use by others, it is important that its name is globally unique. It is expected that most module names will follow the “reverse domain name” convention, just like package names.

The easiest approach is to name a module after the top-level package that the module provides. For example, the SLF4J logging façade has a module `org.slf4j` with packages `org.slf4j`, `org.slf4j.spi`, `org.slf4j.event`, and `org.slf4j.helpers`.

This convention prevents package name conflicts in modules. Any given package can only be placed in one module. If your module names are unique and your package names start with the module name, then your package names will also be unique.

You can use shorter module names for modules that are not meant to be used by other programmers, such as a module containing an application program. Just to show that it can be done, I will do the same in this chapter. Modules with what could plausibly be library code will have names such as `com.horstmann.greet`, and modules containing programs (with a class that has a `main` method) will have catchy names such as `ch15.sec03`.



**NOTE:** You only use module names in module declarations. In the source files for your Java classes, you never refer to module names. Instead, you use package names in the same way that they have always been used.

---

## 15.3 The Modular “Hello, World!” Program

Let us put the traditional “Hello, World!” program into a module. First we need to put the class into a package—the “unnamed package” cannot be contained in a module. Here it is:

```
package com.horstmann.hello;

public class HelloWorld {
 public static void main(String[] args) {
 System.out.println("Hello, Modular World!");
 }
}
```

So far, nothing has changed. To make a module `ch15.sec03` containing this package, you need to add a module declaration. You place it in a file named `module-info.java`, located in the base directory (that is, the same directory that contains the `com` directory). By convention, the name of the base directory is the same as the module name.

```
ch15.sec03/
└ module-info.java
 com/
 └ horstmann/
 └ hello/
 └ HelloWorld.java
```

The `module-info.java` file contains the module declaration:

```
module ch15.sec03 { }
```

This module declaration is empty because the module has nothing to offer to anyone, nor does it need anything.

Now you compile as usual:

```
javac ch15.sec03/module-info.java ch15.sec03/com/horstmann/hello/HelloWorld.java
```

The `module-info.java` file doesn't look like a Java source file, and of course there can't be a class with the name `module-info`, since class names cannot contain hyphens. The `module` keyword, as well as keywords `requires`, `exports`, and so on, that you will see in the following sections, are “restricted keywords” that have a special meaning only in module declarations. The file is compiled into a class file `module-info.class` that contains the module definition in binary form.

To run this program as a modular application, you specify the *module path*, which is similar to the class path, but it contains modules. You also specify the main class in the format `modulename/classname`:

```
java --module-path ch15.sec03 --module ch15.sec03/com.horstmann.hello.HelloWorld
```

Instead of `--module-path` and `--module`, you can use the single-letter options `-p` and `-m`:

```
java -p ch15.sec03 -m ch15.sec03/com.horstmann.hello.HelloWorld
```

Either way, the "Hello, Modular World!" greeting will appear, demonstrating that you have successfully modularized your first application.



---

**NOTE:** When you compile this module, you get two warnings:

```
warning: [module] module name component sec03 should avoid terminal digits
warning: [module] module name component ch15 should avoid terminal digits
```

These warnings are intended to discourage programmers from adding version numbers to module names. You can ignore them, or suppress them with an annotation:

```
@SuppressWarnings("module")
module ch15.sec03 {
}
```

In this one respect, the `module` declaration is just like a class declaration: You can annotate it. (The annotation type must have target `ElementType.MODULE`.)

---

## 15.4 Requiring Modules

Let us make a new module `ch15.sec04` in which a program uses a `JOptionPane` to show the "Hello, Modular World!" message:

```
package com.horstmann.hello;

import javax.swing.JOptionPane;

public class HelloWorld {
 public static void main(String[] args) {
 JOptionPane.showMessageDialog(null, "Hello, Modular World!");
 }
}
```

Now compilation fails with this message:

```
error: package javax.swing is not visible
 (package javax.swing is declared in module java.desktop,
 but module ch15.sec04 does not read it)
```

The JDK has been modularized, and the `javax.swing` package is now contained in the `java.desktop` module. Our module needs to declare that it relies on that module:


```
module ch15.sec04 {
 requires java.desktop;
}
```

It is a design goal of the module system that modules are explicit about their requirements, so that the virtual machine can ensure that all requirements are fulfilled before starting a program.

In the preceding section, the need for explicit requirements did not arise because we only used the `java.lang` package. This package is included in the `java.base` module which is required by default.

Note that our `ch15.sec04` module lists only its own module requirements. It requires the `java.desktop` module so that it can use the `javax.swing` package. The `java.desktop` module itself declares that it requires three other modules, namely `java.datatransfer`, `java.prefs`, and `java.xml`.

Figure 15-1 shows the *module graph* whose nodes are modules. The edges of the graph (that is, the arrows joining nodes) are either declared requirements or the implied requirement on `java.base` when none is declared.

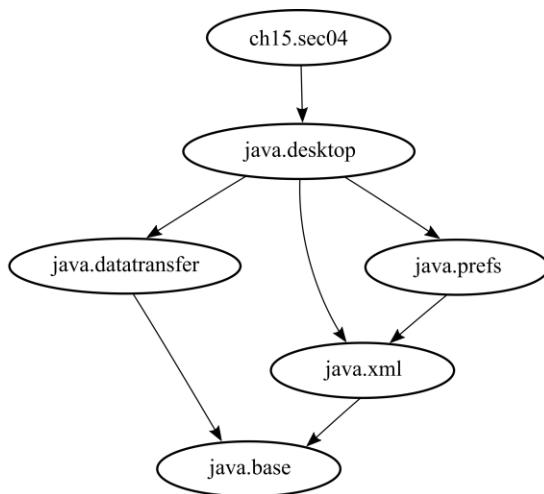

**Figure 15-1** The module graph of the Swing “Hello, Modular World!” application

You cannot have cycles in the module graph. That is, a module cannot directly or indirectly require itself.

A module does not automatically pass on access rights to other modules. In our example, the `java.desktop` module declares that it requires `java.prefs`, and the `java.prefs` module declares that it requires `java.xml`. That does not give `java.desktop` the right to use packages from the `java.xml` module. It needs to explicitly declare that requirement. In mathematical terms, the `requires`

relationship is not “transitive.” Generally, this behavior is desirable because it makes requirements explicit, but as you will see in Section 15.10, “Transitive and Static Requirements” (page 487), you can relax it in some cases.



**NOTE:** The error message at the beginning of this section stated that our ch15.sec04 module did not “read” the java.desktop module. In the parlance of the Java Platform Module System, module *M* *reads* module *N* in the following cases:

1. *M* requires *N*.
  2. *M* requires a module that transitively requires *N* (see Section 15.10, “Transitive and Static Requirements,” page 487).
  3. *N* is *M* or `java.base`.
- 

## 15.5 Exporting Packages

In the preceding section, you saw that a module must require another module if it wants to use its packages. However, that does not automatically make all packages in the required module available. A module states which of its packages are accessible, using the `exports` keyword. For example, here is a part of the module declaration for the `java.xml` module:

```
module java.xml {
 exports javax.xml;
 exports javax.xml.catalog;
 exports javax.xml.datatype;
 exports javax.xml.namespace;
 exports javax.xml.parsers;
 ...
}
```

This module makes many packages available, but hides others (such as `jdk.xml.internal`) by not exporting them.

When a package is exported, its `public` and `protected` classes and interfaces, and their `public` and `protected` members, are accessible outside the module. (As always, `protected` types and members are accessible only in subclasses.)

However, a package that is not exported is not accessible outside its own module. This is quite different from Java before modules. In the past, you were able to use public classes from any package, even if it was not part of the public API. For example, it was commonly recommended to use classes such as `sun.misc.BASE64Encoder` or `com.sun.rowset.CachedRowSetImpl` when the public API did not provide the appropriate functionality.

Nowadays, you can no longer access unexported packages from the Java platform API since all of them are contained inside modules. As a result, some programs will no longer run with Java 9. Of course, nobody ever committed to keeping non-public APIs available, so this should not come as a shock.

Let us put exports to use in a simple situation. We will prepare a module `com.horstmann.greet` that exports a package, also called `com.horstmann.greet`, following the convention that a module that provides code for others should be named after the top-level package inside it. There is also a package `com.horstmann.greet.internal` that we don't export.

A public Greeter interface is in the first package.

```
package com.horstmann.greet;

public interface Greeter {
 static Greeter newInstance() {
 return new com.horstmann.greet.internal.GreeterImpl();
 }

 String greet(String subject);
}
```

The second package has a class that implements the interface. The class is public since it is accessed in the first package.

```
package com.horstmann.greet.internal;

import com.horstmann.greet.Greeter;

public class GreeterImpl implements Greeter {
 public String greet(String subject) {
 return "Hello, " + subject + "!";
 }
}
```

The `com.horstmann.greet` module contains both packages but only exports the first:

```
module com.horstmann.greet {
 exports com.horstmann.greet;
}
```

The second package is inaccessible outside the module.

We put our application into a second module, which will require the first module:

```
module ch15.sec05 {
 requires com.horstmann.greet;
}
```



**NOTE:** The `exports` statement is followed by a package name, whereas `requires` is followed by a module name.

---

Our application now uses a Greeter to obtain a greeting:

```
package com.horstmann.hello;

import com.horstmann.greet.Greeter;

public class HelloWorld {
 public static void main(String[] args) {
 Greeter greeter = Greeter.newInstance();
 System.out.println(greeter.greet("Modular World"));
 }
}
```

Here is the source file structure for these two modules:

```
com.horstmann.greet
└ module-info.java
 com
 └ horstmann
 └ greet
 └ Greeter.java
 └ internal
 └ GreeterImpl.java
ch15.sec05
└ module-info.java
 com
 └ horstmann
 └ hello
 └ HelloWorld.java
```

To build this application, first compile the `com.horstmann.greet` module:

```
javac com.horstmann.greet/module-info.java \
 com.horstmann.greet/com/horstmann/greet/Greeter.java \
 com.horstmann.greet/com/horstmann/greet/internal/GreeterImpl.java
```

Then compile the application module with the first module on the module path:

```
javac -p com.horstmann.greet ch15.sec05/module-info.java \
 ch15.sec05/com/horstmann/hello/HelloWorld.java
```

Finally, run the program with both modules on the module path:

```
java -p ch15.sec05:com.horstmann.greet \
 -m ch15.sec05/com.horstmann.hello.HelloWorld
```

You have now seen the `requires` and `exports` statements that form the backbone of the Java Platform Module System. As you can see, the module system is conceptually simple. Modules specify what modules they need, and which packages they offer to other modules. Section 15.11, “Qualified Exporting and Opening” (page 489) shows a minor variation of the `exports` statement.



**CAUTION:** A module does not provide a scope. You cannot have two packages with the same name in different modules. This is true even for hidden packages (that is, packages that are not exported.)

## 15.6 Modules and Reflective Access

In the preceding section, you saw that the module system enforces encapsulation. A module can only access explicitly exported packages from another module. In the past, it was always possible to overcome pesky access restrictions by using reflection. As you have seen in Chapter 4, reflection can access private members of any class.

However, in the modular world, that is no longer true. If a class is inside a module, reflective access to non-public members will fail. Specifically, recall how we accessed private fields:

```
Field f = obj.getClass().getDeclaredField("salary");
f.setAccessible(true);
double value = f.getDouble(obj);
f.setDouble(obj, value * 1.1);
```

The call `f.setAccessible(true)` succeeds unless a security manager disallows private field access. However, it is not common to run Java applications with security managers, and there are many libraries that use reflective access. Typical examples are object-relational mappers such as JPA that automatically persist objects in databases.

If you use such a library, and you also want to use modules, you have to be careful. To demonstrate this issue, I will use JAXB instead of JPA. (JPA isn’t a part of Java SE, but JAXB is, at least for now—its module is deprecated). JAXB can turn arbitrary objects into XML, and conversely turn XML back into objects. You use annotations to direct the process. Here is a trivial class that illustrates the mechanism:

```
package com.horstmann.places;

import javax.xml.bind.annotation.XmlElement;
import javax.xml.bind.annotation.XmlRootElement;

@XmlRootElement
public class Country {
 @XmlElement private String name;
 @XmlElement private double area;

 public Country() {}

 public Country(String name, double area) {
 this.name = name;
 this.area = area;
 }
 // ...
}
```

The `@XmlRootElement` annotation indicates that objects of this class can be formatted (or “marshalled”) into XML, and the `@XmlElement` annotation is applied to the fields that should be included in the generated XML.

Here is a short program that demonstrates how to convert an object into XML:

```
package com.horstmann.places;

import javax.xml.bind.JAXBContext;
import javax.xml.bind.JAXBException;
import javax.xml.bind.Marshaller;

public class Demo {
 public static void main(String[] args) throws JAXBException {
 Country belgium = new Country("Belgium", 30510);
 JAXBContext context = JAXBContext.newInstance(Country.class);
 Marshaller m = context.createMarshaller();
 m.setProperty(Marshaller.JAXB_FORMATTED_OUTPUT, true);
 m.marshal(belgium, System.out);
 }
}
```

When you run the program, it prints

```
<country>
 <name>Belgium</name>
 <area>30510.0</area>
</country>
```

As you can see, there is nothing that the programmer needs to do to make this happen. Through reflection, the JAXB library determines the names and values of the fields. (There are numerous ways to tweak the XML that is generated, but those details are not important here. I just use JAXB as an example of a library that uses reflection.)

Now let us put the `Country` and `Demo` classes inside a module. When you do that, the `Demo` program will fail with an exception:

```
Exception in thread "main" java.lang.reflect.InaccessibleObjectException:
 Unable to make field
 private java.lang.String com.horstmann.places.Country.name accessible:
 module ch15.sec06 does not "opens com.horstmann.places" to module java.xml.bind
```

Of course, in pristine theory, it is wrong to violate encapsulation and poke around in the private members of an object. But mechanisms such as XML binding or object-relational mapping are so common that the module system must accommodate them.

Using the `opens` keyword, a module can *open* a package, which enables runtime access to all types and members in the given package, allowing access of private members through reflection. Here is what our module has to do:

```
module ch15.sec06 {
 requires java.xml.bind;
 opens com.horstmann.places;
}
```

With this change, JAXB will work correctly.

A module can be declared as `open`, such as

```
open module ch15.sec06 {
 requires java.xml.bind;
}
```

An open module grants runtime access to all of its packages, as if all packages had been declared with `exports` and `opens`. However, only explicitly exported packages are accessible at compile time. Open modules combine the compile-time safety of the module system with the classic permissive runtime behavior.

Recall from Section 4.4.2, “Loading Resources” (page 162) that JAR files can contain, in addition to class files and a manifest, *file resources* which can be loaded with the method `Class.getResourceAsStream`, and now also with `Module.getResourceAsStream`. If a resource is stored in a directory that matches a package in a module, then the package must be opened to the caller. Resources in other directories, as well as the class files and manifest, can be read by anyone.



**NOTE:** It is possible that future libraries will use *variable handles* instead of reflection for reading and writing fields. A VarHandle is similar to a Field. You can use it to read or write a specific field of any instance of a specific class. However, to obtain a VarHandle, the library code needs a Lookup object:

```
public Object getFieldValue(Object obj, String fieldName, Lookup lookup)
 throws NoSuchFieldException, IllegalAccessException {
 Class<?> cl = obj.getClass();
 Field field = cl.getDeclaredField(fieldName);
 VarHandle handle = MethodHandles.privateLookupIn(cl, lookup)
 .unreflectVarHandle(field);
 return handle.get(obj);
}
```

This works provided the Lookup object is generated in the module that has the permission to access the field. Some method in the module simply calls `MethodHandles.lookup()`, which yields an object encapsulating the access rights of the caller. In this way, one module can give permission for accessing private members to another module. The practical issue is how those permissions can be given with a minimum of hassle.

---

## 15.7 Modular JARs

So far, we have simply compiled modules into the directory tree of the source code. Clearly, that is not satisfactory for deployment. Instead, a module can be deployed by placing all its classes in a JAR file, with a `module-info.class` in the root. Such a JAR file is called a *modular JAR*.

To create a modular JAR file, you use the `jar` tool in the usual way. If you have multiple packages, it is best to compile with the `-d` option which places class files into a separate directory. The directory is created if it doesn't already exist. Then use the `-c` option of the `jar` command to change to that directory when collecting files.

```
javac -d modules/com.horstmann.greet `find com.horstmann.greet -name *.java`
jar -cvf com.horstmann.greet.jar -C modules/com.horstmann.greet .
```

If you use a build tool such as Maven, Ant, or Gradle, just keep building your JAR file as you always do. As long as `module-info.class` is included, you get a modular JAR.

Then you can include the modular JAR in the module path, and the module will be loaded.



**CAUTION:** In the past, the classes of a package were sometimes distributed over multiple JAR files. (Such a package is called a “split package.”) This was probably never a good idea, and it is not possible with modules.

As with regular JAR files, you can specify a main class in a modular JAR:

```
javac -p com.horstmann.greet.jar -d modules/ch15.sec05 `find ch15.sec05 -name *.java`
jar -c -v -f ch15.sec05.jar -e com.horstmann.hello.HelloWorld -C modules/ch15.sec05 .
```

When you launch the program, you specify the module containing the main class:

```
java -p com.horstmann.greet.jar:ch15.sec05.jar -m ch15.sec05
```

When creating a JAR file, you can optionally specify a version number. Use the `--module-version` parameter, and also add `@` and the version number to the JAR file name:

```
jar -c -v -f com.horstmann.greet@1.0.jar --module-version 1.0 -C com.horstmann.greet .
```

As already discussed, the version number is not used by the Java Platform Module System for resolving modules, but it can be queried by other tools and frameworks.



**NOTE:** You can find out the version number through the reflection API.  
In our example:

```
Optional<String> version
= Greeter.class.getModule().getDescriptor().rawVersion();
```

yields an `Optional` containing the version string “1.0”.



**NOTE:** The module equivalent to a class loader is a *layer*. The Java Platform Module System loads the JDK modules and application modules into the *boot layer*. A program can load other modules, using the layer API (which is not covered in this book). Such a program may choose to take module versions into account. It is expected that developers of programs such as Java EE application servers make use of the layer API to provide support for modules.



**TIP:** If you want to load a module into JShell, include the JAR on the module path and use the --add-modules option:

```
jshell --module-path com.horstmann.greet@1.0.jar \
--add-modules com.horstmann.greet
```

---

## 15.8 Automatic Modules and the Unnamed Module

You now know to put the Java Platform Module System to use. If you start with a brand-new project in which you write all the code yourself, you can design modules, declare module dependencies, and package your application into modular JAR files.

However, that is an extremely uncommon scenario. Almost all projects rely on third-party libraries. Of course, you can wait until the providers of all libraries have turned them into modules, and then modularize your own code.

But what if you don't want to wait? The Java Platform Module System provides two mechanisms for crossing the chasm that separates today's pre-modular world and fully modular applications: automatic modules and the unnamed module.

For migration purposes, you can turn any JAR file into a module, simply by placing it onto a directory in the module path instead of the class path. A JAR without a `module-info.class` on the module path is called an *automatic module*. An automatic module has the following properties:

1. The module implicitly has a `requires` clause for all other modules.
2. All of its packages are exported and opened.
3. If there is an entry with key `Automatic-Module-Name` in the JAR file manifest `META-INF/MANIFEST.MF`, the value becomes the module name.
4. Otherwise the module name is obtained from the JAR file name, dropping any trailing version number and replacing sequences of non-alphanumeric characters with a dot.

The first two rules imply that the packages in the automatic module act as if they were on the class path. The reason for using the module path is for the benefit of other modules, allowing them to express dependencies on this module.

Suppose, for example, that you are implementing a module that processes CSV files and uses the Apache Commons CSV library. You would like to express in your `module-info.java` file that your module depends on Apache Commons CSV.

If you add `commons-csv-1.4.jar` onto the module path, then your modules can reference the module. Its name is `commons.csv` since the trailing version number `-1.4` is removed and the non-alphanumeric character `-` is replaced by a dot.

This name might be an acceptable module name because Commons CSV is well known and it is unlikely that someone else will try to use the same name for a different module. But it would be better if the maintainers of this JAR file could quickly agree to reserve a reverse DNS name, preferably the top-level package name `org.apache.commons.csv` as the module name. They just need to add a line

```
Automatic-Module-Name: org.apache.commons.csv
```

to the `META-INF/MANIFEST.MF` file inside the JAR. Eventually, hopefully, they will turn the JAR file into a true module by adding `module-info.java` with the reserved module name, and every other module that refers to the CSV module with that name will just continue to work.



**NOTE:** The migration plan to modules is a great social experiment, and nobody knows whether it will end well. Before you put third-party JARs on the module path, check whether they are modular, and if not, whether their manifest has a module name. If not, you can still turn the JAR into an automatic module, but be prepared to update the module name later.

Any class that is not on the module path is part of an *unnamed module*. Technically, there may be more than one unnamed module, but all of them together act as if they were a single module, which is called *the unnamed module*. As with automatic modules, the unnamed module can access all other modules, and all of its packages are exported and opened.

However, *no named module* can access the unnamed module. Therefore, migration to the Java Platform Module System is necessarily a bottom-up process. The Java platform itself is modularized. Next, you modularize libraries, either by using automatic modules or by turning them into true modules. Once all libraries used by your application are modularized, you can turn the code of your application into a module.

## 15.9 Command-Line Flags for Migration

Even if your programs do not use modules, you cannot escape the modular world when running with Java 9 and beyond. Even if the application code resides on the class path in an unnamed module and all packages are exported and opened, it interacts with the Java platform, which is modularized.

In Java 9, the default behavior is to permit illegal module access but to display a warning on the console for the first instance of each offense. In a future version of Java, the default behavior will change, and illegal access will be denied. In order to give you time to prepare for that change, you should test your applications with the `--illegal-access` flag. There are four possible settings:

1. `--illegal-access=permit` is the Java 9 default behavior, printing a message for the first instance of illegal access.
2. `--illegal-access=warn` prints a message for each illegal access.
3. `--illegal-access=debug` prints a message and stack trace for each illegal access.
4. `--illegal-access=deny` is the future default behavior, denying all illegal access.

Now is the time to test with `--illegal-access=deny` so that you can be ready when that behavior becomes the default.

Consider an application that uses an internal API that is no longer accessible, such as `com.sun.rowset.CachedRowSetImpl`. The best remedy is to change the implementation. (As of Java 7, you can get a cached row set from a `RowSetProvider`.) But suppose you don't have access to the source code.

In that case, start the application with the `--add-exports` flag. Specify the module and the package that you want to export, and the module to which you want to export the package, which in our case is the unnamed module.

```
java --illegal-access=deny --add-exports java.sql.rowset/com.sun.rowset=ALL_UNNAMED \
-jar MyApp.jar
```

Now suppose your application uses reflection to access private fields or methods. Reflection inside the unnamed module is OK, but it is no longer possible to reflectively access non-public members of the Java platform classes. For example, some libraries that dynamically generate Java classes call the protected `ClassLoader.defineClass` method through reflection. If an application uses such a library, add the flag

```
--add-opens java.base/java.lang=ALL-UNNAMED
```

A small number of modules in the Java SE platform are not in the `java.se` aggregator module, and they are not accessible by default. These are the modules `java.activation`, `java.corba`, `java.transaction`, `java.xml.bind`, `java.xml.ws`, `java.xml.ws.annotation`, which contain packages that are a part of the Java EE specification. Java EE application servers include these packages. They would not start up under Java 9 if there were conflicting packages in the Java platform.

You can use these modules from a modular application simply by requiring them in the module descriptor. But if an application is not modularized and

you need one of them, you have to add it explicitly. Use the `--add-module` flag when compiling and running the program:

```
java --illegal-access=deny --add-module java.xml.bind -jar MyProg.java
```



**NOTE:** The `java.activation`, `java.corba`, `java.transaction`, `java.xml.bind`, `java.xml.ws`, and `java.xml.ws.annotation` modules are deprecated in Java 9 and may be removed from the Java SE platform in a future version.

When adding all those command-line options to get a legacy app to work, you may well end up with the command line from hell. To better manage a multitude of options, you can put options in one or more files which you specify with an `@` prefix. For example,

```
java @options1 @options2 -jar MyProg.java
```

where the files `options1` and `options2` contain options for the `java` command.

There are a few syntax rules for the options files:

- Separate options with spaces, tabs, or newlines.
- Use double quotes around arguments that include spaces, such as "Program Files".
- A line ending in a `\` is merged with the next line.
- Backslashes must be escaped, such as `C:\\\\Users\\\\Fred`.
- Comment lines start with `#`.

## 15.10 Transitive and Static Requirements

In Section 15.4, "Requiring Modules" (page 474), you have seen the basic form of the `requires` statement. In this section, you will see two variants that are occasionally useful.

In some situation, it can be tedious for a user of a given module to declare all required modules. Consider for example the `javafx.controls` module that contains JavaFX user interface elements such as buttons. The `javafx.controls` requires the `javafx.base` module, and everyone using `javafx.controls` will also need `javafx.base`. (You wouldn't be able to do much with a user interface control such as a `Button` if you didn't have packages from the `javafx.base` module available.) For that reason, the `javafx.controls` module declares the requirement with the `transitive` modifier:

```
module javafx.controls {
 requires transitive javafx.base;
 ...
}
```

Any module that declares a requirement on `javafx.controls` now automatically requires `javafx.base`.



**NOTE:** Some programmers recommend that you should always use `requires transitive` when a package from another module is used in the public API. But that is not a rule of the Java language. Consider for example, the `java.sql` module:

```
module java.sql {
 requires transitive java.logging;
 ...
}
```

There is a single use of a package from the `java.logging` module in the entire `java.sql` API, namely the `java.sql.Driver.parentLogger` method that returns a `java.util.logging.Logger`. It would have been perfectly acceptable to not declare this module requirement as transitive. Then those modules, and only those, who actually use that method would need to declare that they require `java.logging`.

---

One compelling use of the `requires transitive` statement is an *aggregator* module—a module with no packages and only transitive requirements. One such module is the `java.se` module, declared like this:

```
module java.se {
 requires transitive java.compiler;
 requires transitive java.datatransfer;
 requires transitive java.desktop;
 ...
 requires transitive java.sql;
 requires transitive java.sql.rowset;
 requires transitive java.xml;
 requires transitive java.xml.crypto;
}
```

A programmer who isn't interested in fine-grained module dependencies can simply require `java.se` and get all modules of the Java SE platform.

Finally, there is an uncommon `requires static` variant that states that a module must be present at compile time but is optional at runtime. There are two use cases:

1. To access an annotation that is processed at compile time and declared in a different module.
2. To use a class in a different module if it is available, and otherwise do something else, such as:

```
try {
 new oracle.jdbc.driver.OracleDriver();
 ...
} catch (NoClassDefFoundError er) {
 // Do something else
}
```

## 15.11 Qualified Exporting and Opening

In this section, you will see a variant of the `exports` and `opens` statement that narrows their scope to a specified set of modules. For example, the `javafx.base` module contains a statement

```
exports com.sun.javafx.collections to
 javafx.controls, javafx.graphics, javafx.fxml, javafx.swing;
```

Such a statement is called a *qualified export*. The listed modules can access the package, but other modules cannot.

Excessive use of qualified exports can indicate a poor modular structure. Nevertheless, they can arise when modularizing an existing code base. Here, the Java platform designers distributed the code for JavaFX into multiple modules, which is a good idea because not all JavaFX applications need FXML or Swing interoperability. However, the JavaFX implementors liberally used internal classes such as `com.sun.javafx.collections.ListListenerHelper` in their code. In a greenfield project, one can instead design a more robust public API.

Similarly, you can restrict the `opens` statement to specific modules. For example, in Section 15.6, “Modules and Reflective Access” (page 479) we could have used a qualified `opens` statement, like this:

```
module ch15.sec06 {
 requires java.xml.bind;
 opens com.horstmann.places to java.xml.bind;
}
```

Now the `com.horstmann.places` package is only opened to the `java.xml.bind` module. Admittedly, it seems rather brittle to put a dependency on a particular persistence mechanism into the module descriptor. Instead, you could place all classes that need to be persisted into a separate package and open up that package to all modules, so that any persistence mechanism can access it.

## 15.12 Service Loading

The `ServiceLoader` class (see Section 4.4.5, “Service Loaders,” page 166) provides a lightweight mechanism for matching up service interfaces with implementations. The Java Platform Module System makes it easier to use this mechanism.

Here is a quick reminder of service loading. A service has an interface and one or more possible implementations. Here is a simple example of a simple interface:

```
public interface GreeterService {
 String greet(String subject);
 Locale getLocale();
}
```

One or more modules provide implementations, such as

```
public class FrenchGreeter implements GreeterService {
 public String greet(String subject) { return "Bonjour " + subject; }
 public Locale getLocale() { return Locale.FRENCH; }
}
```

The service consumer must pick an implementation among all offered implementations, based on whatever criteria it deems appropriate.

```
ServiceLoader<GreeterService> greeterLoader = ServiceLoader.load(GreeterService.class);
GreeterService chosenGreeter;
for (GreeterService greeter : greeterLoader) {
 if (...) {
 chosenGreeter = greeter;
 }
}
```

In the past, implementations were offered by placing text files into the `META-INF/services` directory of the JAR file containing the implementation classes. The module system provides a better approach. Instead of text files, you add statements to the module descriptors.

A module providing an implementation of a service adds a `provides` statement that lists the service interface (which may be defined in any module) and the implementing class (which must be a part of this module). Here is an example from the `jdk.security.auth` module:

```
module jdk.security.auth {
 ...
 provides javax.security.auth.spi.LoginModule with
 com.sun.security.auth.module.Krb5LoginModule,
 com.sun.security.auth.module.UnixLoginModule,
 com.sun.security.auth.module.JndiLoginModule,
 com.sun.security.auth.module.KeyStoreLoginModule,
 com.sun.security.auth.module.LdapLoginModule,
 com.sun.security.auth.module.NTLoginModule;
}
```

This is the equivalent of the `META-INF/services` file.

The consuming modules contain a `uses` statement.

```
module java.base {
 ...
 uses javax.security.auth.spi.LoginModule;
}
```

When code in a consuming module calls `ServiceLoader.load(serviceInterface.class)`, the matching provider classes will be loaded, even though they may not be in accessible packages.

## 15.13 Tools for Working with Modules


The `jdeps` tool analyzes the dependencies of a given set of JAR files. Suppose, for example, you want to modularize JUnit 4. Run

```
jdeps -s junit-4.12.jar hamcrest-core-1.3.jar
```

The `-s` flag generates a summary output:

```
hamcrest-core-1.3.jar -> java.base
junit-4.12.jar -> hamcrest-core-1.3.jar
junit-4.12.jar -> java.base
junit-4.12.jar -> java.management
```

That tells you the module graph:

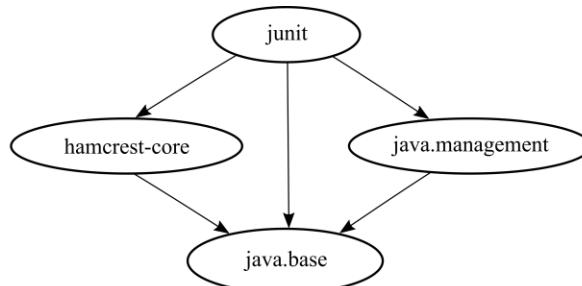

If you omit the `-s` flag, you get the module summary followed by a mapping from packages to required packages and modules. If you add the `-v` flag, the listing maps classes to required packages and modules.

The `--generate-module-info` option produces `module-info` files for each analyzed module:


```
jdeps --generate-module-info /tmp/junit junit-4.12.jar hamcrest-core-1.3.jar
```



**NOTE:** There is also an option to generate graphical output in the “dot” language for describing graphs. Assuming you have the dot tool installed, run these commands:

```
jdeps -s -dotoutput /tmp/junit junit-4.12.jar hamcrest-core-1.3.jar
dot -Tpng /tmp/junit/summary.dot > /tmp/junit/summary.png
```

Then you get this `summary.png` image:

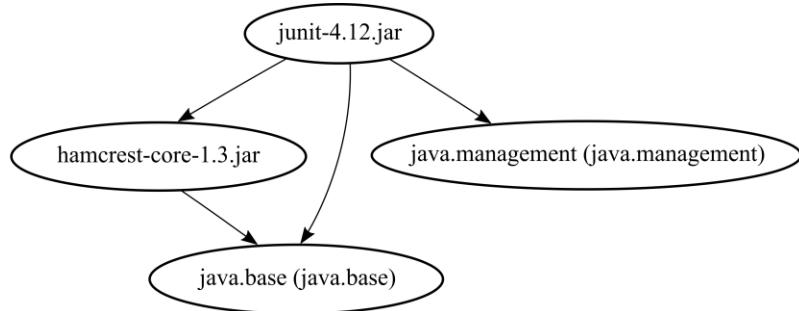

---

You use the `jlink` tool to produce an application that executes without a separate Java runtime. The resulting image is much smaller than the entire JDK. You specify the modules that you want to have included and an output directory.

```
jlink --module-path com.horstmann.greet.jar:ch15.sec05.jar:$JAVA_HOME/jmods \
--add-modules ch15.sec05 --output /tmp/hello
```

The output directory has a subdirectory `bin` with a `java` executable. If you run

```
bin/java -m ch15.sec05
```

the `main` method of the module’s main class is invoked.

The point of `jlink` is that it bundles up the minimal set of modules that is required to run the application. You can list them all:

```
bin/java --list-modules
```

In this example, the output is

```
ch15.sec05
com.horstmann.greet
java.base@9
```

All modules are included in a *runtime image* file lib/modules. On my computer, that file is 23MB, whereas the runtime image of all JDK modules take up 181MB. The entire application takes up 45MB, less than 10% of the JDK which is 486MB.

This can be the basis of a useful tool for packaging an application. You would still need to produce file sets for multiple platforms and launch scripts for the application.



**NOTE:** You can inspect the runtime image with the jimage command. However, the format is internal to the JVM, and runtime images are not meant to be generated or used by other tools.

Finally, the jmod tool builds and inspects the module files that are included with the JDK. When you look into the jmods directory inside the JDK, you will find a file with extension jmod for each module. There is no longer a rt.jar file.

Like JAR files, these files contain class files. In addition, they can hold native code libraries, commands, header files, configuration files, and legal notices. The JMOD files use the ZIP format. You can inspect their contents with any ZIP tool.

Unlike JAR files, JMOD files are only useful for linking; that is, for producing runtime images. There is no need for you to produce JMOD files unless you also want to bundle binary files such as native code libraries with your modules.



**NOTE:** Since the rt.jar and tools.jar files are no longer included with Java 9, you need to update any references to them. For example, if you referred to tools.jar in a security policy file, change it to a reference to the module:

```
grant codeBase "jrt:/jdk.compiler" {
 permission java.security.AllPermission;
};
```

The jrt: syntax denotes the Java runtime file.

## Exercises

1. The “restricted keywords” `module`, `exports`, `requires`, `uses`, `to`, and so on, have specific meanings in module declarations. Can you use them as names for classes? Packages? Modules? In particular, can you make a module called `module`? Try creating a context where you can produce declarations such as the following:

```
requires requires;
exports exports;
opens to to opens;
```

How about a module transitive? Can you require it?

2. Try accessing `GreeterImpl` in the program in Section 15.5, “Exporting Packages” (page 476) from the `HelloWorld` class. What happens? Is it a compile-time or a runtime error?
3. In the program in Section 15.5, “Exporting Packages” (page 476), use `java.util.logging.Level` to make a `Greeter` return an empty string when the level is less than `Level.INFO`. What is the effect on the module descriptors?
4. What happens if you put the Apache CSV JAR onto the class path as an unnamed module and try accessing its packages from a module? What should you do instead?
5. Develop an example that demonstrates a compelling use for a `requires` transitive dependency on a module such as `java.sql`, `java.xml`, or `java.desktop`.
6. Develop examples for the two uses cases of `requires static`. Would you ever want to have `requires transitive static`?
7. In the program in Section 15.12, “Service Loading” (page 490), what happens if the `provides` or `uses` statements are omitted? Why aren’t these compile-time errors?
8. In the program in Section 15.12, “Service Loading” (page 490), use a service provider factory; that is, a class with a public static method `provider()` that returns the service object.
9. Reorganize the program in Section 15.7, “Modular JARs” (page 482) so that the service interface and implementation are defined in separate modules.
10. Download the open source JFreeChart program and use `jdeps` to analyze the dependencies of the demo program and the JAR files in the `lib` subdirectory.

11. Turn the demo program of JFreeChart into a module and the JAR files in the `lib` subdirectory into automatic modules.
12. Run `jlink` to get a runtime image of the JFreeChart demo program.
13. Try running a Java 8 version of the JavaFX SceneBuilder program under Java 9. What command-line flags do you need to start it? How did you find out?

# Index

## Symbols and Numbers

- (minus sign)
  - flag (for output), 35
  - in dates, 414
  - in regular expressions, 310
  - operator, 17–18
- - in command-line options, 81
  - in shell scripts, 463
  - operator, 17, 19
- >, in lambda expressions, 114, 117
- ∞, in string templates, 434
- \_ (underscore)
  - in number literals, 12
  - in variable names, 14, 67
- , (comma)
  - flag (for output), 35
  - in numbers, 422, 428, 433
  - normalizing, 317
  - trailing, in arrays, 44
- ; (semicolon)
  - in Java vs. JavaScript, 450
  - path separator (Windows), 81, 248

- : (colon)
  - in assertions, 194
  - in dates, 414
  - in switch statement, 37
  - path separator (Unix), 81, 248
  - :: operator, 117, 145
- ! (exclamation sign)
  - comments, in property files, 247
  - operator, 17, 22
- != operator, 17, 22
  - for wrapper classes, 47
- ? (quotation mark)
  - in regular expressions, 310–311, 313
  - replacement character, 295, 438
  - wildcard, for types, 212–216, 227
- ? : operator, 17, 22
- / (slash)
  - file separator (Unix), 248, 298
  - in javac path segments, 5
  - operator, 17–18
  - root component, 298
- //, /\*...\*/ comments, 3
- /\*\*...\*/ comments, 90–91
- /= operator, 17

- . (period)
  - in method calls, 6
  - in numbers, 422, 428, 433
  - in package names, 5, 79
  - in regular expressions, 310–311, 319
  - operator, 17
- .., parent directory, 299
- ... (ellipsis), for varargs, 54
- '...' (back quotes), in shell scripts, 462
- ^ (caret)
  - for function parameters, 114
  - in regular expressions, 310–313, 318
  - operator, 17, 23
- ^= operator, 17
- ~ (tilde), operator, 17, 23
- '...' (single quotes)
  - for character literals, 13–14
  - in JavaScript, 450
  - in string templates, 434
- "..." (double quotes)
  - for strings, 6
  - in javadoc hyperlinks, 94
  - in shell scripts, 462
- "" (empty string), 26–27, 147
- ( (left parenthesis), in formatted output, 35
- (...) (parentheses)
  - empty, for anonymous classes, 130
  - for anonymous functions (JavaScript), 458
  - for casts, 21, 103
  - in regular expressions, 310–313, 316–317
  - operator, 17
- [...] (square brackets)
  - for arrays, 43–44, 50
  - in JavaScript, 454, 457–458
  - in regular expressions, 310–312
  - operator, 17
- {...} (curly braces)
  - in annotation elements, 379
  - in lambda expressions, 114
  - in regular expressions, 310–313, 318
  - in string templates, 433
  - with arrays, 44
- {}{}, double brace initialization, 144
- @ (at)
  - in java command, 487
  - in javadoc comments, 91
- \$ (dollar sign)
  - currency symbol, 433
  - flag (for output), 36
  - in JavaScript function calls, 455, 460
  - in regular expressions, 310–311, 313, 318
  - in variable names, 14
- \${...}, in shell scripts, 462–463
- € currency symbol, 428, 433
- \* (asterisk)
  - for annotation processors, 394
  - in documentation comments, 92
  - in regular expressions, 310–313, 317
  - operator, 17–18
- wildcard:
  - in class path, 81
  - in imported classes, 83–84
- \*= operator, 17
- \ (backslash)
  - character literal, 14
  - file separator (Windows), 248, 298
  - in option files, 487
  - in regular expressions, 310–311, 318
- & (ampersand), operator, 17, 23
- && (double ampersand)
  - in regular expressions, 312
  - operator, 17, 22
- &= operator, 17
- # (number sign)
  - comments, in property files, 247
  - flag (for output), 35
  - in javadoc hyperlinks, 93
  - in option files, 487
  - in string templates, 434
- #!, in shell scripts, 464
- % (percent sign)
  - conversion character, 34–35
  - operator, 17–18
- %% pattern variable, 202
- %= operator, 17
- + (plus sign)
  - flag (for output), 35
  - in regular expressions, 310–313

operator, 17–18  
  for strings, 24–25, 27, 147  
++ operator, 17, 19  
+= operator, 17  
< (left angle bracket)  
  flag (for output), 36  
  in shell syntax, 33  
  in string templates, 434  
  operator, 22, 456  
<< operator, 17, 23  
<<= operator, 17  
<= operator, 17, 22  
<%...%>, <%=...%> delimiters (JSP), 464  
<, in string templates, 434  
<> (diamond syntax)  
  for array lists, 45  
  for constructors of generic classes, 209  
<...> (angle brackets)  
  for type parameters, 109, 208  
  in javadoc hyperlinks, 93  
  in regular expressions, 313  
=, == operators, 17–18  
== operator, 17, 22, 149  
  for class objects, 160  
  for enumerations, 155  
  for strings, 26  
  for wrapper classes, 47  
=>, in JavaScript, 459  
> (right angle bracket)  
  in shell syntax, 33  
  operator, 22  
>=, >>, >>> operators, 17, 22–23  
>>=, >>>= operators, 17  
| (vertical bar)  
  in regular expressions, 310–312  
  in string templates, 434  
  operator, 17, 23  
|- operator, 17  
|| operator, 17, 22  
0 (zero)  
  as default value, 71, 74  
  flag (for output), 35  
  formatting symbol (date/time), 416  
  prefix, for octal literals, 11  
\0, in regular expressions, 311  
0b prefix, 11  
0x prefix, 11, 35  
0xFEFF byte order mark, 291

## A

a formatting symbol (date/time), 416  
a, A conversion characters, 34  
\a, \A, in regular expressions, 311, 314  
abstract classes, 141–142  
abstract methods, of an interface, 115  
abstract modifier, 103, 141–142  
AbstractCollection class, 106  
AbstractMethodError, 107  
AbstractProcessor class, 394  
accept methods (*Consumer*, *XxxConsumer*), 121–122  
acceptEither method (*CompletableFuture*), 339–340  
AccessibleObject class, 172  
  setAccessible method, 170, 172  
  trySetAccessible method, 170  
accessors, 62  
accumulate method (*LongAccumulator*), 356  
accumulateAndGet method (*AtomicXxx*), 355  
accumulator functions, 278  
add method  
  of *ArrayDeque*, 250  
  of *ArrayList*, 46, 62  
  of *BlockingQueue*, 353  
  of *Collection*, 236  
  of *List*, 238  
  of *ListIterator*, 241  
  of *LongAdder*, 356  
addAll method  
  of *Collection*, 214, 236  
  of *Collections*, 239  
  of *List*, 238  
addExact method (*Math*), 20  
addHandler method (*Logger*), 200  
addition, 18  
  identity for, 278  
addSuppressed method (*IOException*), 189  
aggregators, 488  
allMatch method (*Stream*), 267  
allOf method  
  of *CompletableFuture*, 339–340  
  of *EnumSet*, 250

- allProcesses method (`ProcessHandle`), 370
- and, andNot methods (`BitSet`), 249
- and, andThen methods (functional interfaces), 121
- Android, 341
- AnnotatedConstruct interface, 395
- AnnotatedElement interface, 392–393
- annotation interfaces, 383–386
- annotation processors, 394
- annotations
  - accessing, 384
    - from a different module, 489
  - and modifiers, 382
  - container, 389, 392
  - declaration, 380–381
  - documented, 389
  - generating source code with, 395–398
  - inherited, 389, 392
  - key/value pairs in. *See* elements
  - meta, 384–390
  - multiple, 380
  - processing:
    - at runtime, 391–393
    - source-level, 394–398
  - repeatable, 380, 389, 392
  - standard, 386–390
  - type use, 381–382
- anonymous classes, 130–131
- anyMatch method (`Stream`), 267
- anyOf method (`CompletableFuture`), 339–340
- Apache Commons CSV, 484
- API documentation, 28–30
  - generating, 90
- Applet class, 163
- applications. *See* programs
- apply, applyAsXXX methods (functional interfaces), 121–122
- applyToEither method (`CompletableFuture`), 339–340
- \$ARG, in shell scripts, 463
- arguments array (`jjs`), 463
- arithmetic operations, 17–24
- Array class, 174–175
- array list variables, 45
- array lists, 45–46
  - anonymous, 144
  - checking for nulls, 215
  - constructing, 45–46
  - converting between, 212
  - copying, 48
  - filling, 49
  - instantiating with type variables, 222
  - size of, 46
  - sorting, 49
  - visiting all elements of, 47
  - working with elements of, 46–47
- array variables
  - assigning values to, 45
  - copying, 47
  - declaring, 43–44
  - initializing, 43
- ArrayList class, 45–46, 237
  - add method, 46, 62
  - clone method, 154
  - forEach method, 117
  - get, remove, set, size methods, 46
  - removeIf method, 116
- arrays, 43–45
  - accessing nonexistent elements in, 43
  - allocating, 222
  - annotating, 381
  - casting, 174
  - checking, 174
  - comparing, 149
  - computing values of, 349
  - constructing, 43–44
  - constructor references with, 118
  - converting:
    - to a reference of type `Object`, 146
    - to/from streams, 271, 281, 350
  - copying, 48
  - covariant, 212
  - filling, 44, 49
  - generating `Class` objects for, 160
  - growing, 174–175
  - hash codes of, 151
  - in JavaScript, 457–458
  - length of, 43, 45, 127

- multidimensional, 50–52, 147  
of bytes, 288–289  
of generic types, 118, 223  
of objects, 44, 349  
of primitive types, 349  
of strings, 317  
passing into methods, 53  
printing, 49, 52, 147  
serializable, 319  
sorting, 49, 109–111, 349–350  
superclass assignment in, 140  
using class literals with, 160
- Arrays class  
  asList method, 253  
  copyOf method, 48  
  deepToString method, 147  
  equals method, 149  
  fill method, 49  
  hashCode method, 151  
  parallelXXX methods, 49, 349  
  sort method, 49, 111–112, 116–117  
  stream method, 262, 279  
  toString method, 49, 147
- ArrayStoreException, 140, 212, 223
- ASCII, 30, 290  
  for property files, 437  
  for source files, 438
- ASM tool, 398
- assert statement, 194
- AssertionError, 194
- assertions, 193–195  
  checking, 381  
  enabling/disabling, 194–195
- assignment operators, 18
- associative operations, 278
- asString method (`HttpResponse`), 308
- assSubclass method (`Class`), 227
- asynchronous computations, 335–341
- AsyncTask class (Android), 341
- atomic operations, 346, 351, 354–357, 360  
  and performance, 355
- AtomicXXX classes, 355
- atZone method (`LocalDateTime`), 410
- @author tag (javadoc), 91, 95
- autoboxing, 46, 123
- AutoCloseable interface, 187, 210  
  close method, 188
- availableCharsets method (`Charset`), 292
- availableProcessors method (`Runtime`), 331
- average method (`XxxStream`), 280
- B**
- b, B conversion characters, 35  
\b (backspace), 14  
\b, \B, in regular expressions, 314  
bash scripts (Unix), 461
- BasicFileAttributes class, 303
- batch files (Windows), 461
- BeanInfo class, 173
- between method (`Duration`), 403
- BiConsumer interface, 121
- BiFunction interface, 121, 123
- BigDecimal class, 13, 23–24
- big-endian format, 291, 296–297
- BigInteger class, 11, 23–24
- binary data, reading/writing, 296
- binary numbers, 11, 13
- binary trees, 242
- BinaryOperator interface, 121
- binarySearch method (`Collections`), 240
- Bindings interface, 449
- BiPredicate interface, 121
- BitSet class, 248–249  
  collecting streams into, 279  
  methods of, 249
- bitwise operators, 23
- block statement, labeled, 41
- blocking queues, 352–353
- BlockingQueue interface, 353
- Boolean class, 46
- boolean type, 14  
  default value of, 71, 74  
  formatting for output, 35  
  reading/writing, 296  
  streams of, 279
- BooleanSupplier interface, 122
- bootstrap class loader, 163
- boxed method (`XxxStream`), 280
- branches, 36–38
- break statement, 37, 39–41

- bridge methods, 218–219  
  clashes of, 225  
BufferedReader class, 294  
build method (`HttpClient`), 308  
bulk operations, 352  
Byte class, 46  
  `MIN_VALUE`, `MAX_VALUE` constants, 11  
  `toUnsignedInt` method, 12  
byte codes, 4  
  writing to memory, 446–447  
byte order mark, 291  
byte type, 10–12, 289  
  streams of, 279  
  type conversions of, 21  
ByteArrayClass class, 446  
ByteArrayClassLoader class, 447  
ByteArrayXxxStream classes, 288–289  
ByteBuffer class, 297  
bytes  
  arrays of, 288–289  
  converting to strings, 292  
  reading, 289  
  writing, 290
- C**
- c, C conversion characters, 34  
C:\ root component, 298  
C/C++ programming languages  
  `#include` directive in, 84  
  allocating memory in, 346  
  integer types in, 11  
  pointers in, 63  
C# programming language, type  
  parameters in, 215  
\c, in regular expressions, 311  
CachedRowSetImpl class, 486  
calculators, 157  
Calendar class, 401  
  `getFirstDayOfWeek` method, 431  
  weekends in, 407  
calendars, 60  
call method (`CompilationTask`), 445  
call by reference, 69  
Callable interface, 112  
  call method, 333  
  extending, 445  
callbacks, 112–113, 337  
  registering, 335  
camel case, 15  
cancel method  
  of `CompletableFuture`, 337  
  of `Future`, 333  
cancellation requests, 364  
CancellationException, 337  
cardinality method (`BitSet`), 249  
carriage return, character literal for,  
  14  
case label, 37  
cast method (`Class`), 227  
casts, 21, 103–104, 140  
  and generic types, 220  
  annotating, 382  
  inserting, 217–218  
catch statement, 186–187  
  annotating parameters of, 380  
  in JavaScript, 461  
  in try-with-resources, 189  
  no type variables in, 225  
ceiling method (`NavigableSet`), 243  
Channel interface, 104  
channels, 297  
char type, 13–14  
  streams of, 279  
  type conversions of, 21  
character class, 46  
character classes, 310  
character encodings, 290–293  
  detecting, 292  
  localizing, 438  
  partial, 292, 295  
  platform, 292, 438  
character literals, 13–14  
characters, 288  
  combined, 432  
  formatting for output, 34  
  normalized, 432–433  
  reading/writing, 296  
charAt method (`String`), 31  
CharSequence interface, 28  
  chars, `codePoints` methods, 279  
  splitting by regular expressions,  
    263

- Charset class  
  availableCharsets method, 292  
  defaultCharset method, 292, 438  
  displayName method, 438  
  forName method, 292
- checked exceptions, 183–186  
  and generic types, 226  
  and no-argument constructors, 171  
  combining in a superclass, 185  
  declaring, 185–186  
  documenting, 186  
  in lambda expressions, 186  
  not allowed in a method, 191  
  rethrowing, 190
- checked views, 221, 254
- checkedXxx methods (*Collections*), 240, 254
- Checker Framework, 381
- childrenNames method (*Preferences*), 440
- choice indicator, in string templates, 434
- Church, Alonzo, 114, 404
- Class class, 159–162, 228  
  asSubclass, cast methods, 227  
  comparing objects of, 160  
  forName method, 160–161, 164–165,  
    184, 192, 447  
  generic, 227  
  getCanonicalName method, 160–161  
  getClassLoader method, 161  
  getComponentType method, 161, 174  
  getConstructor(s) methods, 162, 168,  
    171, 227  
  getDeclaredConstructor(s) methods, 162,  
    168, 227  
  getDeclaredField(s) methods, 162  
  getDeclaredMethod(s) methods, 162, 171  
  getDeclaringClass method, 161  
  getEnclosingXxx methods, 161  
  getEnumConstants method, 227  
  getField(s) methods, 162, 168  
  getInterfaces method, 161  
  getMethod(s) methods, 162, 168, 171  
  getModifiers method, 161  
  getName method, 159–161  
  getPackage, getPackageName methods, 161  
  getResource method, 163, 435  
  getResourceAsStream method, 161–162
- getSimpleName method, 161  
  getSuperclass method, 161, 227  
  getTypeName method, 161  
  getTypeParameters method, 228  
  isXxx methods, 161, 174  
  newInstance method, 171, 227  
  toString, toGenericString methods, 161
- class declarations  
  annotations in, 380, 389  
  initialization blocks in, 72–73
- class files, 4, 163  
  paths of, 79  
  processing annotations in, 398
- class literals, 160  
  no annotations for, 382  
  no type variables in, 221
- class loaders, 163–164
- class objects, 160
- class path, 80–81  
  problems with, 471
- .class suffix, 160
- ClassCastException, 104, 221
- classes, 2, 60  
  abstract, 103, 108, 141–142  
  accessing from a different module, 489  
  adding functionality to, 77  
  adding to packages, 83  
  anonymous, 130–131  
  companion, 106  
  compiling on the fly, 446  
  constructing objects of, 14  
  deprecated, 93  
  documentation comments for, 90–92  
  encapsulation of, 469–470  
  enumerating members of, 158,  
    168–169  
  evolving, 324  
  extending, 136–145  
    in JavaScript, 459–460  
  fields of, 135  
  final, 141  
  generic, 45  
  immutable, 28, 347  
  implementing, 65–69, 153  
  importing, 83–84  
  inner, 87–89

classes (*cont.*)  
    instances of, 6, 65, 78  
    loading, 169  
    local, 129–130  
    members of, 135  
    naming, 14–15, 78, 159  
    nested, 85–90, 382  
    not known at compile time, 160, 175  
    protected, 142–143  
    public, 83, 476  
    static initialization of, 164  
    system, 195  
    testing, 83  
    utility, 83, 165  
    wrapper, 46–47  
classes win rule, 151  
classifier functions, 274  
ClassLoader class  
    defineClass method, 486  
    extending, 447  
    findClass, loadClass methods, 164  
    setXxxAssertionStatus methods, 195  
classloader inversion, 165  
ClassNotFoundException, 184  
CLASSPATH environment variable, 82  
clear method  
    of BitSet, 249  
    of Collection, 236  
    of Map, 246  
clone method  
    of ArrayList, 154  
    of Enum, 156  
    of Message, 153–154  
    of Object, 143, 146, 151–154, 171  
    protected, 152  
Cloneable interface, 153  
CloneNotSupportedException, 153–154,  
    156  
cloning, 151–154  
close method  
    of AutoCloseable, 188  
    of PrintWriter, 187–188  
    throwing exceptions, 188  
Closeable interface, 104  
    close method, 188  
closures, 125  
code element (HTML), in documentation  
    comments, 91  
code generator tools, 388  
code points, 31, 290  
    turning a string into, 263  
code units, 13, 31, 279  
    in regular expressions, 311  
codePoints method (CharSequence), 279  
codePoints, codePointXxx methods (String),  
    31–32  
Collator class, 27  
    methods of, 432  
collect method (Stream), 271–272, 279  
Collection interface, 106, 236  
    add method, 236  
    addAll method, 214, 236  
    clear method, 236  
    contains, containsAll, isEmpty methods,  
        237  
    iterator, spliterator methods, 237  
    parallelStream method, 237, 260–261,  
        280, 348  
    remove, removeXxx, retainAll methods, 236  
    size method, 237  
    stream method, 237, 260–261  
    toArray method, 237  
collections, 235–254  
    generic, 254  
    iterating over elements of, 260–261  
    mutable, 253  
    processing, 239  
    serializable, 319  
    threadsafe, 354  
    unmodifiable views of, 253–254  
    vs. streams, 261  
    with given elements, 252  
Collections class, 106, 239  
    addAll method, 239  
    binarySearch method, 240  
    copy method, 239  
    disjoint method, 239  
    fill method, 49, 239  
    frequency method, 239  
    indexOfSubList, lastIndexOfSubList  
        methods, 240  
    nCopies method, 237, 239

replaceAll method, 239  
reverse, shuffle methods, 49, 240  
rotate, swap methods, 240  
sort method, 49, 215, 240  
synchronizedXxx, unmodifiableXxx methods, 240  
Collector interface, 272  
Collectors class, 85  
  counting method, 275  
  filtering method, 277  
  flatMapting method, 276  
  groupingBy method, 274–277  
  groupingByConcurrent method, 275, 282  
  joining method, 272  
  mapping method, 276  
  maxBy, minBy methods, 276  
  partitioningBy method, 275, 277  
  reducing method, 277  
  summarizingXxx methods, 272, 276  
  summingXxx methods, 276  
  toCollection, toList methods, 272  
  toConcurrentMap method, 274  
  toMap method, 273–274  
  toSet method, 272, 275  
com global object (JavaScript), 454  
command-line arguments, 49–50  
comments, 3  
  documentation, 90–95  
commonPool method (*ForkJoinPool*), 335  
companion classes, 106  
Comparable interface, 109–111, 155, 215, 242  
  compareTo method, 109  
  streams of, 265  
  with priority queues, 251  
Comparator interface, 85, 111–112, 127–129, 242  
  comparing, comparingXxx methods, 128–129  
  naturalOrder method, 129  
  nullsFirst, nullsLast methods, 129  
  reversed method, 128  
  reverseOrder method, 129  
  streams of, 265  
  thenComparing method, 128–129  
  with priority queues, 251  
compare method (*Integer*, *Double*), 110  
compareTo method  
  of *Enum*, 156  
  of *Instant*, 403  
  of *String*, 26–27, 109, 431  
compareToIgnoreCase method (*String*), 117  
compareUnsigned method (*Integer*, *Long*), 20  
compatibility, drawbacks of, 216  
Compilable interface, 452  
compilation, 4  
CompilationTask interface, 444  
  call method, 445  
compile method (*Pattern*), 315, 318  
compiler  
  instruction reordering in, 343  
  invoking, 444  
compile-time errors, 15  
completable futures, 335–340  
  combining, 340  
  composing, 337–340  
  interrupting, 337  
CompletableFuture class, 335–340  
  acceptEither, applyToEither methods, 339–340  
  allOf, anyOf methods, 339–340  
  cancel method, 337  
  complete, completeExceptionally methods, 336  
  exceptionally method, 338–339  
  handle method, 339  
  isDone method, 336  
  runAfterXxx methods, 339–340  
  supplyAsync method, 335–337  
  thenAccept method, 335, 339  
  thenAcceptBoth, thenCombine methods, 339–340  
  thenApply, thenApplyAsync, thenCompose methods, 337–339  
  thenRun method, 339  
  whenComplete method, 336, 338–339  
CompletionStage interface, 339  
compose method (functional interfaces), 121  
computations  
  asynchronous, 335–341  
  mutator, 62  
  reproducible floating-point, 20

- computations (*cont.*)  
with arbitrary precision, 13  
`compute`, `computeIfXxx` methods (`Map`), 245  
`concat` method (`Stream`), 265  
concatenation, 24–25  
    objects with strings, 147  
concurrent access errors, 126  
concurrent programming, 329–369  
    for scripts, 449  
    strategies for, 346  
`ConcurrentHashMap` class, 350–352, 362  
    `compute` method, 350–352  
    `computeIfXxx`, `forEachXxx`, `merge`, `putIfAbsent`,  
        `reduceXxx`, `searchXxx` methods, 351  
    `keySet`, `newKeySet` methods, 354  
    no null values in, 244  
`ConcurrentModificationException`, 241, 350  
`ConcurrentSkipListXxx` classes, 354  
conditional operator, 22  
configuration files, 439–441  
    editing, 199–200  
    locating, 162  
    resolving paths for, 299  
confinement, 346  
`connect` method (`URLConnection`), 306  
`Console` class, 33  
console, displaying fonts on, 438  
`ConsoleHandler` class, 200, 203  
constants, 15–16, 105  
    naming, 15  
    static, 75–76  
    using in another class, 16  
`Constructor` interface, 168–169  
    `getModifiers`, `getName` methods, 168  
    `newInstance` method, 171–172  
constructor references, 118–119  
    annotating, 382  
constructors, 69–74  
    annotating, 224, 380–381  
    documentation comments for, 90  
    executing, 70  
    for subclasses, 139  
    implementing, 69–70  
    in abstract classes, 142  
    invoking another constructor from, 71  
    no-argument, 73, 139, 171  
overloading, 70–71  
public, 70, 168  
references in, 348  
Consumer interface, 121  
`contains` method (`String`), 28  
`contains`, `containsAll` methods (`Collection`),  
    237  
`containsXxx` methods (`Map`), 246  
Content-Type header, 292  
context class loaders, 164–166  
`continue` statement, 40–41  
control flow, 36–43  
conversion characters, 34–35  
cooperative cancellation, 364  
`copy` method  
    of `Collections`, 239  
    of `Files`, 290, 301–302, 305  
`copyOf` method (`Arrays`), 48  
`CopyOnWriteArrayList` classes, 354  
CORBA (Common Object Request  
    Broker Architecture), 470  
`count` method (`Stream`), 261, 266  
counters  
    atomic, 354–357  
    de/incrementing, 189  
counting method (`Collectors`), 275  
country codes, 275, 424  
covariance, 211  
`createBindings` method (`ScriptEngine`), 449  
`createInstance` method (`Util`), 165  
`createTempXxx` methods (`Files`), 301  
`createXxx` methods (`Files`), 300  
critical sections, 346, 357, 363  
Crockford, Douglas, 451  
currencies, 428–429  
    formatting, 433  
`Currency` class, 428  
`current` method (`ProcessHandle`), 370
- D**
- d  
    conversion character, 34  
    formatting symbol (date/time), 416  
D suffix, 12  
\\d, \\D, in regular expressions, 312  
daemon threads, 366

- databases, 377  
  annotating access to, 388  
  persisting objects in, 479  
DataInput/Output interfaces, 295–296  
  read/writeXxx methods, 296–297, 322  
DataXxxStream classes, 296  
Date class, 401, 416–417  
DateFormat class, 429  
dates  
  computing, 407–408  
  formatting, 413–416, 422, 429–431,  
    433  
  local, 404–407  
  nonexistent, 407, 412, 430  
  parsing, 415  
datesUntil method (`LocalDate`), 406–407  
DateTimeFormat class, 429–431  
DateTimeFormatter class, 413–416  
  and legacy classes, 417  
  format method, 413, 430  
  ofLocalizedXxx methods, 413, 430  
  ofPattern method, 415  
  parse method, 415  
  toFormat method, 415  
  withLocale method, 413, 430  
DateTimeParseException, 430  
daylight savings time, 410–413  
DayOfWeek enumeration, 61, 406–407,  
  411  
  getDisplayName method, 415, 430  
dayOfWeekInMonth method  
  (TemporalAdjusters), 408  
deadlocks, 346, 358, 362–363  
debugging  
  messages for, 183  
  overriding methods for, 141  
  primary arrays for, 49  
  streams, 266  
  threads, 366  
  using anonymous subclasses for,  
    143–144  
  with assertions, 194  
DecimalFormat class, 78  
  number format patterns of, 433  
declaration-site variance, 215  
decomposition (for classes), 52–54  
decomposition modes (for characters),  
  432  
decrement operator, 19  
decrementExact method (`Math`), 20  
deep copies, 153  
deepToString method (`Arrays`), 147  
default label (in switch), 37, 159  
default methods, 106–108  
  conflicts of, 107–108, 144–145  
  in interfaces, 151  
default modifier, 106, 385  
defaultCharset method (`Charset`), 292, 438  
defaultXxxObject methods (`ObjectXxxStream`),  
  322  
defensive programming, 193  
deferred execution, 119–120  
defineClass method (`ClassLoader`), 486  
delete, deleteIfExists methods (`Files`), 301  
delimiters, for scanners, 294  
@Deprecated annotation, 93, 386–387  
@deprecated tag (`javadoc`), 93, 387  
Deque interface, 238, 250  
destroy, destroyForcibly methods  
  of `Process`, 369  
  of `ProcessHandle`, 370  
DiagnosticCollector class, 447  
DiagnosticListener interface, 447  
diamond syntax (<>)  
  for array lists, 45  
  for constructors of generic classes, 209  
directories, 298  
  checking for existence, 300, 302  
  creating, 300–302  
  deleting, 301, 304–305  
  moving, 301  
  temporary, 301  
  user, 299  
  visiting, 302–305  
  working, 367  
directory method (`ProcessBuilder`), 367  
disjoint method (`Collections`), 239  
displayName method (`Charset`), 438  
distinct method (`Stream`), 265, 282  
dividedBy method (`Duration`), 404  
divideUnsigned method (`Integer`, `Long`), 20  
division, 18

**do** statement, 38  
**doc-files** directory, 91  
**documentation comments**, 90–95  
**@Documented** annotation, 387, 389  
**domain names**  
 — for modules, 472  
 — for packages, 79  
**dot notation**, 6, 16  
**double brace initialization**, 144  
**Double** class, 46  
 — compare method, 110  
 — equals method, 149  
 — `isFinite`, `isInfinite` methods, 13  
 — `NaN`, `NEGATIVE_INFINITY`, `POSITIVE_INFINITY`  
 — values, 13  
 — `parseDouble` method, 27  
 — `toString` method, 27  
**double type**, 12–13  
 — atomic operations on, 357  
 — functional interfaces for, 122  
 — streams of, 279  
 — type conversions of, 20–22  
**DoubleAccumulator**, **DoubleAdder** classes, 357  
**DoubleConsumer**, **DoubleXxxOperator**,  
 — **DoublePredicate**, **DoubleSupplier**,  
 — **DoubleToXxxFunction** interfaces, 122  
**DoubleFunction** interface, 122, 220  
**doubles** method (**Random**), 280  
**DoubleStream** class, 279–280  
**DoubleSummaryStatistics** class, 272, 280  
**doubleValue** method (**Number**), 428  
**downstream** collectors, 275–277, 282  
**Driver.parentLogger** method, 488  
**dropWhile** method (**Stream**), 265  
**Duration** class  
 — `between` method, 403  
 — `dividedBy`, `isZero`, `isNegative`, `minus`,  
     — `minusXxx`, `multipliedBy`, `negated`, `plus`,  
     — `plusXxx` methods, 404  
 — immutability of, 347, 404  
 — `ofXxx` methods, 403, 405, 413  
 — `toXxx` methods, 403  
**dynamic method lookup**, 139–140,  
 218–219  
**dynamically typed languages**, 456

**E**

**E** constant (**Math**), 20  
**e**, **E**  
 — conversion characters, 34  
 — formatting symbols (date/time), 416  
**\e**, **\E**, in regular expressions, 311  
**Eclipse**, 5  
**ECMAScript standard**, 452, 454  
**edu** global object (JavaScript), 454  
**effectively final variables**, 126  
**efficiency**, and **final** modifier, 141  
**Element** interface, 395  
**element** method (**BlockingQueue**), 353  
**elements** (in annotations), 378–379, 385  
**else** statement, 36  
**em** element (HTML), in documentation  
 — comments, 91  
**Emacs** text editor, 453  
**empty** method  
 — of **Optional**, 269  
 — of **Stream**, 262  
**empty string**, 26, 147  
 — concatenating, 27  
**encapsulation**, 60, 469–471, 479  
**encodings**. *See character encodings*  
**end** method (**Matcher**, **MatchResult**), 315–316  
**<>END**, in shell scripts, 463  
**endsWith** method (**String**), 28  
**engine scope**, 449  
**enhanced for loop**, 47, 52, 126  
 — for collections, 241  
 — for enumerations, 155  
 — for iterators, 167  
 — for paths, 300  
**entering**, **exiting** methods (**Logger**), 197  
**Entry** class, 217  
**entrySet** method (**Map**), 246  
**Enum** class, 155–156  
**enum instances**  
 — adding methods to, 157  
 — construction, 156  
 — referred by name, 159  
**enum keyword**, 16, 154  
**enumeration sets**, 250  
**enumerations**, 154–159  
 — annotating, 380

- comparing, 155  
constructing, 156  
defining, 16  
nested inside classes, 158  
serialization of, 323  
static members of, 157–158  
traversing instances of, 155  
using in switch, 158
- `EnumMap`, `EnumSet` classes, 250
- `$ENV`, in shell scripts, 463
- environment variables, modifying, 368
- epoch, definition of, 402
- equality, testing for, 22
- `equals` method
- final, 150
  - for subclasses, 149
  - for values from different classes, 149
- null-safe, 149  
of `Arrays`, 149  
of `Double`, 149  
of `Instant`, 403  
of `Object`, 146, 148–150  
of `Objects`, 149  
of `String`, 25–26  
of wrapper classes, 47
- overriding, 148–150  
symmetric, 150
- `equalsIgnoreCase` method (`String`), 26
- `$ERR`, in shell scripts, 462
- Error class, 183
- error messages, for generic methods, 210
- `eval` method (`ScriptEngine`), 449–451
- even numbers, 18
- EventHandler interface, 113
- Exception class, 183
- `exceptionally` method (`CompletableFuture`), 338–339
- exceptions, 182–193
- and generic types, 225–226
  - annotating, 382
  - catching, 186–190
    - in JavaScript, 461
  - chaining, 190–191
  - checked, 171, 183–186
  - combining in a superclass, 185
  - creating, 184
- documenting, 186  
hierarchy of, 183–185  
logging, 198  
rethrowing, 189–191  
suppressed, 189  
throwing, 182–183  
uncaught, 192  
unchecked, 183
- `exec` method (`Runtime`), 367
- Executable class
- `getModifiers` method, 172
  - `getParameters` method, 169
- ExecutableElement interface, 395
- ExecutionException, 333
- Executor interface, 338
- executor services, 331
- default, 335
- ExecutorCompletionService class, 334
- Executors class, 331
- ExecutorService interface, 445
- `execute` method, 331
  - `invokeAll`, `invokeAny` methods, 334
- `exists` method (`Files`), 300, 302
- exit function (shell scripts), 464
- `$EXIT`, in shell scripts, 462
- `exitValue` method (`Process`), 369
- exports keyword, 473, 476–479
  - qualified, 489
- `exportSubtree` method (`Preferences`), 440
- extends keyword, 104, 136, 210–214
- Externalizable interface, 322
- F**
- `f` conversion character, 34
- `F` suffix, 12
- `\f`, in regular expressions, 311
- factory methods, 70, 78
- failures, logging, 190
- falling through, 37
- `false` value (`boolean`), 14
  - as default value, 71, 74
- Field interface, 168–169
- `get`, `getXxx`, `set`, `setXxx` methods, 170, 172
- `getModifiers`, `getName` method, 168, 172
- `getType` method, 168

fields (instance and static variables), 135  
enumerating, 168–169  
final, 344  
provided, 143  
public, 168  
retrieving values of, 169–171  
setting, 170  
transient, 321  
`File` class, 300  
file attributes  
copying, 301  
filtering paths by, 303  
file handlers  
configuring, 201–202  
default, 200  
file managers, 446  
file pointers, 296  
`file.encoding` system property, 292  
`file.separator` system property, 248  
`FileChannel` class  
get, `getXXX`, open, put, `putXXX` methods, 297  
lock, `tryLock` methods, 298  
`FileFilter` class, 120  
`FileHandler` class, 200–203  
`FileNotFoundException`, 183  
files  
archiving, 305  
channels to, 297  
checking for existence, 183, 300–302  
closing, 187  
copying/moving, 301–302  
creating, 299–302  
deleting, 301  
empty, 300  
encoding of, 290–291  
locking, 297–298  
memory-mapped, 297  
missing, 447  
random-access, 296–297  
reading from/writing to, 33, 183, 289  
temporary, 301  
`Files` class  
copy method, 290, 301–302, 305  
createTemp`XXX` methods, 301  
create`XXX` methods, 300  
delete, `deleteIfExists` methods, 301  
exists method, 300, 302  
find method, 302–303  
`isXXX` methods, 300, 302  
lines method, 263, 293  
list method, 302–303  
move method, 301–302  
`newBufferedReader` method, 294, 448  
`newBufferedWriter` method, 294, 302  
`newXXXStream` methods, 288, 302, 320  
read, `readNBytes` methods, 289  
`readAllBytes` method, 289, 293  
`readAllLines` method, 293  
walk method, 302–305  
`walkFileTree` method, 302, 304  
write method, 295, 302  
`FileSystem`, `FileSystems` classes, 305  
`FileTime` class, 417  
`FileVisitor` interface, 304  
fill method  
of `Arrays`, 49  
of `Collections`, 49, 239  
filter method (`Stream`), 261–263, 267  
Filter interface, 202  
filtering method (`Collectors`), 277  
final fields, 344  
final methods, 347  
final modifier, 15, 73, 141  
final variables, 343, 347  
finalize method  
of `Enum`, 156  
of `Object`, 146  
finally statement, 189–190  
for locks, 358  
financial calculations, 13  
find method (`Files`), 302–303  
findAll method (`Scanner`), 316  
findAny method (`Stream`), 267  
findClass method (`ClassLoader`), 164  
findFirst method (`Stream`), 168, 267  
fine method (`Logger`), 197  
first method (`SortedSet`), 243  
first day of week, 431  
firstDay`OfXXX` methods (`TemporalAdjusters`), 408  
flag bits, sequences of, 248

flatMap method  
  general concept of, 264  
  of Optional, 269–271  
  of Stream, 264

flatMapting method (`Collectors`), 276

flip method (`BitSet`), 249

Float class, 46

float type, 12–13  
  streams of, 279  
  type conversions of, 20–22

floating-point types, 12–13  
  and binary number system, 13  
  comparing, 110  
  division of, 18  
  formatting for output, 34  
  in hexadecimal notation, 13  
  type conversions of, 20–22

floor method (`NavigableSet`), 243

floorMod method (`Math`), 19

fonts, missing, 438

for statement, 39  
  declaring variables for, 42  
  enhanced, 47, 52, 126, 155, 241, 300  
  multiple variables in, 39

for each loop (JavaScript), 458

forEach method  
  of `ArrayList`, 117  
  of `Map`, 246

forEach, forEachOrdered methods (`Stream`), 271

forEachXxx methods (`ConcurrentHashMap`), 352

ForkJoinPool class, 338  
  commonPool method, 335

forLanguageTag method (`Locale`), 426

format method  
  of `DateTimeFormatter`, 413, 430  
  of `MessageFormat`, 433–435  
  of `String`, 427

Format class, 417

format specifiers, 34

formatted output, 33–36

Formatter class, 203

formatters, for date/time values, 414–415

forms, posting data from, 307–309

forName method  
  of `Charset`, 292  
  of `Class`, 160–161, 164–165, 184, 192, 447

frequency method (`Collections`), 239

from method (`Instant`, `ZonedDateTime`), 416

full indicator, in string templates, 433

Function interface, 121, 273

function keyword (JavaScript), 458

function types, 114  
  structural, 120

functional interfaces, 115–116  
  as method parameters, 213–214  
  common, 121  
  contravariant in parameter types, 214  
  for primitive types, 122  
  implementing, 123

@FunctionalInterface annotation, 123, 386, 388–389

functions, 60  
  higher-order, 127–129

Future interface, 334  
  cancel, isCancelled, isDone methods, 333  
  get method, 333, 335

futures, 333–335  
  completable, 335–340

**G**

g formatting symbol (date/time), 416

g, G conversion characters, 34

\G, in regular expressions, 314

%g pattern variable, 202

garbage collector, 251

generate method (`Stream`), 262, 279

@Generated annotation, 387–388

generators, converting to streams, 281

generic classes, 45, 208–209  
  constructing objects of, 209  
  information available at runtime, 227  
  instantiating, 209

generic collections, 254

generic constructors, 228

generic methods, 209–210  
  calling, 210  
  declaring, 210  
  information available at runtime, 227

generic type declarations, 228–229  
generic types, 110  
    and exceptions, 225–226  
    and lambda expressions, 213  
    and reflection, 226–229  
    annotating, 381  
    arrays of, 118  
    casting, 220  
    in JVM, 216–219  
    invariant, 212–213  
    restrictions on, 220–226  
`GenericArrayType` interface, 228  
`get` method  
    of `Array`, 174  
    of `ArrayList`, 46  
    of `BitSet`, 249  
    of `Field`, 170, 172  
    of `FileChannel`, 297  
    of `Future`, 333, 335  
    of `List`, 238  
    of `LongAccumulator`, 356  
    of `Map`, 243, 245  
    of `Optional`, 269–271  
    of `Path`, 298–300  
    of `Preferences`, 440  
    of `ServiceLoader.Provider`, 167  
    of `Supplier`, 121  
    of `ThreadLocal`, 365  
GET requests, 308  
`getAndXxx` methods (`AtomicXxx`), 355  
`getAnnotation`, `getAnnotationsByType` methods  
    (`AnnotatedConstruct`), 395  
`getAnnotationXxx` methods  
    (`AnnotatedElement`), 392–393  
`getAsXxx` methods  
    of `OptionalXxx`, 280  
    of `XxxSupplier`, 122  
`getAudioClip` method (`Applet`), 163  
`getAvailableCurrencies` method (`Currency`),  
    428  
`getAvailableIds` method (`ZoneId`), 410  
`getAvailableLocales` method (`Locale`), 425  
`getAverage` method (`XxxSummaryStatistics`),  
    272  
`getBundle` method (`ResourceBundle`), 436–438  
`getCanonicalName` method (`Class`), 160–161  
`getClass` method (`Object`), 141, 146, 149,  
    159, 221, 227  
`getClassLoader` method (`Class`), 161  
`getComponentType` method (`Class`), 161, 174  
`getConstructor(s)` methods (`Class`), 162,  
    168, 171, 227  
`getContents` method (`ListResourceBundle`),  
    437  
`getContextClassLoader` method (`Thread`),  
    165  
`getCountry` method (`Locale`), 274  
`getCurrencyInstance` method (`NumberFormat`),  
    427  
`getDayOfMonth` methods  
    of `LocalDate`, 61, 406–407  
    of `LocalTime`, 409  
    of `ZonedDateTime`, 411  
`getDeclaredAnnotationXxx` methods  
    (`AnnotatedElement`), 392–393  
`getDeclaredConstructor(s)` methods (`Class`),  
    162, 168, 227  
`getDeclaredField(s)` methods (`Class`), 162  
`getDeclaredMethod(s)` methods (`Class`), 162,  
    171  
`getDeclaringClass` method  
    of `Class`, 161  
    of `Enum`, 156  
`getDefault` method (`Locale`), 426, 436  
`getDisplayName` method  
    of `Currency`, 429  
    of `DayOfWeek`, `Month`, 415, 430  
    of `Locale`, 426  
`getElementsAnnotatedWith` method  
    (`RoundEnvironment`), 395  
`getEnclosedElements` method (`TypeElement`),  
    395  
`getEnclosingXxx` methods (`Class`), 161  
`getEngineXxx` methods (`ScriptEngineManager`),  
    448  
`getEnumConstants` method (`Class`), 227  
`getErrorStream` method (`Process`), 368  
`getField(s)` methods (`Class`), 162, 168  
`getFileName` method (`Path`), 300  
`getFilePointer` method (`RandomAccessFile`),  
    297  
`getFirstDayOfWeek` method (`Calendar`), 431

getGlobal method (`Logger`), 195  
getHead method (`Formatter`), 203  
getHeaderFields method (`URLConnection`), 307  
getInputStream method  
  of `URL`, 306  
  of `URLConnection`, 307  
getInstance method  
  of `Collator`, 432  
  of `Currency`, 428  
getInterfaces method (`Class`), 161  
getISOXXX methods (`Locale`), 425  
getLength method (`Array`), 174  
getLogger method (`Logger`), 196  
getMax method (`XxxSummaryStatistics`),  
  272  
getMethod(s) methods (`Class`), 162, 168,  
  171  
getMethodCallSyntax method  
  (`ScriptEngineFactory`), 451  
getModifiers method  
  of `Class`, 161  
  of `Constructor`, 168  
  of `Executable`, 172  
  of `Field`, 168, 172  
  of `Method`, 168  
getMonthXXX methods  
  of `LocalDate`, 61, 406  
  of `LocalTime`, 409  
  of `ZonedDateTime`, 412  
getName method  
  of `Class`, 159–161  
  of `Constructor`, 168  
  of `Field`, 168, 172  
  of `Method`, 168  
  of `Parameter`, 172  
  of `Path`, 300  
  of `PropertyDescriptor`, 173  
getNumberInstance method (`NumberFormat`),  
  427  
getObject method ( `ResourceBundle`), 437  
getOrDefault method (`Map`), 244–245  
getOutputStream method (`URLConnection`), 306  
getPackage, getPackageName methods (`Class`),  
  161  
getParameters method (`Executable`), 169  
getParent method (`Path`), 300  
getPath method (`FileSystem`), 305  
getPercentInstance method (`NumberFormat`),  
  427  
getProperties method (`System`), 248  
getProperty method (`System`), 163  
getPropertyDescriptors method (`BeanInfo`),  
  173  
getPropertyType, getReadMethod methods  
  (`PropertyDescriptor`), 173  
getQualifiedName method (`TypeElement`), 395  
getResource method (`Class`), 163, 435  
getResourceAsStream method  
  of `Class`, 161–162  
  of `Module`, 481  
getRoot method (`Path`), 300  
getSimpleName method  
  of `Class`, 161  
  of `Element`, 395  
getString method (`ResourceBundle`), 436  
getSuperclass method (`Class`), 161, 227  
getSuppressed method (`IOException`), 189  
getSymbol method (`Currency`), 429  
getSystemJavaCompiler method (`ToolProvider`),  
  444  
getTail method (`Formatter`), 203  
getTask method (`JavaCompiler`), 444–445  
getType method (`Field`), 168  
getTypeName method (`Class`), 161  
getTypeParameters method (`Class`), 228  
getURLs method (`URLClassLoader`), 163  
getValue method (`LocalDate`), 61  
getWriteMethod method (`PropertyDescriptor`),  
  173  
getXxx methods (`Array`), 174  
getXxx methods (`Field`), 170, 172  
getXxx methods (`FileChannel`), 297  
getXxx methods (`Preferences`), 440  
getXxxInstance methods (`NumberFormat`), 78  
getXxxStream methods (`Process`), 367  
getYear method  
  of `LocalDate`, 406  
  of `LocalTime`, 409  
  of `ZonedDateTime`, 412  
GlassFish administration tool, 463  
Goetz, Brian, 329  
Gregorian calendar reform, 406

- GregorianCalendar class, 416–417  
group method (`Matcher`, `MatchResult`), 315, 317  
grouping, 274–275  
    classifier functions of, 274  
    reducing to numbers, 275  
groupingBy method (`Collectors`), 274–277  
groupingByConcurrent method (`Collectors`), 275, 282  
GUI (graphical user interface)  
    callbacks in, 112–113  
    long-running tasks in, 340–341  
    missing fonts in, 438
- H**
- `H` formatting symbol (date/time), 416  
`h`, `H` conversion characters, 35  
`\h`, `\H`, in regular expressions, 312  
`%h` pattern variable, 202  
handle method (`CompletableFuture`), 339  
Handler class, 203  
Hansen, Per Brinch, 360  
hash method (`Object`), 151  
hash codes, 150–151  
    computing in `String` class, 150  
    formatting for output, 35  
hash functions, 150–151, 242  
hash maps  
    concurrent, 350–352  
    weak, 251  
hash tables, 242  
hashCode method  
    of `Arrays`, 151  
    of `Enum`, 156  
    of `Object`, 146, 148, 150–151  
HashMap class, 243  
    null values in, 244  
HashSet class, 242  
Hashtable class, 360  
hasNext method (`Iterator`), 240  
hasNext, hasNextXxx methods (`Scanner`), 33, 293  
headMap method (`SortedMap`), 253  
headSet method  
    of `NavigableSet`, 243  
    of `SortedSet`, 243, 253  
heap pollution, 221, 254  
Hello, World! program, 2  
    modular, 472–474  
helper methods, 216  
here documents, 463  
hexadecimal numbers, 11, 13  
    formatting for output, 34  
higher method (`NavigableSet`), 243  
higher-order functions, 127–129  
`hn`, `hr` elements (HTML), in  
    documentation comments, 91  
Hoare, Tony, 360  
HTML documentation, generating, 398  
HTTP connections, 306–309  
HttpClient class, 306–309, 335  
    enabling logging for, 309  
HttpHeaders class, 309  
HttpResponse class, 308–309  
HttpURLConnection class, 306–307  
hyperlinks  
    in documentation comments, 93–94  
    regular expressions for, 310
- I**
- [I] prefix, 147, 160  
IANA (Internet Assigned Numbers Authority), 410  
IDE (integrated development environment), 3, 5  
identity method  
    of `Function`, 121, 273  
    of `UnaryOperator`, 121  
identity values, 278  
if statement, 36  
ifPresent, ifPresentOrElse methods  
    (`Optional`), 268  
IllegalArgumentException, 194  
IllegalStateException, 273, 353  
ImageIcon class, 163  
images, locating, 162  
`img` element (HTML), in documentation  
    comments, 91  
immutability, 346  
immutable classes, 347  
implements keyword, 101–102

import statement, 7, 83–84  
  no annotations for, 382  
  static, 85  
import static statement, 159  
importPreferences method (`Preferences`), 441  
`InaccessibleObjectException`, 170, 481  
increment method (`LongAdder`), 356  
increment operator, 19  
incrementAndGet method (`AtomicXXX`), 355  
incrementExact method (`Math`), 20  
indexOf method  
  of `List`, 238  
  of `String`, 28  
indexOfSubList method (`Collections`), 240  
info method  
  of `Logger`, 195  
  of `ProcessHandle`, 370  
inheritance, 136–154  
  and default methods, 144–145  
  classes win rule, 145, 151  
`@Inherited` annotation, 387, 389  
initCause method (`Throwable`), 191  
initialization blocks, 72–73  
  static, 76  
Inlining, 141  
inner classes, 87–89  
  anonymous, 130–131  
  capturing `this` references in, 118  
  invoking methods of outer classes, 88  
local, 126, 129–131  
  syntax for, 89  
input  
  reading, 32–33, 293–294  
  redirecting, 449  
  setting locales for, 427  
  splitting along delimiters, 317  
input prompts, 33  
input streams, 288  
  copying, 290  
  obtaining, 288  
  reading from, 289  
InputStream class, 289  
  `transferTo` method, 290  
InputStreamReader class, 293  
INSTANCE instance (enum types), 323  
instance methods, 6, 66–67  
instance variables, 65, 67–68  
  annotating, 380  
  comparing, 149  
  default values of, 71–72  
  final, 73  
  in abstract classes, 142  
  in JavaScript, 460  
  initializing, 72–73, 139  
  not accessible from static methods, 77  
  of deserialized objects, 322–324  
  protected, 143  
  setting, 70  
  transient, 321  
  vs. local, 72  
instanceof operator, 104, 140, 149  
  annotating, 382  
instances, 6  
Instant class, 402  
  and legacy classes, 417  
  `compareTo`, `equals` methods, 403  
  `from` method, 416  
  immutability of, 347, 404  
  minus, `minusXXX`, plus, `plusXXX` methods, 404  
  now method, 403  
instruction reordering, 343  
int type, 10–12  
  functional interfaces for, 122  
  processing values of, 120  
  random number generator for, 6, 38  
  streams of, 279  
  type conversions of, 20–22  
  using class literals with, 160  
IntBinaryOperator interface, 122  
IntConsumer interface, 120, 122  
Integer class, 46  
  `compare` method, 110  
  `MIN_VALUE`, `MAX_VALUE` constants, 11  
  `parseInt` method, 27, 184  
  `toString` method, 27  
  unsigned division in, 12  
  `xxxUnsigned` methods, 20  
integer indicator, in string templates, 433  
integer types, 10–12  
  comparing, 110  
  computing, 18, 20

integer types (*cont.*)  
    formatting for output, 34  
    in hexadecimal notation, 11  
    reading/writing, 296–297  
    type conversions of, 20–22  
    values of:  
        even/odd, 18  
        signed, 12

@interface declaration, 384–385

interface keyword, 101

interface methods, 106–108

interfaces, 100–105  
    annotating, 380–381  
    compatibility of, 107  
    declarations of, 100–101  
    defining variables in, 105  
    documentation comments for, 90  
    evolution of, 106  
    extending, 104  
    functional, 115–116  
    implementing, 101–103  
        in JavaScript, 459–460  
        in scripting engines, 451  
        multiple, 105  
    methods of, 101–102  
    nested, enumerating, 168–169  
    no instance variables in, 105  
    no redefining methods of the `Object` class in, 151  
    views of, 252

Internet Engineering Task Force, 423

interrupted method (`Thread`), 364

interrupted status, 364

InterruptedException, 363–364

intersects method (`BitSet`), 249

IntFunction interface, 122, 220

IntPredicate interface, 122

intrinsic locks, 358–360

ints method (`Random`), 280

IntSequence interface, 129

IntStream class, 279–280  
    parallel method, 280

IntSummaryStatistics class, 272, 280

IntSupplier, IntToXxxFunction, IntUnaryOperator interfaces, 122

InvalidClassException, 324

InvalidPathException, 298

Invocable interface, 450

InvocationHandler interface, 175

invoke method (`Method`), 171–172

invokeXxx methods (`ExecutorService`), 334

IOException, 183, 293  
    addSuppressed, getSuppressed methods, 189

isAfter, isBefore methods  
    of `LocalDate`, 406  
    of `LocalTime`, 409  
    of `ZonedDateTime`, 412

isAlive method  
    of `Process`, 369  
    of `ProcessHandle`, 370

isCancelled method (`Future`), 333

isDone method  
    of `CompletableFuture`, 336  
    of `Future`, 333

isEmpty method  
    of `BitSet`, 249  
    of `Collection`, 237  
    of `Map`, 246

isEqual method (`Predicate`), 121–122

isFinite, isInfinite methods (`Double`), 13

isInterrupted method (`Thread`), 364

isLoggable method (`Filter`), 202

isNamePresent method (`Parameter`), 172

isNull method (`Objects`), 117

ISO 8601 format, 388

ISO 8859-1 encoding, 292, 295

isPresent method (`Optional`), 269–271

isXxx methods (`Class`), 161, 174

isXxx methods (`Files`), 300, 302

isXxx methods (`Modifier`), 162, 168

isZero, isNegative methods (`Duration`), 404

Iterable interface, 240–241, 300, 458  
    iterator method, 240

iterate method (`Stream`), 262, 266, 279, 349

iterator method  
    of `Collection`, 237  
    of `ServiceLoader`, 167  
    of `Stream`, 271

Iterator interface  
    next, hasNext methods, 240  
    remove, removeIf methods, 241

iterators, 240–241, 271

- converting to streams, 281
- for random numbers, 459
- invalid, 241
- traversing, 167
- weakly consistent, 350

## J

JAR files, 80–81

- dependencies in, 491
  - for split packages, 483
  - manifest for, 484–485
  - modular, 482–484
  - processing order of, 82
  - resources in, 163, 435
  - scanning for deprecated elements, 387
- jar program, 80–81
- C option, 482–483
  - d option, 482–483
  - module-version option, 483

Java EE platform, 335, 486–487

Java Persistence Architecture, 377

Java Platform Module System, 469–493

- layers in, 483
- migration to, 484–486
- no support for versioning in, 471, 474, 483
- service loading in, 490–491

java program, 4

- add-exports, --add-opens options, 486
- add-module option, 484, 487
- cp (--class-path, -classpath) option, 81–82
- disableassertions (-da) option, 195
- enableassertions (-ea) option, 194
- enablesystemassertions (-esa) option, 195
- illegal-access option, 486
- jar option, 81
- m, -p (--module, --module-path) options, 473, 483

option files for, 487

specifying locales in, 426

Java programming language

- compatibility with older versions of, 145, 216

online API documentation on, 28–30

portability of, 19

- strongly typed, 14
  - Unicode support in, 30–32
  - uniformity of, 3, 108
- java, javax, javafx global objects (JavaScript), 454

java.activation module, 486–487

java.awt package, 83, 471

java.base module, 475

java.class.path, java.home, java.io.tmpdir system properties, 248

java.corba module, 486–487

java.desktop module, 474

Java.extend function (JavaScript), 459

Java.from function (JavaScript), 457

java.lang, java.lang.annotation packages, 386

java.lang.reflect package, 168

java.logging module, 488

java.sql package, 417

Java.super function (JavaScript), 460

java.time package, 401–417

Java.to function (JavaScript), 457

java.transaction module, 486–487

Java.type function (JavaScript), 454–455

java.util package, 7, 350

java.util.concurrent package, 350, 353

java.util.concurrent.atomic package, 355

java.util.logging package, 196

java.version system property, 248

java.xml.bind, java.xml.ws, java.xml.ws.annotation modules, 486–487

JavaBeans, 172–173

javac program, 4

- author option, 95

- cp (--class-path, -classpath) option, 81

- d option, 80, 94

- encoding option, 438

- link, -linksources options, 95

- parameters option, 169

- processor option, 394

- version option, 95

- Xlint option, 37

- XprintRounds option, 398

JavaCompiler.getTask method, 444–445

- javadoc program, 90–95  
  including annotations in, 389  
JavaFileObject interface, 445  
JavaFX platform, 112–113  
  and threads, 341  
  distributed over multiple modules,  
    489  
javafx.base, javafx.controls modules,  
  487–488  
javan.log files, 200  
JavaScript programming language  
  accessing classes of, from Java, 451  
  anonymous functions in, 458  
  anonymous subclasses in, 459  
  arrays in, 457–458  
  arrow function syntax, 459  
  bracket notation in, 454, 457–458  
  calling static methods in, 455  
  catching Java exceptions in, 461  
  constructing Java objects in,  
    454–455  
  delimiters in, 450  
  extending Java classes in, 459–460  
  implementing Java interfaces in,  
    459–460  
  inner classes in, 455  
  instance variables in, 460  
  lists and maps in, 458  
  methods in, 453–454  
  numbers in, 456  
  objects in, 456  
  REPL for, 452–453  
  semicolons in, 450  
  strings in, 456  
  superclasses in, 460  
JavaServer Faces framework, 246  
javax.annotation package, 386  
javax.swing package, 474  
JAXB (Java Architecture for XML  
  Binding), 479  
jconsole program, 200  
jdeprscan program, 387  
jdeps program, 491  
JDK (Java Development Kit), 3  
  obsolete features in, 470  
jdk.incubator.http package, 306  
jjs program, 452–453  
  command-line arguments in, 463  
  executing commands in, 462  
jlink program, 492  
jmod program, 493  
job scheduling, 251  
join method  
  of String, 25  
  of Thread, 363  
joining method (Collectors), 272  
JPA (Java Persistence API), 479  
JShell, 7–10  
  imported packages in, 9–10  
  loading modules into, 484  
JSP (JavaServer Pages), 464  
JUnit, 377–378
- K**
- K formatting symbol (date/time), 416  
\k, in regular expressions, 313  
key/value pairs  
  adding new keys to, 243  
  in annotations. *See* elements  
  removed by garbage collector, 251  
  values of, 243  
keys method (Preferences), 440  
keySet method  
  of ConcurrentHashMap, 354  
  of Map, 246, 252  
keywords, 15
- L**
- \L suffix, 11  
\L prefix, 160  
labeled statements, 40–41  
lambda expressions, 113–116  
  and generic types, 213  
  annotating targets for, 388  
  capturing variables in, 124–127  
  executing, 119  
  for loggers, 196  
  parameters of, 115  
  processing, 119–123  
  return type of, 115  
  scope of, 124  
  this reference in, 124

throwing exceptions in, 186  
using with streams, 263  
vs. anonymous functions (JavaScript),  
    458  
    with parallel streams, 348  
language codes, 275, 424  
language model API, 395  
last method (*SortedSet*), 243  
lastIndex0f method  
    of *List*, 238  
    of *String*, 28  
lastIndex0fSubList method (*Collections*),  
    240  
lastXxx methods (*TemporalAdjusters*), 408  
lazy operations, 261, 266, 283, 317  
leap seconds, 402  
leap years, 405–406  
legacy code, 416–417  
length method  
    of arrays, 43  
    of *RandomAccessFile*, 297  
    of *String*, 6, 31  
.level suffix, 199  
lib/modules file, 493  
limit method (*Stream*), 264, 282  
line feed  
    character literal for, 14  
    formatting for output, 35  
    in regular expressions, 314  
line.separator system property, 248  
lines method  
    of *BufferedReader*, 294  
    of *Files*, 263, 293  
@link tag (javadoc), 93–94  
linked lists, 237, 241  
*LinkedBlockingQueue* class, 353, 362  
*LinkedHashMap* class, 246  
*LinkedList* class, 237  
list method (*Files*), 302–303  
List interface, 215, 237  
    add, addAll, get, indexOf, lastIndexOf,  
        listIterator, remove, replaceAll, set,  
        sort methods, 238  
    of method, 46, 48, 238, 252  
    subList method, 238, 253  
ListIterator interface, 241  
ListResourceBundle class, 437  
lists  
    converting to streams, 281  
    in Nashorn, 458  
    mutable, 253  
    printing elements of, 117  
    removing *null* values from, 117  
    sublists of, 253  
    unmodifiable views of, 254  
little-endian format, 291  
load method (*ServiceLoader*), 167  
load balancing, 319  
loadClass method (*ClassLoader*), 164  
local classes, 129–130  
local date/time, 404–410  
local variables, 41–43  
    annotating, 380–381  
    vs. instance, 72  
LocalDate class, 61  
    and legacy classes, 417  
    datesUntil method, 406–407  
    getXxx methods, 61, 406–407  
    isXxx methods, 406  
    minus, minusXxx methods, 406–407  
    now method, 70, 77, 405–406  
    of method, 61, 70, 405–406  
    ofInstant method, 406  
    parse method, 430  
    plus, plusXxx methods, 61–62, 64,  
        406–407  
    toEpochSecond method, 406  
    until method, 406  
    withXxx methods, 406  
LocalDateTime class, 410  
    and legacy classes, 417  
    atZone method, 410  
    parse method, 430  
Locale class, 273  
    forLanguageTag method, 426  
    getAvailableLocales method, 425  
    getCountry method, 274  
    getDefault method, 426, 436  
    getDisplayName method, 426  
    getISOXxx methods, 425  
    setDefault method, 426  
    predefined fields, 425

- locales, 273–276, 422–427  
  date/time formatting for, 429–431  
  default, 413, 426, 429–430, 436  
  displaying names of, 426  
  first day of week in, 431  
  for template strings, 433–435  
  formatting styles for, 415, 430  
  sorting words for, 431–432  
  specifying, 423–425  
  weekdays and months in, 415  
`LocalTime` class, 409–410  
  and legacy classes, 417  
final, 141  
`getXXX`, `isXXX`, `minus`, `minusXXX`, `now`, `of`,  
  `ofInstant`, `plus`, `plusXXX`, `toXXX`, `withXXX`  
  methods, 409  
`parse` method, 430  
`lock` method  
  of `FileChannel`, 298  
  of `ReentrantLock`, 358  
locks, 346  
  error-prone, 347  
  intrinsic, 358–360  
  reentrant, 357–358  
  releasing, 189, 343  
log handlers, 200–202  
  default, 197, 200  
  filtering/formatting, 202  
  installing custom, 200  
  levels of, 200  
  suppressing messages in, 197  
`Logger` class, 488  
  `addHandler` method, 200  
  entering, exiting methods, 197  
  `fine` method, 197  
  `getGlobal` method, 195  
  `getLogger` method, 196  
  `info` method, 195  
  `log` method, 197–198  
  `logp`, `logrb` methods, 198  
  `setFilter` method, 203  
  `setLevel` method, 195, 197, 200  
  `setUseParentHandlers` method,  
    200  
  `throwing` method, 198  
  `warning` method, 197  
`loggers`  
  defining, 196  
  filtering/formatting, 202  
  hierarchy of, 196  
logging, 195–203  
  configuring, 197–200  
  enabling/disabling, 197  
  failures, 190  
  levels of, 197–200  
  localizing, 199  
  overriding methods for, 141  
  using for unexpected exceptions, 198  
`Long` class, 46  
  `MIN_VALUE`, `MAX_VALUE` constants, 11  
  unsigned division in, 12  
  `xxxUnsigned` methods, 20  
`long` indicator, in string templates, 433  
`long` type, 10–12  
  atomic operations on, 356–357  
  functional interfaces for, 122  
  streams of, 279  
  type conversions of, 20–22  
`LongAccumulator` class, 356  
  `accumulate`, `get` methods, 356  
`LongAdder` class, 356–357  
  `add`, `increment`, `sum` methods, 356  
`LongConsumer`, `LongXxxOperator`, `LongPredicate`,  
  `LongSupplier`, `LongToXxxFunction`  
  interfaces, 122  
`LongFunction` interface, 122, 220  
`longs` method (`Random`), 280  
`LongStream` class, 279–280  
`LongSummaryStatistics` class, 272, 280  
long-term persistence, 324  
`Lookup` class, 482  
  `lookup` method (`MethodHandles`), 482  
loops, 38–39  
  exiting, 39–41  
  infinite, 39

## M

- `m`, `M` formatting symbols (date/time), 416  
main method, 2, 6  
  decomposing, 52–54  
  string array parameter of, 49  
`ManagedExecutorService` class, 335

Map interface, 238  
  clear method, 246  
  compute, computeIfXXX methods, 245  
  containsXXX methods, 246  
  entrySet method, 246  
  forEach method, 246  
  get, getOrDefault methods, 243, 245  
  isEmpty method, 246  
  keySet method, 246, 252  
  merge method, 244–245  
  of method, 246, 252  
  ofEntries method, 252  
  put method, 243, 245  
  putAll, putIfAbsent methods, 245  
  remove, replace methods, 245  
  replaceAll method, 246  
  size method, 246  
  values method, 246, 252  
map method  
  of Optional, 268  
  of Stream, 263  
mapping method (Collectors), 276  
maps, 243–246  
  concurrent, 246, 274  
  empty, 246  
  in Nashorn, 458  
  iterating over, 244  
  of stream elements, 273–274, 282  
  order of elements in, 246  
  views of, 244  
    unmodifiable , 254  
mapToInt method (Stream), 278  
mapToXXX methods (XxxStream), 280  
marker interfaces, 153  
Matcher class, 315–317  
  quoteReplacement method, 318  
  replaceAll method, 317–318  
  replaceFirst method, 318  
matcher, matches methods (Pattern), 314  
MatchResult interface, 315–318  
Math class  
  E constant, 20  
  floorMod method, 19  
  max, min methods, 19  
  PI constant, 20, 75  
  pow method, 19, 77  
  round method, 21  
  sqrt method, 19  
  xxxExact methods, 20, 22  
max method  
  of Stream, 266  
  of XxxStream, 280  
MAX\_VALUE constant (integer classes), 11  
maxBy method  
  of BinaryOperator, 121  
  of Collectors, 276  
medium indicator, in string templates, 433  
memory  
  allocating, 346  
  caching, 342  
  concurrent access to, 343  
memory-mapped files, 297  
merge method  
  of ConcurrentHashMap, 351  
  of Map, 244–245  
Message class, 153–154  
MessageFormat class, 433–435  
meta-annotations, 384–390  
META-INF/MANIFEST.MF file, 484–485  
META-INF/services directory, 490  
Method interface, 168–169  
  getModifiers, getName methods, 168  
  invoke method, 171–172  
method calls, 6  
  receiver of, 67  
method expressions, 117, 145  
method references, 117–118, 221  
  annotating, 382  
MethodHandles.lookup method, 482  
methods, 2  
  abstract, 115, 141–142  
  accessor, 62  
  annotating, 224, 380  
  atomic, 351  
  body of, 66  
  chaining calls of, 62  
  clashes of, 224–225  
  compatible, 151  
  declarations of, 65  
  default, 106–108  
  deprecated, 93  
  documentation comments for, 90, 92

- methods (*cont.*)
  - enumerating, 168–169
  - factory, 70, 78
  - final, 141, 347
  - header of, 65
  - Inlining, 141
  - instance, 66–67
  - invoking, 171
  - modifying functions, 128
  - mutator, 62, 254, 347
  - naming, 14–15
  - native, 76
  - overloading, 71, 118
  - overriding, 106, 137–139, 141, 185–186, 387
  - parameters of, 169
    - null checks for, 193
  - passing arrays into, 53
  - private, 109
  - proxied, 176
  - public, 101–102, 168
  - restricted to subclasses, 142–143
  - return value of, 2, 66
  - returning functions, 127
  - static, 53, 77–78, 85, 105–106
  - storing in variables, 6
  - symmetric, 150
  - synchronized, 359–361
  - utility, 83
  - variable number of arguments of, 53
- Microsoft Notepad, 291
- Microsoft Windows
  - batch files, 461
  - path separator, 81, 248
  - registry, 439
- `min` method
  - of `Math`, 19
  - of `Stream`, 266
  - of `XxxStream`, 280
- `MIN_VALUE` constant (integer classes), 11
- `minBy` method
  - of `BinaryOperator`, 121
  - of `Collectors`, 276
- `minus, minusXxx` methods
  - of `Instant`, `Duration`, 404
  - of `LocalDate`, 406–407
- of `LocalTime`, 409
- of `ZonedDateTime`, 411
- Modifier interface
  - `isXxx` methods, 162, 168
  - `toString` method, 162
- modifiers, checking, 168
- `module` keyword, 473
- module path, 473, 483–485
- `Module.getResourceAsStream` method, 481
- `module-info.class` file, 473, 482
- `module-info.java` file, 473
- modules, 469–493
  - aggregator, 488
  - and versioning, 471, 474, 483
  - annotating, 474
  - automatic, 484–485
  - bundling up the minimal set of, 492
  - declaration of, 472–473
  - deprecated, 487
  - documentation comments for, 91, 94
  - illegal access to, 486
  - inspecting files in, 493
  - loading into JShell, 484
  - naming, 472, 484
  - open, 481
  - reflective access for, 169–170
  - required, 474–476, 487–489
  - tools for, 491–493
  - transitive, 487–489
    - unnamed, 485
- monads, 264
- monitors (classes), 360
- `Month` enumeration, 405–406, 412
  - `getDisplayName` method, 415, 430
- `MonthDay` class, 407
- `move` method (`Files`), 301–302
- multiplication, 18
- `multipliedBy` method (`Duration`), 404
- mutators, 62
  - and unmodifiable views, 254

## N

n

- conversion character, 35
- formatting symbol (date/time), 416

\n (line feed)  
  for character literals, 14  
  in property files, 247–248  
  in regular expressions, 311–313, 318  
name method (`Enum`), 156  
NaN (not a number), 13  
Nashorn engine, 448, 452–461  
  anonymous subclasses in, 459  
  arrays in, 457–458  
  catching Java exceptions in, 461  
  class objects in, 455  
  extending Java classes in, 459–460  
  getters/setters in, 454  
  implementing Java interfaces in, 459–460  
  instance variables in, 460  
  lists and maps in, 458  
  methods in, 453–454  
  no standard input source in, 450  
  numbers in, 456  
  running from command line, 452  
  shell scripting in, 461–464  
  strings in, 455  
  superclasses in, 460  
native methods, 76  
`naturalOrder` method (`Comparator`), 129  
navigable maps/sets, 254  
`NavigableMap` interface, 354  
`NavigableSet` interface, 238, 242, 253  
  methods of, 243  
`nCopies` method (`Collections`), 237, 239  
`negate` method (`Predicate`, `BiPredicate`), 121  
`negated` method (`Duration`), 404  
`negateExact` method (`Math`), 20  
`NEGATIVE_INFINITY` value (`Double`), 13  
negative values, 10  
nested classes, 85–90  
  annotating, 382  
  enumerating, 168–169  
  inner, 87–89  
  public, 86  
  static, 85–86  
`new` operator, 6, 14, 17, 70  
  as constructor reference, 118  
  for anonymous classes, 130  
  for arrays, 43–44, 50  
  in JavaScript, 455–459  
`newBufferedReader` method (`Files`), 294, 448  
`newBufferedWriter` method (`Files`), 294, 302  
`newBuilder`, `newHttpClient` methods  
  (`HttpClient`), 308, 335  
`newFileSystem` method (`FileSystems`), 305  
`newInputStream` method (`Files`), 288, 302, 320  
`newInstance` method  
  of `Array`, 174  
  of `Class`, 171, 227  
  of `Constructor`, 171–172  
`newKeySet` method (`ConcurrentHashMap`), 354  
`newline`. *See* line feed  
`newOutputStream` method (`Files`), 288, 302, 320  
`newProxyInstance` method (`Proxy`), 175  
`newXxxThreadPool` methods (`Executors`), 331  
`next` method (`Iterator`), 240  
`next`, `nextOrSame` methods  
  (`TemporalAdjusters`), 408  
`next`, `nextXxx` methods (`Scanner`), 32, 293  
`nextInt` method (`Random`), 6, 38  
`nextXxxBit` methods (`BitSet`), 249  
`nominal typing`, 120  
`noneMatch` method (`Stream`), 267  
`noneOf` method (`EnumSet`), 250  
`noninterference`, of stream operations, 283  
`@NonNull` annotation, 381  
`normalize` method (`Path`), 299  
`Normalizer` class, 433  
`NoSuchElementException`, 269, 353  
`notify`, `notifyAll` methods (`Object`), 146, 361–362  
`NotSerializableException`, 321  
`now` method  
  of `Instant`, 403  
  of `LocalDate`, 70, 77, 405–406  
  of `LocalTime`, 409  
  of `ZonedDateTime`, 411  
`null` value, 26, 64  
  as default value, 71, 74  
  checking parameters for, 193  
  comparing against, 149  
  converting to strings, 147

- NullPointerException**, 26, 45, 64, 72, 184, 193, 244
  - vs. `Optional`, 266
- nullsFirst**, **nullsLast** methods (`Comparator`), 129
- Number** class, 428
- number** indicator, in string templates, 433
- Number** type (JavaScript), 456
- NumberFormat** class
  - `getXXXInstance` methods, 78, 427
  - not threadsafe, 365–366
  - `parse` method, 428
  - `setCurrency` method, 429
- NumberFormatException**, 184
- numbers**
  - big, 23–24
  - comparing, 110
  - converting to strings, 27
  - default value of, 71, 74
  - even or odd, 18
  - formatting, 34, 422, 427, 433
  - from grouped elements, 275
  - in regular expressions, 312
  - non-negative, 194, 248
  - printing, 34
  - random, 6, 38, 262, 264, 280
  - reading/writing, 293, 296–297
  - rounding, 13, 21
  - type conversions of, 20–22
  - unsigned, 12, 20
  - with fractional parts, 12–13
- 0**
  - o** conversion character, 34
- Object** class, 145–154
  - `clone` method, 143, 146, 151–154, 171
  - `equals` method, 146, 148–150
  - `finalize` method, 146
  - `getClass` method, 141, 146, 149, 159, 221, 227
  - `hashCode` method, 146, 148, 150–151
  - `notify`, `notifyAll` methods, 146, 361–362
  - `toString` method, 146–147
  - `wait` method, 146, 361–362
- object references**, 63–64
  - and serialization, 320
- attempting to change**, 69
- comparing**, 148
- default value of**, 71, 74
- null**, 64
  - passed by value, 69
- ObjectInputStream** class, 320–321
  - `defaultReadObject` method, 322
  - `readFields` method, 325
  - `readObject` method, 320–323, 325
- object-oriented programming**, 59–97
  - encapsulation, 469–470
- ObjectOutputStream** class, 320
  - `defaultWriteObject` method, 322
  - `writeObject` method, 320–322
- object-relational mappers**, 479
- objects**, 2, 60–64
  - calling methods on, 6
  - casting, 103–104
  - cloning, 151–154
  - comparing, 47, 148–150
  - constructing, 6, 69–74, 171–172
    - in JavaScript, 454–455
  - converting:
    - to strings, 146–147
    - to XML, 480
  - deep/shallow copies of, 152–154
  - deserialized, 322–324
  - externalizable, 322
  - immutable, 62
  - initializing variables with, 14
  - inspecting, 169–171
  - invoking static methods on, 77
  - mutable, 73
  - serializable, 319–321
  - sorting, 109–111
  - state of, 60
- Objects** class
  - `equals` method, 149
  - `hash` method, 151
  - `isNull` method, 117
  - `requireNonNull` method, 193
- objXXXConsumer** interfaces, 122
- octal numbers**, 11
  - formatting for output, 34
- octonions**, 31
- odd numbers**, 18

of method  
  of EnumSet, 250  
  of IntStream, 279  
  of List, 46, 48, 238, 252  
  of LocalDate, 61, 70, 405–406  
  of LocalTime, 409  
  of Map, 246, 252  
  of Optional, 269  
  of ProcessHandle, 370  
  of Set, 252  
  of Stream, 261–262  
  of ZonedDateTime, 410–411  
ofDateAdjuster method (`TemporalAdjusters`),  
  408  
ofDays method (`Period`), 413  
ofEntries method (`Map`), 252  
offer method (`BlockingQueue`), 353  
offsetByCodePoints method (`String`), 31  
`OffsetDateTime` class, 413  
ofInstant method  
  of LocalDate, 406  
  of LocalTime, 409  
  of ZonedDateTime, 411  
ofLocalizedXXX methods (`DateTimeFormatter`),  
  413, 430  
ofNullable method  
  of Optional, 269  
  of Stream, 271  
ofPattern method (`DateTimeFormatter`), 415  
ofXXX methods (`Duration`), 403, 405, 413  
onExit method  
  of Process, 369  
  of ProcessHandle, 370  
open keyword, 481  
open method (`FileChannel`), 297  
openConnection method (`URL`), 306  
opens keyword, 481  
  qualified, 489  
openStream method (`URL`), 288  
Operation interface, 157  
operations  
  associative, 278  
  atomic, 346, 351, 354–357, 360  
  bulk, 352  
  lazy, 261, 266, 283, 317  
parallel, 348–350  
performed optimistically, 355  
stateless, 281  
threadsafe, 350–354  
operators, 17–24  
  precedence of, 17  
option files, 487  
Optional class, 266–270  
  creating values of, 269  
  empty method, 269  
  flatMap method, 269–271  
  for empty streams, 277–278  
  for processes, 370  
  get method, 269–271  
  ifPresent, ifPresentOrElse methods, 268  
  isPresent method, 269–271  
  map method, 268  
  of, ofNullable methods, 269  
  orElse method, 266–268  
  orElseXXX methods, 267–268  
  stream method, 270–271  
OptionalXXX classes, 280  
or method  
  of BitSet, 249  
  of Predicate, BiPredicate, 121  
order method (`ByteBuffer`), 297  
ordinal method (`Enum`), 156  
org global object (JavaScript), 454  
org.omg.corba package, 470  
os.arch, os.name, os.version system  
  properties, 248  
OSGi (Open Service Gateway Initiative),  
  471  
\$OUT, in shell scripts, 462  
output  
  formatted, 33–36  
  redirecting, 449  
  setting locales for, 427  
  writing, 294–295  
output streams, 288  
  closing, 290  
  obtaining, 288  
  writing to, 290  
OutputStream class, 320  
  write method, 290  
OutputStreamWriter class, 294  
@Override annotation, 138, 386–387

overriding, 137–139  
for logging/debugging, 141  
`overview.html` file, 94

## P

`\p`, `\P`, in regular expressions, 312  
package statement, 79  
package declarations, 79–80  
Package object (JavaScript), 454  
`package-info.java` file, 94, 380  
packages, 3, 78–85  
accessing, 83, 143, 470, 477–478, 481, 484  
adding classes to, 83  
annotating, 380–381  
default, 79  
documentation comments for, 91, 94  
exporting, 476–479, 481  
naming, 79  
not nesting, 79  
split, 483  
parallel method (`XxxStream`), 280  
parallel streams, 348–349  
parallelStream method (`Collection`), 237, 260–261, 280, 348  
parallelXxx methods (`Arrays`), 49, 349  
`@param` tag (javadoc), 92  
Parameter class, 172  
parameter variables, 68  
annotating, 380  
scope of, 42  
ParameterizedType interface, 228  
parentLogger method (`Driver`), 488  
parse method  
of `DateTimeFormatter`, 415  
of `LocalXxx`, `ZonedDateTime`, 430  
of `NumberFormat`, 428  
Parse.quote method, 311  
parseDouble method (`Double`), 27  
ParseException, 428  
parseInt method (`Integer`), 27, 184  
partitioning, 347  
partitioningBy method (`Collectors`), 275, 277  
Pascal triangle, 51  
passwords, 33

Path interface, 106, 298–300  
get method, 298–300  
getXxx methods, 300  
normalize, relativize methods, 299  
resolve, resolveSibling methods, 299  
subpath method, 300  
toAbsolutePath, toFile methods, 299  
path separators, 298  
path.separator system property, 248  
paths, 298  
absolute vs. relative, 298–299  
filtering, 303  
resolving, 299  
taking apart/combining, 300  
Paths class, 106  
Pattern class  
compile method, 315, 318  
flags, 318–319  
matcher, matches methods, 314  
split method, 317  
splitAsStream method, 263, 317  
pattern variables, 202  
PECS (producer extends, consumer super), 214  
peek method  
of `BlockingQueue`, 353  
of `Stream`, 266  
percent indicator, in string templates, 433  
performance  
and atomic operations, 355  
and combined operators, 19  
and memory caching, 343  
Period class, 405  
ofDays method, 413  
`@Persistent` annotation, 389  
PI constant (`Math`), 20, 75  
placeholders, 433–435  
platform class loader, 163  
platform encoding, 292, 438  
plugins, loading, 164  
plus, plusXxx methods  
of `Instant`, `Duration`, 404  
of `LocalDate`, 61–62, 64, 406–407  
of `LocalTime`, 409  
of `ZonedDateTime`, 411–412  
Point class, 146–147

- Point2D class (JavaFX), 321  
poll method (`BlockingQueue`), 353  
pollXxx methods (`NavigableSet`), 243  
pop method (`ArrayDeque`), 250  
portability, 19  
`POSITIVE_INFINITY` value (`Double`), 13  
POST requests, 308  
`@PostConstruct` annotation, 386, 388  
pow method (`Math`), 19, 77  
predefined character classes, 310, 312, 314  
`@PreDestroy` annotation, 386, 388  
predicate functions, 275  
Predicate interface, 116, 121  
  and, or, negate methods, 121  
  isEqual method, 121–122  
  test method, 121, 213  
Preferences class, 439–441  
previous method (`ListIterator`), 241  
previous, previousOrSame methods  
  (`TemporalAdjusters`), 408  
previousXxxBit methods (`BitSet`), 249  
preVisitDirectory, postVisitDirectory  
  methods (`FileVisitor`), 304  
primitive types, 10–14  
  and type parameters, 220  
attempting to update parameters of, 68  
comparing, 149  
converting to strings, 147  
functions interfaces for, 122  
passed by value, 69  
streams of, 278–280  
wrapper classes for, 46–47  
printStackTrace method (`Throwable`), 192  
PrintStream class, 6, 147, 295  
  print method, 6, 33, 195, 294–295  
  printf method, 34–35, 53, 294–295  
  println method, 6, 32–33, 49, 117,  
    294–295  
PrintWriter class, 294  
  close method, 187–188  
  printf method, 427  
priority queues, 251  
private modifier, 2, 83  
  for enum constructors, 157  
Process class, 366–370  
  destroy, destroyForcibly methods,  
    369  
  exitValue method, 369  
  getErrorMessage method, 368  
  getOutputStream methods, 367  
  isAlive method, 369  
  onExit method, 369  
  supportsNormalTermination method, 369  
  toHandle method, 370  
  waitFor method, 369  
ProcessBuilder class, 366–370  
  directory method, 367  
  redirectXxx methods, 368  
  start method, 368  
processes, 366–370  
  building, 367–368  
  getting info about, 370  
  killing, 369  
  running, 368–369  
ProcessHandle interface, 370  
processing pipeline, 337  
Processor interface, 394  
Programmer’s Day, 405  
programming languages  
  dynamically typed, 456  
  functional, 99  
  object-oriented, 2  
  scripting, 448  
programs  
  compiling, 3  
  configuration options for, 247  
  localizing, 421–441  
  packaging, 493  
  responsive, 340  
  running, 3  
  testing, 193  
promises (in concurrent libraries),  
  336  
properties, 172–173  
  loading from file, 247  
  naming, 173  
  read-only/write-only, 173  
  testing for, 213  
Properties class, 247–248  
.properties extension, 435

property files  
  encoding, 247, 437  
  generating, 398  
  localizing, 435–437  
protected modifier, 142–143  
`Provider.get`, `Provider.type` methods, 167  
provides keyword, 490  
Proxy class, 175–176  
  `newProxyInstance` method, 175  
public modifier, 2, 83  
  and method overriding, 139  
  for interface methods, 101–102  
push method (`ArrayDeque`), 250  
put method  
  of `BlockingQueue`, 353  
  of `FileChannel`, 297  
  of `Map`, 243, 245  
  of `Preferences`, 440  
putAll method (`Map`), 245  
putIfAbsent method  
  of `ConcurrentHashMap`, 351  
  of `Map`, 245  
putXxx methods (`FileChannel`), 297  
putXxx methods (`Preferences`), 440

## Q

\Q, in regular expressions, 311  
qualified exports, 489  
Queue interface, 238, 250  
  synchronizing methods in, 360  
  using `ArrayDeque` with, 250  
quote method (`Parse`), 311  
quoteReplacement method (`Matcher`), 318

## R

\r (carriage return)  
  for character literals, 14  
  in property files, 248  
\r, \R, in regular expressions, 311,  
  314  
race conditions, 281, 344–346  
Random class, 6  
  ints, longs, doubles methods, 280  
  nextInt method, 6, 38  
random numbers, 6, 38, 459  
  streams of, 262, 264, 280

RandomAccess interface, 237  
RandomAccessFile class, 296–297  
  `getFilePointer` method, 297  
  `length` method, 297  
  `seek` method, 296–297  
RandomNumbers class, 77  
range method (`EnumSet`), 250  
range, rangeClosed methods (`XxxStream`), 279  
ranges, 253  
  converting to streams, 281  
raw types, 217, 220–221  
read method  
  of `Files`, 289  
  of `InputStream`, 289  
  of `InputStreamReader`, 293  
readAllXxx methods (`Files`), 289, 293  
Reader class, 293  
readers, 288  
readExternal method (`Externalizable`), 322  
readFields method (`ObjectInputStream`), 325  
readLine function (shell scripts), 464  
readLine method  
  of `BufferedReader`, 294  
  of `Console`, 33  
readNBytes method (`Files`), 289  
readObject method (`ObjectInputStream`),  
  320–323, 325  
readPassword method (`Console`), 33  
readResolve method (`Serializable`),  
  322–323  
readXxx methods (`DataInput`), 296–297, 322  
receiver parameters, 67, 383  
redirection syntax, 33  
redirectXxx methods (`ProcessBuilder`), 368  
reduce method (`Stream`), 277–279  
reduceXxx methods (`ConcurrentHashMap`), 352  
reducing method (`Collectors`), 277  
reductions, 266, 277–279  
ReentrantLock class, 357–358  
  lock, unlock methods, 358  
reflection, 168–176  
  and generic types, 222, 226–229  
  and module system, 169–170, 479,  
    486  
processing annotations with, 391–393  
ReflectiveOperationException, 160

regular expressions, 310–319  
finding matches of, 314–316  
flags for, 318–319  
groups in, 316–317  
replacing matches with, 317  
splitting input with, 317  
relational operators, 22  
relativize method (`Path`), 299  
remainderUnsigned method (`Integer`, `Long`), 20  
`remove` method  
  of `ArrayDeque`, 250  
  of `ArrayList`, 46  
  of `BlockingQueue`, 353  
  of `Collection`, 236  
  of `Iterator`, 241  
  of `List`, 238  
  of `Map`, 245  
  of `Preferences`, 440  
`removeIf` method  
  of `ArrayList`, 116  
  of `Iterator`, 241  
`removeNode` method (`Preferences`), 440  
`removeXxx` methods (`Collection`), 236  
`@Repeatable` annotation, 387, 389  
REPL (“read-eval-print” loop), 452–453  
`replace` method  
  of `Map`, 245  
  of `String`, 28  
`replaceAll` method  
  of `Collections`, 239  
  of `List`, 238  
  of `Map`, 246  
  of `Matcher`, 317–318  
  of `String`, 317  
`replaceFirst` method (`Matcher`), 318  
`requireNonNull` method (`Objects`), 193  
requires keyword, 473, 476–479, 484, 487–489  
`resolve`, `resolveSibling` methods (`Path`), 299  
`@Resource` annotation, 386, 388  
resource bundles, 435–438  
resource injections, 388  
 `ResourceBundle` class, 199  
  extending, 437  
  `getBundle` method, 436–438  
  `getObject` method, 437  
  `getString` method, 436  
resources, 159–168  
  loading, 162, 481  
  managing, 187  
`@Resources` annotation, 387  
`resume` method (`Thread`, deprecated), 363  
`retainAll` method (`Collection`), 236  
`@Retention` annotation, 384, 387  
`return` statement, 37, 53, 66  
  in lambda expressions, 114  
  not in `finally`, 189  
`@return` tag (`javadoc`), 92  
return types, covariant, 138, 219  
return values  
  as arrays, 53  
  missing, 266  
  providing type of, 53  
`reverse` method (`Collections`), 49, 240  
reverse domain name convention, 79, 472  
`reversed` method (`Comparator`), 128  
`reverseOrder` method (`Comparator`), 129  
RFC 822, RFC 1123 formats, 414  
`rlwrap` program, 453  
`rotate` method (`Collections`), 240  
`round` method (`Math`), 21  
`RoundEnvironment` interface, 395  
roundoff errors, 13  
`RowSetProvider` class, 486  
`rt.jar` file, 493  
`runAfterXxx` methods (`CompletableFuture`), 339–340  
`Runnable` interface, 112, 121, 331, 333  
  executing on the UI thread, 341  
  `run` method, 121, 330, 363–364  
  using class literals with, 160  
runtime  
  raw types at, 220–221  
  safety checks at, 218  
`Runtime` class  
  `availableProcessors` method, 331  
  `exec` method, 367  
runtime image file, 493  
`RuntimeException`, 183

**S**

s formatting symbol (date/time), 416  
s, S conversion characters, 34  
\s, \S, in regular expressions, 312  
safety checks, as runtime, 218  
@SafeVarargs annotation, 224, 386, 388  
Scala programming language  
  REPL in, 453  
  type parameters in, 215  
Scanner class, 32  
  findAll method, 316  
  hasNext, hasNextXxx, next, nextXxx methods, 32, 293  
  tokens method, 263, 294  
  useLocale method, 427  
scheduling applications  
  and time zones, 405, 410  
  computing dates for, 407–408  
ScriptContext interface, 449  
ScriptEngine interface  
  createBindings method, 449  
  eval method, 449–451  
ScriptEngineFactory interface, 451  
ScriptEngineManager class  
  getEngineXxx methods, 448  
  visibility of bindings in, 449  
scripting engines, 448–449  
  compiling code in, 452  
  implementing Java interfaces in, 451  
scripting languages, 448  
  invoking functions in, 450  
searchXxx methods (ConcurrentHashMap), 352  
security, 83  
SecurityException, 170  
@see tag (javadoc), 93–94  
seek method (RandomAccessFile), 296  
sequences, producing, 262  
serial numbers, 321  
Serializable interface, 319–321  
  readResolve, writeReplace methods, 322–323  
serialization, 319–325  
serialVersionUID instance variable, 324  
server-side software, 319  
ServiceLoader class, 166–168, 490  
  iterator, load method, 167

ServiceLoader.Provider interface, 167  
services  
  configurable, 166  
  loading, 166–168, 490–491  
ServletException class, 191  
Set interface, 238, 354  
  of method, 252  
  working with EnumSet, 250  
set method  
  of Array, 174  
  of ArrayList, 46  
  of BitSet, 249  
  of Field, 172  
  of List, 238  
  of ListIterator, 241  
setAccessible method (AccessibleObject), 170, 172  
setContextClassLoader method (Thread), 165  
setCurrency method (NumberFormat), 429  
setDaemon method (Thread), 366  
setDecomposition method (Collator), 432  
setDefault method (Locale), 426  
setDefaultUncaughtExceptionHandler method (Thread), 192  
setDoOutput method (URLConnection), 306  
setFilter methods (Handler, Logger), 203  
setFormatter method (Handler), 203  
setLevel method (Logger), 195, 197, 200  
setOut method (System), 76  
setReader method (ScriptContext), 449  
setRequestProperty method (URLConnection), 306  
sets, 242–243  
  immutable, 347  
  threadsafe, 354  
  unmodifiable views of, 254  
setStrength method (Collator), 432  
setUncaughtExceptionHandler method (Thread), 363  
setUseParentHandlers method (Logger), 200  
setWriter method (ScriptContext), 449  
setXxx methods (Array), 174  
setXxx methods (Field), 170, 172  
setXxxAssertionStatus methods (ClassLoader), 195

- shallow copies, 152–154
- shared variables, 343–347
  - atomic mutations of, 354–357
  - locking, 357–358
- shebang, 464
- shell scripts, 461–464
  - command-line arguments in, 463
  - environment variables in, 463
  - executing, 462
  - generating, 398
  - string interpolation in, 462–463
- shell, redirection syntax of, 33
- shift operators, 23
- Shift\_JIS encoding, 292
- short circuit evaluation, 22
- Short class, 46
  - MIN\_VALUE, MAX\_VALUE constants, 11
- short indicator, in string templates, 433
- short type, 10–12
  - streams of, 279
  - type conversions of, 21
- short-term persistence, 324
- shuffle method (*Collections*), 49, 240
- SimpleFileVisitor class, 304
- SimpleJavaFileObject class, 446
- @since tag (javadoc), 92
- singletons, 323
- size method
  - of ArrayList, 46
  - of Collection, 237
  - of Map, 246
- skip method (*Stream*), 264
- sleep method (*Thread*), 363, 365
- SLF4J (Simple Logging Fasade for Java), 196, 472
- SOAP protocol, 471
- SocketHandler class, 200
- sort method
  - of Arrays, 49, 111–112, 116–117
  - of Collections, 49, 215, 240
  - of List, 238
- sorted maps, 253–254
- sorted method (*Stream*), 265
- sorted sets, 238, 253
  - traversing, 242
  - unmodifiable views of, 254
- sorted streams, 281
- SortedMap interface, 253
- SortedSet interface, 238, 242
  - first, last methods, 243
  - headSet, subSet, tailSet methods, 243, 253
- sorting
  - array lists, 49
  - arrays, 49, 109–111
  - chaining comparators for, 128
  - changing order of, 127
  - streams, 265
  - strings, 26–27, 117, 431–432
- source code, generating, 395–398
- source files
  - documentation comments for, 94
  - encoding of, 438
  - placing, in a file system, 80
  - reading from memory, 445
- space flag (for output), 35
- spaces
  - in regular expressions, 312
  - removing, 28
- split method
  - of Pattern, 317
  - of String, 25, 317
- splitAsStream method (*Pattern*), 263, 317
- spliterator method (*Collection*), 237
- sqrt method (*Math*), 19
- square root, computing, 270
- Stack class, 250
- stack trace, 192–193
- StackWalker class, 192
- standard output, 3
- StandardCharsets class, 292
- StandardJavaFileManager interface, 445–447
- start method
  - of Matcher, MatchResult, 315–316
  - of ProcessBuilder, 368
  - of Thread, 363
- startsWith method (*String*), 28
- stateless operations, 281
- statements, combining, 43
- static constants, 75–76
- static imports, 85
- static initialization, 164

static methods, 53, 77–78  
accessing static variables from, 77  
importing, 85  
in interfaces, 105–106

static modifier, 2, 16, 53, 74–78, 158  
for modules, 488

static nested classes, 85–86

static variables, 74–75  
accessing from static methods, 77  
importing, 85  
visibility of, 343

stop, suspend methods (`Thread`, deprecated), 363

Stream interface  
collect method, 271–272, 279  
concat method, 265  
count method, 261, 266  
distinct method, 265, 282  
dropWhile method, 265  
empty method, 262  
filter method, 261–263, 267  
findAny method, 267  
findFirst method, 168, 267  
flatMap method, 264  
forEach, forEachOrdered methods, 271  
generate method, 262, 279  
iterate method, 262, 266, 279, 349  
iterator method, 271  
limit method, 264, 282  
map method, 263  
mapToInt method, 278  
max, min methods, 266  
of method, 261–262  
ofNullable method, 271  
peek method, 266  
reduce method, 277–279  
skip method, 264  
sorted method, 265  
takeWhile method, 265  
toArray method, 118, 271  
unordered method, 282  
`xxxMatch` methods, 267

stream method  
of Arrays, 262, 279  
of BitSet, 249  
of Collection, 237, 260–261

of Optional, 270–271

streams, 259–283  
collecting elements of, 271–274  
computing values from, 277–279  
converting to/from arrays, 262, 271, 281, 350  
creating, 261–263  
debugging, 266  
empty, 262, 266, 277–278  
filtering, 270  
finite, 262  
flattening, 264, 270  
infinite, 261–262, 264, 266  
intermediate operations for, 261  
locating services with, 167  
noninterference of, 283  
of primitive type values, 278–280  
of random numbers, 280  
ordered, 281  
parallel, 260, 267, 271, 274–275, 278, 280–283, 348–349  
processed lazily, 261, 266, 283  
reductions of, 266  
removing duplicates from, 265  
sorting, 265  
splitting/combining, 264–265  
summarizing, 272, 280  
terminal operation for, 261, 266  
transformations of, 263–264, 280  
vs. collections, 261

strictfp modifier, 19

StrictMath class, 20

String class, 6, 28  
charAt method, 31  
codePoints, codePointXxx methods, 31–32  
compareTo method, 26–27, 109, 431  
compareToIgnoreCase method, 117  
contains method, 28  
endsWith method, 28  
equals method, 25–26  
equalsIgnoreCase method, 26

final, 141  
format method, 427  
hash codes, 150  
immutability of, 28, 347  
indexOf, lastIndexOf methods, 28

join method, 25  
length method, 6, 31  
offsetByCodePoints method, 31  
replace method, 28  
replaceAll method, 317  
split method, 25, 317  
startsWith method, 28  
substring method, 25  
toLowerCase method, 28, 263, 427  
toUpperCase method, 28, 427  
trim method, 28, 428  
string interpolation, in shell scripts, 462–463  
`StringBuilder` class, 25  
strings, 6, 24–32  
    comparing, 25–27  
    concatenating, 24–25, 147  
    converting:  
        from byte arrays, 292  
        from objects, 146–147  
        to code points, 263  
        to numbers, 27  
    empty, 26–27, 147  
    formatting for output, 34  
    internal representation of, 32  
    normalized, 432  
    sorting, 26–27, 117, 431–432  
    splitting, 25, 263  
    templates for, 433–435  
    transforming to lower/uppercase, 263, 427  
`StringSource` class, 445  
`StringWriter` class, 295  
strong element (HTML), in documentation comments, 91  
subclasses, 136–137  
    anonymous, 143–144, 157  
    calling `toString` method in, 147  
    constructors for, 139  
    initializing instance variables in, 139  
    methods in, 137  
    preventing, 141  
    public, 139  
    superclass assignments in, 139  
`subList` method (`List`), 238, 253  
`subMap` method (`SortedMap`), 253  
subpath method (`Path`), 300  
subSet method  
    of `NavigableSet`, 243  
    of `SortedSet`, 243, 253  
substring method (`String`), 25  
subtractExact method (`Math`), 20  
subtraction, 18  
    accurate, 24  
    not associative, 278  
subtypes, 103  
    wildcards for, 212  
sum method  
    of `LongAdder`, 356  
    of `XxxStream`, 280  
summarizingXxx methods (`Collectors`), 272, 276  
summaryStatistics method (`XxxStream`), 280  
summingXxx methods (`Collectors`), 276  
super keyword, 108, 138–139, 145, 213–215  
superclasses, 136–137  
    annotating, 381  
    calling `equals` method, 149  
    default methods of, 144–145  
    in JavaScript, 460  
    methods of, 137–139  
    public, 139  
supertypes, 103–105  
    wildcards for, 213–214  
Supplier interface, 121, 336  
`supplyAsync` method (`CompletableFuture`), 335–337  
supportsNormalTermination method  
    of `Process`, 369  
    of `ProcessHandle`, 370  
`@SuppressWarnings` annotation, 37, 220, 386, 388–389, 474  
swap method (`Collections`), 240  
Swing GUI toolkit, 113, 341  
SwingConstants interface, 105  
SwingWorker class (Swing), 341  
switch statement, 37  
    using enumerations in, 158  
symbolic links, 302–303  
synchronized keyword, 358–361  
synchronized views, 254

synchronizedXXX methods (*Collections*), 240  
System class  
    getProperties method, 248  
    getProperty method, 163  
    setOut method, 76  
system class loader, 163, 165  
system classes, enabling/disabling  
    assertions for, 195  
system properties, 248  
System.err constant, 192, 200, 366, 444  
System.in constant, 32  
System.out constant, 6, 16, 32–35, 49, 53,  
    76, 117, 195, 294, 444  
systemXXX methods (*Preferences*), 439

**T**

T, in dates, 414  
t, T conversion characters, 35  
\t  
    in regular expressions, 311  
tab, for character literals, 14  
\t pattern variable, 202  
tab completion, 9  
tagging interfaces, 153  
tailMap method (*SortedMap*), 253  
tailSet method  
    of *NavigableSet*, 243  
    of *SortedSet*, 243, 253  
take method (*BlockingQueue*), 353  
takeWhile method (*Stream*), 265  
tar program, 80–81  
@Target annotation, 384–385, 387  
Task class (*JavaFX*), 341  
tasks, 330–335  
    cancelling, 333–334  
    combining results from, 333–335  
    computationally intensive, 331  
    coordinating work between, 352–353  
    defining, 112  
    executing, 112, 331  
    groups of, 366  
    long-running, 340–341  
    running, 330–332  
    short-lived, 331  
    submitting, 333  
    vs. threads, 331  
working simultaneously, 336  
Temporal interface, 408  
TemporalAdjuster.ofDateAdjuster method,  
    408  
TemporalAdjusters class, 408  
terminal window, 4  
test method  
    of BiPredicate, 121  
    of Predicate, 121, 213  
    of XxxPredicate, 122  
@Test annotation, 378–379, 384  
TextStyle enumeration, 431  
thenAccept method (*CompletableFuture*), 335,  
    339  
thenAcceptBoth, thenCombine methods  
    (*CompletableFuture*), 339–340  
thenApply, thenApplyAsync methods  
    (*CompletableFuture*), 337–339  
thenComparing method (*Comparator*), 128–129  
thenCompose method (*CompletableFuture*),  
    338–339  
thenRun method (*CompletableFuture*), 339  
third-party libraries, 484–485  
this reference, 67–68  
    annotating, 383  
    capturing, 118  
    in constructors, 71, 348  
    in lambda expressions, 124  
Thread class  
    get/setContextClassLoader methods, 165  
    interrupted, isInterrupted methods, 364  
    join method, 363  
    properties, 366  
    resume, stop, suspend methods  
        (deprecated), 363  
    setDaemon method, 366  
    setDefaultUncaughtExceptionHandler  
        method, 192  
    setUncaughtExceptionHandler method, 363  
    sleep method, 363, 365  
    start method, 363  
ThreadLocal class, 365–366  
    get, withInitial methods, 365  
threads, 331, 362–366  
    and visibility, 342–344, 360  
    atomic mutations in, 354–357

creating, 112  
daemon, 366  
groups of, 366  
interrupting, 333, 364–365  
local variables in, 365–366  
locking, 357–358  
names of, 366  
priorities of, 366  
race conditions in, 281, 344–346  
running tasks in, 112  
starting, 363  
states of, 366  
temporarily inactive, 364  
terminating, 331–332  
uncaught exception handlers of, 366  
vs. tasks, 331  
waiting on conditions, 360  
worker, 340–341  
throw statement, 183  
Throwable class, 183  
  getStackTrace, printStackTrace methods, 192  
  in assertions, 194  
  initCause method, 191  
  no generic subtypes for, 225  
throwing method (`Logger`), 198  
throws keyword, 185  
  type variables in, 225–226  
@throws tag (`javadoc`), 92, 186  
time  
  current, 402  
  formatting, 413–416, 429–431  
  measuring, 403  
  parsing, 415  
Time class, 416–417  
time indicator, in string templates, 433  
time zones, 410–413  
TimeoutException, 333  
Timestamp class, 150, 416–417  
timestamps, 413  
  using instants as, 403  
TimeZone class, 417  
™ (trademark symbol), 432–433  
toAbsolutePath method (`Path`), 299  
toArray method  
  of `Collection`, 237  
  of `Stream`, 118, 271  
  of `XxxStream`, 280  
toByteArray method  
  of `BitSet`, 249  
  of `ByteArrayOutputStream`, 288–289  
toCollection method (`Collectors`), 272  
toConcurrentMap method (`Collectors`), 274  
toEpochSecond method  
  of `LocalDate`, 406  
  of `LocalTime`, 409  
toFile method (`Path`), 300  
toFormat method (`DateTimeFormatter`), 415  
toGenericString method (`Class`), 161  
toHandle method (`Process`), 370  
toInstant method  
  of `Date`, 416  
  of `ZonedDateTime`, 410, 412  
toIntExact method (`Math`), 22  
tokens method (`Scanner`), 263, 294  
toList method (`Collectors`), 272  
toLocalXxx methods (`ZonedDateTime`), 412  
toLongArray method (`BitSet`), 249  
toLowerCase method (`String`), 28, 263, 427  
toMap method (`Collectors`), 273–274  
ToolProvider.getSystemJavaCompiler method, 444  
tools.jar file, 493  
toPath method (`File`), 300  
toSet method (`Collectors`), 272, 275  
toString method  
  calling from subclasses, 147  
  of `Arrays`, 49, 147  
  of `BitSet`, 249  
  of `Class`, 161  
  of `Double`, `Integer`, 27  
  of `Enum`, 156  
  of `Modifier`, 162  
  of `Object`, `Point`, 146–147  
toUnsignedInt method (`Byte`), 12  
toUpperCase method (`String`), 28, 427  
toXxx methods (`Duration`), 403  
ToXxxFunction interfaces, 122, 220  
toXxxOfDay methods (`LocalTime`), 409  
toZonedDateTime method (`GregorianCalendar`), 416–417  
transferTo method (`InputStream`), 290

transient modifier, 321  
 transitive keyword, 487–489  
 TreeMap class, 243, 274  
 TreeSet class, 242  
`trim` method (`String`), 28, 428  
 true value (`boolean`), 14  
 try statement, 186–190
 

- for visiting directories, 302

 tryLock method (`FileChannel`), 298  
 trySetAccessible method (`AccessibleObject`), 170  
 try-with-resources statement, 187–189
 

- closing output streams with, 290
- for file locking, 298

 type bounds, 210–211, 229
 

- annotating, 382

 type erasure, 216–219, 224
 

- clashes after, 224–225

 Type interface, 228  
 type method (`ServiceLoader.Provider`), 167  
 type parameters, 109, 208–209
 

- and primitive types, 209, 220
- annotating, 380

 type variables
 

- and exceptions, 225–226
- in static context, 224
- no instantiating of, 221–223
- wildcards with, 214–215

 TypeElement interface, 395  
 TypeVariable interface, 228

## U

\u
 

- for character literals, 13–14, 437–438
- in regular expressions, 311

 %u pattern variable, 202  
 UnaryOperator interface, 121  
 uncaught exception handlers, 363, 366  
 unchecked exceptions, 183
 

- and generic types, 226
- documenting, 186

 UncategorizedException, 293  
 Unicode, 30–32, 279, 290
 

- normalization forms in, 432
- replacement character in, 295

 unit tests, 377

Unix operating system
 

- bash scripts, 461
- path separator, 81, 248
- specifying locales in, 426
- wildcard in classpath in, 82

 unlock method (`ReentrantLock`), 358  
 unmodifiableXXX methods (`Collections`), 240  
 unordered method (`Stream`), 282  
 until method (`LocalDate`), 405–406  
 updateAndGet method (`AtomicXXX`), 355  
 URI class, 308  
 URL class, 308
 

- final, 141
- `getInputStream` method, 306
- `openConnection` method, 306
- `openStream` method, 288

 URLClassLoader class, 163  
 URLConnection class, 306–307
 

- `connect` method, 306
- `getHeaderFields` method, 307
- `getInputStream` method, 307
- `getOutputStream` method, 306
- `setDoOutput` method, 306
- `setRequestProperty` method, 306

 URLs, reading from, 288, 306  
 useLocale method (`Scanner`), 427  
 user directory, 299  
 user interface. *See GUI*  
 user preferences, 439–441  
 user.dir, user.home, user.name system properties, 248  
 userXXX methods (`Preferences`), 439  
 uses keyword, 491  
 UTC (coordinated universal time), 411  
 UTF-8 encoding, 290–291
 

- for source files, 438
- modified, 296

 UTF-16 encoding, 13, 31, 279, 291
 

- in regular expressions, 311

 Util class, 165

## V

v formatting symbol (date/time), 416  
 \v, \V, in regular expressions, 312  
 valueOf method
 

- of BitSet, 249

- of `Enum`, 155–156
  - `values` method
    - of `Enum`, 155
    - of `Map`, 246, 252
  - `varargs` parameters
    - corrupted, 388
    - declaring, 54
  - `VarHandle` class, 482
  - variable handles, 482
  - `VariableElement` interface, 395
  - variables, 6, 14–16
    - atomic mutations of, 354–357
    - capturing, in lambda expressions, 124–127
    - declaring, 14–15
    - defined in interfaces, 105
    - deprecated, 93
    - documentation comments for, 91–92
    - effectively final, 126
    - final, 343, 347
    - holding object references, 63–64
    - initializing, 14–16
    - local, 41–43
    - naming, 14–15
    - parameter, 68
    - private, 65, 83
    - public static final, 105
    - redefining, 42
    - scope of, 41, 83
    - shared, 343–347, 357–358
    - static final. *See* constants
    - static, 74–75, 77, 85, 343
    - thread-local, 365–366
    - using an abstract class as type of, 142
    - visibility of, 342–344, 360
    - volatile, 343–344
  - `@version` tag (`javadoc`), 91, 95
  - versioning, 324
  - views, 252–254
  - virtual machine, 4
    - instruction reordering in, 343
  - visibility, 342–344
    - guaranteed with locks, 360
  - `visitFile`, `visitFileFailed` methods (`FileVisitor`), 304
  - `void` keyword, 2, 53
    - using class literals with, 160
  - `volatile` modifier, 343–344
- ## W
- `\w`, `\W`, in regular expressions, 312
  - `wait` method (`Object`), 146, 361–362
  - `waitFor` method (`Process`), 369
  - waiting on a condition, 361
  - `walk` method (`Files`), 302–305
  - `walkFileTree` method (`Files`), 302, 304
  - `warning` method (`Logger`), 197
  - warnings
    - for switch statements, 159
    - suppressing, 220, 224, 388
  - weak references, 251
  - weaker access privilege, 139
  - `WeakHashMap` class, 251
  - weakly consistent iterators, 350
  - `WeakReference` class, 252
  - web pages
    - extracting links from, 337
    - reading, 338, 340
  - `whenComplete` method (`CompletableFuture`), 336, 338–339
  - while statement, 38–39
    - breaking/continuing, 40
    - continuing, 40
    - declaring variables for, 42
  - white space
    - in regular expressions, 312
    - removing, 28
  - wildcards
    - annotating, 382
    - capturing, 216
    - for annotation processors, 394
    - for types, 212–214
    - in class path, 81
    - unbounded, 215
    - with imported classes, 83–84
    - with type variables, 214–215
  - `WildcardType` interface, 228
  - `Window` class, 83
  - `WindowAdapter` class, 106
  - `WindowListener` interface, 106
  - `with` method (`Temporal`), 408

- withInitial method (`ThreadLocal`), 365
  - withLocale method (`DateTimeFormatter`), 413, 430
  - withXXX methods
    - of `LocalDate`, 406
    - of `LocalTime`, 409
    - of `ZonedDateTime`, 411
  - words
    - in regular expressions, 312
    - reading from a file, 293
    - sorting alphabetically, 431–432
  - working directory, 367
  - wrapper classes, 46–47
  - write method
    - of `Files`, 295, 302
    - of `OutputStream`, 290
  - writeExternal method (`Externalizable`), 322
  - writeObject method (`ObjectOutputStream`), 320–322
  - Writer class, 294–295
    - write method, 294
  - writeReplace method (`Serializable`), 322–323
  - writers, 288
  - writeXXX methods (`DataOutput`), 296–297, 322
  - X**
    - x formatting symbol (date/time), 416
    - x, X conversion characters, 34
  - \x, in regular expressions, 311
  - XML descriptors, generating, 398
  - @XmlElement annotation, 480
  - @XmlRootElement annotation, 480
  - xor method (`BitSet`), 249
- Y**
- y formatting symbol (date/time), 416
  - Year, YearMonth classes, 407
- Z**
- z, Z formatting symbols (date/time), 414, 416
  - \z, \Z, in regular expressions, 314
  - ZIP file systems, 305
  - ZipInputStream, ZipOutputStream classes, 305
  - zoned time, 404–407, 410–413
  - ZonedDateTime class, 410–413
    - and legacy classes, 417
  - getDayOfMonth methods, 411
  - getMonthXXX, getYear, getXxx, isXXX methods, 412
  - minus, minusXXX, now, ofInstant methods, 411
  - of method, 410–411
  - parse method, 430
  - plus, plusXXX methods, 411–412
  - toInstant method, 410, 412
  - toLocalXXX methods, 412
  - withXXX methods, 411
  - ZoneId class, 410