

```
In [1]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

```
In [2]: df=pd.read_csv(r"C:\Users\Admin\Downloads\8_BreastCancerPrediction - 8_BreastCancerPrediction.csv")
```

```
In [3]: df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 569 entries, 0 to 568
Data columns (total 32 columns):
#   Column                                Non-Null Count  Dtype
---  -
0   id                                     569 non-null    int64
1   diagnosis                             569 non-null    object
2   radius_mean                           569 non-null    float64
3   texture_mean                           569 non-null    float64
4   perimeter_mean                         569 non-null    float64
5   area_mean                             569 non-null    float64
6   smoothness_mean                        569 non-null    float64
7   compactness_mean                       569 non-null    float64
8   concavity_mean                         569 non-null    float64
9   concave points_mean                    569 non-null    float64
10  symmetry_mean                           569 non-null    float64
11  fractal_dimension_mean                  569 non-null    float64
12  radius_se                               569 non-null    float64
13  texture_se                              569 non-null    float64
14  perimeter_se                            569 non-null    float64
15  area_se                                 569 non-null    float64
16  smoothness_se                           569 non-null    float64
17  compactness_se                           569 non-null    float64
18  concavity_se                             569 non-null    float64
19  concave points_se                       569 non-null    float64
20  symmetry_se                              569 non-null    float64
21  fractal_dimension_se                    569 non-null    float64
22  radius_worst                            569 non-null    float64
23  texture_worst                           569 non-null    float64
24  perimeter_worst                         569 non-null    float64
25  area_worst                              569 non-null    float64
26  smoothness_worst                        569 non-null    float64
27  compactness_worst                       569 non-null    float64
28  concavity_worst                         569 non-null    float64
29  concave points_worst                    569 non-null    float64
30  symmetry_worst                           569 non-null    float64
31  fractal_dimension_worst                  569 non-null    float64
dtypes: float64(30), int64(1), object(1)
memory usage: 142.4+ KB
```

```
In [4]: df.describe()
```

```
Out[4]:
```

	id	radius_mean	texture_mean	perimeter_mean	area_mean	smoothness_mean	compactness_mean	c
count	5.690000e+02	569.000000	569.000000	569.000000	569.000000	569.000000	569.000000	
mean	3.037183e+07	14.127292	19.289649	91.969033	654.889104	0.096360	0.104341	
std	1.250206e+08	3.524049	4.301036	24.298981	351.914129	0.014064	0.052813	
min	8.670000e+03	6.981000	9.710000	43.790000	143.500000	0.052630	0.019380	
25%	8.692180e+05	11.700000	16.170000	75.170000	420.300000	0.086370	0.064920	
50%	9.060240e+05	13.370000	18.840000	86.240000	551.100000	0.095870	0.092630	
75%	8.813129e+06	15.780000	21.800000	104.100000	782.700000	0.105300	0.130400	
max	9.113205e+08	28.110000	39.280000	188.500000	2501.000000	0.163400	0.345400	

8 rows × 31 columns




```
In [5]: df1=df.head(100)
```

```
In [6]: df1.columns
```

```
Out[6]: Index(['id', 'diagnosis', 'radius_mean', 'texture_mean', 'perimeter_mean',
               'area_mean', 'smoothness_mean', 'compactness_mean', 'concavity_mean',
               'concave points_mean', 'symmetry_mean', 'fractal_dimension_mean',
               'radius_se', 'texture_se', 'perimeter_se', 'area_se', 'smoothness_se',
               'compactness_se', 'concavity_se', 'concave points_se', 'symmetry_se',
               'fractal_dimension_se', 'radius_worst', 'texture_worst',
               'perimeter_worst', 'area_worst', 'smoothness_worst',
               'compactness_worst', 'concavity_worst', 'concave points_worst',
               'symmetry_worst', 'fractal_dimension_worst'],
              dtype='object')
```


```
In [9]: sns.pairplot(df1)
```

```
Out[9]: <seaborn.axisgrid.PairGrid at 0x1f8653fbc10>
```

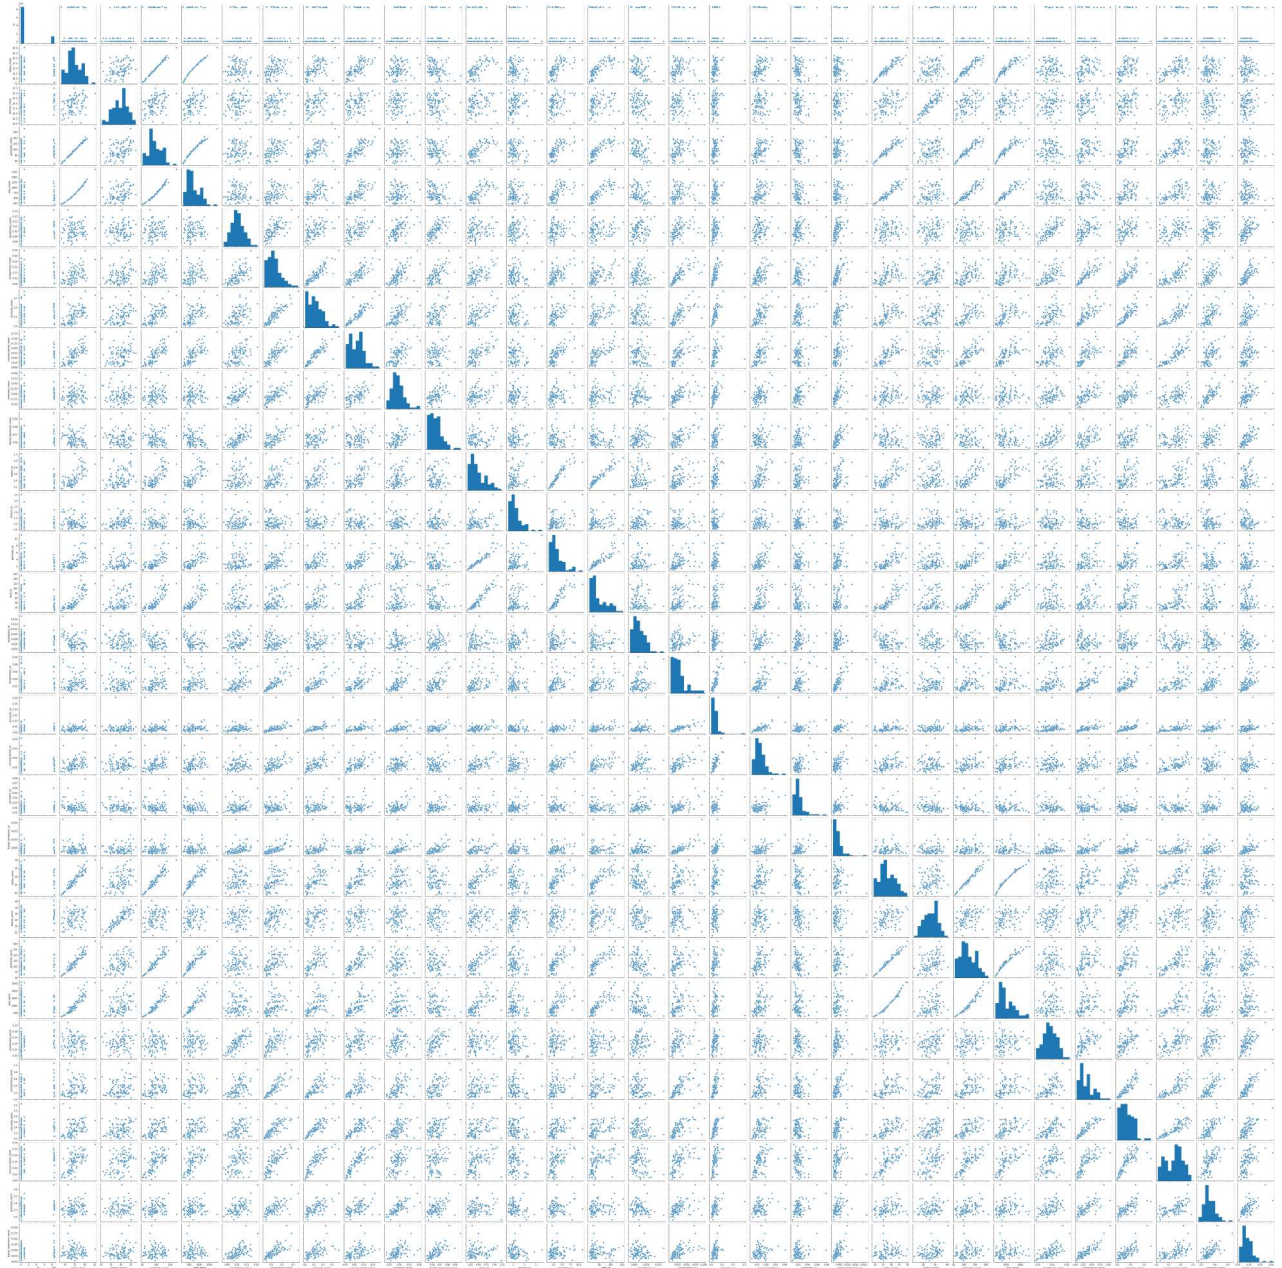

```
In [10]: sns.distplot(df1['symmetry_worst'])
```

```
Out[10]: <matplotlib.axes._subplots.AxesSubplot at 0x1f82eb55910>
```

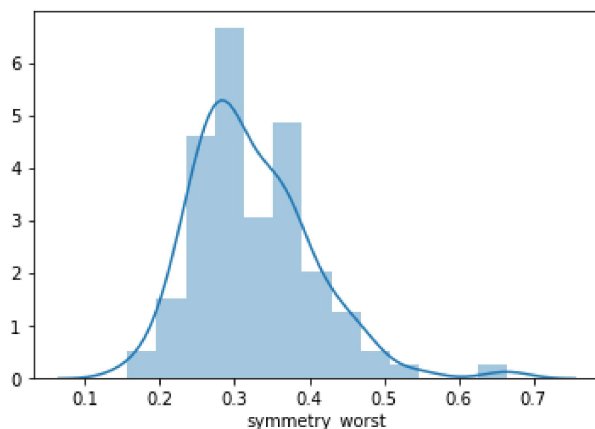

```
In [11]: df2=df1[['radius_mean', 'texture_mean', 'perimeter_mean',
                  'area_mean', 'smoothness_mean', 'compactness_mean', 'concavity_mean',
                  'concave points_mean', 'symmetry_mean', 'fractal_dimension_mean',
                  'radius_se', 'texture_se', 'perimeter_se', 'area_se', 'smoothness_se',
                  'compactness_se', 'concavity_se', 'concave points_se', 'symmetry_se',
                  'fractal_dimension_se', 'radius_worst', 'texture_worst',
                  'perimeter_worst', 'area_worst', 'smoothness_worst',
                  'compactness_worst', 'concavity_worst', 'concave points_worst',
                  'symmetry_worst', 'fractal_dimension_worst']]
df2
```


```
Out[11]:
```

	radius_mean	texture_mean	perimeter_mean	area_mean	smoothness_mean	compactness_mean	concavity_mean	poi
0	17.990	10.38	122.80	1001.0	0.11840	0.27760	0.300100	
1	20.570	17.77	132.90	1326.0	0.08474	0.07864	0.086900	
2	19.690	21.25	130.00	1203.0	0.10960	0.15990	0.197400	
3	11.420	20.38	77.58	386.1	0.14250	0.28390	0.241400	
4	20.290	14.34	135.10	1297.0	0.10030	0.13280	0.198000	
...
95	20.260	23.03	132.40	1264.0	0.09078	0.13130	0.146500	
96	12.180	17.84	77.79	451.1	0.10450	0.07057	0.024900	
97	9.787	19.94	62.11	294.5	0.10240	0.05301	0.006829	
98	11.600	12.84	74.34	412.6	0.08983	0.07525	0.041960	
99	14.420	19.77	94.48	642.5	0.09752	0.11410	0.093880	

100 rows × 30 columns

```
In [12]: sns.heatmap(df2.corr())
```

```
Out[12]: <matplotlib.axes._subplots.AxesSubplot at 0x1f833f6ca60>
```

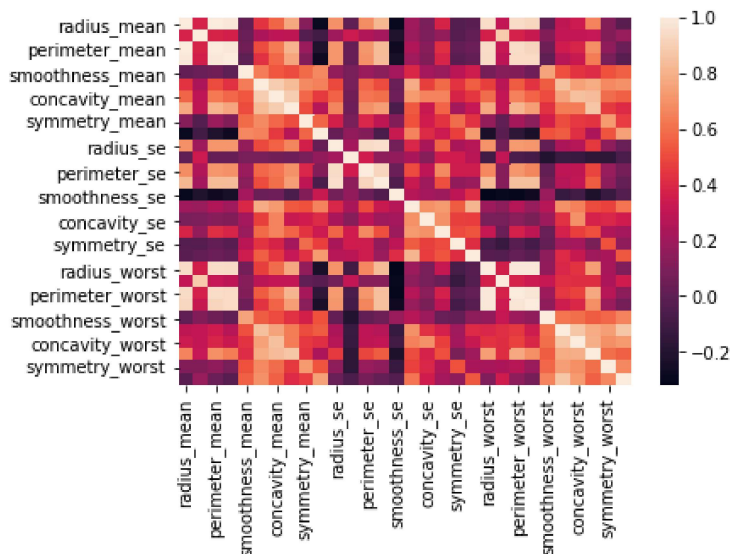

```
In [13]: x=df2[['perimeter_worst', 'area_worst', 'smoothness_worst',
               'compactness_worst', 'concavity_worst', 'concave points_worst']]
y=df2[['symmetry_worst']]
```

```
In [14]: from sklearn.model_selection import train_test_split
x_train,x_test,y_train,y_test = train_test_split(x,y,test_size=0.3)
```

```
In [15]: from sklearn.linear_model import LinearRegression
lr= LinearRegression()
lr.fit(x_train,y_train)
```


```
Out[15]: LinearRegression()
```

```
In [16]: print(lr.intercept_)

[0.11219744]
```

```
In [17]: prediction= lr.predict(x_test)
plt.scatter(y_test,prediction)
```

```
Out[17]: <matplotlib.collections.PathCollection at 0x1f83e485850>
```

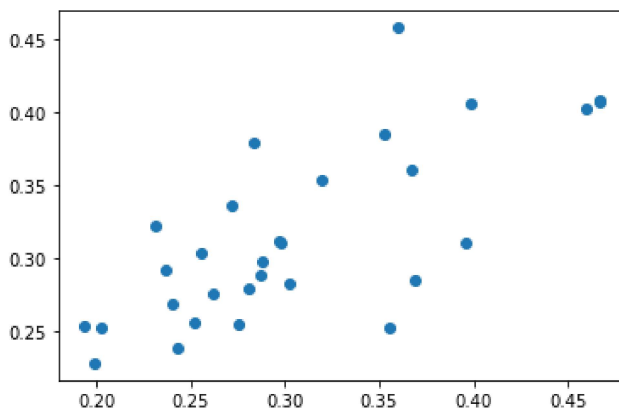

```
In [18]: print(lr.score(x_test,y_test))

0.5186476676031839
```

```
In [19]: print(lr.score(x_train,y_train))
```

```
0.5899276009129012
```

```
In [21]: from sklearn.linear_model import Ridge,Lasso  
rr=Ridge(alpha=10)  
rr.fit(x_train,y_train)
```

```
Out[21]: Ridge(alpha=10)
```

```
In [22]: rr.score(x_test,y_test)
```

```
Out[22]: 0.3815704990793837
```

```
In [23]: la=Lasso(alpha=10)  
la.fit(x_train,y_train)
```

```
Out[23]: Lasso(alpha=10)
```

```
In [24]: la.score(x_test,y_test)
```

```
Out[24]: -0.0976405949875565
```

```
In [ ]:
```