

```
In [45]: import numpy as np  
import pandas as pd  
import matplotlib.pyplot as plt  
import seaborn as sns
```

```
In [46]: df=pd.read_csv(r"C:\Users\Admin\Downloads\5_Instagram data - 5_Instagram data.csv")
df
```

Out[46]:

	Impressions	From Home	From Hashtags	From Explore	From Other	Saves	Comments	Shares	Likes	Profile Visits	F
0	3920	2586	1028	619	56	98	9	5	162	35	
1	5394	2727	1838	1174	78	194	7	14	224	48	
2	4021	2085	1188	0	533	41	11	1	131	62	
3	4528	2700	621	932	73	172	10	7	213	23	
4	2518	1704	255	279	37	96	5	4	123	8	
...	
114	13700	5185	3041	5352	77	573	2	38	373	73	
115	5731	1923	1368	2266	65	135	4	1	148	20	
116	4139	1133	1538	1367	33	36	0	1	92	34	
117	32695	11815	3147	17414	170	1095	2	75	549	148	

	Impressions	From Home	From Hashtags	From Explore	From Other	Saves	Comments	Shares	Likes	Profile Visits	F
118	36919	13473	4176	16444	2547	653	5	26	443	611	

119 rows × 13 columns

In [47]: df.describe()

Out[47]:

	Impressions	From Home	From Hashtags	From Explore	From Other	Saves	Comm
count	119.000000	119.000000	119.000000	119.000000	119.000000	119.000000	119.00
mean	5703.991597	2475.789916	1887.512605	1078.100840	171.092437	153.310924	6.66
std	4843.780105	1489.386348	1884.361443	2613.026132	289.431031	156.317731	3.54
min	1941.000000	1133.000000	116.000000	0.000000	9.000000	22.000000	0.00
25%	3467.000000	1945.000000	726.000000	157.500000	38.000000	65.000000	4.00
50%	4289.000000	2207.000000	1278.000000	326.000000	74.000000	109.000000	6.00
75%	6138.000000	2602.500000	2363.500000	689.500000	196.000000	169.000000	8.00
max	36919.000000	13473.000000	11817.000000	17414.000000	2547.000000	1095.000000	19.00

In [48]: df.info()

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 119 entries, 0 to 118
Data columns (total 13 columns):
#   Column          Non-Null Count  Dtype
---  -
0   Impressions     119 non-null   int64
1   From Home       119 non-null   int64
2   From Hashtags   119 non-null   int64
3   From Explore    119 non-null   int64
4   From Other      119 non-null   int64
5   Saves           119 non-null   int64
6   Comments        119 non-null   int64
7   Shares          119 non-null   int64
8   Likes           119 non-null   int64
9   Profile Visits  119 non-null   int64
10  Follows         119 non-null   int64
11  Caption         119 non-null   object
12  Hashtags        119 non-null   object
dtypes: int64(11), object(2)
memory usage: 12.2+ KB
```

```
In [49]: df.columns
```

```
Out[49]: Index(['Impressions', 'From Home', 'From Hashtags', 'From Explore',  
              'From Other', 'Saves', 'Comments', 'Shares', 'Likes', 'Profile Visit  
s',  
              'Follows', 'Caption', 'Hashtags'],  
              dtype='object')
```

```
In [50]: df1=df.head(100)  
df1
```

Out[50]:


	Impressions	From Home	From Hashtags	From Explore	From Other	Saves	Comments	Shares	Likes	Profile Visits	Fo
0	3920	2586	1028	619	56	98	9	5	162	35	
1	5394	2727	1838	1174	78	194	7	14	224	48	
2	4021	2085	1188	0	533	41	11	1	131	62	
3	4528	2700	621	932	73	172	10	7	213	23	
4	2518	1704	255	279	37	96	5	4	123	8	
...
95	5394	2275	2975	45	65	61	19	6	147	69	
96	2766	2541	116	51	9	40	10	4	114	11	
97	3924	2244	1278	326	34	139	11	3	151	19	
98	3015	2034	771	115	41	52	11	4	92	9	
99	5409	2643	2006	1068	230	393	10	27	275	38	

100 rows × 13 columns




```
In [51]: sns.pairplot(df1)
```

```
Out[51]: <seaborn.axisgrid.PairGrid at 0x145935c3e50>
```

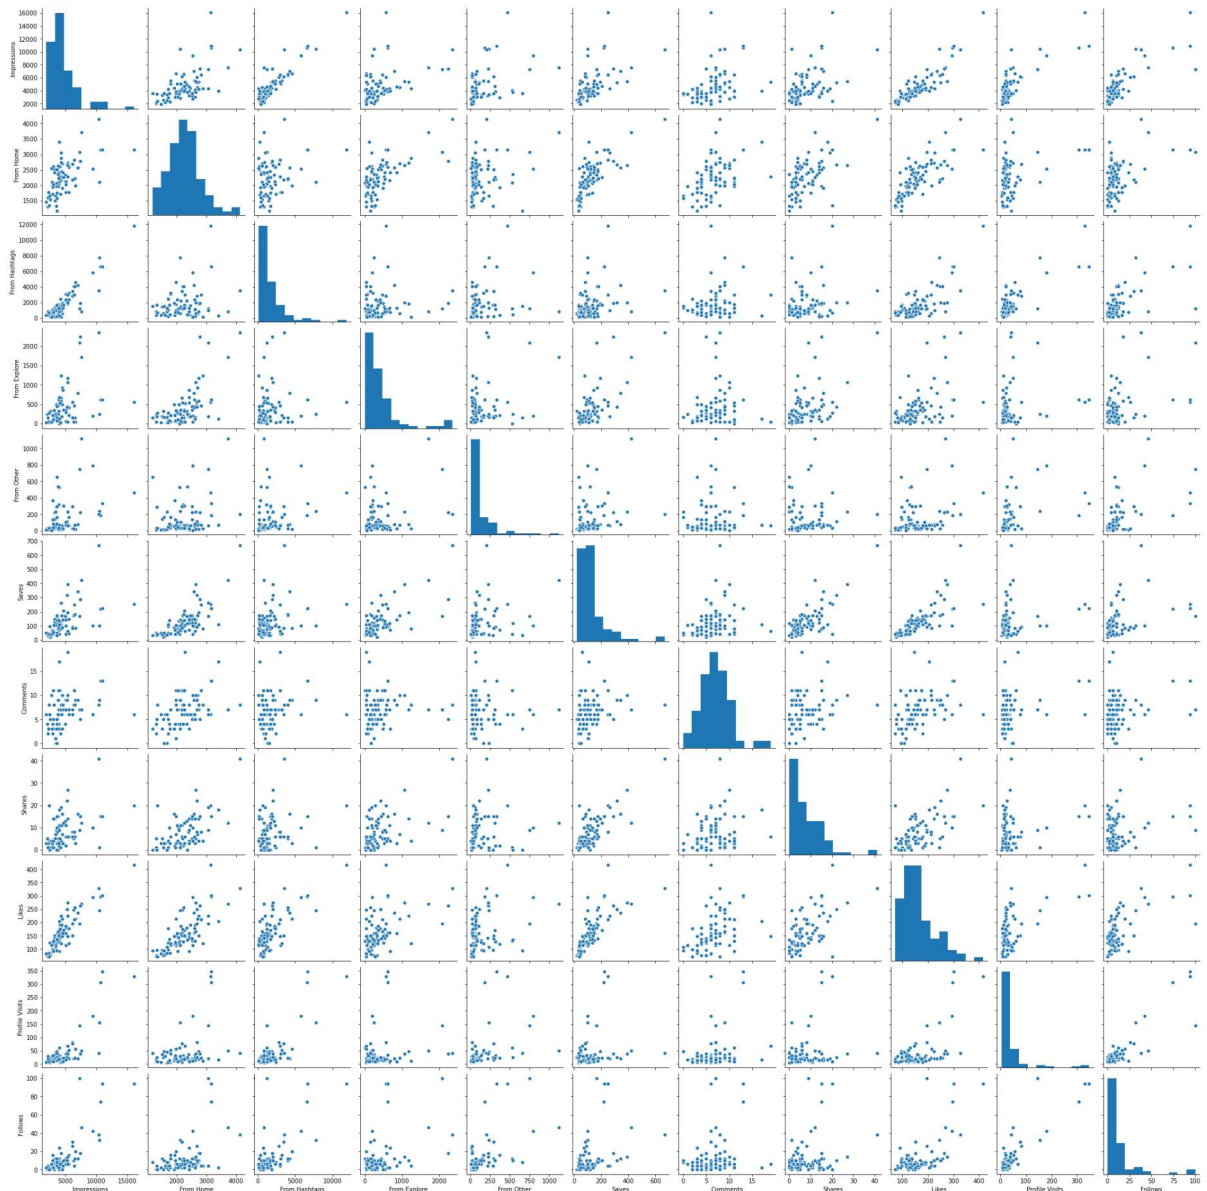



```
In [53]: sns.distplot(df1['Follows'])
```

```
Out[53]: <matplotlib.axes._subplots.AxesSubplot at 0x14599ff86d0>
```

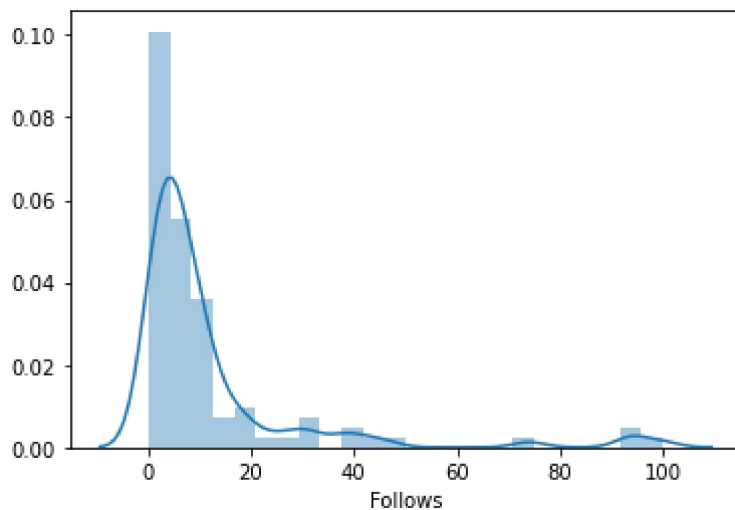

```
In [54]: sns.heatmap(df1.corr())
```

```
Out[54]: <matplotlib.axes._subplots.AxesSubplot at 0x1459ba260d0>
```

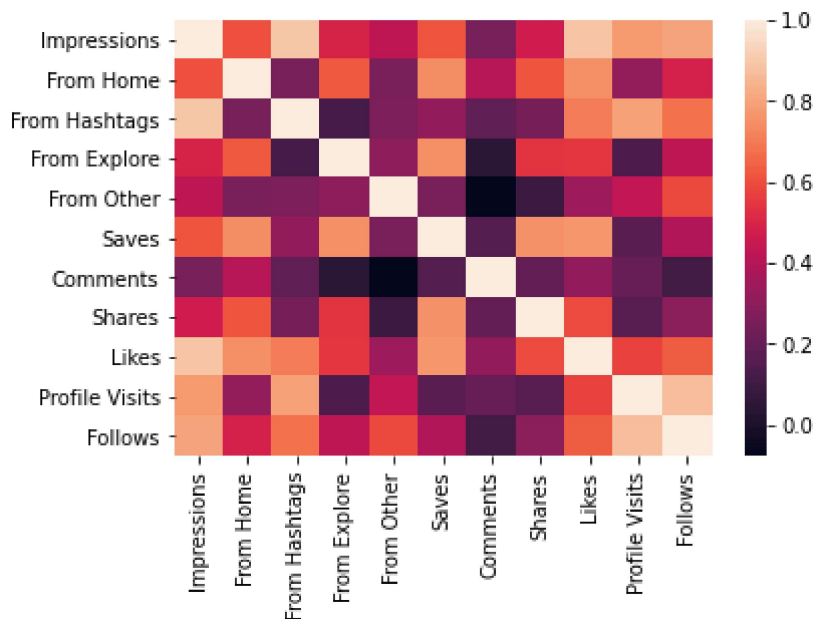

```
In [55]: x=df1[['Impressions', 'From Home', 'From Hashtags', 'From Explore',
               'From Other', 'Saves', 'Comments', 'Shares', 'Likes', 'Profile Visits']]
y=df1['Follows']
```

```
In [61]: from sklearn.model_selection import train_test_split
x_train,x_test,y_train,y_test = train_test_split(x,y,test_size=0.3)
```

```
In [62]: from sklearn.linear_model import LinearRegression  
lr= LinearRegression()  
lr.fit(x_train,y_train)
```

Out[62]: LinearRegression()

```
In [63]: print(lr.intercept_)
```

-8.61530490269823

```
In [64]: print(lr.score(x_train,y_train))
```

0.9494592077021216

```
In [65]: from sklearn.linear_model import Ridge,Lasso
```

```
In [66]: rr=Ridge(alpha=10)  
rr.fit(x_train,y_train)
```

Out[66]: Ridge(alpha=10)

```
In [67]: rr.score(x_test,y_test)
```

Out[67]: 0.6681355031269268

```
In [68]: la=Lasso(alpha=10)  
la.fit(x_train,y_train)
```

Out[68]: Lasso(alpha=10)

```
In [69]: la.score(x_test,y_test)
```

Out[69]: 0.6585281377993993

```
In [ ]:
```

```
In [ ]:
```