





DOKUMENTASI LEMBAR KERJA SUPERLAB – ASJ DEBIAN 10




Nama : Andhika Rafi
NIS : 12410185
Rombel : TJKT XI-3

1. Install Server Debian 10






A. Hasil Konfigurasi

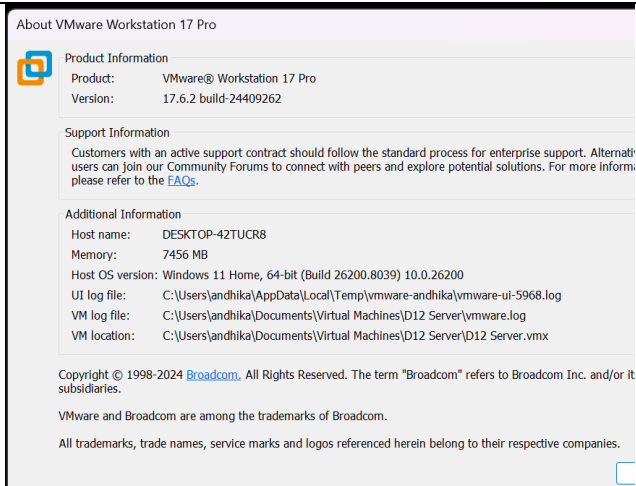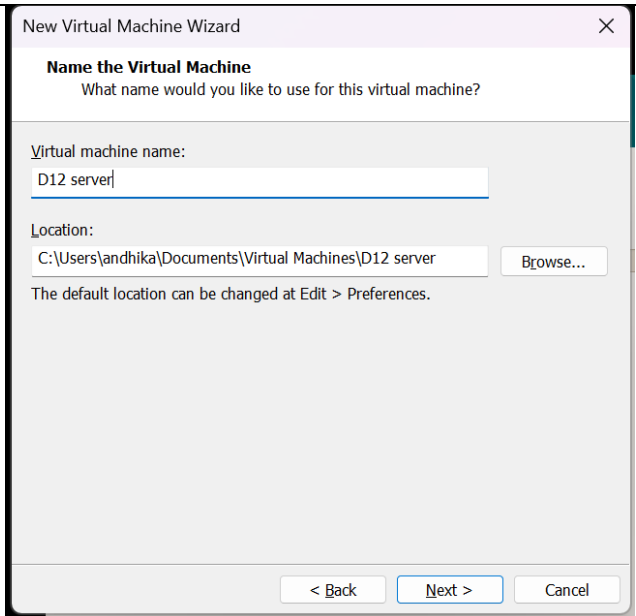No	Konfigurasi	Screenshot Hasil Konfigurasi
1	Guest OS	
2	Virtual Machine Name	

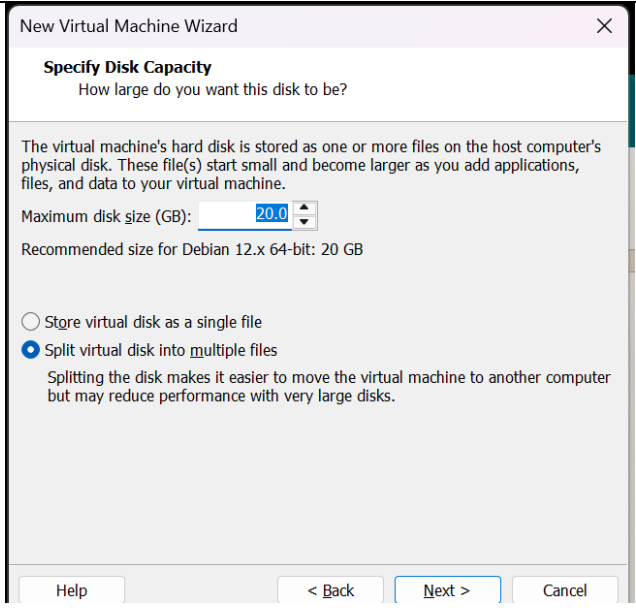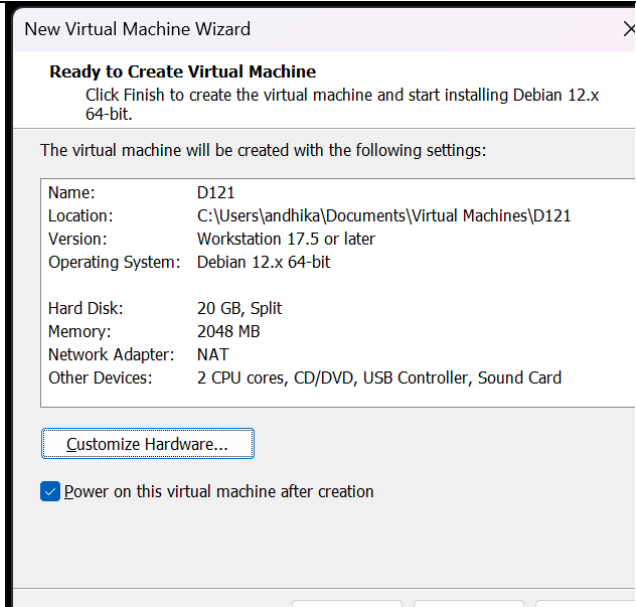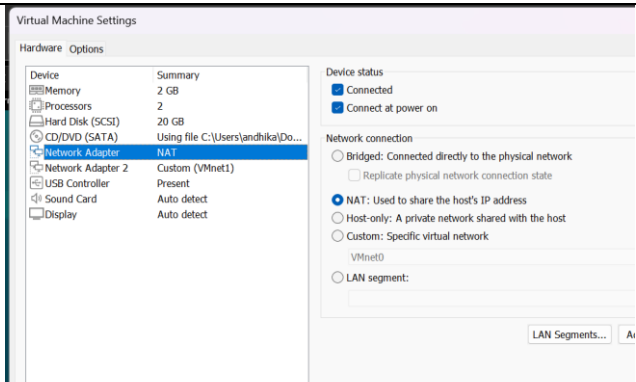

3	Disk Space	
4	Memory	
5	Network Adapter	

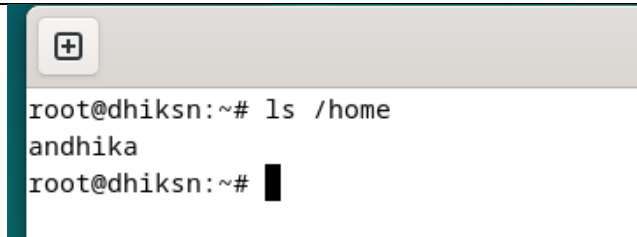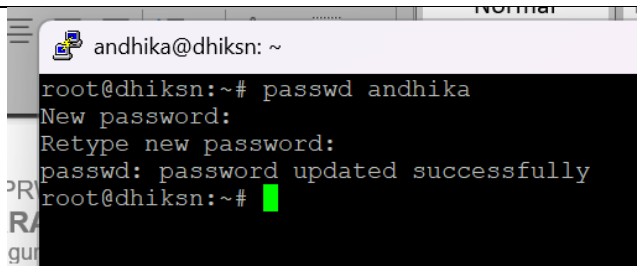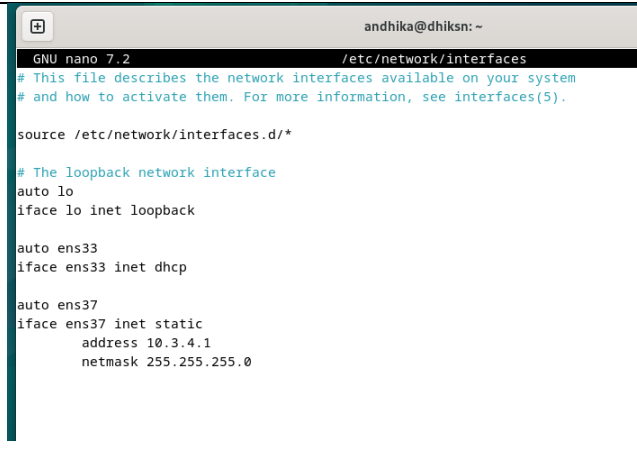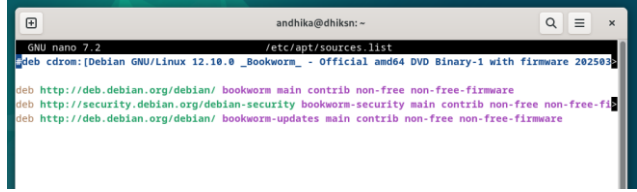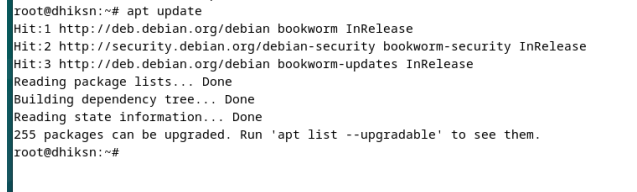

6	Username	
7	Password	
8	IP Address	
9	Repository Lokal	
10	Update Repository	

2. SSH Server



A. Hasil Konfigurasi

No	Konfigurasi	Screenshot Hasil Ujicoba
----	-------------	--------------------------



1	Update package	<pre>root@dhiksn:~# apt update Hit:1 http://deb.debian.org/debian bookworm InRelease Hit:2 http://security.debian.org/debian-security bookworm-security InRelease Hit:3 http://deb.debian.org/debian bookworm-updates InRelease Reading package lists... Done Building dependency tree... Done Reading state information... Done 255 packages can be upgraded. Run 'apt list --upgradable' to see them. root@dhiksn:~#</pre>
2	Install SSH	<pre>andhika@dhiksn:~ root@dhiksn:~# apt install openssh-server Reading package lists... Done Building dependency tree... Done Reading state information... Done The following additional packages will be installed: libssl3 openssh-client openssh-sftp-server openssh-runit-helper Suggested packages: keychain libpam-ssh monkeysphere ssh-askpass molly-guard ufw The following NEW packages will be installed: openssh-server openssh-sftp-server runit-helper The following packages will be upgraded: libssl3 openssh-client openssh 3 upgraded, 3 newly installed, 0 to remove and 252 not upgraded. Need to get 4,989 kB of archives. After this operation, 2,243 kB of additional disk space will be used. Do you want to continue? [Y/n] y Get:1 http://deb.debian.org/debian bookworm/main amd64 runit-helper all 2.15.2 [6,520 B] Get:2 http://security.debian.org/debian-security bookworm-security/main amd64 libssl3 amd64 3.0.19-1-debian; [2,032 kB] Get:3 http://security.debian.org/debian-security bookworm-security/main amd64 openssh-client amd64 1:9.2p1-; [2,032 kB]</pre>
3	Edit file sshd_config	PermitRootLogin prohibit jadi PermitRootLogin yes dan buka pagar PasswordAuthentication yes <pre>andhika@dhiksn:~ GNU nano 7.2 /etc/ssh/sshd_config #Port 22 #AddressFamily any #ListenAddress 0.0.0.0 #ListenAddress :: #HostKey /etc/ssh/ssh_host_rsa_key #HostKey /etc/ssh/ssh_host_ecdsa_key #HostKey /etc/ssh/ssh_host_ed25519_key # Ciphers and keying #RekeyLimit default none # Logging #SyslogFacility AUTH #LogLevel INFO # Authentication: #LoginGraceTime 2m PermitRootLogin yes #StrictModes yes #MaxAuthTries 6 #MaxSessions 10</pre>
4	Restart service SSH	<pre>root@dhiksn:~# systemctl restart ssh root@dhiksn:~#</pre>

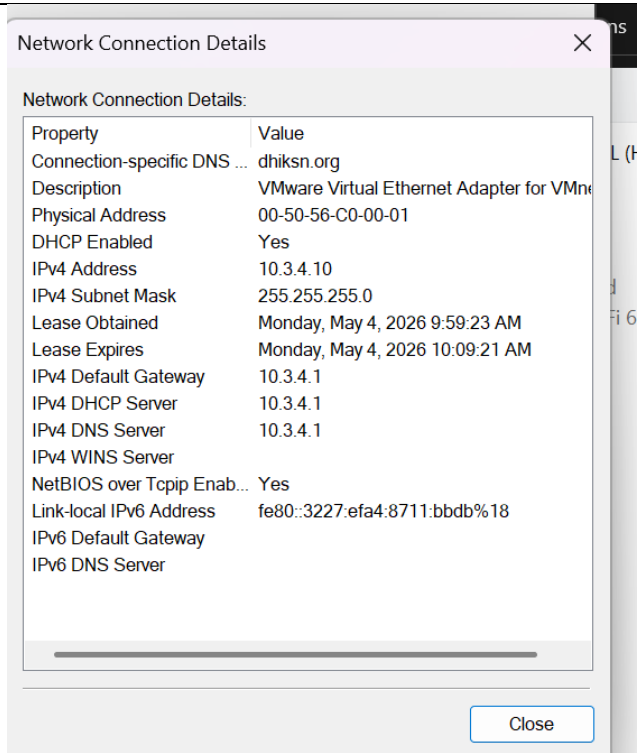
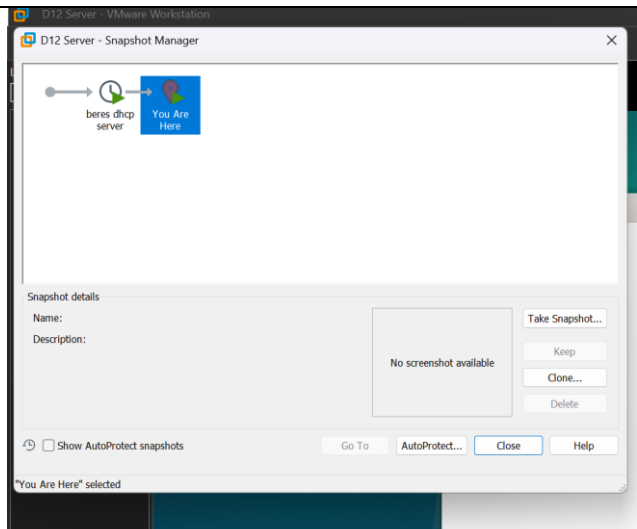


5	Konfig IP Address Client	
6	Snapshoot	

B. Hasil Ujicoba

No	Uji Coba	Screenshot Hasil Ujicoba
----	----------	--------------------------

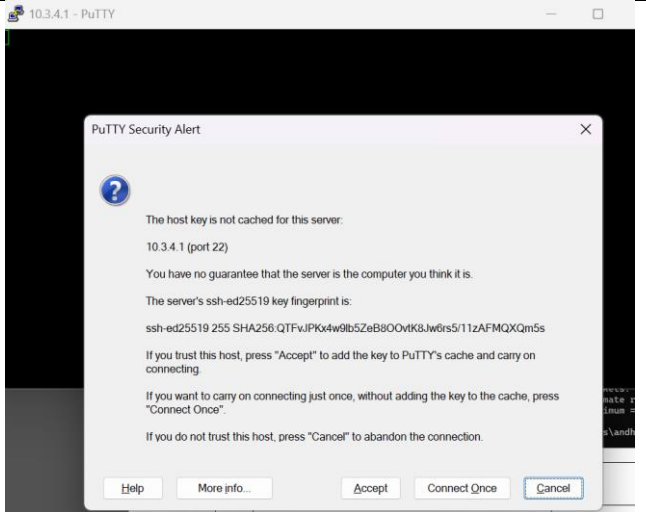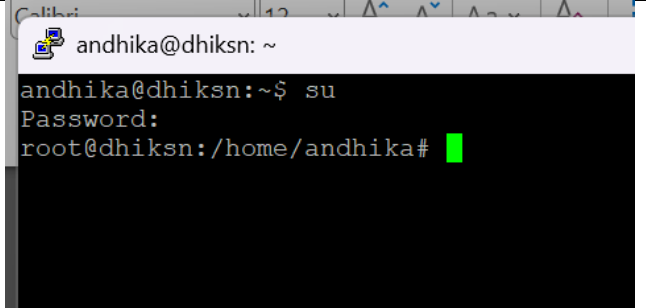


1	Ping ke IP Server	<pre>C:\Users\andhika>ping 10.3.4.1 Pinging 10.3.4.1 with 32 bytes of data: Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Ping statistics for 10.3.4.1: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 1ms, Maximum = 1ms, Average = 1ms C:\Users\andhika></pre>
2	Konek SSH menggunakan Putty	
3	Login sebagai root	

3. DHCP Server


A. Hasil Konfigurasi

No	Konfigurasi	Screenshot Hasil Ujicoba
----	-------------	--------------------------

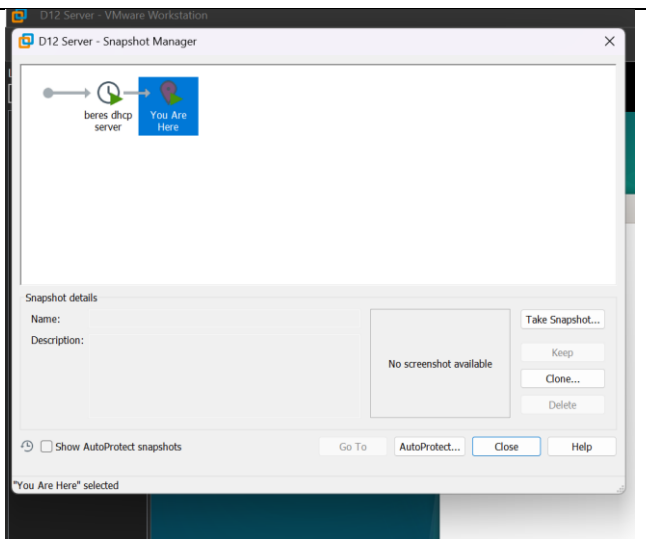

1	Snapshot	
2	Install DHCP Server	<pre>andhika@dhiksn: ~ root@dhiksn:~# apt install isc-dhcp-server Reading package lists... Done Building dependency tree... Done Reading state information... Done isc-dhcp-server is already the newest version (4.4.3-P1-2). 0 upgraded, 0 newly installed, 0 to remove and 252 not upgraded. root@dhiksn:~#</pre>
3	Edit file dhcpd.conf	<pre>andhika@dhiksn: ~ GNU nano 7.2 /etc/dhcp/dhcpd.conf # This declaration allows BOOTP clients to get dynamic addresses, # which we don't really recommend. #subnet 10.254.239.32 netmask 255.255.255.224 { # range dynamic-bootp 10.254.239.40 10.254.239.60; # option broadcast-address 10.254.239.31; # option routers rtr-239-32-1.example.org; #} # A slightly different configuration for an internal subnet. subnet 10.3.4.0 netmask 255.255.255.0 { range 10.3.4.10 10.3.4.30; option domain-name-servers ns1.internal.example.org; option domain-name "dhiksn.org"; option routers 10.3.4.1; option broadcast-address 10.3.4.31; default-lease-time 600; max-lease-time 7200; } # Hosts which require special configuration options can be listed in</pre>
4	Edit file default isc-dhcp-server	<pre>andhika@dhiksn: ~ GNU nano 7.2 /etc/default/isc-dhcp-server # Defaults for isc-dhcp-server (sourced by /etc/init.d/isc-dhcp-server) # Path to dhcpd's config file (default: /etc/dhcp/dhcpd.conf). #DHCPDv4_CONF=/etc/dhcp/dhcpd.conf #DHCPDv6_CONF=/etc/dhcp/dhcpd6.conf # Path to dhcpd's PID file (default: /var/run/dhcpd.pid). #DHCPDv4_PID=/var/run/dhcpd.pid #DHCPDv6_PID=/var/run/dhcpd6.pid # Additional options to start dhcpd with. # Don't use options -cf or -pf here; use DHCPD_CONF/ DHCPD_PID instead #OPTIONS="" # On what interfaces should the DHCP server (dhcpd) serve DHCP requests? # Separate multiple interfaces with spaces, e.g. "eth0 eth1". INTERFACESv4="ens37" INTERFACESv6=""</pre>

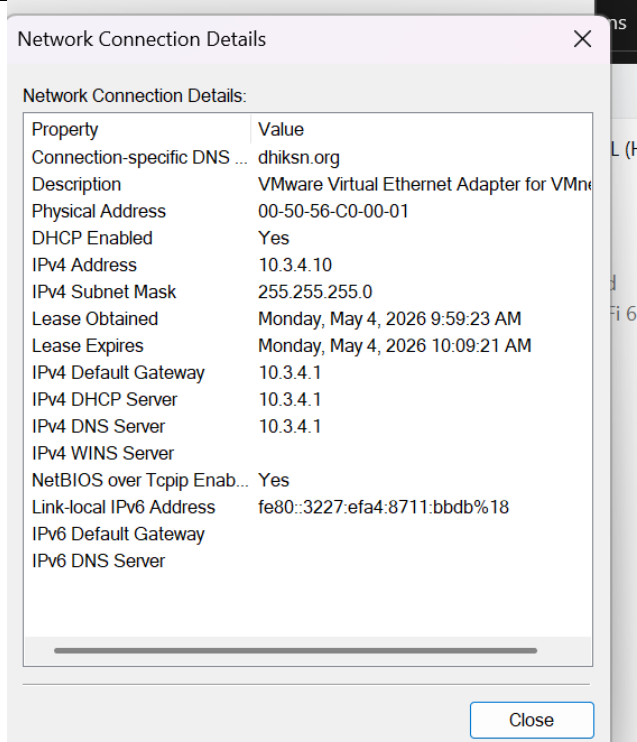

5	Restart Service DHCP Server	<pre>root@dhiksn:~# systemctl restart isc-dhcp-server root@dhiksn:~#</pre>
6	Konfig IP DHCP disisi Client	

B. Hasil Ujicoba


No	Uji Coba	Screenshot Hasil Ujicoba
----	----------	--------------------------







1	Cek IP di Interface Host-Only	Network Connection Details Network Connection Details: <table><tr><td>Property</td><td>Value</td></tr><tr><td>Connection-specific DNS ...</td><td>dhiksn.org</td></tr><tr><td>Description</td><td>VMware Virtual Ethernet Adapter for VMne</td></tr><tr><td>Physical Address</td><td>00-50-56-C0-00-01</td></tr><tr><td>DHCP Enabled</td><td>Yes</td></tr><tr><td>IPv4 Address</td><td>10.3.4.10</td></tr><tr><td>IPv4 Subnet Mask</td><td>255.255.255.0</td></tr><tr><td>Lease Obtained</td><td>Monday, May 4, 2026 9:59:23 AM</td></tr><tr><td>Lease Expires</td><td>Monday, May 4, 2026 10:09:21 AM</td></tr><tr><td>IPv4 Default Gateway</td><td>10.3.4.1</td></tr><tr><td>IPv4 DHCP Server</td><td>10.3.4.1</td></tr><tr><td>IPv4 DNS Server</td><td>10.3.4.1</td></tr><tr><td>IPv4 WINS Server</td><td></td></tr><tr><td>NetBIOS over Tcpip Enab...</td><td>Yes</td></tr><tr><td>Link-local IPv6 Address</td><td>fe80::3227:efa4:8711:bdbb%18</td></tr><tr><td>IPv6 Default Gateway</td><td></td></tr><tr><td>IPv6 DNS Server</td><td></td></tr></table> Close	Property	Value	Connection-specific DNS ...	dhiksn.org	Description	VMware Virtual Ethernet Adapter for VMne	Physical Address	00-50-56-C0-00-01	DHCP Enabled	Yes	IPv4 Address	10.3.4.10	IPv4 Subnet Mask	255.255.255.0	Lease Obtained	Monday, May 4, 2026 9:59:23 AM	Lease Expires	Monday, May 4, 2026 10:09:21 AM	IPv4 Default Gateway	10.3.4.1	IPv4 DHCP Server	10.3.4.1	IPv4 DNS Server	10.3.4.1	IPv4 WINS Server		NetBIOS over Tcpip Enab...	Yes	Link-local IPv6 Address	fe80::3227:efa4:8711:bdbb%18	IPv6 Default Gateway		IPv6 DNS Server	
Property	Value																																			
Connection-specific DNS ...	dhiksn.org																																			
Description	VMware Virtual Ethernet Adapter for VMne																																			
Physical Address	00-50-56-C0-00-01																																			
DHCP Enabled	Yes																																			
IPv4 Address	10.3.4.10																																			
IPv4 Subnet Mask	255.255.255.0																																			
Lease Obtained	Monday, May 4, 2026 9:59:23 AM																																			
Lease Expires	Monday, May 4, 2026 10:09:21 AM																																			
IPv4 Default Gateway	10.3.4.1																																			
IPv4 DHCP Server	10.3.4.1																																			
IPv4 DNS Server	10.3.4.1																																			
IPv4 WINS Server																																				
NetBIOS over Tcpip Enab...	Yes																																			
Link-local IPv6 Address	fe80::3227:efa4:8711:bdbb%18																																			
IPv6 Default Gateway																																				
IPv6 DNS Server																																				
2	Test Ping ke IP Server	<pre>C:\Users\andhika>ping 10.3.4.1 Pinging 10.3.4.1 with 32 bytes of data: Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Ping statistics for 10.3.4.1: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 1ms, Maximum = 1ms, Average = 1ms C:\Users\andhika></pre>																																		

4. DNS Server





A. Hasil Konfigurasi

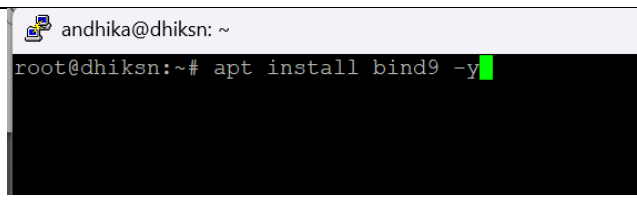No	Konfigurasi	Screenshot Hasil Ujicoba
1	Snapshot	
2	Install DNS Server	 <pre>andhika@dhiksn: ~ root@dhiksn:~# apt install bind9 -y</pre>

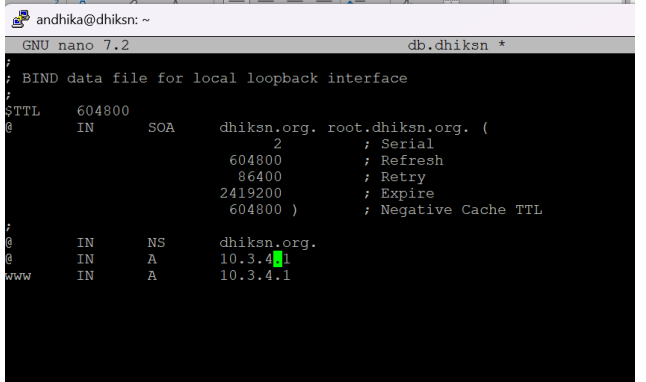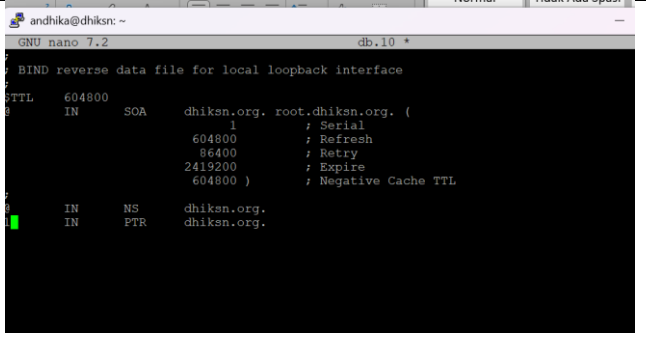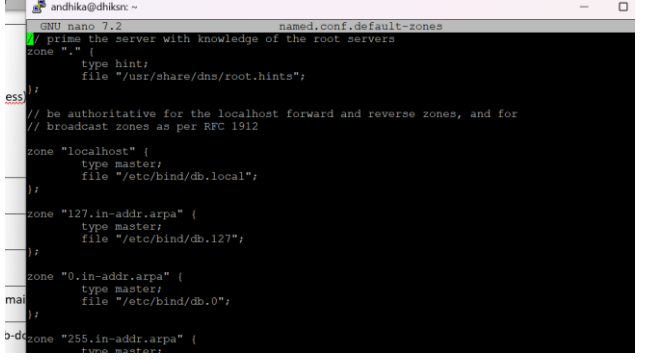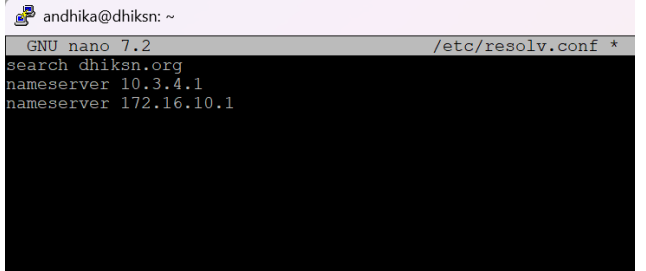

3	Copy file Forward	<pre>root@dhiksn:/etc/bind# cp db.local db.dhiksn root@dhiksn:/etc/bind# cp db.127 db.10 root@dhiksn:/etc/bind#</pre>
4	Copy file Reverse	<pre>root@dhiksn:/etc/bind# cp db.local db.dhiksn root@dhiksn:/etc/bind# cp db.127 db.10 root@dhiksn:/etc/bind#</pre>
5	Edit file Forward (db.domain)	
6	Edit file Reverse (db.ipaddress)	
7	Edit file conf.default-zones	
8	Edit file resolv.conf	

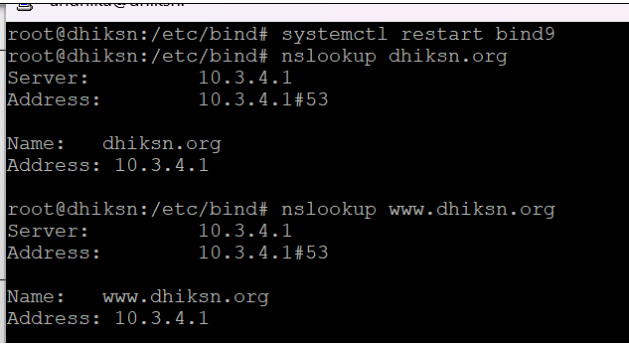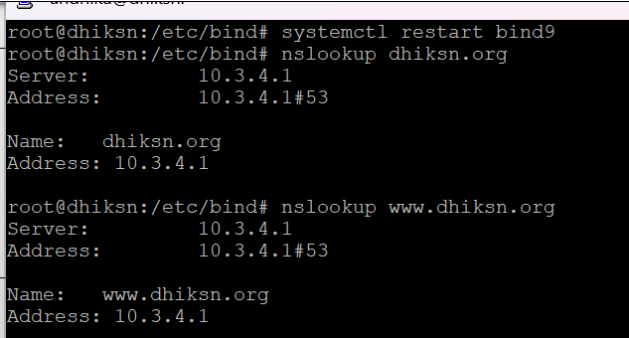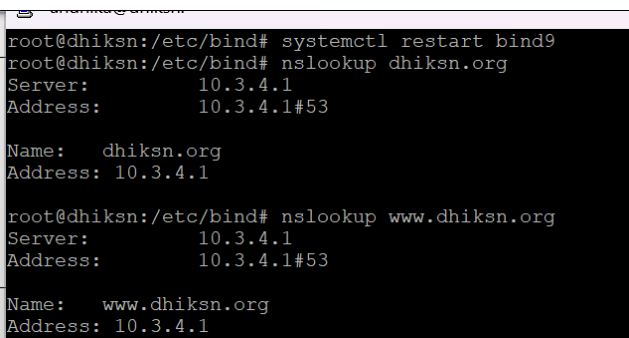
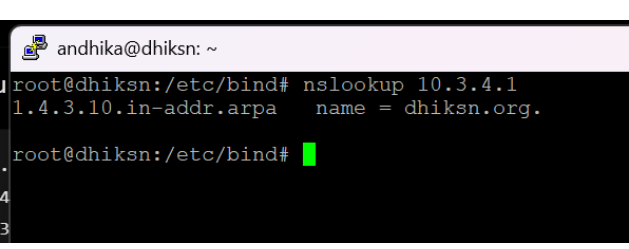


9	Restart service DNS Server	 <pre>root@dhiksn:/etc/bind# systemctl restart bind9 root@dhiksn:/etc/bind# nslookup dhiksn.org Server: 10.3.4.1 Address: 10.3.4.1#53 Name: dhiksn.org Address: 10.3.4.1 root@dhiksn:/etc/bind# nslookup www.dhiksn.org Server: 10.3.4.1 Address: 10.3.4.1#53 Name: www.dhiksn.org Address: 10.3.4.1</pre>
10	nslookup menggunakan domain	 <pre>root@dhiksn:/etc/bind# systemctl restart bind9 root@dhiksn:/etc/bind# nslookup dhiksn.org Server: 10.3.4.1 Address: 10.3.4.1#53 Name: dhiksn.org Address: 10.3.4.1 root@dhiksn:/etc/bind# nslookup www.dhiksn.org Server: 10.3.4.1 Address: 10.3.4.1#53 Name: www.dhiksn.org Address: 10.3.4.1</pre>
11	nslookup menggunakan sub-domain	 <pre>root@dhiksn:/etc/bind# systemctl restart bind9 root@dhiksn:/etc/bind# nslookup dhiksn.org Server: 10.3.4.1 Address: 10.3.4.1#53 Name: dhiksn.org Address: 10.3.4.1 root@dhiksn:/etc/bind# nslookup www.dhiksn.org Server: 10.3.4.1 Address: 10.3.4.1#53 Name: www.dhiksn.org Address: 10.3.4.1</pre>
12	nslookup menggunakan ip address	 <pre>andhika@dhiksn: ~ root@dhiksn:/etc/bind# nslookup 10.3.4.1 1.4.3.10.in-addr.arpa name = dhiksn.org. root@dhiksn:/etc/bind#</pre>

B. Hasil Uji Coba

No	Uji Coba	Screenshot Hasil Ujicoba
----	----------	--------------------------

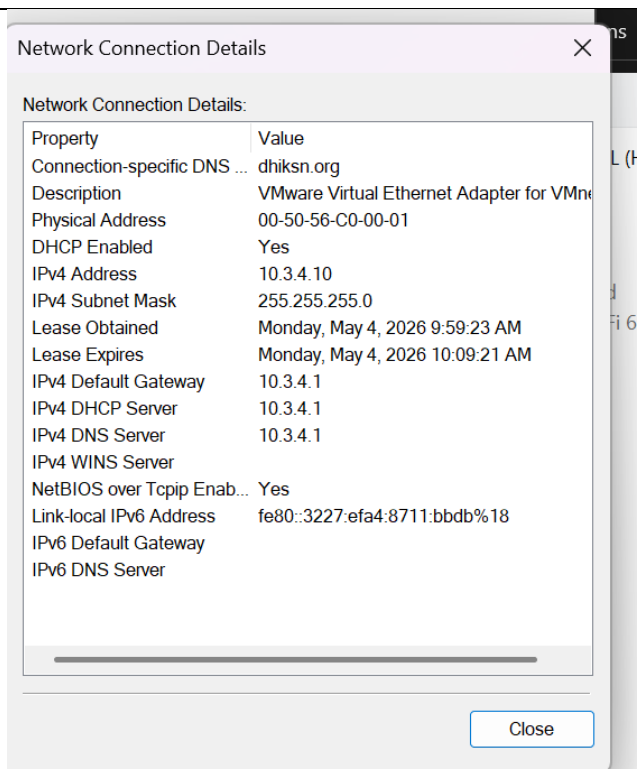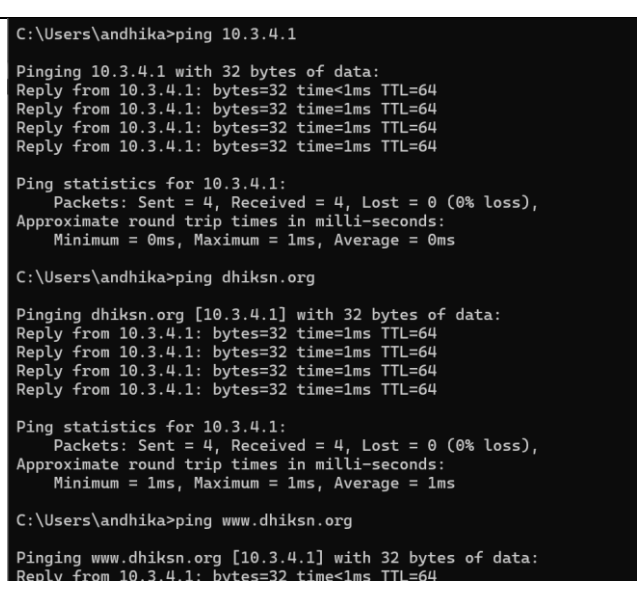

1	Cek IP di Interface Host-Only	
2	Test ping ke ip address di cmd	




3	Test ping ke domain di cmd	<pre>C:\Users\andhika>ping 10.3.4.1 Pinging 10.3.4.1 with 32 bytes of data: Reply from 10.3.4.1: bytes=32 time<1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Ping statistics for 10.3.4.1: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 1ms, Average = 0ms C:\Users\andhika>ping dhiksn.org Pinging dhiksn.org [10.3.4.1] with 32 bytes of data: Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Ping statistics for 10.3.4.1: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 1ms, Maximum = 1ms, Average = 1ms C:\Users\andhika>ping www.dhiksn.org Pinging www.dhiksn.org [10.3.4.1] with 32 bytes of data: Reply from 10.3.4.1: bytes=32 time=1ms TTL=64</pre>
4	Test ping ke subdomain di cmd	<pre>C:\Users\andhika>ping 10.3.4.1 Pinging 10.3.4.1 with 32 bytes of data: Reply from 10.3.4.1: bytes=32 time<1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Ping statistics for 10.3.4.1: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 1ms, Average = 0ms C:\Users\andhika>ping dhiksn.org Pinging dhiksn.org [10.3.4.1] with 32 bytes of data: Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Reply from 10.3.4.1: bytes=32 time=1ms TTL=64 Ping statistics for 10.3.4.1: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 1ms, Maximum = 1ms, Average = 1ms C:\Users\andhika>ping www.dhiksn.org Pinging www.dhiksn.org [10.3.4.1] with 32 bytes of data: Reply from 10.3.4.1: bytes=32 time=1ms TTL=64</pre>





5	nslookup ip address, domain dan subdomain di cmd	<pre>PS C:\Users\andhika> nslookup dhiksn.org Server: dhiksn.org Address: 10.3.4.1 Name: dhiksn.org Address: 10.3.4.1 PS C:\Users\andhika> nslookup www.dhiksn.org Server: dhiksn.org Address: 10.3.4.1 Name: www.dhiksn.org Address: 10.3.4.1 PS C:\Users\andhika> nslookup 10.3.4.1 Server: dhiksn.org Address: 10.3.4.1 Name: dhiksn.org Address: 10.3.4.1 PS C:\Users\andhika> </pre>
---	--	--

5. FTP Server


A. Hasil Konfigurasi

No	Konfigurasi	Screenshot Hasil Ujicoba
1	Snapshot	
2	Install FTP Server	<pre>andhika@dhiksn: ~ root@dhiksn:~# apt install vsftpd -y</pre>
3	Buat User Baru	<pre>andhika@dhiksn: ~ root@dhiksn:~# sudo adduser dhiksn-ftp Adding user 'dhiksn-ftp' ... Adding new group 'dhiksn-ftp' (1001) ... Adding new user 'dhiksn-ftp' (1001) with group 'dhiksn-ftp (1001)' ... Creating home directory '/home/dhiksn-ftp' ... Copying files from '/etc/skel' ... New password: Retype new password: password: password updated successfully Changing the user information for dhiksn-ftp Enter the new value, or press ENTER for the default Full Name []: Room Number []: Work Phone []: Home Phone []: Other []: Is the information correct? [Y/n] y Adding new user 'dhiksn-ftp' to supplemental / extra groups 'users' ... Adding user 'dhiksn-ftp' to group 'users' ... root@dhiksn:~#</pre>

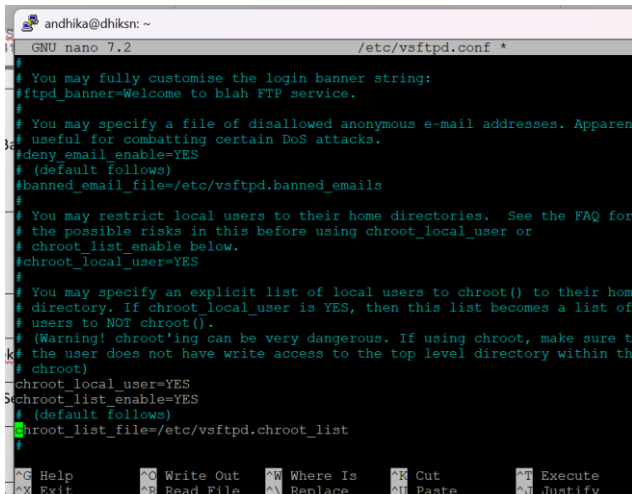
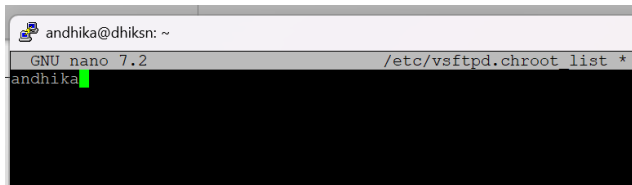


4	Set Password User Baru	<pre>root@dhiksn:~# passwd dhiksn-ftp New password: Retype new password: passwd: password updated successfully root@dhiksn:~#</pre>
5	Edit file vsftpd.conf	Uncomment write_enable=YES, ascii_upload_enable=YES, ascii_download_enable=YES, dan yg dibawah ini  The screenshot shows the nano editor editing /etc/vsftpd.conf. The following lines are visible and commented out: #ftp_banner=Welcome to blah FTP service., #deny_email_enable=YES, #chroot_local_user=YES, #chroot_list_enable=YES, and #chroot_list_file=/etc/vsftpd.chroot_list.  The screenshot shows the nano editor editing /etc/vsftpd.chroot_list. The file is currently empty.
6	Buat direktori ftp	<pre>andhika@dhiksn: ~ root@dhiksn:~# mkdir /home/dhiksn-ftp/ftp root@dhiksn:~# chmod 755 /home/dhiksn-ftp/ftp root@dhiksn:~# systemctl restart vsftpd root@dhiksn:~#</pre>
7	Ubah hak akses direktori ftp	<pre>andhika@dhiksn: ~ root@dhiksn:~# mkdir /home/dhiksn-ftp/ftp root@dhiksn:~# chmod 755 /home/dhiksn-ftp/ftp root@dhiksn:~# systemctl restart vsftpd root@dhiksn:~#</pre>

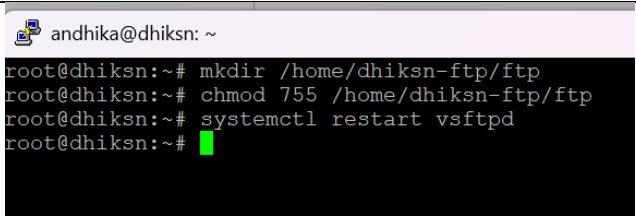

8	Restart service FTP Server	
---	----------------------------	--






B. Hasil Ujicoba

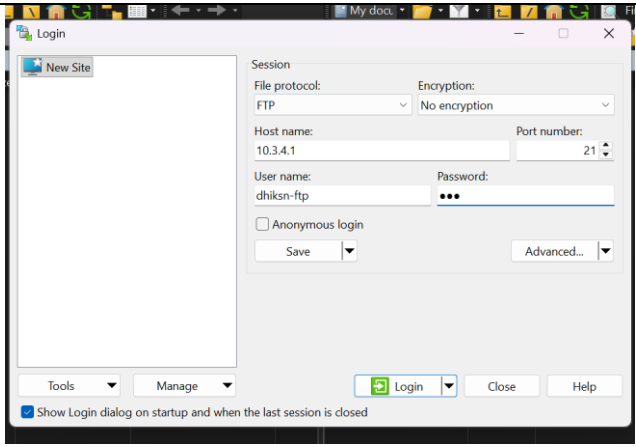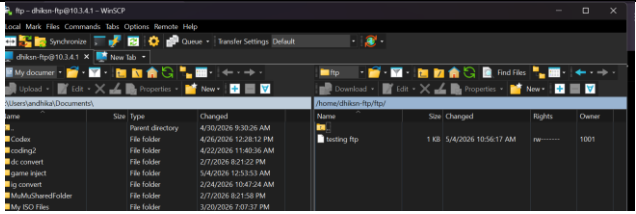No	Uji Coba	Screenshot Hasil Ujicoba						
1	Akses FTP Server (WinSCP)							
2	File text (Notepad)	<table><tr><td>yt_downloader</td><td>File folder</td><td>2/24/2026 11:50:45 AM</td></tr><tr><td>testing ftp</td><td>0 KB File</td><td>5/4/2026 10:55:49 AM</td></tr></table>	yt_downloader	File folder	2/24/2026 11:50:45 AM	testing ftp	0 KB File	5/4/2026 10:55:49 AM
yt_downloader	File folder	2/24/2026 11:50:45 AM						
testing ftp	0 KB File	5/4/2026 10:55:49 AM						
3	Upload file text ke FTP Server							
4	Cek isi file text di sisi Server							









6. Web Server dan Databases

- Web Statis (html dan php)

A. Hasil Konfigurasi

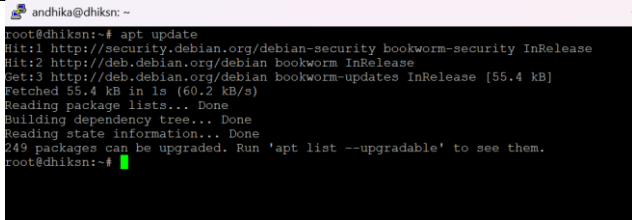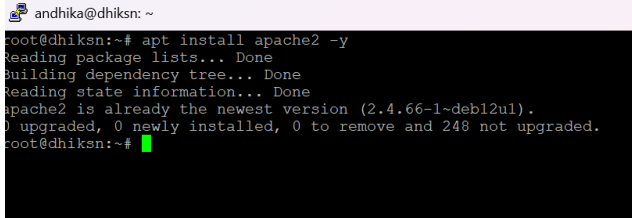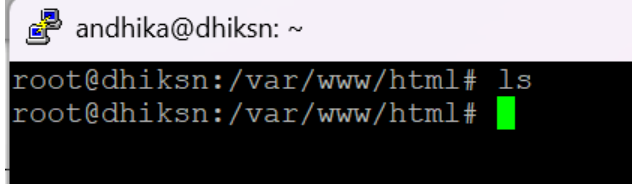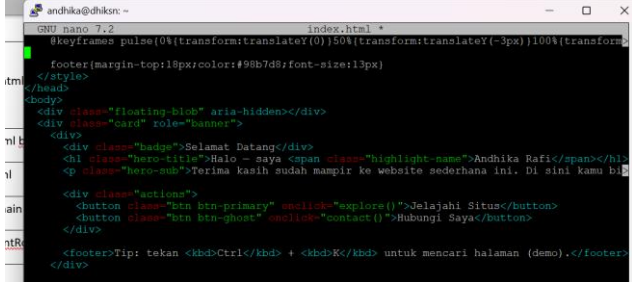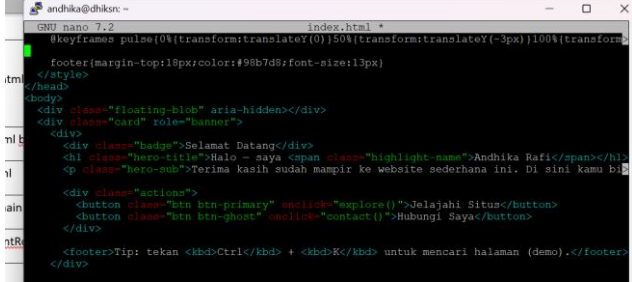No	Konfigurasi	Screenshot Hasil Ujicoba
1	Snapshoot	
2	Update package	
3	Install Web Server	
4	Hapus file index.html	
5	Buat file index.html baru	
6	Edit file index.html	

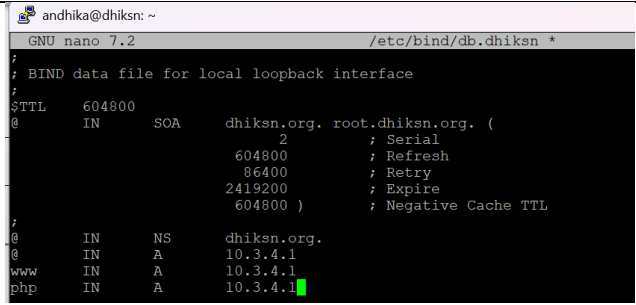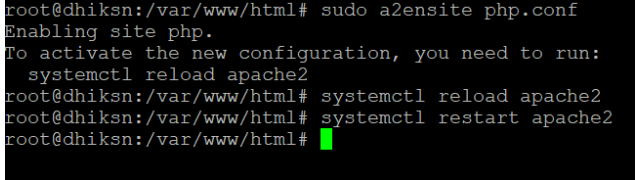
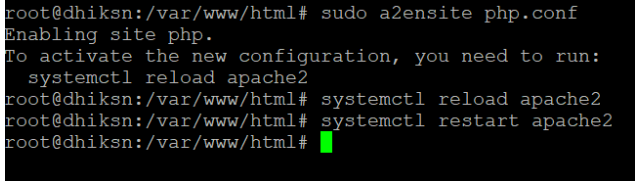


7	nslookup subdomain php	
8	Buat file DocumentRoot dan log php	
9	Ubah Permission	
10	Edit file index.php	
11	Buat direktori virtualhost php	
12	Edit file php.conf	
13	Enable virtualhost php	
14	Reload dan restart web server	

B. Hasil Uji Coba



No	Uji Coba	Screenshot Hasil Ujicoba
1	Cek IP Interface Host-Only	

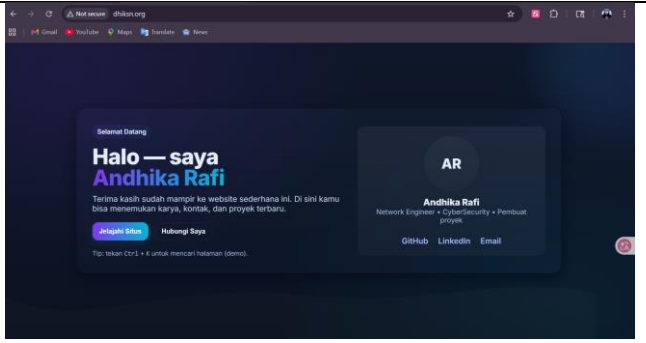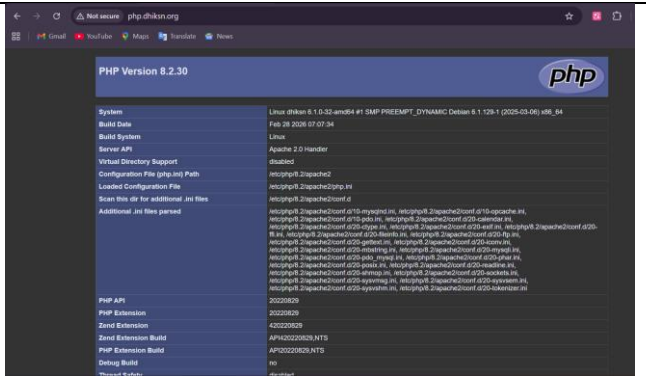

2	Search website domain utama	
3	Search website subdomai php	

- WordPress

A. Hasil Konfigurasi

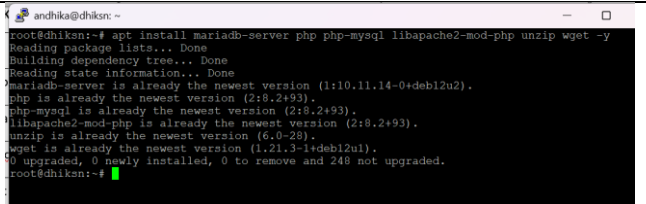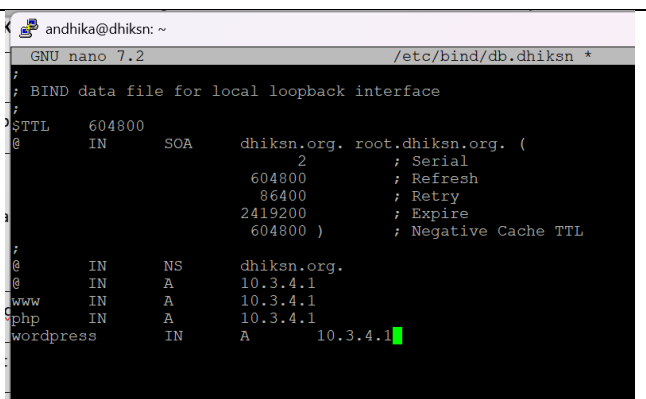No	Konfigurasi	Screenshot Hasil Ujicoba
1	Snapshoot	
2	Install Databases Server, PHP, dan Unzip	
3	nslookup subdomain wordpress	






4	Buat DocumentRoot dan log wordpress	<pre>andhika@dhiksn: ~ root@dhiksn:~# mkdir -p /var/www/html/wordpress root@dhiksn:~# mkdir -p /var/log/apache2/wordpress root@dhiksn:~# chmod -R 755 /var/www/html/wordpress root@dhiksn:~# cd /var/www/html/wordpress/ root@dhiksn:/var/www/html/wordpress#</pre>
5	Pindah ke direktori DocumentRoot wordpress	<pre>andhika@dhiksn: ~ root@dhiksn:~# mkdir -p /var/www/html/wordpress root@dhiksn:~# mkdir -p /var/log/apache2/wordpress root@dhiksn:~# chmod -R 755 /var/www/html/wordpress root@dhiksn:~# cd /var/www/html/wordpress/ root@dhiksn:/var/www/html/wordpress#</pre>
6	Download installer wordpress	<pre>root@dhiksn:/var/www/html/wordpress# wget https://wordpress.org/latest.zip --2026-05-04 00:23:31-- https://wordpress.org/latest.zip Resolving wordpress.org (wordpress.org)... 198.143.164.252, 2607:f978:5:8002::c68fa4fc Connecting to wordpress.org (wordpress.org) 198.143.164.252 :443... connected. HTTP request sent, awaiting response... 200 OK Length: 28686458 (27M) [application/zip] Saving to: 'latest.zip' latest.zip 100%[=====] 27.36M 4.85MB/s in 7.4s 2026-05-04 00:23:39 (3.69 MB/s) - 'latest.zip' saved [28686458/28686458] root@dhiksn:/var/www/html/wordpress#</pre>
7	Unzip file latest.zip	<pre>andhika@dhiksn: ~ inflating: wordpress/wp-admin/js/editor-expand.min.js inflating: wordpress/wp-admin/js/media-gallery.min.js inflating: wordpress/wp-admin/js/common.min.js inflating: wordpress/wp-admin/js/tags-box.min.js inflating: wordpress/wp-admin/js/svg-painter.min.js inflating: wordpress/wp-admin/js/custom-background.js inflating: wordpress/wp-admin/js/color-picker.min.js inflating: wordpress/wp-admin/js/site-icon.min.js inflating: wordpress/wp-admin/js/auth-app.js inflating: wordpress/wp-admin/js/code-editor.js inflating: wordpress/wp-admin/js/common.js inflating: wordpress/wp-admin/js/set-post-thumbnail.min.js inflating: wordpress/wp-admin/js/postbox.min.js inflating: wordpress/wp-admin/js/color-picker.js inflating: wordpress/wp-admin/js/password-strength-meter.js inflating: wordpress/wp-admin/js/customize-nav-menus.js inflating: wordpress/wp-admin/js/editor-expand.js inflating: wordpress/wp-admin/js/code-editor.min.js inflating: wordpress/wp-admin/js/set-post-thumbnail.js inflating: wordpress/wp-admin/options-permalink.php inflating: wordpress/wp-admin/widgets.php inflating: wordpress/wp-admin/setup-config.php inflating: wordpress/wp-admin/install.php inflating: wordpress/wp-admin/admin-header.php inflating: wordpress/wp-admin/post-new.php inflating: wordpress/wp-admin/themes.php inflating: wordpress/wp-admin/options-reading.php inflating: wordpress/wp-trackback.php inflating: wordpress/wp-comments-post.php root@dhiksn:/var/www/html/wordpress#</pre>
8	Pindahkan file dari direktori wordpress	<pre>root@dhiksn:/var/www/html/wordpress# mv wordpress/* /var/www/html/wordpress/ root@dhiksn:/var/www/html/wordpress# ls index.php wp-activate.php wp-content wp-login.php xmlrpc.php latest.zip wp-admin wp-cron.php wp-mail.php license.txt wp-blog-header.php wp-includes wp-settings.php readme.html wp-comments-post.php wp-links-opml.php wp-signup.php wordpress wp-config-sample.php wp-load.php wp-trackback.php root@dhiksn:/var/www/html/wordpress#</pre>
9	Hapus direktori wordpress/	<pre>root@dhiksn:/var/www/html/wordpress# rm -rf wordpress/ root@dhiksn:/var/www/html/wordpress#</pre>
10	Ubah owner dan permission DocumentRoot wordpress	<pre>andhika@dhiksn: ~ root@dhiksn:~# mkdir -p /var/www/html/wordpress root@dhiksn:~# mkdir -p /var/log/apache2/wordpress root@dhiksn:~# chmod -R 755 /var/www/html/wordpress root@dhiksn:~# cd /var/www/html/wordpress/ root@dhiksn:/var/www/html/wordpress#</pre>




11	Konfigurasi installation database (mysql_secure_installation)	<pre>andhika@dhiksn: ~ root@dhiksn:/var/www/html/wordpress# mysql_secure_installation NOTE: RUNNING ALL PARTS OF THIS SCRIPT IS RECOMMENDED FOR ALL MariaDB SERVERS IN PRODUCTION USE! PLEASE READ EACH STEP CAREFULLY! In order to log into MariaDB to secure it, we'll need the current password for the root user. If you've just installed MariaDB, and haven't set the root password yet, you should just press enter here. Enter current password for root (enter for none): OK, successfully used password, moving on... Setting the root password or using the unix_socket ensures that nobody can log into the MariaDB root user without the proper authorisation. You already have your root account protected, so you can safely answer 'n'. Switch to unix_socket authentication [Y/n] y Enabled successfully! Reloading privilege tables.. ... Success! You already have your root account protected, so you can safely answer 'n'. Change the root password? [Y/n] y New password: Re-enter new password: Password updated successfully! Change the root password? [Y/n] y New password: Re-enter new password: Password updated successfully! Reloading privilege tables.. ... Success! By default, a MariaDB installation has an anonymous user, allowing anyone to log into MariaDB without having to have a user account created for them. This is intended only for testing, and to make the installation go a bit smoother. You should remove them before moving into a production environment. Remove anonymous users? [Y/n] y ... Success! Normally, root should only be allowed to connect from 'localhost'. This ensures that someone cannot guess at the root password from the network. Disallow root login remotely? [Y/n] y ... Success! By default, MariaDB comes with a database named 'test' that anyone can access. This is also intended only for testing, and should be removed before moving into a production environment. Remove test database and access to it? [Y/n] y Remove test database and access to it? [Y/n] y - Dropping test database... ... Success! - Removing privileges on test database... ... Success! Reloading the privilege tables will ensure that all changes made so far will take effect immediately. Reload privilege tables now? [Y/n] y ... Success! Cleaning up... All done! If you've completed all of the above steps, your MariaDB installation should now be secure. Thanks for using MariaDB! root@dhiksn:/var/www/html/wordpress#</pre>
12	Buat database dan user untuk wordpress	<pre>root@dhiksn:/var/www/html/wordpress# mysql -u root -p Enter password: Welcome to the MariaDB monitor. Commands end with ; or \g. Your MariaDB connection id is 41 Server version: 10.11.14-MariaDB-0+deb12u2 Debian 12 Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others. Type 'help;' or '\h' for help. Type '\c' to clear the current input statement. MariaDB [(none)]> create database wordpress; Query OK, 1 row affected (0.007 sec) MariaDB [(none)]> CREATE USER 'wpdhiksn'@'localhost' IDENTIFIED BY '123'; Query OK, 0 rows affected (0.001 sec) MariaDB [(none)]> GRANT ALL PRIVILEGES ON wordpress.* TO 'wpdhiksn'@'localhost'; Query OK, 0 rows affected (0.001 sec) MariaDB [(none)]> flush privileges -> ^C MariaDB [(none)]> flush privileges; Query OK, 0 rows affected (0.000 sec) MariaDB [(none)]> exit Bye root@dhiksn:/var/www/html/wordpress#</pre>


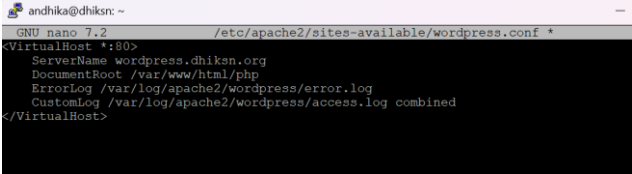
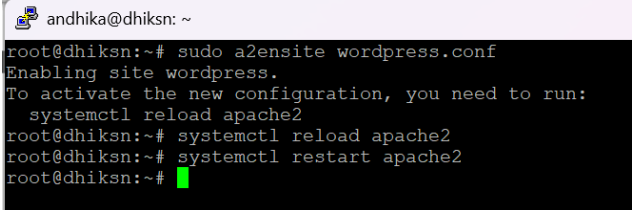
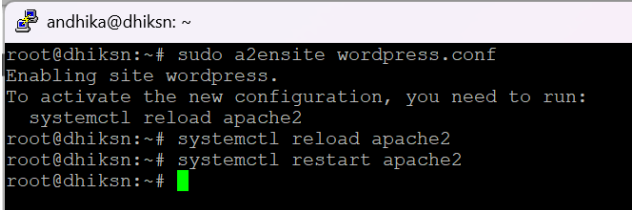


13	Buat direktori virtualhost wordpress	
14	Edit file wordpress.conf	
15	Enable virtualhost wordpress.conf	
16	Reload dan restart web server	



B. Hasil Uji Coba

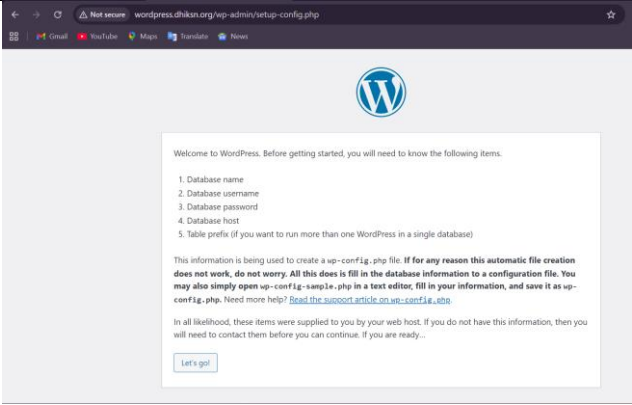No	Uji Coba	Screenshot Hasil Ujicoba
1	Akses website subdomain wordpress	

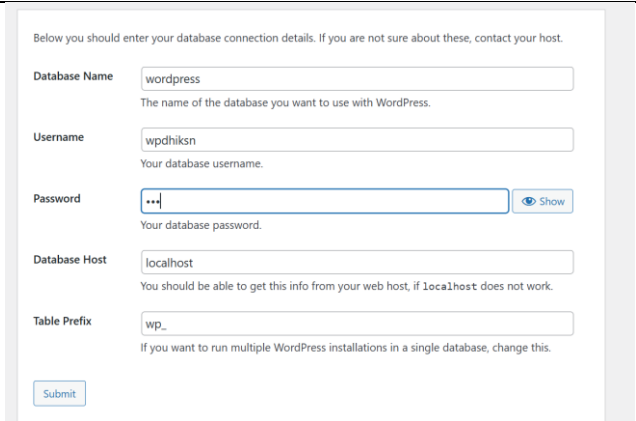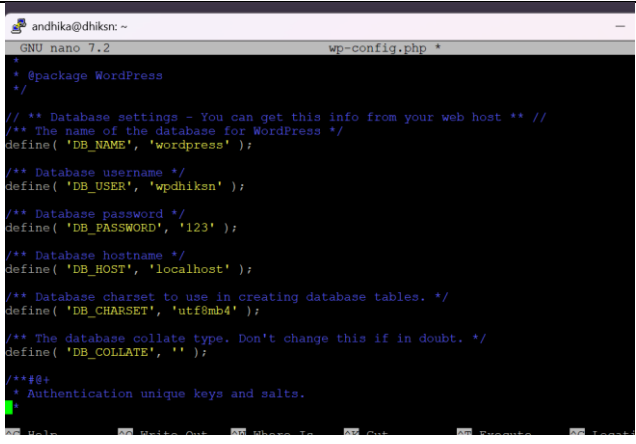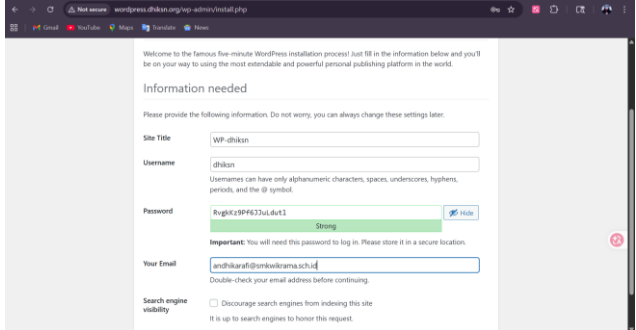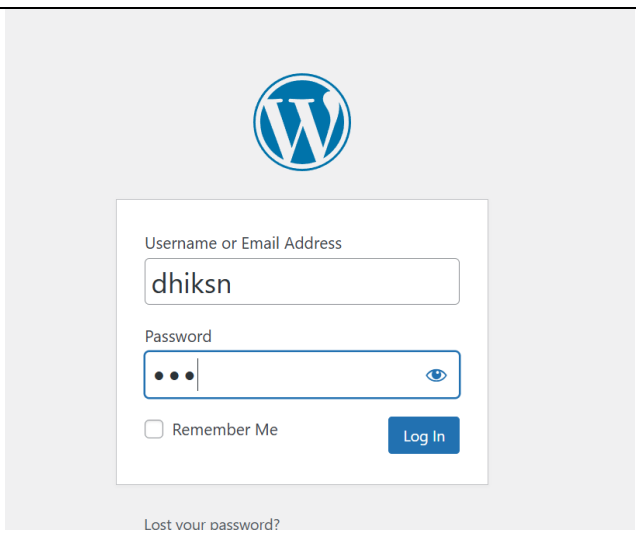




2	Isi informasi databases connection	
3	Edit file wp-config.php	
4	Isi halaman informasi website	
5	Login wp-admin	

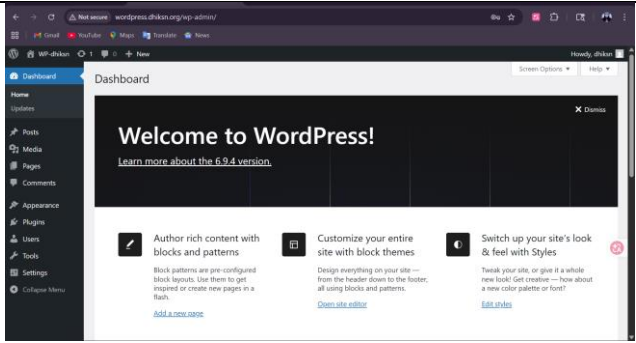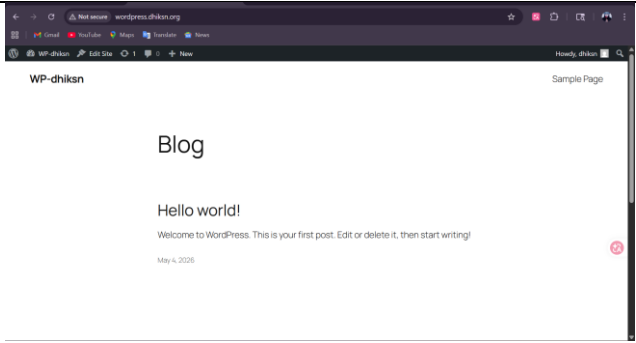

6	Tampilan dashboard wp-admin	
7	Tampilan website wordpress	

- **phpMyAdmin**







A. Hasil Konfigurasi

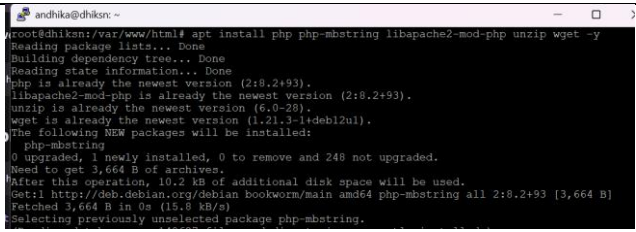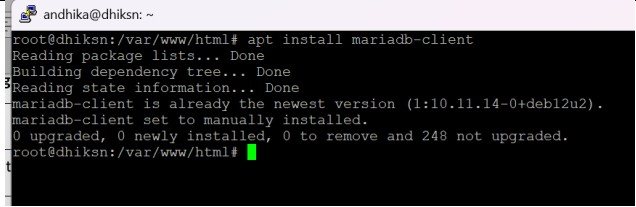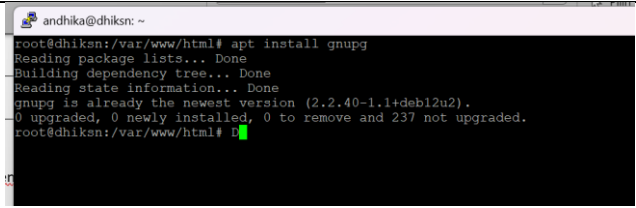No	Konfigurasi	Screenshot Hasil Ujicoba
1	Snapshot	
2	Install dependency php	
3	Install mariadb-client	
4	Install gnupg	



5	Buat DocumentRoot dan log phpmyadmin	<pre>root@dhiksn:/var/www/html# mkdir -p /var/www/html/phpmyadmin/log root@dhiksn:/var/www/html# cd /var/www/html/phpmyadmin root@dhiksn:/var/www/html/phpmyadmin# wget https://www.phpmyadmin.net/downloads/phpMyAdmin-latest-all-languages.tar.gz --no-check-certificate --2026-05-04 00:50:47-- https://www.phpmyadmin.net/downloads/phpMyAdmin-latest-all-languages.tar.gz Resolving www.phpmyadmin.net (www.phpmyadmin.net)... 207.211.208.174, 79.127.235.51, 79.127.170.194, ... Connecting to www.phpmyadmin.net (www.phpmyadmin.net) 207.211.208.174 :443... connected. HTTP request sent, awaiting response... 302 Found Location: https://files.phpmyadmin.net/phpMyAdmin/5.2.3/phpMyAdmin-5.2.3-all-languages.tar.gz [following] --2026-05-04 00:50:48-- https://files.phpmyadmin.net/phpMyAdmin/5.2.3/phpMyAdmin-5.2.3-all-languages.tar.gz Resolving files.phpmyadmin.net (files.phpmyadmin.net)... 79.127.235.11, 79.127.170.194, 79.127.213.245, ... Connecting to files.phpmyadmin.net (files.phpmyadmin.net) 79.127.235.11 :443... connected. HTTP request sent, awaiting response... 200 OK Length: 14446385 (14M) [application/octet-stream] Saving to: 'phpMyAdmin-latest-all-languages.tar.gz' phpMyAdmin-latest-all-l 100%[=====] 13.78M 4.93MB/s in 2.8s 2026-05-04 00:50:52 (4.93 MB/s) - 'phpMyAdmin-latest-all-languages.tar.gz' saved [14446385/14446385] root@dhiksn:/var/www/html/phpmyadmin#</pre>
6	Pindah ke DocumentRoot phpmyadmin	<pre>root@dhiksn:/var/www/html# mkdir -p /var/www/html/phpmyadmin/log root@dhiksn:/var/www/html# cd /var/www/html/phpmyadmin root@dhiksn:/var/www/html/phpmyadmin# wget https://www.phpmyadmin.net/downloads/phpMyAdmin-latest-all-languages.tar.gz --no-check-certificate --2026-05-04 00:50:47-- https://www.phpmyadmin.net/downloads/phpMyAdmin-latest-all-languages.tar.gz Resolving www.phpmyadmin.net (www.phpmyadmin.net)... 207.211.208.174, 79.127.235.51, 79.127.170.194, ... Connecting to www.phpmyadmin.net (www.phpmyadmin.net) 207.211.208.174 :443... connected. HTTP request sent, awaiting response... 302 Found Location: https://files.phpmyadmin.net/phpMyAdmin/5.2.3/phpMyAdmin-5.2.3-all-languages.tar.gz [following] --2026-05-04 00:50:48-- https://files.phpmyadmin.net/phpMyAdmin/5.2.3/phpMyAdmin-5.2.3-all-languages.tar.gz Resolving files.phpmyadmin.net (files.phpmyadmin.net)... 79.127.235.11, 79.127.170.194, 79.127.213.245, ... Connecting to files.phpmyadmin.net (files.phpmyadmin.net) 79.127.235.11 :443... connected. HTTP request sent, awaiting response... 200 OK Length: 14446385 (14M) [application/octet-stream] Saving to: 'phpMyAdmin-latest-all-languages.tar.gz' phpMyAdmin-latest-all-l 100%[=====] 13.78M 4.93MB/s in 2.8s 2026-05-04 00:50:52 (4.93 MB/s) - 'phpMyAdmin-latest-all-languages.tar.gz' saved [14446385/14446385] root@dhiksn:/var/www/html/phpmyadmin#</pre>
7	Download Installer phpMyAdmin	<pre>root@dhiksn:/var/www/html# mkdir -p /var/www/html/phpmyadmin/log root@dhiksn:/var/www/html# cd /var/www/html/phpmyadmin root@dhiksn:/var/www/html/phpmyadmin# wget https://www.phpmyadmin.net/downloads/phpMyAdmin-latest-all-languages.tar.gz --no-check-certificate --2026-05-04 00:50:47-- https://www.phpmyadmin.net/downloads/phpMyAdmin-latest-all-languages.tar.gz Resolving www.phpmyadmin.net (www.phpmyadmin.net)... 207.211.208.174, 79.127.235.51, 79.127.170.194, ... Connecting to www.phpmyadmin.net (www.phpmyadmin.net) 207.211.208.174 :443... connected. HTTP request sent, awaiting response... 302 Found Location: https://files.phpmyadmin.net/phpMyAdmin/5.2.3/phpMyAdmin-5.2.3-all-languages.tar.gz [following] --2026-05-04 00:50:48-- https://files.phpmyadmin.net/phpMyAdmin/5.2.3/phpMyAdmin-5.2.3-all-languages.tar.gz Resolving files.phpmyadmin.net (files.phpmyadmin.net)... 79.127.235.11, 79.127.170.194, 79.127.213.245, ... Connecting to files.phpmyadmin.net (files.phpmyadmin.net) 79.127.235.11 :443... connected. HTTP request sent, awaiting response... 200 OK Length: 14446385 (14M) [application/octet-stream] Saving to: 'phpMyAdmin-latest-all-languages.tar.gz' phpMyAdmin-latest-all-l 100%[=====] 13.78M 4.93MB/s in 2.8s 2026-05-04 00:50:52 (4.93 MB/s) - 'phpMyAdmin-latest-all-languages.tar.gz' saved [14446385/14446385] root@dhiksn:/var/www/html/phpmyadmin#</pre>
8	Download digital signature file installer phpMyAdmin	<pre>andhika@dhiksn: ~ root@dhiksn:/var/www/html/phpmyadmin# wget https://files.phpmyadmin.net/phpMyAdmin/5.2.3-all-languages.tar.gz.asc --2026-05-04 00:52:36-- https://files.phpmyadmin.net/phpMyAdmin/5.2.3/phpMyAdmin-5.2.3-all-languages.tar.gz.asc Resolving files.phpmyadmin.net (files.phpmyadmin.net)... 89.187.163.20, 79.127.235.8, 79.127.170.194, ... Connecting to files.phpmyadmin.net (files.phpmyadmin.net) 89.187.163.20 :443... connected. HTTP request sent, awaiting response... 200 OK Length: 833 [application/octet-stream] Saving to: 'phpMyAdmin-5.2.3-all-languages.tar.gz.asc' phpMyAdmin-5.2.3-all-l 100%[=====] 833 --KB/s in 0s 2026-05-04 00:52:36 (21.5 MB/s) - 'phpMyAdmin-5.2.3-all-languages.tar.gz.asc' saved [833/833] root@dhiksn:/var/www/html/phpmyadmin#</pre>
9	Cek installer dan digital signature	<pre>root@dhiksn:/var/www/html/phpmyadmin# gpg --keyserver hkp://keyserver.ubuntu.com --recv-keys 3D06A59EC730EB71B511C17CE752F178259BD92 gpg: /root/.gnupg/trustdb.gpg: trustdb created gpg: key CE752F178259BD92: public key "Isaac Bennetch cbennetch@gmail.com" imported gpg: Total number processed: 1 gpg: imported: 1 root@dhiksn:/var/www/html/phpmyadmin# gpg --verify phpMyAdmin-5.2.3-all-languages.tar.gz.asc phpMyAdmin-5.2.3-all-languages.tar.gz gpg: Signature made Tue 07 Oct 2025 04:43:06 PM EDT gpg: using RSA key 3D06A59EC730EB71B511C17CE752F178259BD92 gpg: Good signature from "Isaac Bennetch cbennetch@gmail.com" [unknown] gpg: aka "Isaac Bennetch cisaac@bennetch.org" [unknown] gpg: WARNING: This key is not certified with a trusted signature! gpg: There is no indication that the signature belongs to the owner. Primary key fingerprint: 3D06 A59E CE73 0EB7 1B51 1C17 CE75 2F17 8259 BD92 root@dhiksn:/var/www/html/phpmyadmin#</pre>
10	Import keyring phpMyAdmin	<pre>root@dhiksn:/var/www/html/phpmyadmin# gpg --keyserver hkp://keyserver.ubuntu.com --recv-keys 3D06A59EC730EB71B511C17CE752F178259BD92 gpg: /root/.gnupg/trustdb.gpg: trustdb created gpg: key CE752F178259BD92: public key "Isaac Bennetch cbennetch@gmail.com" imported gpg: Total number processed: 1 gpg: imported: 1 root@dhiksn:/var/www/html/phpmyadmin# gpg --verify phpMyAdmin-5.2.3-all-languages.tar.gz.asc phpMyAdmin-5.2.3-all-languages.tar.gz gpg: Signature made Tue 07 Oct 2025 04:43:06 PM EDT gpg: using RSA key 3D06A59EC730EB71B511C17CE752F178259BD92 gpg: Good signature from "Isaac Bennetch cbennetch@gmail.com" [unknown] gpg: aka "Isaac Bennetch cisaac@bennetch.org" [unknown] gpg: WARNING: This key is not certified with a trusted signature! gpg: There is no indication that the signature belongs to the owner. Primary key fingerprint: 3D06 A59E CE73 0EB7 1B51 1C17 CE75 2F17 8259 BD92 root@dhiksn:/var/www/html/phpmyadmin#</pre>

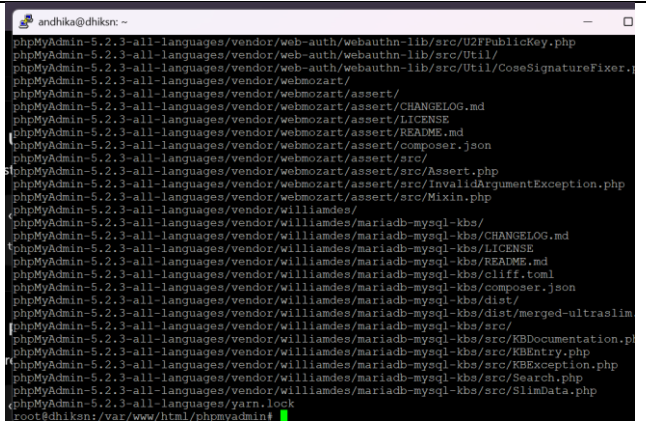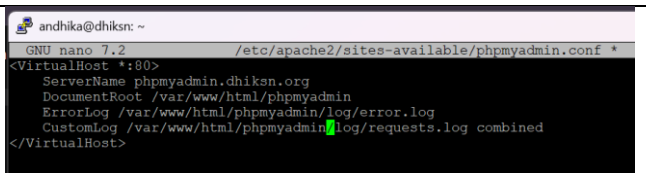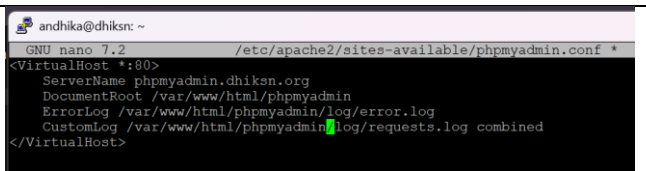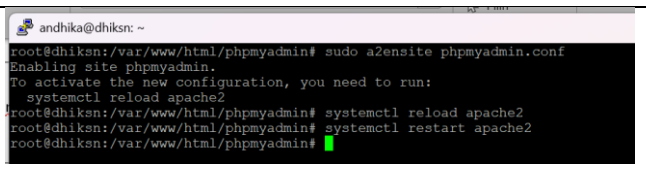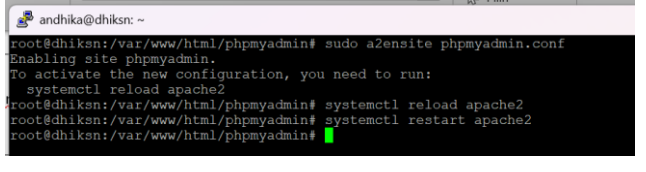
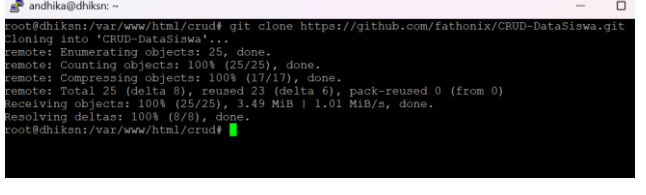





11	Unpack file installer phpMyAdmin	
12	Buat direktori virtualhost phpmyadmin	
13	Edit file phpmyadmin.conf	
14	Enable virtualhost phpmyadmin.conf	
16	Reload dan restart web server	
17	Konfig CRUD – Silahkan di lanjut sendiri !!!	



		<pre>MariaDB [(none)]> use crud; Reading table information for completion of table and column names You can turn off this feature to get a quicker startup with -A Database changed MariaDB [crud]> show tables; +-----+ Tables_in_crud +-----+ siswa +-----+ 1 row in set (0.008 sec) MariaDB [crud]> CREATE TABLE siswa (-> id INT(11) AUTO_INCREMENT PRIMARY KEY, -> nis VARCHAR(20) NOT NULL, -> nama VARCHAR(100) NOT NULL, -> alamat TEXT, -> kelas VARCHAR(10) ->); ERROR 1050 (42S01): Table 'siswa' already exists MariaDB [crud]></pre>
--	--	--

B. Uji Coba

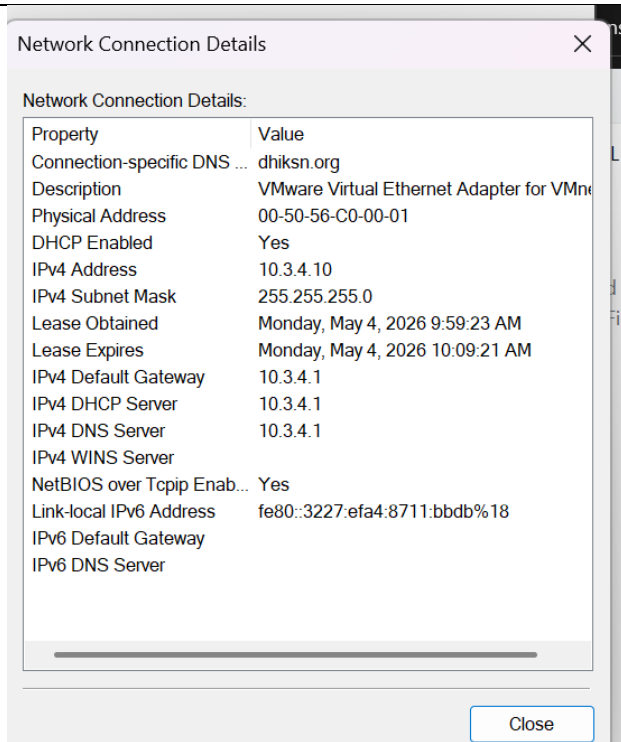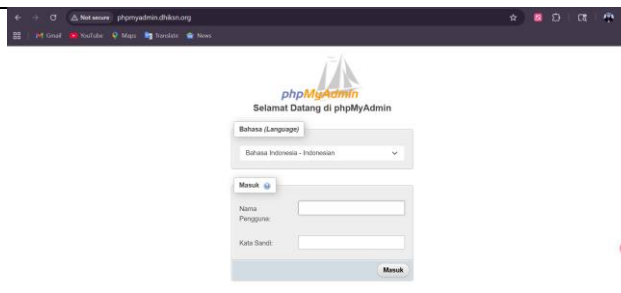No	Uji Coba	Screenshot Hasil Ujicoba
1	Cek IP Address interface Host-Only	
2	Search website subdomain phpmyadmin	

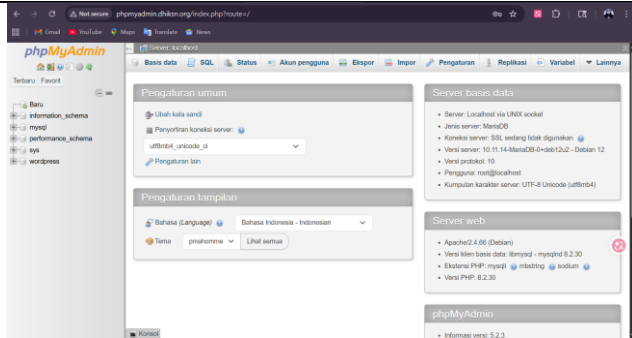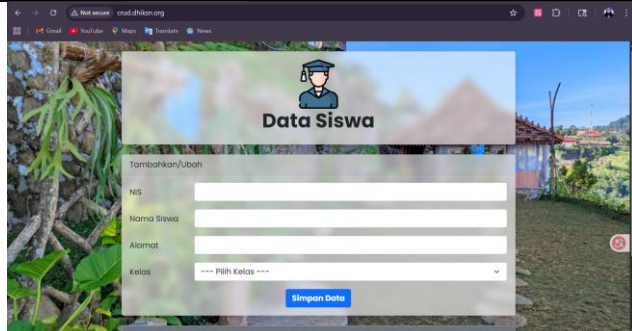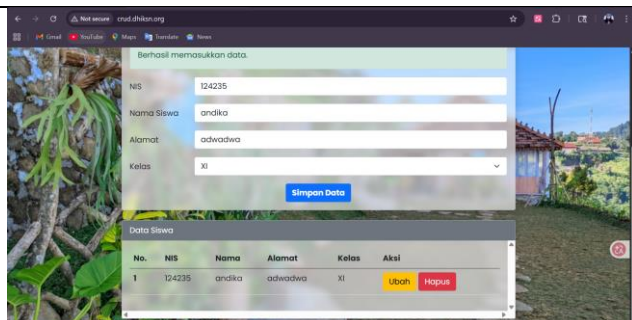3	Login menggunakan user root													
4	Screenshoot tampilan Dashboard phpmyadmin													
5	Screenshoot tampilan website CRUD													
6	Buat / tambah data melalui Web CRUD	 <table><thead><tr><th>No.</th><th>NIS</th><th>Nama</th><th>Alamat</th><th>Kelas</th><th>Aksi</th></tr></thead><tbody><tr><td>1</td><td>124235</td><td>andika</td><td>adwadwa</td><td>XI</td><td>Ubah Hapus</td></tr></tbody></table>	No.	NIS	Nama	Alamat	Kelas	Aksi	1	124235	andika	adwadwa	XI	Ubah Hapus
No.	NIS	Nama	Alamat	Kelas	Aksi									
1	124235	andika	adwadwa	XI	Ubah Hapus									





YAYASAN PRWAITAMA

SMK WIKRAMA BOGOR

Jl. Raya Wangun Kel. Sindangsari Kec. Bogor Timur





Telp/Fax.(0251) 8242411 E-mail : prohumasi@smkwikrama.net Website : www.smkwikrama.net

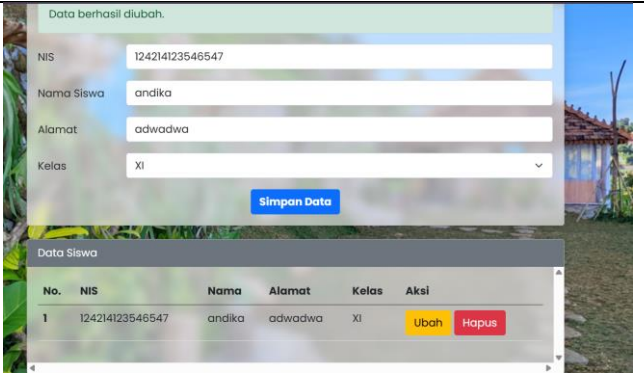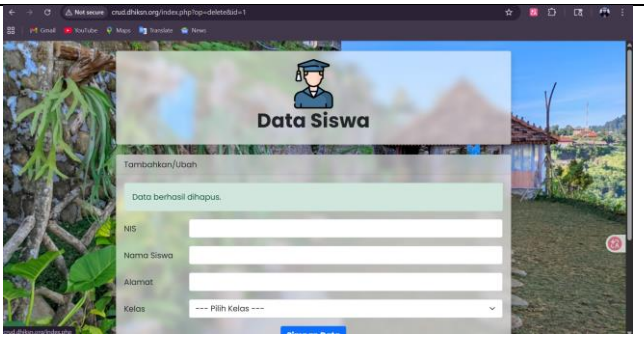7	Update data melalui Web CRUD	
8	Hapus data melalui Web CRUD	



7. Mail Server


A. Hasil Konfigurasi


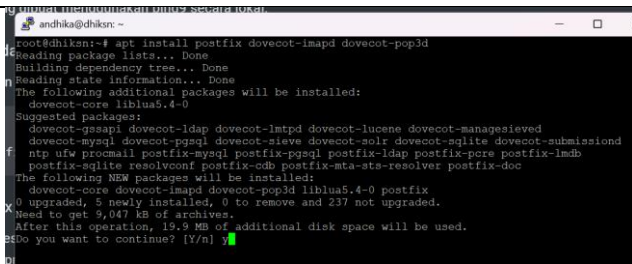

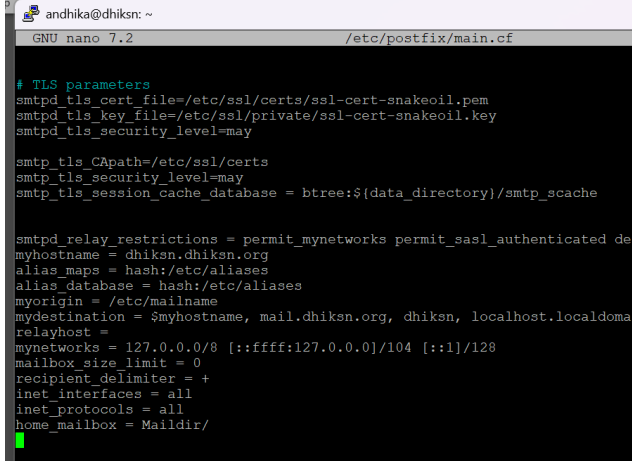
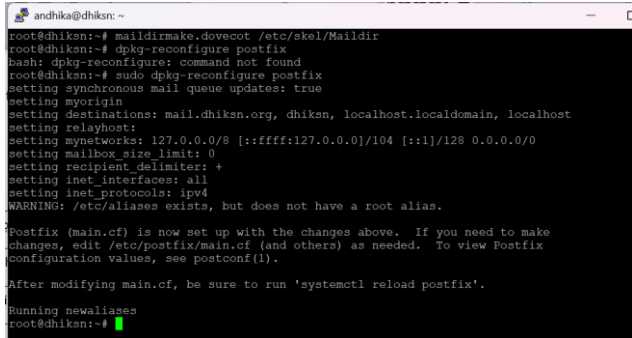
No	Konfigurasi	Screenshot Hasil Ujicoba
1	Snapshot	
2	Install postfix dan dovecot	
3	Dpkg reconfigure postfix	
4	Edit file main.cf	 



5	Edit file dovecot.conf	<pre>andhika@dhiksn: ~ GNU nano 7.2 /etc/dovecot/dovecot.conf * # Default values are shown for each setting, it's not required to uncomment # those. These are exceptions to this though! No sections (e.g. namespace {}) # or plugin settings are added by default, they're listed only as examples. # Paths are also just examples with the real defaults being based on configure # options. The paths listed here are for configure --prefix=/usr # --sysconfdir=/etc --localstatedir=/var # Enable installed protocols #include_try /usr/share/dovecot/protocols.d/*.protocol # A comma separated list of IPs or hosts where to listen in for connections. # "*" listens in all IPv4 interfaces, "::" listens in all IPv6 interfaces. # If you want to specify non-default ports or anything more complex, # edit conf.d/master.conf. listen = * # Base directory where to store runtime data. base_dir = /var/run/dovecot/ # Name of this instance. In multi-instance setup dovecotd and other commands</pre>
6	Edit file 10-auth.conf	<pre>andhika@dhiksn: ~ GNU nano 7.2 /etc/dovecot/conf.d/10-auth.conf * ## ## Authentication processes ## # Disable LOGIN command and all other plaintext authentications unless # SSL/TLS is used (LOGINDISABLED capability). Note that if the remote IP # matches the local IP (ie. you're connecting from the same computer), the # connection is considered secure and plaintext authentication is allowed. # See also ssl=required setting. disable_plaintext_auth = no # Authentication cache size (e.g. 10M). 0 means it's disabled. Note that # bsdauth and PAM require cache_key to be set for caching to be used. auth_cache_size = 0</pre>
7	Edit file 10-mail.conf	<pre>andhika@dhiksn: ~ GNU nano 7.2 /etc/dovecot/conf.d/10-mail.conf * # tries to find the mailboxes automatically. This won't work if the user # doesn't yet have any mail, so you should explicitly tell Dovecot the full # location. # If you're using mbox, giving a path to the INBOX file (eg. /var/mail/%u) # isn't enough. You'll also need to tell Dovecot where the other mailboxes are # kept. This is called the "root mail directory", and it must be the first # path given in the mail_location setting. # There are a few special variables you can use, eg.: # %u - username # %n - user part in user@domain, same as %u if there's no domain # %d - domain part in user@domain, empty if there's no domain # %h - home directory # See doc/wiki/Variables.txt for full list. Some examples: mail_location = maildir:~/Maildir mail_location = mbox:~/mail:INBOX=/var/mail/%u mail_location = mbox:/var/mail/%d/%n:INDEX=/var/indexes/%d/%n/%n <doc/wiki/MailLocation.txt> mail_location = mbox:~/mail:INBOX=/var/mail/%u</pre>
8	Maildirmake dovecot	<pre>andhika@dhiksn: ~ root@dhiksn:~# maildirmake dovecot /etc/skel/Maildir root@dhiksn:~# dpkg-reconfigure postfix</pre>
9	Restart service postfix dan dovecot	<pre>andhika@dhiksn: ~ root@dhiksn:~# systemctl restart dovecot postfix root@dhiksn:~#</pre>

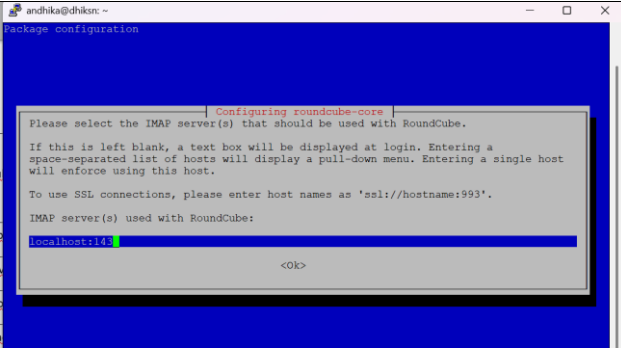



10	Buat user1	<pre>root@dhiksn:~# sudo adduser dhiksn Adding user `dhiksn' ... Adding new group `dhiksn' (1002) ... Adding new user `dhiksn' (1002) with group `dhiksn (1002)' ... Creating home directory `/home/dhiksn' ... Copying files from `/etc/skel' ... New password: Retype new password: passwd: password updated successfully Changing the user information for dhiksn Enter the new value, or press ENTER for the default Full Name []: Room Number []: Work Phone []: Home Phone []: Other []: Is the information correct? [Y/n] y Adding new user `dhiksn' to supplemental / extra groups `users' ... Adding user `dhiksn' to group `users' ... root@dhiksn:~# sudo adduser sakiara Adding user `sakiara' ... Adding new group `sakiara' (1003) ... Adding new user `sakiara' (1003) with group `sakiara (1003)' ... Creating home directory `/home/sakiara' ... Copying files from `/etc/skel' ... New password: Retype new password: passwd: password updated successfully</pre>
11	Buat user2	<pre>root@dhiksn:~# sudo adduser dhiksn Adding user `dhiksn' ... Adding new group `dhiksn' (1002) ... Adding new user `dhiksn' (1002) with group `dhiksn (1002)' ... Creating home directory `/home/dhiksn' ... Copying files from `/etc/skel' ... New password: Retype new password: passwd: password updated successfully Changing the user information for dhiksn Enter the new value, or press ENTER for the default Full Name []: Room Number []: Work Phone []: Home Phone []: Other []: Is the information correct? [Y/n] y Adding new user `dhiksn' to supplemental / extra groups `users' ... Adding user `dhiksn' to group `users' ... root@dhiksn:~# sudo adduser sakiara Adding user `sakiara' ... Adding new group `sakiara' (1003) ... Adding new user `sakiara' (1003) with group `sakiara (1003)' ... Creating home directory `/home/sakiara' ... Copying files from `/etc/skel' ... New password: Retype new password: passwd: password updated successfully</pre>
12	Install roundcube	<pre>andhika@dhiksn: ~ root@dhiksn:~# apt install mariadb-server roundcube Reading package lists... Done Building dependency tree... Done Reading state information... Done mariadb-server is already the newest version (1:10.11.14-0+deb12u2). roundcube is already the newest version (1.6.5+dfsg-1+deb12u8). 0 upgraded, 0 newly installed, 0 to remove and 237 not upgraded. root@dhiksn:~#</pre>
13	Dpkg roundcube-core	

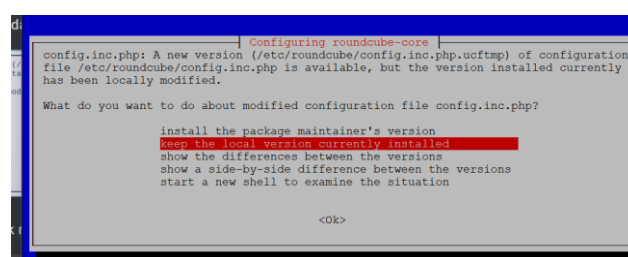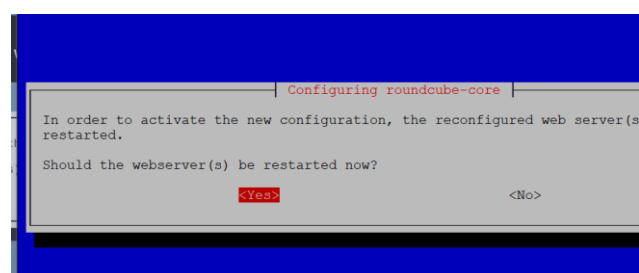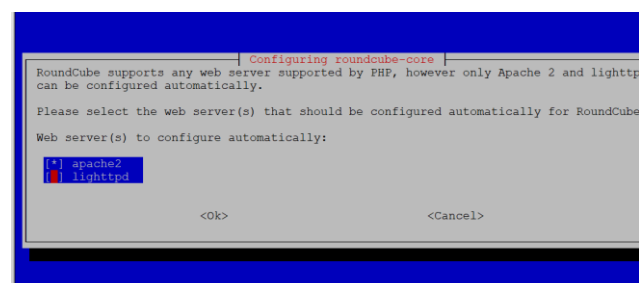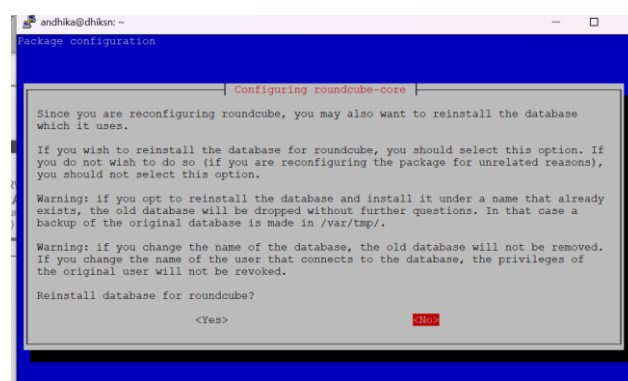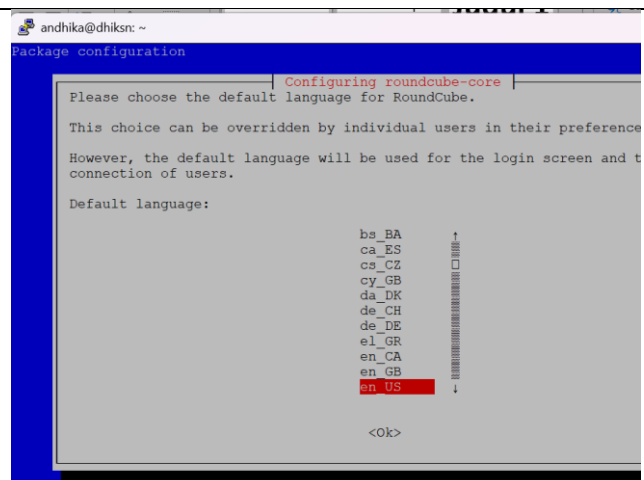



		<pre>andhika@dhiksn: ~ GNU nano 7.2 /etc/apache2/apache2.conf # a CustomLog directive. # # These deviate from the Common Log Format definitions in that they # (the actual bytes sent including headers) instead of %b (the size # requested file), because the latter makes it impossible to detect # requests. # # Note that the use of %{X-Forwarded-For}i instead of %h is not recommended. # Use mod_remoteip instead. # LogFormat "%v:%p %h %l %u %t \"%r\" %>s %O \"%{Referer}i\" \"%{User-Agent}i\"" LogFormat "%h %l %u %t \"%r\" %>s %O \"%{Referer}i\" \"%{User-Agent}i\"" LogFormat "%h %l %u %t \"%r\" %>s %O" common LogFormat "%{Referer}i -> %U" referer LogFormat "%{User-agent}i" agent # # Include of directories ignores editors' and dpkg's backup files, # see README.Debian for details. # # Include generic snippets of statements IncludeOptional conf-enabled/*.conf # # Include the virtual host configurations: IncludeOptional sites-enabled/*.conf # # Include # #</pre>
14	Buat direktori virtualhost mail	<pre>andhika@dhiksn: ~ bot@dhiksn:/etc/apache2/sites-available# ls 00-default.conf default-ssl.conf php.conf wordpress.conf rud.conf main.conf phpmyadmin.conf bot@dhiksn:/etc/apache2/sites-available# touch mail.conf bot@dhiksn:/etc/apache2/sites-available# nano mail</pre>
16	Edit file mail.conf	<pre>andhika@dhiksn: ~ GNU nano 7.2 mail.conf <VirtualHost *:80> ServerName mail.dhiksn.org DocumentRoot /usr/share/roundcube </VirtualHost></pre>
17	Enable virtualhost mail.conf	<pre>root@dhiksn:/etc/apache2/sites-available# sudo a2ensite mail.conf Enabling site mail. To activate the new configuration, you need to run: systemctl reload apache2 root@dhiksn:/etc/apache2/sites-available# systemctl reload apache2 root@dhiksn:/etc/apache2/sites-available# systemctl restart apache2 root@dhiksn:/etc/apache2/sites-available#</pre>
18	Reload dan restart apache2	<pre>root@dhiksn:/etc/apache2/sites-available# sudo a2ensite mail.conf Enabling site mail. To activate the new configuration, you need to run: systemctl reload apache2 root@dhiksn:/etc/apache2/sites-available# systemctl reload apache2 root@dhiksn:/etc/apache2/sites-available# systemctl restart apache2 root@dhiksn:/etc/apache2/sites-available#</pre>

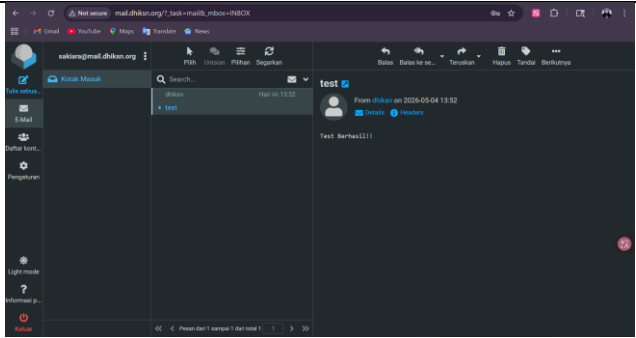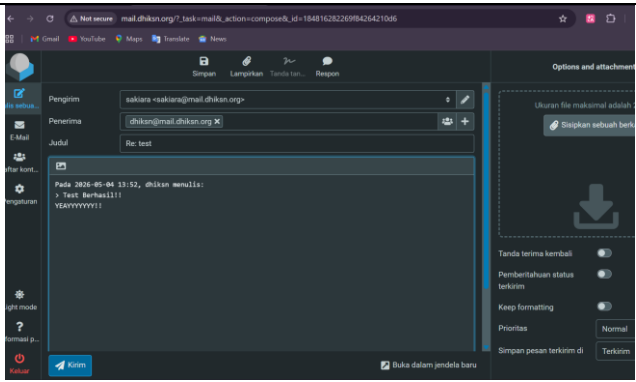

5	Cek email dari user 1 di Inbox	
6	Balas email dari user1	
7	Cek email reply dari user2	