

Dewan Institute of Management Studies Meerut



A MAJOR PROJECT PROPOSAL

ON

“E COMMERCE WEB APP”

**For the fulfilment to award the
degree of**

MASTER OF COMPUTER APPLICATION

SUBMITTED TO

Ravi Kumar Sikka Sir

SUBMITTED BY

Shubham Dhiman

(2100740140076)

Declaration

I am hereby declare that the project report "E
COMMERCE WEB APPLICATION" is my own work and
efforts and that is has not been submitted anywhere
for any award. The text embodied on this report have
not been submitted to any other university or institute
for the award of any degree or diploma.

Date:

Shubham Dhiman

Certificate

This is to certify that the project entitled, "E COMMERCE WEB APPLICATION" submitted by "SHUBHAM DHIMAN" in partial fulfillment of the requirements for the award of "MCA" in "Computers" at the "Dewan Institute of Management Studies Meerut" is an authentic work carried out by him under my supervision and guidance.

To the best of my knowledge, the matter embodied in the project has not been submitted to any other University / Institute for the award of any Degree or Diploma.

Date:

Mr. Ravi Kumar Sikka Professor
(Dewan Institute of Management Studies Meerut)

ACKNOWLEDGEMENT

I am students of MCA (2rd Year) here by submit my research project.

Merely words to thank these people would be insufficient.

I thank to my project guide for helping us to settle all the problems I had while my research project report underwent for setting our quires.

Finally, but definitely not the last I am thankful to our family for standing by us in our confusions and apprehensions.

INDEX

S.no	Contents	Page No.
1.	Title of Project	4
2.	Introduction	6
3.	Objective	7
4.	Hardware & Software Requirements	8
5.	Analysis <ul style="list-style-type: none">• E-R Diagram	10
6.	Modules	11
7.	Input / Output Screen	12
8.	Coding	
9.	Testing	17
10.	Future Scope	19
11.	Bibliography	20

INTRODUCTION OF PROJECT

An e-commerce web application serves as the virtual storefront, connecting buyers and sellers in a seamless online marketplace. It provides a platform for businesses to showcase their products or services, manage inventory, process transactions, and engage with customers. At the same time, it offers a convenient and personalized shopping experience for users, enabling them to browse, compare, and purchase products effortlessly.

Behind the scenes, sophisticated technologies power these e-commerce applications, ensuring secure transactions, efficient order management, and personalized recommendations. The use of secure payment gateways, robust inventory management systems, and data analytics tools enhances the overall user experience, driving customer satisfaction and loyalty.

OBJECTIVE OF THE PROJECT

The primary objective of an e-commerce web application is to facilitate online transactions and create a seamless shopping experience for customers. However, the objectives can vary depending on the specific goals of the business. Here are some common objectives of an e-commerce web application:

1. Increase Sales
2. Enhance User Experience
3. Improve Customer Engagement
4. Streamline Operations etc.

Hardware & Software Requirement

Hardware Requirements	Software Requirements
<ul style="list-style-type: none">● 500 MB RAM	<ul style="list-style-type: none">● Operating System: Windows 7 and Above
<ul style="list-style-type: none">● More than 500 MB Hard disk	<ul style="list-style-type: none">● Toolkit-jdk
<ul style="list-style-type: none">● 1 GB Processor	<ul style="list-style-type: none">● IDE: Net beans 8.2 Or Higher
<ul style="list-style-type: none">● Intel core i3	<ul style="list-style-type: none">● Connector/driver : MySQL

ANALYSIS

1. Identification of Need

To identify the need for an e-commerce web application, consider the following:

- **Market research:** Conduct a thorough analysis of the target market to identify consumer preferences, shopping behaviors, and existing competitors.
- **Customer demands:** Determine if there is a demand for online shopping in the target market. Look for indications such as increasing online sales, a growing number of smartphone users, and a shift towards convenience-oriented shopping.
- **Competitive advantage:** Assess if an e-commerce web application can provide a competitive advantage over existing brick-and-mortar stores or online retailers. Consider factors like a wider product selection, personalized shopping experiences, ease of use, and efficient order fulfillment.
- **Convenience and accessibility:** Determine if customers would benefit from the convenience and accessibility of an e-commerce platform. Factors such as 24/7 availability, doorstep delivery, and easy product search and comparison can drive the need for an online shopping solution.

E R Diagram

- Entity Relational Model


product	
productid INT	
productname VARCHAR(45)	
productCategories VARCHAR(45)	
productPrice DOUBLE	
productImage VARCHAR(45)	
productActualPrice DOUBLE	
Indexes	
PRIMARY	

contact	
id INT	
name VARCHAR(45)	
email VARCHAR(45)	
subject VARCHAR(255)	
message VARCHAR(255)	
Indexes	
PRIMARY	


user	
email VARCHAR(45)	
firstName VARCHAR(45)	
lastName VARCHAR(45)	
address VARCHAR(100)	
state VARCHAR(45)	
country VARCHAR(45)	
zipcode INT	
mobile BIGINT	
city VARCHAR(45)	
Indexes	
PRIMARY	

userorder	
id INT	
name VARCHAR(45)	
price DOUBLE	
image VARCHAR(45)	
quantity INT	
email VARCHAR(45)	
categories VARCHAR(45)	
total DOUBLE	
autoid INT	
Indexes	
PRIMARY	


- **User Entity**

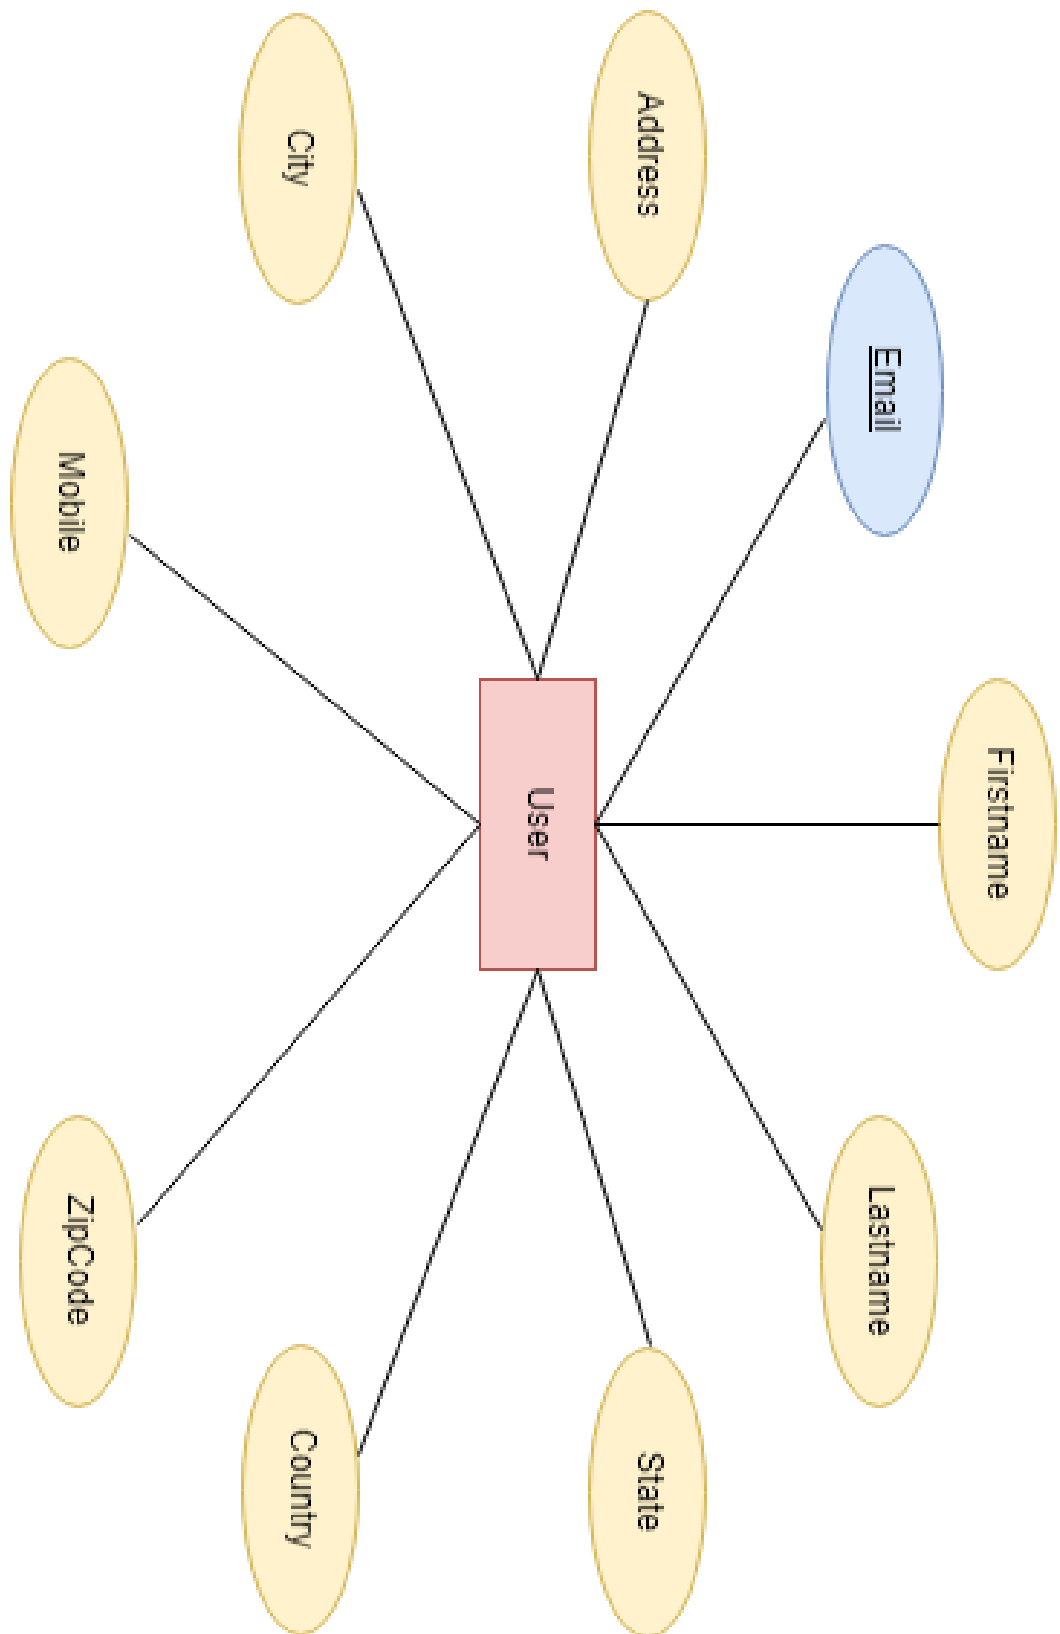

- **Contact Entity**

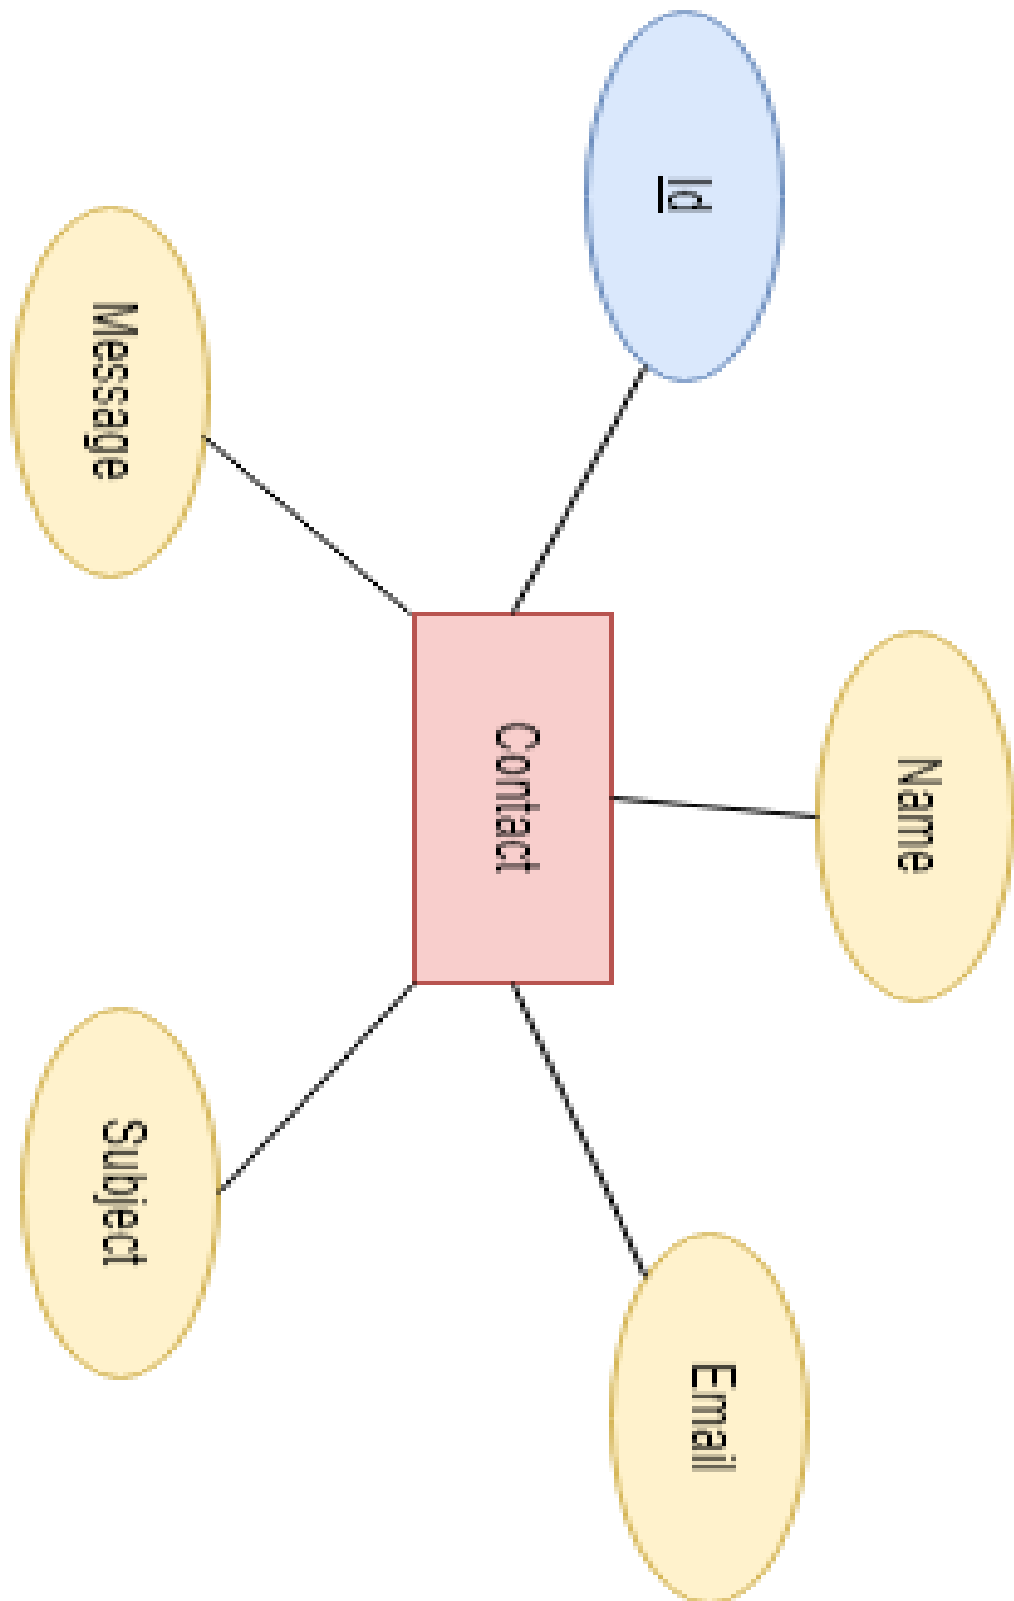

- **Product Entity**

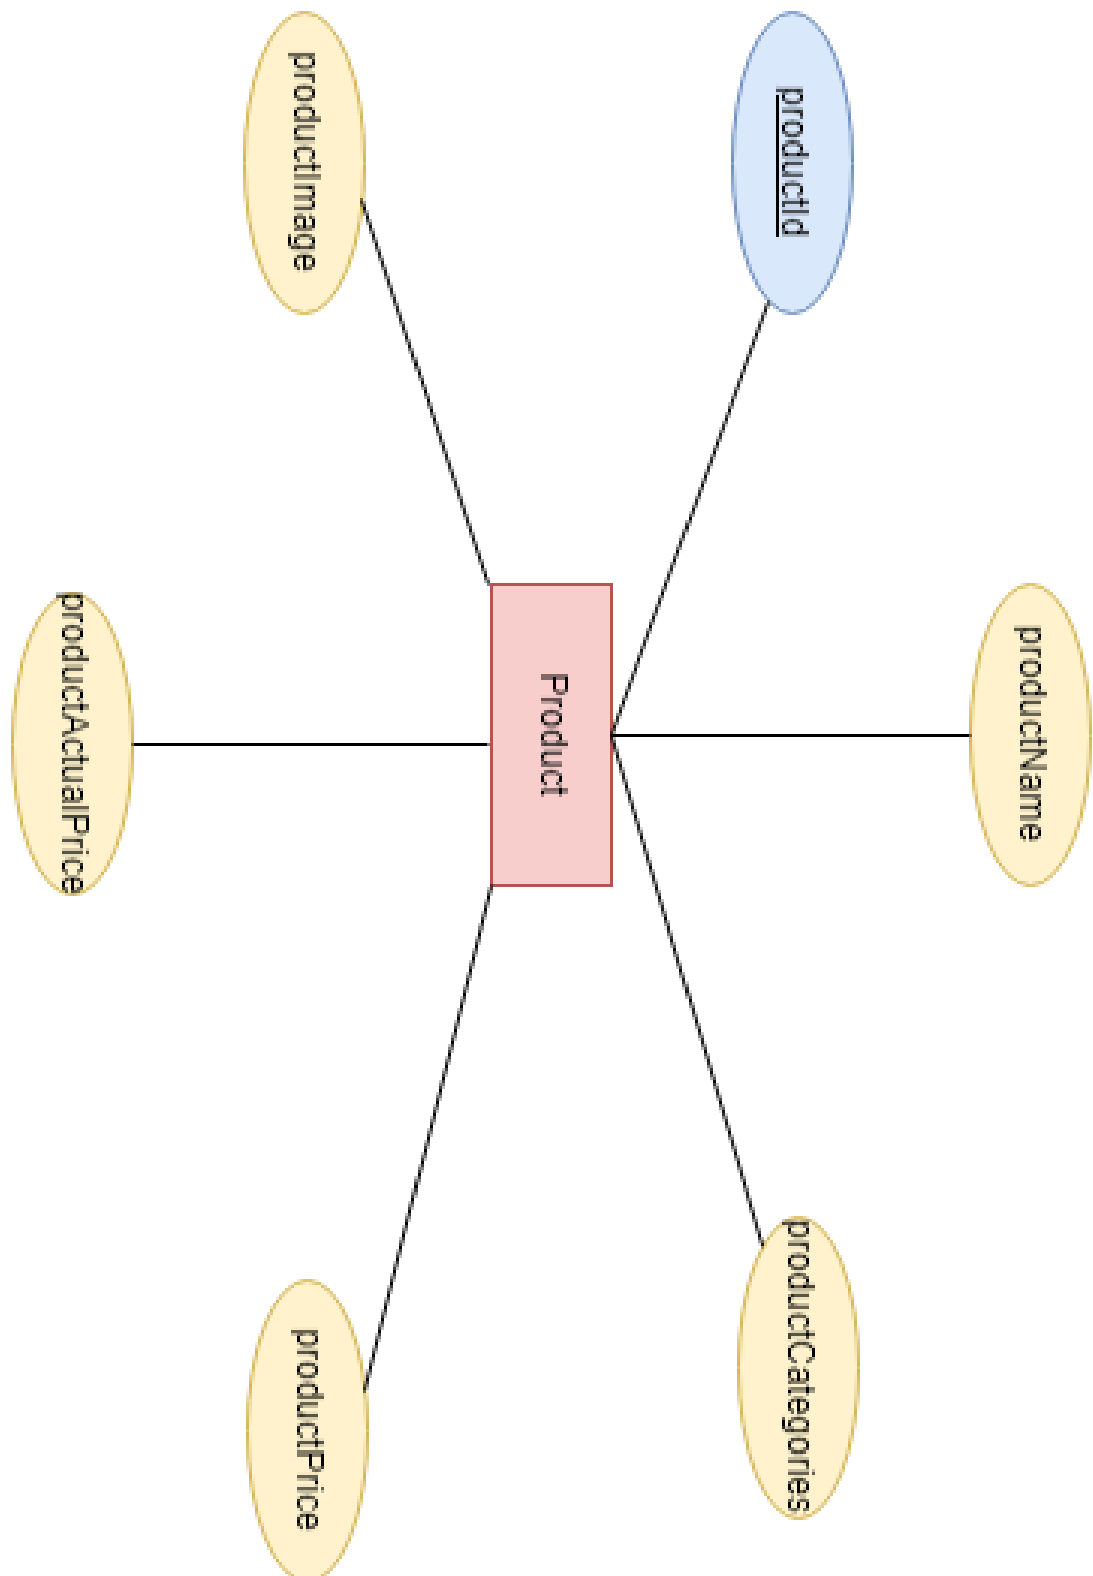


Modules


- 1 Welcome page
- 2 Add To Cart page
- 3 Checkout page
- 4 Orders page
- 5 Contact page

Input / Output Screen

1. Welcome page

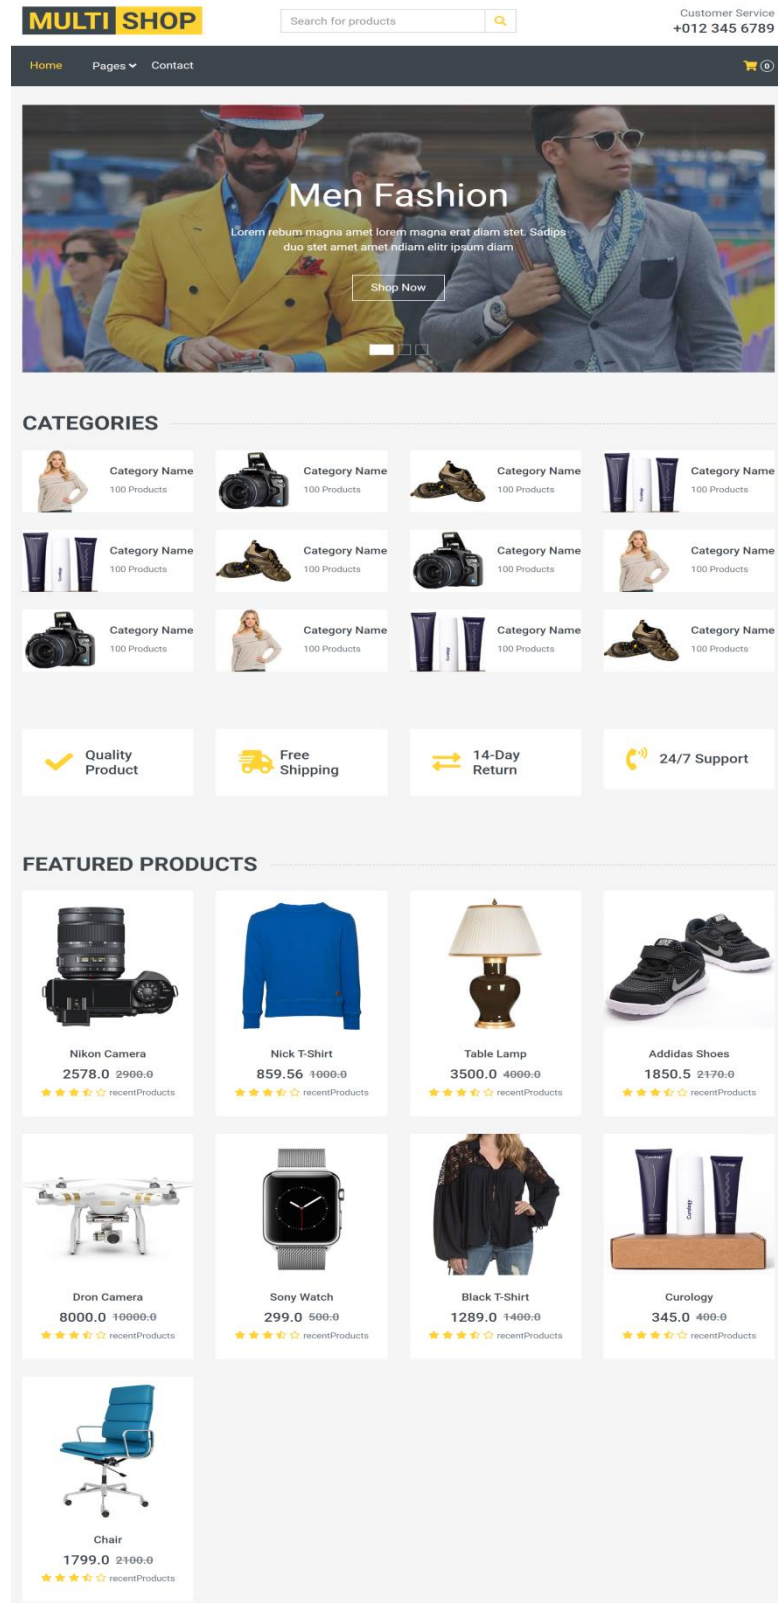

2. Add to Cart page

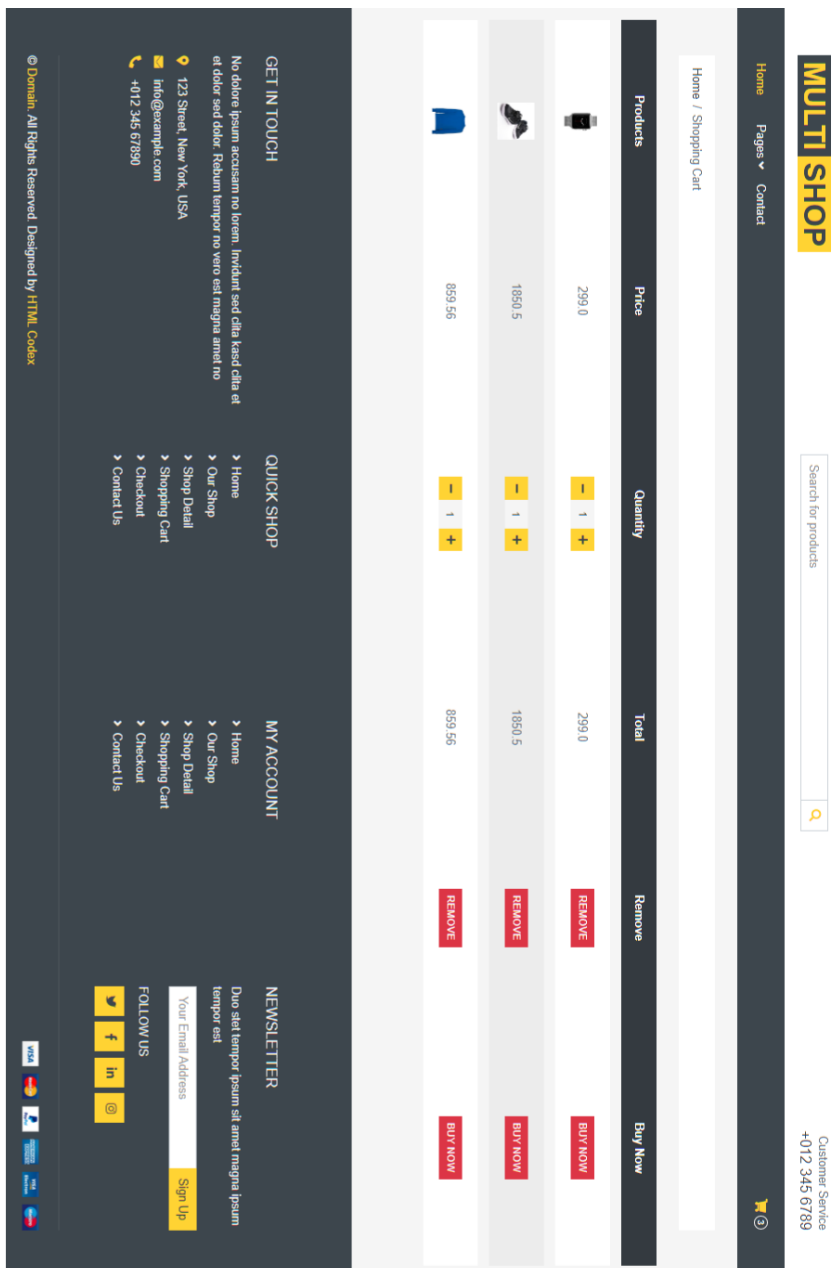

3. Checkout page

Home

Pages

Contact

Customer Service
+012 345 6789

MULTI SHOP

Search for products

Q

🏠

📞

BILLING ADDRESS

First Name

John

Last Name

Doe

Email

example@gmail.com

Mobile No

+123 456 789

Address

123 Street

Country

United States

City

New York

State

New York

ZIP Code

123

Create an account

Product Name

Price

Click The Icon To Add Product

+

Product Quantity

Total Price

PAYMENT

Cash on delivery (COD)

Place Order

QUICK SHOP

Home

Our Shop

Shop Detail

Shopping Cart

Checkout

Contact Us

MY ACCOUNT

Home

Our Shop

Shop Detail

Shopping Cart

Checkout

Contact Us

GET IN TOUCH

No dolore ipsum accusam no lorem. Invidunt sed clita kasd clita et et dolor sed dolor. Rebum tempor no vero est magna amet no

123 Street, New York, USA

Info@example.com

+012 345 67890

NEWSLETTER

Due siet tempor ipsum sit amet magna ipsum tempor est

Your Email Address

Sign Up

FOLLOW US

Twitter

Facebook

LinkedIn

Instagram

© Domain. All Rights Reserved. Designed by HTML Codes

🇺🇸

🇪🇸

🇩🇪

🇬🇧

🇮🇹

🇯🇵

17

4. Order page

MULTI SHOP



Home Pages Contact

Customer Service
+012 345 6789

Search for products

Q

Home / Orders

Products	Name	Price	Quantity	Cancel Order
	Nikon Camera	2578.0	1	CANCEL
	Sony Watch	299.0	1	CANCEL

GET IN TOUCH

No dolore ipsum accusam no lorem. Invidunt sed cilia kasd cilia et et dolor sed dolor. Rebum tempor no vero est magna amet no

123 Street, New York, USA

info@example.com

+012 345 67890

QUICK SHOP

[Home](#)
[Our Shop](#)
[Shop Detail](#)
[Shopping Cart](#)
[Checkout](#)
[Contact Us](#)

MY ACCOUNT

[Home](#)
[Our Shop](#)
[Shop Detail](#)
[Shopping Cart](#)
[Checkout](#)
[Contact Us](#)





NEWSLETTER






























Duo sitet tempor ipsum sit amet magna ipsum tempor est

Your Email Address

Sign Up


FOLLOW US





18

5. Contact page

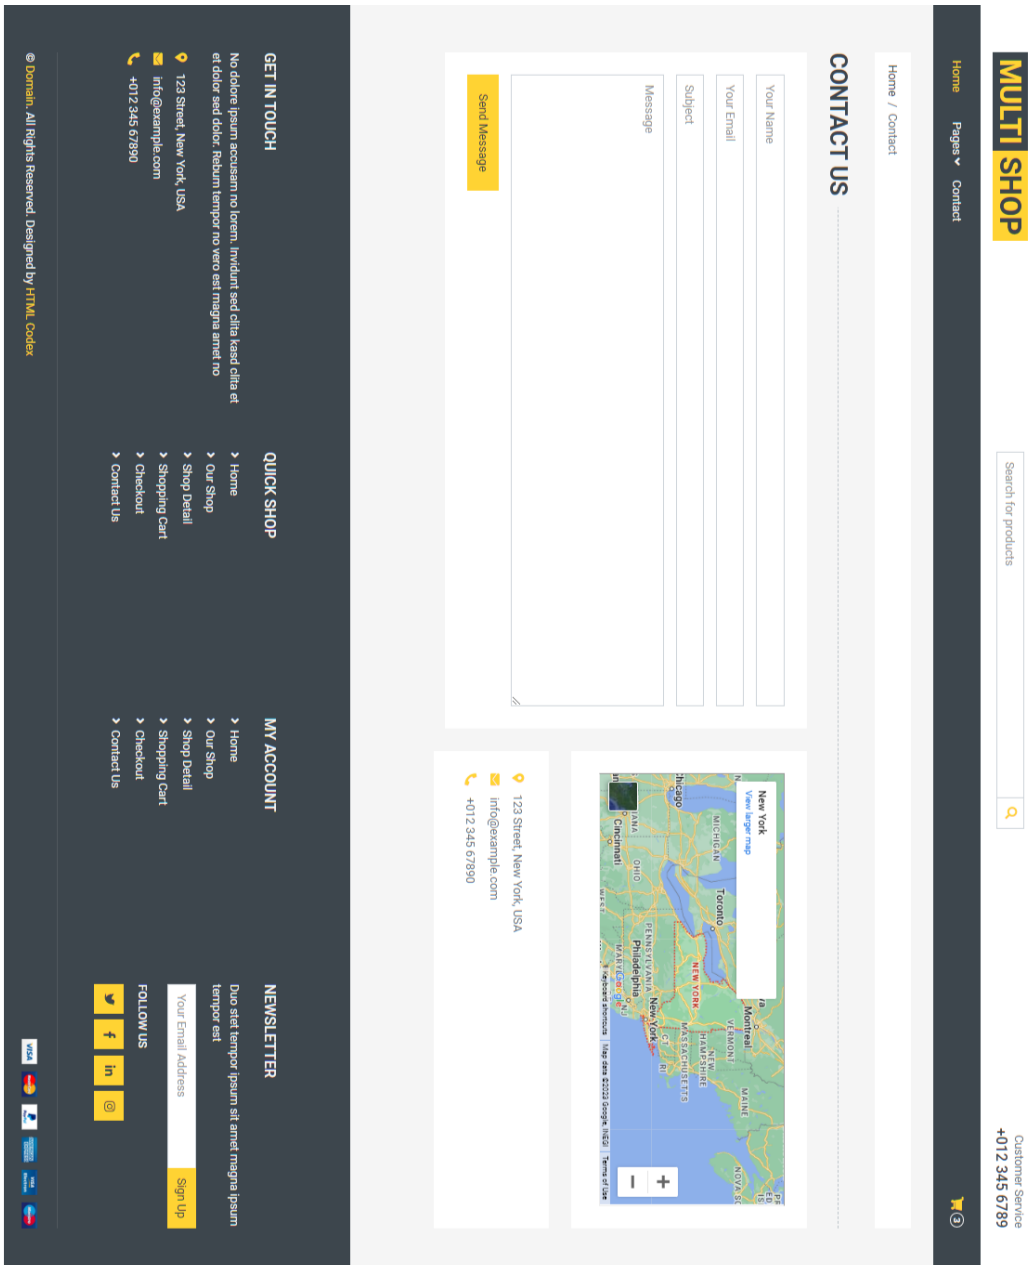

CODING

1. Welcome Page:

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>

<!DOCTYPE html>

<html>

<head>

<meta charset="ISO-8859-1">

<title>Home Page</title>

<%@ include file="/common/headSection"%>

</head>

<body>

<%@ include file="/common/topbar"%>

<%@ include file="/common/navbar.jsp"%>

<%@ include file="/common/carousel.jsp"%>

<%@ include file="/common/categories"%>

<%@ include file="/common/featured"%>

<%@ include file="/common/featuredProducts.jsp"%>

<%@ include file="/common/offers"%>

<%@ include file="/common/recentProducts.jsp"%>

<%@ include file="/common/footer"%>

<%@ include file="/common/javascriptLibraries"%>

</body>

</html>
```

2. Add To Cart Page:

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>

<!DOCTYPE html>

<html>

<head>

<meta charset="ISO-8859-1">

<title>Cart Page</title>

<%@ include file="/common/headSection"%>

</head>

<body>

<%@ include file="/common/topbar"%>

<%@ include file="/common/navbar.jsp"%>

<!-- Breadcrumb Start -->

<div class="container-fluid">

<div class="row px-xl-5">

<div class="col-12">

<nav class="breadcrumb bg-light mb-30">

<a class="breadcrumb-item text-dark" href="index.jsp">Home</a> <span

class="breadcrumb-item active">Shopping Cart</span>

</nav>

</div>

</div>

</div>

</div>

<!-- Breadcrumb End -->

<!-- Cart Start -->

<div class="container-fluid">
```

```

<div class="row ">
<div class="col table-responsive mb-5">
<table
class="table table-light table-borderless table-hover text-center mb-0">
<thead class="thead-dark">
<tr>
<th>Products</th>
<th>Price</th>
<th>Quantity</th>
<th>Total</th>
<th>Remove</th>
<th>Buy Now</th>
</tr>
</thead>
<tbody class="align-middle">
<%
Object object2 = session.getAttribute("cartData");
@SuppressWarnings("unchecked")
ArrayList<CartItem> data = (ArrayList<CartItem>) object2;
%>
<%
if (data != null) { for (CartItem d : data) { %>
<tr>
<td class="align-middle"></td>
<td class="align-middle quantity"><%=d.getCartItemPrice()%></td>
<td class="align-middle">

```

```

<div class="input-group quantity mx-auto" style="width: 100px;">
  <div class="input-group-btn">
    <button class="btn btn-sm btn-primary btn-minus">
      <i class="fa fa-minus"></i>
    </button>
  </div>
  <input type="text"
    class="form-control form-control-sm bg-secondary border-0 text-center"
    value="<%=d.getCartItemQuantity()%>"
    <i class="fa fa-plus"></i>
  </button>
</td>

<td class="align-middle" id="data1"><%=d.getCartItemPrice()%>
</td>

<td class="align-middle"><a class="btn btn-sm btn-danger"
href="removeCart?productId=<%=d.getCartItemId()%>"> REMOVE </a></td>

<td class="align-middle"><a class="btn btn-sm btn-danger"
href="checkout?productId=<%=d.getCartItemId()%>"> BUY NOW </a></td>
</tr>

<%> } else if(data==null){ %>

<tr>

<td>null</td>

</tr>

<% } %>

</tbody>

</table>

</div>

```

```

</div>

<%@ include file="/common/footer"%>

<%@ include file="/common/javascriptLibraries"%>

</body>

</html>

```

3. Checkout Page:

```

<%@page import="com.deewan.Multi_Shop.service.ProductService"%>

<%@page import="com.deewan.Multi_Shop.dto.Product"%>

<%@page import="com.deewan.Multi_Shop.dto.UserDto"%>

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>

<!DOCTYPE html>

<html>

<head>

<meta charset="ISO-8859-1">

<title>Insert title here</title>

<%@ include file="/common/headSection"%>

</head>

<body>

<%@ include file="/common/topbar"%>

<%@ include file="/common/navbar.jsp"%>

<%!

int productId;

%>

<%

```



```

Product product=null;

Object object3 = session.getAttribute("userInfo");

UserDto data = (UserDto) object3;

ProductService productService = new ProductService();

productId=Integer.parseInt(request.getParameter("productId"));

if(productId>0){

product = productService.getSingleProductService(productId);

}

%>

<%

if (data != null && product!=null) {

%>

<form action="checkout" method="post">

<!-- Checkout Start -->

<div class="container-fluid">

<div class="row px-xl-5">

<div class="col-lg-8">

<h5 class="section-title position-relative text-uppercase mb-3">

<span class="bg-secondary pr-3">Billing Address</span>

</h5>

<div class="bg-light p-30 mb-5">

<div class="row">

<div class="col-md-6 form-group">

<label>First Name</label> <input class="form-control"

type="text" placeholder="John" name="firstName"

value="<%=data.getUserFirstname()%>">

</div>

```

```

<div class="col-md-6 form-group">
<label>Last Name</label> <input class="form-control" type="text"
placeholder="Doe" name="lastName"
value="<%=data.getUserLastname()%>">
</div>

<div class="col-md-6 form-group">
<label>E-mail</label> <input class="form-control" type="text"
placeholder="example@email.com" name="email"
value="<%=data.getUserEmail()%>">
</div>

<div class="col-md-6 form-group">
<label>Mobile No</label> <input class="form-control" type="text"
placeholder="+123 456 789" name="mobileNo"
value="<%=data.getUserMobile()%>">
</div>

<div class="col-md-6 form-group">
<label>Address </label> <input class="form-control" type="text"
placeholder="123 Street" name="address"
value="<%=data.getUserFirstname()%>">
</div>

<div class="col-md-6 form-group">
<label>Country</label> <select class="custom-select"
name="country">
<option selected value="united states">United States</option>
<option value="afghanistan">Afghanistan</option>
<option value="albania">Albania</option>
<option value="algeria">Algeria</option>

```

```

</select>

</div>

<div class="col-md-6 form-group">

<label>City</label> <input class="form-control" type="text"
placeholder="New York" name="city"
value="<%=data.getUserCity()%>">

</div>

<div class="col-md-6 form-group">

<label>State</label> <input class="form-control" type="text"
placeholder="New York" name="state"
value="<%=data.getUserState()%>">

</div>

<div class="col-md-6 form-group">

<label>ZIP Code</label> <input class="form-control" type="text"
placeholder="123" name="zipCode"
value="<%=data.getUserZipCode()%>">

</div>

<div class="col-md-12 form-group">

<div class="custom-control custom-checkbox">

<input type="checkbox" class="custom-control-input"
id="newaccount" name="createAccount" value="yes" >

<label class="custom-control-label" for="newaccount">Create
an account</label>

</div>

<%if(request.getAttribute("accountResult")!=null){%>

<p class="text-danger"><%=request.getAttribute("accountResult")%></p>

<%} %>

```

```

</div>

</div>

</div>

</div>

<div class="col-lg-4">

<h5 class="section-title position-relative text-uppercase mb-3">

<span class="bg-secondary pr-3">Order Summery</span>

</h5>

<div class="bg-light p-30 mb-5">

<div class="border-bottom">

<div class="d-flex justify-content-between">

<p class="text-dark mb-3">Product Name</p>

<p class="text-dark mb-3">Price</p>

</div>

<div class="d-flex justify-content-between">

<p><%=product.getProductname()%></p>

<p><%=product.getProductPrice()%></p>

</div>

</div>

<div class="border-bottom">

<div class="d-flex justify-content-between">

<p class="text-dark mt-3 mb-3">Product Quantity</p>

<p class="text-dark mb-3 mt-3">Total Price</p>

</div>

<div class="d-flex justify-content-between">

<p><%=product.getProductQuantity()%></p>

<p><%=product.getProductPrice()%></p>

```

```

<input type="hidden" name="productQuantity"
value="<%=product.getProductQuantity()%>">

<input type="hidden" name="productName" value="<%=product.getProductPrice()%>">

</div>

</div>

</div>

<br>

<div class="mb-5">

<h5 class="section-title position-relative text-uppercase mb-3">

<span class="bg-secondary pr-3">Payment</span>

</h5>

<div class="bg-light p-30">

<div class="form-group"></div>

<div class="form-group mb-4">

<div class="custom-control custom-radio">

<input type="radio" class="custom-control-input" name="payment"

value="castOnDelivery" id="banktransfer" required="required"> <label

class="custom-control-label" for="banktransfer">Cash

on delivery (COD)</label>

</div>

</div>

<input type="hidden" name="productId" value="<%=productId %>">

<button type="submit"

class="btn btn-block btn-primary font-weight-bold py-3">Place

Order</button>

</div>

</div>

```

```

</div>

<!-- Checkout End -->

<%
} else if(data==null && product!=null){
%>

<form action="checkout" method="post">

<!-- Checkout Start -->

<div class="container-fluid">
<div class="row px-xl-5">
<div class="col-lg-8">

<h5 class="section-title position-relative text-uppercase mb-3">

<span class="bg-secondary pr-3">Billing Address</span>

</h5>

<div class="bg-light p-30 mb-5">
<div class="row">
<div class="col-md-6 form-group">
<label>First Name</label> <input class="form-control"
type="text" placeholder="John" name="firstName" required="required">
</div>
<div class="col-md-6 form-group">
<label>Last Name</label> <input class="form-control" type="text"
placeholder="Doe" name="lastName" required="required">
</div>
<div class="col-md-6 form-group">
<label>E-mail</label> <input class="form-control" type="text"
placeholder="example@email.com" name="email" required="required">
</div>

```

```

<div class="col-md-6 form-group">
  <label>Mobile No</label> <input class="form-control" type="text"
  placeholder="+123 456 789" name="mobileNo" required="required">
</div>

<div class="col-md-6 form-group">
  <label>Address </label> <input class="form-control" type="text"
  placeholder="123 Street" name="address" required="required">
</div>

<div class="col-md-6 form-group">
  <label>Country</label> <select class="custom-select"
  name="country" required="required">

  <option selected value="united states">United States</option>
  <option value="afghanistan">Afghanistan</option>
  <option value="albania">Albania</option>
  <option value="algeria">Algeria</option>
  </select>
</div>

<div class="col-md-6 form-group">
  <label>City</label> <input class="form-control" type="text"
  placeholder="New York" name="city" required="required">
</div>

<div class="col-md-6 form-group">
  <label>State</label> <input class="form-control" type="text"
  placeholder="New York" name="state" required="required">
</div>

<div class="col-md-6 form-group">
  <label>ZIP Code</label> <input class="form-control" type="text"

```

```

placeholder="123" name="zipCode" required="required">

</div>

<div class="col-md-12 form-group">

<div class="custom-control custom-checkbox">

<input type="checkbox" class="custom-control-input"

id="newaccount" name="createAccount" value="yes">

<label class="custom-control-label" for="newaccount">Create

an account</label>

</div>

<%if(request.getAttribute("accountResult")!=null){%>

<p class="text-danger"><%=request.getAttribute("accountResult")%></p>

<%} %>

</div>

</div>

</div>

</div>

</div>

<div class="col-lg-4">

<h5 class="section-title position-relative text-uppercase mb-3">

<span class="bg-secondary pr-3">Order Summery</span>

</h5>

<div class="bg-light p-30 mb-5">

<div class="border-bottom">

<div class="d-flex justify-content-between">

<p class="text-dark mb-3">Product Name</p>

<p class="text-dark mb-3">Price</p>

</div>

<div class="d-flex justify-content-between">

```



```

<p class="m-3"><%=product.getProductName()%></p>

<p><%= product.getProductPrice()%></p>

</div>

</div>

<div class="border-bottom">

<div class="d-flex justify-content-between">

<p class="text-dark mt-3 mb-3">Product Quantity</p>

<p class="text-dark mb-3 mt-3">Total Price</p>

</div>

<div class="d-flex justify-content-between">

<p><%= product.getProductQuantity()%></p>

<p><%= product.getProductPrice()%></p>

</div>

</div>

</div>

<br>

<div class="mb-5">

<h5 class="section-title position-relative text-uppercase mb-3">

<span class="bg-secondary pr-3">Payment</span>

</h5>

<div class="bg-light p-30">

<div class="form-group"></div>

<div class="form-group mb-4">

<div class="custom-control custom-radio">

<input type="radio" class="custom-control-input" name="payment"

value="castOnDelivery" id="banktransfer" required="required"> <label

class="custom-control-label" for="banktransfer" >Cash

```

```

on delivery (COD)</label>

</div>

</div>

<input type="hidden" name="productId" value="<%=productId %>">

<button type="submit"

class="btn btn-block btn-primary font-weight-bold py-3">Place

Order</button>

</div>

</div>

</div>

</div>

</div>

<!-- Checkout End -->

</form>

<%

}else if(data!=null && product == null){

%>

<form action="checkout" method="post">

<!-- Checkout Start -->

<div class="container-fluid">

<div class="row px-xl-5">

<div class="col-lg-8">

<h5 class="section-title position-relative text-uppercase mb-3">

<span class="bg-secondary pr-3">Billing Address</span>

</h5>

<div class="bg-light p-30 mb-5">

<label>First Name</label> <input class="form-control"

```

```

type="text" placeholder="John" name="firstName"
value="<%=data.getUserFirstname()%>">

</div>

<div class="col-md-6 form-group">

<label>Last Name</label> <input class="form-control" type="text"

placeholder="Doe" name="lastName" value="<%=data.getUserLastname()%>">

</div>

<div class="col-md-6 form-group">

<label>E-mail</label> <input class="form-control" type="text"

placeholder="example@email.com" name="email" value="<%=data.getUserEmail()%>">

</div>

<div class="col-md-6 form-group">

<label>Mobile No</label> <input class="form-control" type="text"

placeholder="+123 456 789" name="mobileNo" value="<%=data.getUserMobile()%>">

</div>

<div class="col-md-6 form-group">

<label>Address </label> <input class="form-control" type="text"

placeholder="123 Street" name="address" value="<%=data.getUserAddress()%>">

</div>

<div class="col-md-6 form-group">

<label>Country</label> <select class="custom-select"

name="country">

<option selected value="united states">United States</option>

<option value="afghanistan">Afghanistan</option>

<option value="albania">Albania</option>

<option value="algeria">Algeria</option>

</select>

```

```

<div class="col-md-6 form-group">
<label>City</label> <input class="form-control" type="text"
placeholder="New York" name="city" value="<%=data.getUserCity()%>">
</div>

<div class="col-md-6 form-group">
<label>State</label> <input class="form-control" type="text"
placeholder="New York" name="state" value="<%=data.getUserState()%>">
</div>

<div class="col-md-6 form-group">
<label>ZIP Code</label> <input class="form-control" type="text"
placeholder="123" name="zipCode" value="<%=data.getUserZipCode()%>">
</div>

<div class="col-md-12 form-group">
<div class="custom-control custom-checkbox">
<input type="checkbox" class="custom-control-input"
id="newaccount" name="createAccount" value="yes" >
<label class="custom-control-label" for="newaccount">Create
an account</label>
</div>

<%if(request.getAttribute("accountResult")!=null){%>

<p class="text-danger"><%=request.getAttribute("accountResult")%></p>

<%} %>

</div>

</div>

</div>

```

```

<div class="col-lg-4">

<h5 class="section-title position-relative text-uppercase mb-3">

<span class="bg-secondary pr-3">Order Summary</span>

</h5>

<div class="bg-light p-30 mb-5">

<div class="border-bottom">

<div class="d-flex justify-content-between">

<p class="text-dark mb-3">Product Name</p>

<p class="text-dark mb-3">Price</p>

</div>

<div class="d-flex justify-content-between">

<p class="m-3"><a href="index.jsp" class="text-danger">Add Product <i class="fa fa-plus m-3"></i></a></p>

<p></p>

</div>

<%if(request.getAttribute("result")!=null){%>

<p class="text-danger"><%=request.getAttribute("result")%></p>

<%} %>

</div>

<div class="border-bottom">

<div class="d-flex justify-content-between">

<p class="text-dark mt-3 mb-3">Product Quantity</p>

<p class="text-dark mb-3 mt-3">Total Price</p>

</div>

<div class="d-flex justify-content-between">

<div class="mb-5">

<h5 class="section-title position-relative text-uppercase mb-3">

```

```

<span class="bg-secondary pr-3">Payment</span>
</h5>

<div class="bg-light p-30">
<div class="form-group"></div>
<div class="form-group mb-4">
<div class="custom-control custom-radio">
<input type="radio" class="custom-control-input" name="payment"
value="castOnDelivery" id="banktransfer" required="required"> <label
class="custom-control-label" for="banktransfer">Cash
on delivery (COD)</label>
</div>
</div>

<input type="hidden" name="productId" value="<%=productId %>">
<button type="submit"
class="btn btn-block btn-primary font-weight-bold py-3">Place
Order</button>

<!-- Checkout End -->

</form>

<%
} else{
%>

<form action="checkout" method="post">
<!-- Checkout Start -->
<div class="container-fluid">
<div class="row px-xl-5">
<div class="col-lg-8">
<h5 class="section-title position-relative text-uppercase mb-3">

```

```

<span class="bg-secondary pr-3">Billing Address</span>
</h5>

<div class="bg-light p-30 mb-5">

<div class="row">

<div class="col-md-6 form-group">

<label>First Name</label> <input class="form-control"
type="text" placeholder="John" name="firstName" required="required">

</div>

<div class="col-md-6 form-group">

<label>Last Name</label> <input class="form-control" type="text"
placeholder="Doe" name="lastName" required="required">

</div>

<div class="col-md-6 form-group">

<label>E-mail</label> <input class="form-control" type="text"
placeholder="example@email.com" name="email" required="required">

</div>

<div class="col-md-6 form-group">

<label>Mobile No</label> <input class="form-control" type="text"
placeholder="+123 456 789" name="mobileNo" required="required">

</div>

<div class="col-md-6 form-group">

<label>Address </label> <input class="form-control" type="text"
placeholder="123 Street" name="address" required="required">

</div>

<div class="col-md-6 form-group">

<label>Country</label> <select class="custom-select"
name="country" required="required">

```

```

<option selected value="united states">United States</option>

<option value="afghanistan">Afghanistan</option>

<option value="albania">Albania</option>

<option value="algeria">Algeria</option>

</select>

</div>

<div class="col-md-6 form-group">

<label>City</label> <input class="form-control" type="text"

placeholder="New York" name="city" required="required">

</div>

<div class="col-md-6 form-group">

<label>State</label> <input class="form-control" type="text"

placeholder="New York" name="state" required="required">

</div>

<div class="col-md-6 form-group">

<label>ZIP Code</label> <input class="form-control" type="text"

placeholder="123" name="zipCode" required="required">

</div>

<div class="col-md-12 form-group">

<div class="custom-control custom-checkbox">

<input type="checkbox" class="custom-control-input"

id="newaccount" name="createAccount" value="yes">

<label class="custom-control-label" for="newaccount">Create

an account</label>

<%if(request.getAttribute("accountResult")!=null){%>

<p class="text-danger"><%=request.getAttribute("accountResult")%></p>

<%} %>

</div>

```



```

<div class="col-lg-4">
  <h5 class="section-title position-relative text-uppercase mb-3">
    <span class="bg-secondary pr-3">Order Summery</span>
  </h5>
  <div class="bg-light p-30 mb-5">
    <div class="border-bottom">
      <div class="d-flex justify-content-between">
        <p class="text-dark mb-3">Product Name</p>
        <p class="text-dark mb-3">Price</p>
      </div>
      <div class="d-flex justify-content-between">
        <p class="m-3">Click The Icon To Add Product</p>
        <p><a href="index.jsp"><i class="fa fa-plus m-3 text-danger"></i></a></p>
      </div>
    </div>
    <div class="border-bottom">
      <div class="d-flex justify-content-between">
        <p class="text-dark mt-3 mb-3">Product Quantity</p>
        <p class="text-dark mb-3 mt-3">Total Price</p>
      </div>
      <div class="d-flex justify-content-between">
        <div class="mb-5">
          <h5 class="section-title position-relative text-uppercase mb-3">
            <span class="bg-secondary pr-3">Payment</span>
          </h5>
          <div class="bg-light p-30">
            <div class="form-group"></div>

```

```

<div class="form-group mb-4">
  <div class="custom-control custom-radio">
    <input type="radio" class="custom-control-input" name="payment"
    value="castOnDelivery" id="banktransfer" required="required"> <label
    class="custom-control-label" for="banktransfer">Cash
    on delivery (COD)</label>
  </div>
</div>

<input type="hidden" name="productId"
value="<%=request.getParameter("productId") %>">

<button type="submit"
class="btn btn-block btn-primary font-weight-bold py-3">Place
Order</button>

</div>
</div>
</div>
</div>
</div>
</div>
</div>

<!-- Checkout End -->

</form>

<%
}
%>

<%@ include file="/common/footer"%>

<%@ include file="/common/javascriptLibraries"%>

</body>

</html>

```

4. Order Page:

```
<%@page import="com.deewan.Multi_Shop.dto.OrderDto"%>

<%@page import="com.deewan.Multi_Shop.service.OrderService"%>

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>

<!DOCTYPE html>

<html>

<head>

<meta charset="ISO-8859-1">

<title>Insert title here</title>

<%@ include file="/common/headSection"%>

</head>

<body>

<%@ include file="/common/topbar"%>

<%@ include file="/common/navbar.jsp"%>

<!-- Breadcrumb Start -->

<div class="container-fluid">

<div class="row px-xl-5">

<div class="col-12">

<nav class="breadcrumb bg-light mb-30">

<a class="breadcrumb-item text-dark" href="index.jsp">Home</a> <span

class="breadcrumb-item active">Orders</span>

</nav>

</div>

</div>
```

```

<!-- Breadcrumb End -->

<!-- Cart Start -->

<div class="container-fluid">

<div class="row ">

<div class="col table-responsive mb-5">

<table

class="table table-light table-borderless table-hover text-center mb-0">

<thead class="thead-dark">

<tr>

<th>Products</th>

<th>Name</th>

<th>Price</th>

<th>Quantity</th>

<th>Cancel Order</th>

</tr>

</thead>

<tbody class="align-middle">

<%

OrderService orderService = new OrderService();

ArrayList<OrderDto> arrayList =
orderService.getOrderService(request.getParameter("email"));

%>

<%

if (arrayList != null) {

for (OrderDto d : arrayList) {

%>

<tr>

```

```

<td class="align-middle"></td>

<td class="align-middle quantity"><%=d.getOrderItemName()%></td>

<td class="align-middle" id="data1"><%=d.getOrderItemPrice()%>

</td>

<td class="align-middle"><%=d.getOrderItemQuantity()%></td>

<td class="align-middle"><a class="btn btn-sm btn-danger"
href="orders?productId=<%=d.getOrderItemProductId()%>">
CANCEL </a></td>

</tr>

<%
}
} else {
%>

<tr>

<td>this is null table<h1>this is null table</h1></td>

</tr>

<%
}
%>

</tbody>

</table>

</div>

</div>

<%@ include file="/common/footer"%>

<%@ include file="/common/javascriptLibraries"%>

</body>

</html>

```

5. Contact Page:

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>

<!DOCTYPE html>

<html>

<head>

<meta charset="ISO-8859-1">

<title>Insert title here</title>

<%@ include file="/common/headSection"%>

</head>

<body>

<%@ include file="/common/topbar"%>

<%@ include file="/common/navbar.jsp"%>


<!-- Breadcrumb Start -->

<div class="container-fluid">

<div class="row px-xl-5">

<div class="col-12">

<nav class="breadcrumb bg-light mb-30">

<a class="breadcrumb-item text-dark" href="index.jsp">Home</a>

<span class="breadcrumb-item active">Contact</span>

</nav>

</div>

</div>

</div>

<!-- Breadcrumb End -->
```

```

<!-- Contact Start -->

<div class="container-fluid">

<h2 class="section-title position-relative text-uppercase mx-xl-5 mb-4"><span
class="bg-secondary pr-3">Contact Us</span></h2>

<div class="row px-xl-5">

<div class="col-lg-7 mb-5">

<div class="contact-form bg-light p-30">

<div id="success"></div>

<form action="contact" method="post">

<div class="control-group">

<input type="text" class="form-control" id="name" placeholder="Your Name"

required="required" data-validation-required-message="Please enter your name"
name="name"/>

<p class="help-block text-danger"></p>

</div>

<div class="control-group">

<input type="email" class="form-control" id="email" placeholder="Your Email"
name="email"

<p class="help-block text-danger"></p>

</div>

<div class="control-group">

<input type="text" class="form-control" id="subject" placeholder="Subject"
name="subject"

required="required" data-validation-required-message="Please enter a subject"
/>

<p class="help-block text-danger"></p>

</div>

```

```

<div class="control-group">

<textarea class="form-control" rows="8" id="message" placeholder="Message"
name="message"

required="required"

data-validation-required-message="Please enter your message"></textarea>

<p class="help-block text-danger"></p>

</div>

<div>

<button type="submit" class="btn btn-primary py-2 px-4">Send
Message</button>

</div>

</form>

</div>

<div class="col-lg-5 mb-5">

<div class="bg-light p-30 mb-30">

<iframe style="width: 100%; height: 250px;"

src="https://www.google.com/maps/embed?pb=!1m18!1m12!1m3!1d3001156.4288297426!2
d-
78.01371936852176!3d42.72876761954724!2m3!1f0!2f0!3f0!3m2!1i1024!2i768!4f13.1!3
m3!1m2!1s0x4ccc4bf0f123a5a9%3A0xddcfc6c1de189567!2sNew%20York%2C%20USA!5e0!3m2!
1sen!2sbd!4v1603794290143!5m2!1sen!2sbd"

style="border:0;" aria-hidden="false" tabindex="0"></iframe>

</div>

<div class="bg-light p-30 mb-3">

<p class="mb-2"><i class="fa fa-map-marker-alt text-primary mr-3"></i>123
Street, New York, USA</p>

<p class="mb-2"><i class="fa fa-envelope text-primary mr-
3"></i>info@example.com</p>

<p class="mb-2"><i class="fa fa-phone-alt text-primary mr-3"></i>+012 345
67890</p>

```



```
</div>

</div>

</div>

</div>

<!-- Contact End -->

<%@ include file="/common/footer"%>

<%@ include file="/common/javascriptLibraries"%>

</body>

</html>
```

Testing

Testing is an investigation conducted to provide stakeholders with information about the quality of the software product or service under test. Software testing can also provide an objective, independent view of the software to allow the business to appreciate and understand the risks of software implementation. Test techniques include the process of executing a program or application with the intent of finding software bugs (errors or other defects), and verifying that the software product is fit for use.

Software testing involves the execution of a software component or system component to evaluate one or more properties of interest. In general, these properties indicate the extent to which the component or system under test.

- Meets the requirements that guided its design and development,
- Responds correctly to all kinds of inputs,
- Performs its functions within an acceptable time,
- Is sufficiently usable,
- Can be installed and run in its intended environments and
- Achieves the general result its stake holders desire.

As the number of possible tests for even simple software components is practically infinite, all software testing uses some strategy to select tests that are feasible for the available time and resources. As a result, software testing typically (but not exclusively) attempts to execute a program or application with the intent of finding software bugs (errors or other defects). The job of testing is an iterative process as when one

bug is fixed, it can illuminate other, deeper bugs, or can even create new ones.

Software testing can provide objective, independent information about the quality of software and risk of its failure to users or sponsors

FUTURE SCOPE OF THE PROJECT

1. **Mobile Commerce:** With the proliferation of smartphones and mobile internet, mobile commerce (m-commerce) will play a crucial role in the future of e-commerce. Consumers will increasingly use their mobile devices to make purchases, leading to the development of mobile-friendly platforms and innovative mobile payment solutions.
2. **Personalization and Customer Experience:** E-commerce companies will focus on delivering personalized shopping experiences. Advanced data analytics and AI technologies will enable businesses to understand customer preferences better, offer targeted recommendations, and create tailored marketing campaigns to enhance customer satisfaction and loyalty.
3. **Cross-border Trade:** E-commerce will continue to facilitate cross-border trade, enabling businesses to reach global markets and consumers to access a wider range of products. Simplified international logistics, streamlined customs processes, and improved payment gateways will further fuel cross-border e-commerce growth.
4. **Social Commerce:** Social media platforms are becoming integral to e-commerce strategies. Businesses are leveraging social networks to showcase products, drive traffic to their websites, and enable direct purchases within social media platforms. Integration of social commerce features like shoppable posts and live shopping events is expected to grow.

Bibliography

Here is a concise bibliography of key resources on e-commerce:

1. **"E-commerce: Business, Technology, Society"** by Kenneth C. Laudon and Carol Guercio Traver (2019) - This comprehensive textbook provides an overview of e-commerce, covering business models, technologies, and societal implications.
2. **"The E-Commerce Book: Building the E-Empire"** by Steffano Korper and Juanita Ellis (2015) - This practical guide covers various aspects of e-commerce, including strategy, marketing, technology, and legal considerations.
3. **"E-commerce 2019: Business, Technology, Society"** by Kenneth C. Laudon and Carol Guercio Traver (2019) - Another authoritative textbook that explores the impact of e-commerce on business and society, including emerging trends and developments.
4. **"E-commerce: A Managerial Perspective"** by Efraim Turban and others (2017) - Targeted towards managers and executives, this book covers the managerial aspects of e-commerce, including strategy formulation, website design, supply chain management, and security issues.
5. **"E-commerce Essentials"** by Kenneth C. Laudon and Carol Guercio Traver (2020) - A concise guide to e-commerce essentials, covering topics such as online consumer behavior, digital marketing, social media, and mobile commerce.